

NX-5000 series

Common Function Reference

(Common FUNC)

Version:	5.30
Last Updated:	October 29, 2025
Language:	English
Type:	K, F

About This Manual	viii
How to Read the In-depth Manual	x
About Notations.....	x
About the Notation of the Supported Models	xi
About Examples of the Transceiver Display.....	xi
Abbreviations Used in This Document	xii
About Copyright	xiii
Software Copyrights	xiii
Firmware Copyrights	xiii
About Trademarks and Patent Rights	xiii
About the Programming Software	xiv
About KPG-D1N	xiv
About the Notation of "Configuration Using KPG-D1/ D1N"	xiv
About the Zone-channel Format.....	xiv
About System Type	xv
About Multi RF Deck/ Multi Control Head	xv
About NX-5200LG/ NX-5300LG.....	xvi
About NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S.....	xvii
About Options to Use the Functions Described in This Document	xviii
About the Built-in GPS Receiver Unit.....	xx
How to Search for Information.....	xx
Outline of This Transceiver.....	xxii
GENERAL FEATURES	xxii
P25 DIGITAL MODES	xxiii
NXDN DIGITAL MODES	xxiii
DMR DIGITAL MODES	xxiv
ANALOG MODES	xxv
Revision History.....	xxvi

CONTENTS BY PURPOSE xxxvii

1 FUNCTIONS AND PANEL LAYOUT.....1

1.1 NX-5200/ NX-5200S/ NX-5200LG/ NX-5300/ NX-5300S/ NX-5300LG/ NX-5400	1
1.2 NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900	4
1.3 About LCD.....	9
LCD.....	9

Icons	16
Key Guide	17

2 GETTING STARTED 20

2.1 Connecting the Transceiver to a PC	21
2.2 Connecting the Transceiver to a PC by Bluetooth.....	22
2.3 Writing the Configuration Data to the Transceiver.....	22
Writing configuration data to multiple transceivers using Bluetooth communication	23
About the writing of configuration data in a Multi RF Deck/ Multi Control Head structure.....	23
2.4 Reading the Configuration Data from the Transceiver.....	23
2.5 Embedding a Message in the Transceiver (Embedded Message)	24
Embedded Message	24
Embedded Message with Password	24
2.6 Writing Configuration Data Using Wireless Communication (OTAP)	25
IP Based Packet Data Format.....	27
P25 Trunking OTAP.....	28

3 BASIC OPERATIONS..... 29

3.1 Turning the Transceiver ON/ OFF	29
Turning the Transceiver ON	29
Turning the Transceiver OFF.....	31
Power Switch Status Memory	31
3.2 Adjusting the Volume Level	32
3.3 Using Function Keys	32
Mode Reset Timer	33
Keypad Operation.....	36
Manual Dialing	39
3.4 Using Menu Mode	40
3.5 Changing the Zone-channel	43
Changing the Zone	43
Changing the Channel.....	44
Rollover/End Stop	45
Changing the Channel by Specifying the Number (Channel Entry)	45
Changing the Group ID by Specifying the ID (Group ID Entry) (NXDN Trunking System Only).....	47

Changing the Channel with a Single Touch.....	48
Home Channel	48
Direct Channel.....	49
3.6 Transmitting/ Receiving	51
3.7 Viewing the Receive History (Stack)	52
Configuring the Display Order of Data in Stack Mode (Stack Order)	57
Enabling the Storage of Redundant Data (Repeated Calls Stack)	57
Displaying the Caller ID when Displaying a Message (Caller ID for Message)	57
Displaying the Receive Channel (Channel Name (Message Display))	58
Stack Procedure of the Receive History (Old Message Overwrite).....	58
Caller ID Stack	59
Time Stamp	60
Message Memory	60
Clear Caller ID Stack on Reply.....	60
3.8 Operating the Transceiver in Each Mode (Common Operation)	61
Selecting or Clearing Data from a List	61
Entering or Deleting a Code	64
Entering or Deleting Characters.....	66
Scroll Display	71
Character Entry	72
3.9 Locking the Transceiver Keys (Key Lock)	73
Auto Key Lock Timer	75
3.10 Operations in a Single RF Deck/ Dual Control Head Structure	76
About the Behavior in Function Mode While in a Dual Control Head Structure.....	77
About the Reception Display of a Short Message When in a Dual Control Head Structure	78
About Featured Panel Operations.....	78
3.11 Switching the Display Language	79
4 TRANSMISSION/ RECEPTION	80
4.1 Transmit/ Receive Frequencies	80
4.2 Transmit Power.....	81
4.3 Channel Spacing	84
4.4 Beat Shift	86
4.5 Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)	87
5 INDICATION AND DISPLAY	93
5.1 Busy LED	93
5.2 Transmit LED	93
5.3 Selective Call Alert LED	94
5.4 Optional Signaling LED.....	95
5.5 Lighting the Backlight (Backlight)	96
5.6 Changing the Brightness of the Backlight (LCD Brightness).....	98
5.7 Changing the Color Scheme of the Transceiver Display (Color Scheme).....	99
5.8 Automatically Adjusting the Brightness Level of the LCD (Auto Dimmer).....	99
5.9 The Icons on the LCD.....	101
5.10 Displaying the Signal Strength (Signal Strength Indicator)	104
5.11 Display Functions of the Display.....	105
Zone Name Display	105
Display Format	105
Power-on Text	106
Sub-LCD Display	108
Sub-LCD Display Priority	108
Clock Display	109
5.12 Customizing a Displayed Text String (Display Customization)	109
5.13 Displaying a Bitmap Image When the Transceiver is Turned ON (Custom Start-up Screen)	109
6 SOUND	110
6.1 Tones that Sound When a User Operates the Transceiver or When the Transceiver Status Is Changed	110
Power-on Tone.....	112
Control Tone	112
Warning Tone	114
Locator Tone	117
Sidetone.....	117
Alert Tone	118
Volume Level Tone	118
Transmit Tone.....	118
6.2 Tones that Sound When the Transceiver Receives a Call	119
Configuring the Alert Tone (Special Alert Tone)	123
6.3 Tones that Sound When the Communication Starts/ Ends.....	124

Using Sound to Notify the Timing to Start Communications (PTT Proceed Tone)	124
Using Sound to Notify the Other Party that the Communication Ends (PTT Release Tone)	125
6.4 Functions Related to the Volume Configuration	126
Configuring the Minimum Volume Level (Minimum Volume)	126
Configuring the Maximum Volume Level (Maximum Volume)	126
Configuring the Offset Value for Volume Level (Tone Volume Offset)	127
Configuring the Volume Level of Various Tones (Tone Volume)	127
Changing the Tone Volume Level with a Single Touch (Selectable Tone Level)	128
Temporarily Reducing the Volume Level of the Speaker (Speaker Attenuation)	128
Reducing the Audio Output to the External Speaker (External Speaker 4W)	129
Configuring Whether or Not to Reduce the Noise (Noise Blanker (Analog))	129
Notifying of the Transmit Error by the Display and a Tone	130
6.5 Using the Transceiver as a Megaphone (Public Address)	131
About the Speaker to Emit Audio	132
6.6 Restricting Alert Tone When Consecutively Receiving a Call (Alert Tone Restriction from 2nd Call)	133
6.7 Configuring Audio Profile (Audio Profile) ...	135
General	136
RX Audio Response	140
TX Digital Audio Response	142
Active Noise Reduction	144
6.8 Using Voice Guidance (Voice Announcement)	148
Configuring Voice Guidance Method (Voice Announcement Type)	148
Zone-Channel Guide	149
Function Guide	150
Status Guide	152
7 BATTERY	154
7.1 Displaying the Remaining Battery Power Level (Battery Indicator)	154
7.2 Warning that the Battery Voltage Is Low (Battery Warning)	155
7.3 Warning the Battery Power of the Vehicle Battery Is Low (Battery Warning)	156
7.4 Displaying the Remaining Battery Power by Operating the Transceiver (Battery Status)	156
7.5 Reducing Battery Consumption (Battery Saver)	157
7.6 Displaying the Remaining Battery Power When the Transceiver Is Turned ON (Power-on Battery Information)	159
7.7 Checking the Detailed Information of a Battery (Battery Information Display)	160
8 GPS POSITION DISPLAY	161
8.1 Configuring the GPS Position Display	161
8.2 Displaying the Location Information	162
8.3 Confirming the Location Information Stored in the microSD Card	164
Displaying the GPS Data File	164
Deleting the GPS Data File	165
9 STORING RECORDED AUDIO/ GPS DATA	167
9.1 About microSD Card	167
Formatting a microSD Card	168
Removing the microSD Card	169
Folder Structure of a microSD Card	170
Configuring the Warning Behavior for the Remaining Memory Capacity (Low Memory Warning)	173
Configuring the Storage Method of an Audio Data File (First-in First-out Deletion)	174
Recording Time of a microSD Card	174
9.2 Recording Transmitted and Received Audio Automatically (Auto Recording)	175
Configuring Recording Time (Maximum Recording Length)	178
9.3 Recording Audio to a microSD Card (Voice Memo)	179
About the Audio to Be Recorded	180
9.4 Playing Back the Recorded Audio (Playback)	181
Storing Audio Data in the Saved Folder ...	187
9.5 Storing the GPS Data (GPS Data Storage) ...	188
Automatically Storing the GPS Data	188
Manually Storing the GPS Data	189
9.6 Confirming microSD Card Contents via a PC (SD Card Direct Access)	190

10 INDOOR LOCATION 193

10.1 Beacon List.....	200
10.2 Minimum Valid Beacon Signal.....	201
10.3 BLE Scan.....	202
10.4 BLE Scan Time	204
10.5 TX Interval	205
10.6 TX Power.....	206
10.7 GPS Delay Time.....	206
10.8 BLE Beacon Display	207

11 BLUETOOTH COMMUNICATION 210

11.1 Toggling Bluetooth On/ Off.....	210
11.2 Finding a Bluetooth-compatible Device (Bluetooth Find Device).....	212
Configuring the FPU	212
About the Displayed Contents of a Bluetooth-compatible Device.....	214
Configuring the Bluetooth Device Name of the Transceiver (Bluetooth Device Name).....	215
Checking the Bluetooth Device Name (Bluetooth Information)	216
Responding to the Search of a Bluetooth-compatible Device (Bluetooth Discoverable)	216
11.3 Registering and Connecting a Bluetooth-compatible Device to the Transceiver (Pairing/ HSP Connection)	217
About Authentication	218
Finding, Registering and Connecting a Bluetooth-compatible Device (Bluetooth Find Device).....	218
Registering and Connecting Using PF Keys (Define Bluetooth Device)	222
Receive a pairing request from a Bluetooth-compatible device	225
Behavior of the Transceiver When Pairing Cannot Occur.....	228
11.4 Displaying a Bluetooth-compatible Device (Bluetooth My Devices)	229
11.5 About Headset Profile (HSP Connection/ HSP Disconnection)	234
Connecting by Headset Profile.....	234
When a Pairing Cannot Occur with the Bluetooth-compatible Device or the Bluetooth-compatible Device Does Not Behave (Bluetooth Headset Connection Type).....	236

Resetting the Connection by Headset Profile	237
Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Headset Profile)	237
11.6 About Serial Port Profile (SPP Connection/ SPP Disconnection)	238
Connecting by Serial Port Profile	238
Resetting the Connection by Serial Port Profile	239
Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Serial Port Profile)	239
11.7 Switching the Speaker to Emit Audio (Bluetooth Speaker)	240
Determining the Speaker to Emit by Linking with the Microphone Hook (Off-hook Speaker Revert)	241
11.8 About Bluetooth Low Energy (Heart Rate Service/ Automatic Injury Detection Service/ Battery Service/ Device Information Service)	242
Configuring the FPU	243
Connecting by Bluetooth Low Energy	246
Reconnecting by Bluetooth Low Energy	246
Resetting the Connection by Bluetooth Low Energy	247
Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Bluetooth Low Energy).....	247
11.9 Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver (Heart Rate Service).....	248
Automatic Status Transmission.....	249
Activation of Emergency	252
Status Request Message Response	253
GPS Data Transmission	255
Confirming the Heart Rate by Using the Transceiver (Bluetooth My Devices Mode).....	256
11.10 Notifying of Damage on a Bluetooth-compatible Device to the Transceiver (Automatic Injury Detection Service).....	257
Confirming Damage to a Bluetooth-compatible Device by Using the Transceiver (Bluetooth My Devices Mode).....	258
11.11 Confirming the Remaining Battery Power of a Bluetooth-compatible Device (Battery Service).....	259

11.12 Confirming the Manufacturer Name, Model Number, Etc. of a Bluetooth-compatible Device (Device Information Service).....	260	Activating Horn Alert According to the Microphone Hook (Off-hook Horn Alert).....	293
11.13 Resetting the GPS/ Bluetooth Device (GPS/Bluetooth Reset).....	261	Horn Alert Status When the Transceiver Is Turned ON (Horn Alert Mode).....	293
11.14 Configuring the Connection Destination of a Bluetooth-compatible Device (Bluetooth Interface Selection).....	262		
12 EXTERNAL PORTS	263	14 TRANSCEIVER DATA PROTECTION WITH PASSWORD	294
12.1 Universal Connector	263	14.1 Password for Transceiver Operation (Transceiver Password)	294
Assigning Functions to the Universal Connector	263	14.2 Password When Reading Configuration Data in a PC (Read Authorization Password).....	295
Using the Vibrator.....	264	14.3 Password for Writing Configuration Data (Overwrite Password)	296
12.2 D-sub 25-pin Connector.....	266	14.4 Restricting the Functions of KPG-D1/ D1N (Read FPU Data Inhibition)	297
Available Functions for AUX Input Ports	266		
Available Functions for AUX Output Ports.....	276	15 ADJUSTING THE TIME ON THE TRANSCEIVER	298
Dwell Time	280	15.1 Displaying the Current Time.....	298
Avoiding Noise and Chattering on the AUX Input Port (Debounce Time)	280	15.2 Adjusting the Time.....	299
State Hold Timer (Active Low)	281	16 MODE	301
Status Memory (AUX Output Status Message).....	281	16.1 Testing the Transmit and Receive Capabilities of the Transceiver (Panel Test Mode)	301
Functions When Sending by Using the External PTT and Data PTT.....	282	16.2 Adjusting the Transmit and Receive Capabilities of the Transceiver (Panel Tuning Mode)	302
Migrating to a Zone-channel by Using a Connected External Device (Remote Zone-Channel)	284	16.3 Copying the Configuration Data to Another Transceiver (Clone Mode)	303
Optimizing Various Signal Levels	285	16.4 Changing the Configuration of the Transceiver (Front Panel Programming Mode)	304
12.3 Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input)	286	16.5 Overwriting the Firmware (Firmware Programming Mode)	305
		16.6 Checking the Firmware Version (Transceiver Information Mode)	306
13 FUNCTIONS LINKED TO A VEHICLE ...	287	16.7 Testing or Adjusting the Transmit and Receive Capabilities of the Transceiver (PC Test Mode/ PC Tuning Mode)	307
13.1 Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port (Ignition Sense).....	287	17 MULTI RF DECK/ MULTI CONTROL HEAD	308
Usage of the Ignition Sense Port	287	17.1 Description	308
The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)	288	17.2 Structures of Multi RF Deck/ Multi Control Head	309
13.2 Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert)	288	17.3 Building a Multi RF Deck System	310
Conditions to Activate the Horn Alert	290	17.4 Configuring the Initial Configuration.....	310
Horn Alert Logic Signal	292		

Updating the Firmware	310	Bluetooth Device Name	367
Activating a Radio Feature License (KWD-5004MR).....	312	Checking the Bluetooth Device Name (Bluetooth Information)	369
Configuring the FPU Data and Writing the FPU Data to Each RF Deck.....	313	Registering a Bluetooth Connection Device (Pairing).....	369
Configuring the DIP Switch.....	319	Displaying a Bluetooth-compatible Device (Bluetooth My Devices).....	370
17.5 Basic Operations.....	325	VOX	370
Operating a Control Head	325	Switching the Speaker to Emit Audio (Bluetooth Speaker)	373
Receiving	328	17.17 microSD	377
Transmitting	329	Formatting a microSD Card (Format SD Card)	380
17.6 Modulation Line	331	Resetting the Recognition of microSD Card (Eject SD Card).....	380
17.7 Audio Function	340	Recording Received Audio Automatically (Auto Recording)	381
Specifying a Control Head for Controlling the Volume (Master Volume Control)	340	Playing Back the Recorded Audio (Playback)	382
Switching the Output Status of the External Speaker (Unselected RF Deck Speaker)....	341	Storing the GPS Data (GPS Data Storage)	383
Adjusting the Output Level of the External Speaker (Unselected Speaker Offset).....	342	17.18 Relaying the Received Signal (Mobile Relay Station)	387
Communicating Directly Between Control Heads (Intercom).....	343	Examples of Mobile Relay Station Operation	388
Monitoring the Communications of Control Heads (Transmit Audio Monitor)	345	Configuring Mobile Relay Station	390
Muting the Speaker of a Control Head (Speaker 1-2 Mute)	347	Connecting the RF Deck by Using a D-sub 25-pin Cable	392
Using the Transceiver as a Megaphone (Public Address)	348	Creating a Dedicated Mobile Relay Station Cable	395
Configuring the Output Method of the Received Audio and Beep (Multi RF Deck Audio Output Type)	349	Connecting the External Speaker	397
17.8 Inhibiting Transceiver Behaviors by Remote Control (Inhibit/ Stun)	356	Placing the Transceiver in Mobile Relay Station Mode	398
17.9 Communication Ports	357		
PC Interface Protocol	358	18 STRUCTURING A MULTI RF DECK/ MULTI CONTROL HEAD	400
17.10 External Ports (AUX Input/ Output)	358	18.1 Initial Configuration for Multi RF Deck/ Multi Control Head.....	400
Restrictions When Configuring AUX Input/ Output	359	Attaching KRK-15BM to the RF Deck.....	400
17.11 Ignition Sense.....	360	Attaching KRK-14HM to KCH-19M	403
Behaviors of Each Ignition Terminal.....	360	Updating the Firmware	405
17.12 Microphone-hook.....	361	About the Connection of the Control Head to the RF Deck	407
17.13 GPS.....	361	18.2 Adding an RF Deck/ Control Head	409
17.14 Scan	362	Adding a Control Head	409
17.15 Communications in an Emergency (Emergency)	363	Adding an RF Deck	413
17.16 Bluetooth Communication	364	18.3 Replacing an RF Deck/ Control Head	418
Bluetooth On/Off.....	366	Replacing a Control Head.....	418
Finding a Bluetooth-compatible Device (Bluetooth Find Device).....	367		

Replacing an RF Deck	422
18.4 Removing an RF Deck/ Control Head	426
Removing a Control Head	426
Removing an RF Deck.....	429
18.5 Changing Configuration Data While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating.....	432
18.6 Updating Firmware While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating.....	433
18.7 Reconnecting a Removed RF Deck.....	434
18.8 Changing Configuration Data of 1 RF Deck While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating.....	438
18.9 Changing the Display Positions of a Channel Name and an Icon When Multi RF Deck View Is On.....	442
18.10 Troubleshooting in Single RF Deck/ Single Control Head.....	445
18.11 About Configuration Using KPG-D1/ D1N	445
Configuration in KPG-D1/ D1N If Changed from a Single RF Deck Structure to a Multi RF Deck System.....	445
Configuration in KPG-D1/ D1N if RF Decks Are Switched.....	449
Configuration in KPG-D1/ D1N If Control Heads Are Switched	453
Configuration in KPG-D1/ D1N If Changed from a Multi RF Deck System to a Single RF Deck Structure.....	454
18.12 About the Message Display	455
18.13 About the Pin Arrangement for KCT-72 and the Connection of External Devices	456
Connecting the External Speaker	457
Connecting the External Microphone	457
19 VOX	458
19.1 Configuring the Input Sensitivity of the Microphone (VOX Gain Level).....	459
19.2 Retaining Transmitting State after VOX Transmission (VOX Delay Time)	460
19.3 Restricting the VOX Transmission while the Audio Sounds from the Transceiver (Transmit Inhibit while Receiving)	460
19.4 Disabling the VOX by Using the PTT Switch (Cancel Operation)	461
19.5 Notifying a User of the Start of the VOX Transmission with a Tone (VOX Proceed Tone).....	461
19.6 Selecting a Control Head for Using VOX (Control Head for VOX)	461
20 READING THE LOG INFORMATION OF THE TRANSCEIVER (FIELD SUPPORT)	462
21 CONFIGURATION FOR EACH FUNCTION.....	464
21.1 Available Functions for the PF Keys.....	464
21.2 Available Functions for Menu Mode	483
21.3 Available Functions for the Selector	487
Available Functions for the Lever Switch	488
21.4 Available Functions for COM Port	491
Flow Control of the Communication Port (Flow Control)	494
COM Port Functions.....	494
Serial Protocol Types.....	495
22 KEY OPERATIONS FOR EACH MODE.....	496
23 BEEP LIST	507
INDEX.....	517

About This Manual

This In-depth manual describes the functions of the transceiver (NX-5200/ NX-5200S/ NX-5200LG/ NX-5300/ NX-5300S/ NX-5300LG/ NX-5400/ NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900) used in common in each of an analog, P25, NXDN, and DMR systems.

This document is created for the product having the following design specifications.

Item	Specifications	How to Verify
Market Code	K, F	Printed or labeled on the packaging and the model name plate on the transceiver.
Firmware Version of the Transceiver	5.30.00	Can be viewed in the Transceiver Information dialog box of KPG-D1/ KPG-D1N. Or, firmware version of the transceiver can be viewed by the following ways: Portable transceiver or Mobile transceiver (KCH-21R (Handheld Control Head)): Turning the transceiver ON while pressing and holding the Side 3 key of the transceiver displays the firmware version on the display. Mobile transceiver (KCH-19 (Basic Panel)/ KCH-20R (Featured Panel)): Turning the transceiver ON while pressing and holding the [+] key causes the firmware version to appear on the display. Common to Portable and Mobile: Turning the transceiver ON while pressing and holding the Menu ([]) key causes the transceiver to display Radio Mode Selection. Then, if "Transceiver Info" is selected and the Menu ([]) key is pressed, the transceiver enters Transceiver Information Mode, and then the firmware version can be viewed.
Version of KPG-D1/ KPG-D1N	V 5.30	Can be viewed in the About dialog box of KPG-D1/ KPG-D1N.

K, F: Designed for the North American markets.

Also, the following Radio Feature License is required to use the functions described in this manual:

● P25 system ^{*3}

Function Name	Radio Feature License
P25 Conventional ^{*1}	KWD-5100CV
P25 Phase 1 Trunking	KWD-5101TR
P25 Phase 2 Trunking	KWD-5102TR
P25 OTAR	KWD-5103RK
P25 OTAP ^{*2}	KWD-5104AP
P25 Voting Scan	KWD-5105VT
P25 Packet Data	KWD-5106DT
P25 Enhanced Encryption	KWD-5107EE

^{*1} Implemented before the factory shipment for the F-type transceiver.

^{*2} Implemented before the factory shipment for the K- and F-type transceiver.

^{*3} Cannot be implemented for NX-5200S/ NX-5300S/ NX-5600H/ NX-5700S/ NX-5800S.

● NXDN system

Function Name	Radio Feature License
NXDN Conventional ^{*1}	KWD-5200CV
NXDN Type-C Trunking ^{*2 *3}	KWD-5201TR
NXDN OTAP ^{*1}	KWD-5204AP

^{*1} Implemented before the factory shipment for the K- and F-type transceiver.

^{*2} Implemented before the factory shipment for the K-type transceiver. (except NX-5200S/ NX-5300S NX-5700S/ NX-5800S)

^{*3} Cannot be implemented for NX-5600H.

● DMR system ^{*4}

Function Name	Radio Feature License
DMR Conventional ^{*1 *3}	KWD-5300CV
DMR Tier III Trunking	KWD-5301TR
DMR OTAP ^{*2}	KWD-5304AP
Enhanced Encryption	KWD-5500EE

^{*1} Also includes Trunking 2.5 and S-Trunking. (The support for S-Trunking ended in March 2022.)

^{*2} Implemented before the factory shipment.

^{*3} Implemented before the factory shipment for NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S.

^{*4} Cannot be implemented for NX-5200LG/ NX-5300LG/ NX-5600H/ NX-5700H/ NX-5800H.

● Common

Function Name	Radio Feature License
4000 Channel ^{*3}	KWD-5000CH
Front Panel Programming	KWD-5001FP
microSD ^{*4}	KWD-5002SD
Bluetooth Data	KWD-5003BT
Multi RF Deck ^{*1 *2}	KWD-5004MR
Secure Cryptographic Module ^{*1}	KWD-5005AE
DES 4 Keys ^{*1}	KWD-5006DE
Remote Control	KWD-5007RC
Simplified License	KWD-5008SL
Indoor Location ^{*5}	KWD-5020-IL

^{*1} Implemented before the factory shipment.

^{*2} Cannot be implemented for NX-5200/ NX-5200S/ NX-5200LG/ NX-5300/ NX-5300S/ NX-5300LG/ NX-5400/ NX-5700S/ NX-5800S.

^{*3} Cannot be implemented for NX-5200S/ NX-5200LG/ NX-5300S/ NX-5300LG/ NX-5700S/ NX-5800S.

^{*4} Cannot be implemented for NX-5200LG/ NX-5300LG.

^{*5} Cannot be implemented for NX-5200S/ NX-5300S/ NX-5700/ NX-5800/ NX-5900/ NX-5700S/ NX-5800S/ NX-5600H/ NX-5700H/ NX-5800H.

IMPORTANT NOTICE:

THOSE WHO INTEND TO EXPORT OR RE-EXPORT OR TRANSPORT ANY COMPUTER(S) AND/OR ANY KINDS OF PERIPHERAL DEVICE(S) WITH AES/DES ENCRYPTION SOFTWARE INSTALLED (INCLUDING TRANSCEIVERS WITH ANY SOFTWARE FOR AES/DES ENCRYPTION) OUTSIDE OF A COUNTRY OR REGION WITH SUCH CONTROLS OR RESTRICTIONS MUST FULLY COMPLY WITH ANY EXPORT AND IMPORT LAWS AND REGULATIONS OF THE COUNTRY OR REGION AND OBTAIN ALL REQUIRED AUTHORIZATIONS OR LICENSES IN ADVANCE.

How to Read the In-depth Manual

The In-depth Manual has the following sections.

Common Function Reference (Common FUNC)

Describes the functions common to the transceivers.

P25 Function Reference (P25 FUNC)

Describes the P25 functions of the transceiver.

NXDN Function Reference (NXDN FUNC)

Describes the NXDN functions of the transceiver.

DMR Function Reference (DMR FUNC)

Describes the DMR functions of the transceiver.

5-tone Function Reference (5-tone FUNC)

Describes the 5-tone functions of the transceiver.

About Notations

The following notations are used in this manual.

[]

The characters in [] indicate the name of the operating portion of the transceiver and the key of the PC.

" " (Double Quotation Mark)

The characters in " " indicate the name of the functions, buttons, and menus shown on the KPG-D1/ KPG-D1N or the display of the transceiver.

Bold Letters

The characters in bold letters indicate the name of the windows, tabs, checkboxes in KPG-D1/ KPG-D1N and functions assigned to keys on the transceiver.

[] + []

This notation is used for describing functions activated by pressing 2 keys on the PC keyboard at the same time. For example, the notation to enter a capital A on the PC is **[Shift]** + **[a]** for pressing the **[a]** key while pressing the **[Shift]** key.

PF (Programmable Function) Key

This function is used for describing the key that is assigned with any function. When the Reset function is assigned to the **[A]** key, the **[A]** key is described as "the **Reset** key".

Notations for FPU names

KPG-D1 and KPG-D1N are referred to collectively as "KPG-D1/ D1N" in this document.

About the Notation of the Supported Models

This manual describes the supported models according to the following rules:

Model Name	Notation	
NX-5200	Portable	VHF
NX-5200S ^{*3} ^{*4}		VHF
NX-5200LG ^{*5}		VHF
NX-5300		UHF
NX-5300S ^{*3} ^{*4}		UHF
NX-5300LG ^{*5}		UHF
NX-5400 ^{*4}		700 MHz/ 800 MHz
NX-5600H ^{*1}	Mobile	VHF
NX-5700		VHF
NX-5700H ^{*2}		VHF
NX-5700S ^{*3} ^{*4}		VHF
NX-5800		UHF
NX-5800H ^{*2}		UHF
NX-5800S ^{*3} ^{*4}		UHF
NX-5900 ^{*4}		700 MHz/ 800 MHz

^{*1} This is a Low Band model. The following systems are not supported:

- LTR Trunking system
- NXDN Site Roaming system
- NXDN Site Roaming with RAN system
- NXDN Trunking system
- DMR system
- P25 system

^{*2} A DMR system is not supported.

^{*3} A P25 system is not supported. Can be used in either an NXDN system or DMR system. Refer to “[About NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S](#)” about NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S.

^{*4} A Trunking 2.5 system is not supported.

^{*5} A DMR system is not supported. Can be used in either a P25 system or NXDN system. Refer to “[About NX-5200LG/ NX-5300LG](#)” about NX-5200LG/ NX-5300LG.

About Examples of the Transceiver Display

This manual describes mainly by using the display examples of Portable display if the functions are common to the transceivers. The display examples of Mobile display are also described as needed. Also, the display examples of KCH-19 (Basic Panel) display are mainly used as the display examples for Mobile. The display examples of KCH-20R (Featured Panel) are also used as needed.

Because the display is limited to monochrome for NX-5200LG/ NX-5300LG, the NX-5200LG/ NX-5300LG display differs from the display in this manual (color display).

Abbreviations Used in This Document

The following abbreviations are used in this in-depth manual. Refer to the abbreviation table below.

Abbreviation	Full Spelling or Meaning
ACK	Acknowledgment
ANR	Active Noise Reduction
AES	Advanced Encryption Standard
AMBE+2	Advanced Multi-Band Excitation
ARC4	Alleged RC4
AUX	Auxiliary
CAI	Common Air Interface
CH	Channel
COM port	Communication port
COR	Carrier-operated Relay
CW	Continuous Wave
DES	Digital Encryption Standard
DFA	Direct Frequency Assignment
DMR	Digital Mobile Radio
DQT	Digital Quiet Talk
DTC	Data Transmission Control
DTMF	Dual Tone Multi-Frequency
ESN	Electronic Serial Number
ETX	The end of Text
FCC	Federal Communications Commission
FPU	Field Programming Unit
GPS	Global Positioning System
HSP	Headset Profile
ID	Identification
LOK	Link OK (connected to the repeater)
MI2	Microphone Input II
Mic	Microphone
NAC	Network Access Code
OST	Operator Selectable Tone
P25	APCO Project 25
PA	Public Address
PF	Programmable Function
PTT	Push-to-Talk
QT	Quiet Talk
RAN	Radio Access Number
RSSI	Received Signal Strength Indication
RTC	Real Time Clock
RX	Receive
STX	Start of Text
TOR	Tone Operated Relay
TOT	Time-out Timer
TX	Transmit
Vocoder	Voice Encoder/ Decoder
VOX	Voice-operated Transmit

About Copyright

Software Copyrights

All copyrights and other intellectual property rights for this technical document and relevant in-depth manuals as well as the software described in this technical document, relevant in-depth manuals, and help texts and manuals attached to the software are owned by JVCKENWOOD Corporation.

A right to use the software described in this technical document and relevant in-depth manuals is granted to a licensee by JVCKENWOOD Corporation; however, the title to and ownership of the software shall be owned by JVCKENWOOD Corporation. Refer to the help texts attached to this software for details.

JVCKENWOOD Corporation does not warrant that the quality and performance of the software described in this technical document and relevant in-depth manuals conform to the applicability of any use, and JVCKENWOOD Corporation shall be free from liability for any defects, damage or loss, or from any warranty for anything other than what is expressly described in this technical document and relevant in-depth manuals.

Any distribution, resale, lease, waiver, assignment, reproduction or disclosure on a website of all technical manuals written and made by JVCKENWOOD Corporation including but not limited to in-depth manuals, supplements, and help texts attached to the software shall strictly be prohibited.

Firmware Copyrights

The title to and ownership of copyrights for firmware which is described in this technical document, relevant in-depth manuals, and help texts are reserved for JVCKENWOOD Corporation, and the firmware shall be embedded in KENWOOD product memories.

Any modifying, reverse engineering, copying, reproducing or disclosing on an Internet website of the firmware is strictly prohibited without prior written consent of JVCKENWOOD Corporation.

Furthermore, any reselling, assigning or transferring of the firmware is also strictly prohibited without embedding the firmware in KENWOOD product memories.

Firmware is equipped with the AMBE+2™ voice encoding technology under license from Digital Voice Systems.

About Trademarks and Patent Rights

Adobe and Adobe Acrobat are either trademarks of Adobe Systems Incorporated, or registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

NEXEDGE® is a registered trademark of JVCKENWOOD Corporation in the United States and other countries.

NXDN™ is a trademark of Icom Incorporated and JVCKENWOOD Corporation.

This product uses the AMBE+2™ voice encoding technology and the technology is protected by intellectual property rights including patent rights, copyrights, and trade secrets of Digital Voice Systems, Inc.

This voice encoding technology is licensed solely for use within this communications equipment.

The user of this technology is explicitly prohibited from attempting to extract, remove, decompile, reverse engineer, or disassemble the object code, or in any other way convert the object code into human-readable form.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by JVCKENWOOD Corporation is under license. All other trademarks and trade names are the trademarks and trade names of their respective owners.

Automatic Injury Detection (AID) is a registered trademark of Select Engineering Services, LLC.

All other product names referenced herein are trademarks or registered trademarks of their respective manufacturers.

About the Programming Software

Various functions and parameters of the transceiver can be configured by using the KPG-D1/ D1N software. Various functions can be enabled by connecting the transceiver to a PC by use of the KPG-36U/ KPG-36X (Portable) or KPG-46U/ KPG-46X (Mobile) programming cable and writing the data configured using KPG-D1/ D1N to the transceiver. In this manual, a corresponding reference in the help texts of KPG-D1/ D1N is described for each function of the Function Reference.

Therefore, you can configure the function by referring to the function also appearing in the help texts of KPG-D1/ D1N.

About KPG-D1N

KPG-D1N is the programming software to configure functions for the transceiver to be used in the U.S.A.

KPG-D1N is compliant with the FCC Part 90 standard so that the specification does not allow to configure "Wide" (25 kHz) for **Channel Spacing** with a VHF or UHF transceiver in the frequency band regulated by the FCC Part 90. Except for the function above, specifications of KPG-D1 and KPG-D1N are the same.

About the Notation of "Configuration Using KPG-D1/ D1N"

In this manual, for the description of each function written as "Configuration using KPG-D1/ D1N", a corresponding reference in the help texts of KPG-D1/ D1N is described. Therefore, you can configure the function by referring to the function also appearing in the help texts of KPG-D1/ D1N.

About the Zone-channel Format

Using KPG-D1/ D1N, the zone information of the transceiver can be configured by selecting whether to configure for each zone the channels in the same communication system (Analog Conventional, P25 Conventional, NXDN Conventional, DMR Conventional, P25 Trunking, NXDN Trunking, DMR-based Trunking), or channels in different systems.

Channel Table:

The communication system to be used can be selected for each zone. Only channels which use the same communication system can be configured in a zone.

Personality:

The communication system to be used can be selected for each channel. Channels which use different communication systems can exist in a zone.

In this manual, the Channel Table format or the Personality format may be described in explanations and references. This indicates that the function is enabled only when the format is configured. Also, the data configured by the Channel Table format can be migrated to the Personality format, but the data configured by the Personality format cannot be migrated to the Channel Table format.

Refer to the help texts of KPG-D1/ D1N for the method for configuring **Zone-channel Format** using KPG-D1/ D1N.

About System Type

For KPG-D1/ D1N, a **System Type** (Analog Conventional, P25 Conventional, NXDN Conventional, DMR Conventional, P25 Trunking, NXDN Trunking, DMR-based Trunking, LTR Trunking, P25 Voting with NAC, NXDN Site Roaming, NXDN Site Roaming with RAN, or DMR Site Roaming) needs to be selected in **System Information** of KPG-D1/ D1N in order to configure the system data or Zone-channel data of each communication system.

In this manual, for the description of each function written as “Configuration using KPG-D1/ D1N”, a corresponding reference in the help texts of KPG-D1/ D1N is described as follows:

Configuring **Unit ID (Own)** ( **See** Transceiver Settings > Personal > System Information > NXDN Conventional > Unit ID (Own))

In this case, if “NXDN Conventional” is selected in **System Type** of **System Information**, **Unit ID (Own)** can be configured in an NXDN Conventional system.

Refer to the help texts of KPG-D1/ D1N for the method of **System Type** configuration using KPG-D1/ D1N.

About Multi RF Deck/ Multi Control Head

For Mobile, by connecting 1 or 2 Control Heads to multiple mobile transceivers (RF Deck), 1 Multi RF Deck system can be structured.

Refer to “**MULTI RF DECK/ MULTI CONTROL HEAD**” for the instructions on how to structure and how to configure Multi RF Deck/ Multi Control Head, and for the special functions of Multi RF Deck/ Multi Control Head.

About NX-5200LG/ NX-5300LG

A DMR system is not supported for NX-5200LG/ NX-5300LG. Either a P25 system or NXDN system is selected and used.

The following is the rest of the description for NX-5200LG/ NX-5300LG:

- The configuration in Color Scheme is fixed to “Monochrome White”. The LCD is displayed in monochrome (white background, black characters) except for the bitmap indication (Custom Start-up Screen) at startup of the transceiver.
- A microSD card is not supported.
- The expansion of the number of channels to be configured by Radio Feature License (KWD-5000CH) is not supported.
- The following Radio Feature Licenses are implemented before factory shipment:
 - KWD-5005AE (Secure Cryptographic Module)
 - KWD-5006DE (DES 4 Keys)
 - KWD-5100CV (P25 Conventional)
 - KWD-5104AP (P25 OTAP)
 - KWD-5200CV (NXDN Conventional)
 - KWD-5204AP (NXDN OTAP)

Refer to the following table about the main differences of the NX-5200/ NX-5300 and NX-5200LG/ NX-5300LG:

Protocols, Options, and Other	NX-5200/ NX-5300	NX-5200LG/ NX-5300LG
P25 Conventional	Supported	Supported
P25 Phase 1 Trunking/ P25 Phase 2 Trunking	Supported	Supported
Analog	Supported	Supported
NXDN Conventional	Supported	Supported
NXDN Trunking	Supported	Supported
DMR Conventional	Supported	Not supported
DMR-based Trunking	Supported	Not supported
5-tone	Supported	Not supported
4000 Channel (KWD-5000CH)	Supported	Not supported
microSD	Supported	Not supported
Indoor Location	Supported	Supported
Color Scheme	Color/ Monochrome	Monochrome only

About NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S

A P25 system is not supported for NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S. Either an NXDN system or DMR-based Trunking (except the Trunking 2.5 system) is selected and used.

The following is the rest of the description for NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S:

- NX-5700S/ NX-5800S is operated in the state where KCH-19 (Basic Panel) and RF Deck are directly connected. A remote control head, a connection with KCH-20R/ KCH-21R, and Multi RF Deck/ Multi Control Head are not supported.
- The configuration in Color Scheme is fixed to "Monochrome White". The LCD is displayed in monochrome (white background, black characters) except for the bitmap indication (Custom Start-up Screen) at startup of the transceiver.
- The expansion of the number of channels to be configured by Radio Feature License (KWD-5000CH) is not supported.
- The following Radio Feature Licenses are implemented before factory shipment:
 - KWD-5005AE (Secure Cryptographic Module)
 - KWD-5006DE (DES 4 Keys)
 - KWD-5200CV (NXDN Conventional)
 - KWD-5204AP (NXDN OTAP)
 - KWD-5300CV (DMR Conventional)
 - KWD-5304AP (DMR OTAP)

Refer to the following table about the main differences of the NX-5000 series (NX-5200/ NX-5300/ NX-5700/ NX-5800) and NX-5000S series (NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S):

Protocols, Options, and Other	NX-5000 Series	NX-5000S Series
P25	Supported	Not supported
Analog	Supported	Supported
NXDN Conventional	Supported	Supported
NXDN Trunking	Supported	Supported
DMR Conventional	Supported	Supported
DMR-based Trunking	Supported	Supported ^{*1}
5-tone	Supported	Not supported
4000 Channel (KWD-5000CH)	Supported	Not supported
KCH-19 (Basic Panel)	Supported	Supported
KCH-20R (Featured Panel)	Supported	Not supported
KCH-21R (Handheld Control Head)	Supported	Not supported
Single RF Deck/ Single Control Head (Remote Control Head)	Supported	Not supported
Multi RF Deck/ Multi Control Head	Supported	Not supported
Indoor Location	Supported	Not supported
Color Scheme	Color/ Monochrome	Monochrome only
IP connection of OTAP (IP Based Packet Data format)	Supported	Not supported

^{*1} Except the Trunking 2.5 system.

About Options to Use the Functions Described in This Document

To use the functions described in this document, the following KENWOOD optional accessories need to be prepared on your own as necessary.

Portable/ Mobile	Option
Portable	• KMC-25 (Speaker Microphone) • KMC-41 (Speaker Microphone) • KMC-41D (Speaker Microphone) • KMC-42W (Speaker Microphone) • KMC-42WD (Speaker Microphone) • KMC-47GPS/ KMC-47GPSD (GPS Speaker Microphone) • KMC-54WD (Speaker Microphone) • KMC-70 (Speaker Microphone) • KMC-72 (Speaker Microphone) • KWD-AE30 (Secure Cryptographic Module) • KWD-AE31 (Secure Cryptographic Module) • KPG-93 (Keyloader Interface Cable) • KPG-36U/ KPG-36X (Programming Interface Cable) • KHS-14 (Headset) • KHS-15 (Headset)

Portable/ Mobile	Option
Mobile	• KMC-27A (Microphone) • KMC-27B (Microphone) • KMC-28A (Microphone with 12-Keypad) • KMC-30 (Microphone) • KMC-32 (Microphone with 16-Keypad) • KMC-35 (Microphone) • KMC-36 (Microphone with 12-Keypad) • KMC-60 (Microphone) • KMC-62 (Microphone with 16-Keypad) • KCT-73MIC (External Microphone) • KMC-9C (Desktop Microphone) • KMC-53 (Desktop Microphone) • KMC-65 (Microphone) • KMC-66 (Microphone with 12-Keypad) • KES-3 (External Speaker) • KES-5 (External Speaker) • KES-5A (External Speaker) • KAP-2 (PA, HA Unit) • KCT-18 (Ignition Sense Cable) • KCT-46 (Ignition Sense Cable) • KRA-40G (GPS Antenna) • KWD-AE30 (Secure Cryptographic Module) • KWD-AE31 (Secure Cryptographic Module) • KPG-115 (Keyloader Interface Cable) • KPG-46U/ KPG-46X (Programming Interface Cable) • KCH-19 (Remote Control Head (Basic Panel)) • KCH-20R (Remote Control Head (Featured Panel))^{*1} • KCH-21R (Handheld Control Head)^{*1} • KRK-14H (Control Head Interface Kit)^{*1} • KRK-15B (Control Head Remote Kit)^{*1} • KCT-71 (Remote Control Cable)^{*1} • KCT-72 (Connection Cable)^{*1} • KCT-77 (Remote Control Cable)^{*1}

^{*1} Not supported for NX-5700S/ NX-5800S.

About the Built-in GPS Receiver Unit

The GPS receiver unit is built-in for NX-5200/ NX-5200S/ NX-5200LG/ NX-5300/ NX-5300S/ NX-5300LG/ NX-5400/ NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900. Read the following warnings before using the built-in GPS receiver unit:

- **On the use of the GPS**
With frequency interference in the GPS receive frequency range to the transceiver or another transceiver, the GPS receiver may not position normally.
 1. If the GPS receiver positions during transmission:
 - The GPS receiver may be unable to position if the transmit spurious emission of the transceiver interferes within the GPS receive frequency range.
 - The interference to the GPS receiver changes depending on the transmission power of the transceiver. Greater transmission power results in the higher possibility of being unable to position.
 2. If the GPS receiver positions during reception:
 - The GPS receiver may be unable to position if the harmonics of the oscillator equipped in the transceiver interfere within the GPS receive frequency range.
 3. Effects of other interfering frequencies (such as if other transceivers transmit):
 - Even with transmit and receive frequencies other than the above, the GPS receiver may be unable to position if frequencies emitted from other transceivers and electronic equipment interfere within the GPS receive frequency range.
- As the built-in GPS receiver unit consumes more power when powered on compared to when powered off, the battery life of the transceiver becomes shorter compared to when the built-in GPS receiver unit is powered off.
- If the clock in the transceiver is not configured, a cold start always occurs. Therefore, the time until the start of positioning is longer. (Refer to [Adjusting the Time](#).)

How to Search for Information

For your convenience of reading through this document using Adobe Acrobat or Adobe Reader, a link to a corresponding item is pasted in the Contents page, Index page, the lower part of each page and in the context. Clicking the portion where a link is pasted enables a jump to the corresponding page. Placing a pointer over the portion where a link is pasted changes the shape of the pointer to a hand ().


CONTENTS

Clicking a title in the Contents page allows a jump to the corresponding page.

CONTENTS	
About This Manual	viii
How to Read the In-depth Manual	x
About Notations	x


INDEX

Clicking a function name, a title or a page number in the Index pages allows a jump to the corresponding page.

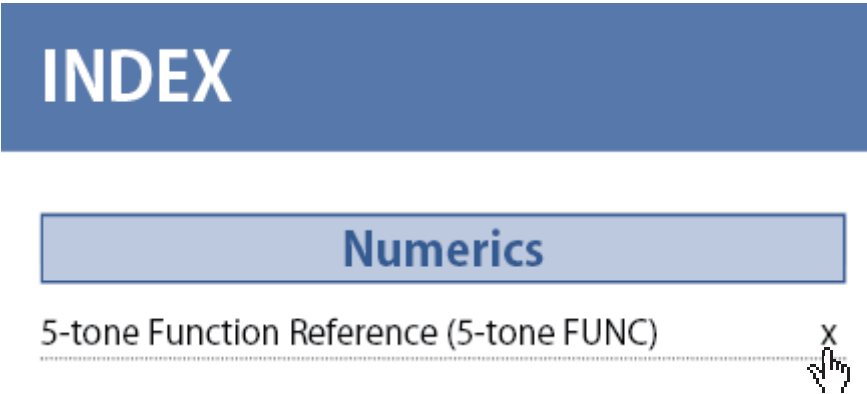

Blue Characters in the Main Text

Clicking a portion with blue characters in the main context allows a jump to the corresponding page.

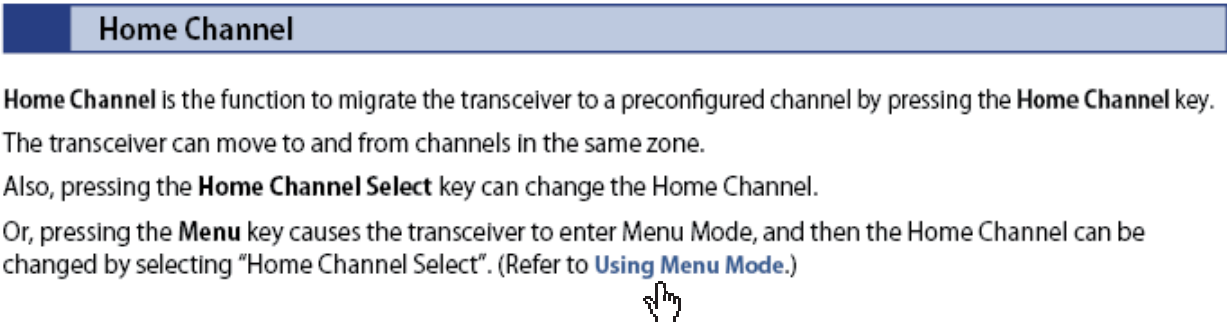

Blue Characters at the Bottom of Each Page

Clicking a portion with blue characters located at the bottom of each page allows a jump to the first page of the contents or index.



Return to the Previous Page

To return to the previous page, click the "Previous Page" button on your Adobe Acrobat or Adobe Reader, or press the [←] key while pressing and holding the [Alt] key on the keyboard.

Search the Text

The text in this document can be searched using the search function of your Adobe Acrobat or Acrobat Reader.

Outline of This Transceiver

NX-5200/ NX-5200S/ NX-5200LG/ NX-5300/ NX-5300S/ NX-5300LG/ NX-5400/ NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900 is the VHF/ UHF or 700 MHz/ 800 MHz transceiver for the use of professionals. The transceiver is equipped with the digital communications system (conventional and trunking) which complies with the NXDN, P25, and DMR common air interface specifications, as well as the existing analog FM mode.

GENERAL FEATURES

Portable

- 128 Zones, 512 Channels per zone *1

Models

- VHF Models
Low: 1 W, High: 6 W
- UHF Models
Low: 1 W, High: 5 W
- 700 MHz/ 800 MHz Model
Low: 1 W, High: 3 W

Display Functions

- Color/ Monochrome LCD (NX-5200/ NX-5300/ NX-5400)
- Monochrome LCD (NX-5200S/ NX-5200LG/ NX-5300S/ NX-5300LG)
- 7 Color LED
- Function/ Status LCD Icons
- Transmit/ Busy/ Call Alert/ Warn LED

Specifications

- Emergency/ AUX Key
- On/ Off Volume Knob
- 16-Position Mechanical Selector
- 2 Position Lever Switch
- 4 Front PF Keys & Cross Key
- 12-Key Keypad (Full key model)
- 3 Customize Keys (Standard key model)
- 3 Side PF Keys
- Audio Power more than 1 W@8 Ω
- PC Serial Interface
- Built-in GPS Receiver
- Built-in Bluetooth
- microSD card slot
- Motion Sensor

Others

- Date & 12/ 24 Hour Time Clock
- Flash Firmware Upgrading

Mobile

- 128 Zones, 512 Channels per zone *1

Models

- L-VHF Model (Low Band)
Low: 25 W, Mid: 70 W, High: 110 W
- VHF Models
Low: 5 W, High: 50 W
- VHF Model (NX-5700H Only)
Low: 25 W, Mid: 50 W, High: 110 W
- UHF Models
Low: 5 W, High: 45 W
- UHF Model (NX-5800H Only)
Low: 25 W, Mid: 50 W, High: 100 W
- 700 MHz/ 800 MHz Model
Low: 2 W, High: 30 W/ 35 W

Display Functions

- Color/ Monochrome LCD (NX-5600H/ NX-5700/ NX-5700H/ NX-5800/ NX-5800H/ NX-5900)
- Monochrome LCD (NX-5700S/ NX-5800S)
- 7 Color LED
- Function/ Status LCD Icons
- Transmit/ Busy/ Call Alert/ Warn LED

Specifications

- Emergency/ AUX Key
- 4 Up/ Down Selectors & 7 Front PF Keys (Basic Panel)
- 14 Front PF Keys & 4-Way D-pad Key (Featured Panel)
- 16-Position Mechanical Selector (Featured Panel)
- 4 Front PF Keys & Cross Key (Handheld Control Head)
- 12-Key Keypad (Handheld Control Head)
- 2 Customize Keys (Handheld Control Head)
- Front Panel Speaker, 4 W Speaker Audio
- Illumination Sensor
- PC Serial Interface
- DB 25 Accessory Interface
- 9 Programmable AUX I/Os
- 2 Programmable AUX Outputs
- Microphone
- Built-in GPS Receiver
- Built-in Bluetooth
- microSD card slot
- 3.5 mm Audio Jack (not available for NX-5600H/ NX-5700H/ NX-5800H)
- USB Micro Terminal (NX-5600H/ NX-5700H/ NX-5800H Only)
- Molex 9pin Connector (NX-5600H/ NX-5700H/ NX-5800H Only)
- 12 W Audio Output (NX-5600H/ NX-5700H/ NX-5800H Only)

Others

- Date & 12/ 24 Hour Time Clock
- Timed Power-off
- Ignition Sense
- Public Address/ Horn Alert Output
- Flash Firmware Upgrading

P25 DIGITAL MODES

GENERAL

- P25 Digital Air Interface
- AMBE+2 VOCODER
- 12.5 kHz Channel Spacing
- Individual Call
- Group Call
- Emergency Call
- All Group Call
- Radio Inhibit / Uninhibit ^{*2}
- Remote Monitor ^{*2}
- Ignition On/ Off GPS Reporting (Mobile Only)
- Single Scan, List Scan
- AES & DES Encryption Module Option
- ARC4 Encryption Option
- AES/ DES Key Loader Option
- Over-the-Air-Rekeying
- Over-the-Air Alias ^{*8}

CONVENTIONAL MODE

- P25 Phase 1 Conventional
- Network Access Code (NAC)
- ALL CALL
- Priority Scan
- 2-tone
- Multi-Zone Scan

TRUNKING MODE

- P25 Phase 1 Trunking, P25 Phase 2 Trunking
- Paging Call
- Telephone Call
- Priority Monitor Scan
- Limited Talkgroup Scan

NXDN DIGITAL MODES

GENERAL

- NXDN Digital Air Interface
- AMBE+2 VOCODER
- 6.25 kHz (Very Narrow)/ 12.5 kHz (Narrow) Channel Spacing
- Over-the-Air Alias
- Paging Call
- Emergency Call
- All Group Call
- Status Message ^{*3}
- Remote Stun/ Kill ^{*2}
- Remote Monitor ^{*2}
- Short & Long Messages ^{*3}
- AUX Input Status Message (Mobile Only) ^{*4}
- AUX Output Status Message (Mobile Only) ^{*5}
- Ignition On/ Off GPS Reporting (Mobile Only)
- Data with Voice
- Single Scan, List Scan
- NXDN Scrambler Included
- AES & DES Encryption Module Option
- AES/ DES Key Loader Option

CONVENTIONAL MODE

- 63 Radio Access Numbers (RAN)
- Individual Call & Group Call
- Mixed FM/ Digital Operation
- Site Roaming
- 2-tone
- Multi-Zone Scan

TRUNKING MODE

- Individual Call
- Group Call & Broadcast Call
- Telephone Call
- Transmission Trunked Mode ^{*6}
- Message Trunked Mode ^{*6}
- 4 Priority Monitor IDs ^{*6}
- Remote Group Add ^{*2}
- Failsoft Mode

DMR DIGITAL MODES**GENERAL**

- DMR Digital Air Interface
- AMBE+2 VOCODER
- 12.5 kHz Channel Spacing
- Color Code
- Individual Call
- Group Call & Broadcast Call
- Emergency Call
- All Group Call
- Status Message ^{*3}
- Remote Stun/ Kill ^{*2}
- Remote Monitor ^{*2}
- Short Messages ^{*3}
- AUX Input Status Message (Mobile Only) ^{*4}
- AUX Output Status Message (Mobile Only) ^{*5}
- Call Interruption
- Over-the-Air Alias
- Remote Control
- Ignition On/ Off GPS Reporting (Mobile Only)
- Single Scan
- Bit Scramble Encryption
- AES & DES Encryption Option
- ARC4 Encryption Option (not available for Trunking 2.5, S-Trunking)

CONVENTIONAL MODE

- Paging Call
- Unaddressed Call
- Open Voice Channel Mode (OVCM)
- Site Roaming
- Multi-Zone Scan
- List Scan

TRUNKING MODE

- Telephone Call
- Dialing Mode
- Alternate Zone-Channel (not available for Trunking 2.5, S-Trunking)
- Vote Now (not available for S-Trunking) ^{*9}
- 4 Priority Monitor IDs (not available for S-Trunking)
- Network Failure Indicator

ANALOG MODES

GENERAL

- 12.5 kHz (Narrow)/ 20.0 kHz (Wide 4k) (NX-5400/ NX-5900 Only)/ 20.0 kHz (Wide) (NX-5600H Only)/ 25.0 kHz (Wide) Channel Spacing ^{*7}
- Conventional & LTR Systems
- FleetSync/ FleetSync II, MDC-1200, DTMF
- QT/ DQT/ 2-tone
- Single Scan, List Scan
- Priority Scan
- Multi-Zone Scan
- Voice Inversion Scrambler (16 Codes)

FleetSync

- PTT ID/ Caller ID
- Selective/ Group Call
- Status Message ^{*3}
- Emergency, Short & Long Messages ^{*3}
- AUX Input Status Message (Mobile Only) ^{*4}
- AUX Output Status Message (Mobile Only) ^{*5}
- Ignition On/ Off GPS Reporting (Mobile Only)

MDC-1200

- PTT ID/ Caller ID
- Selective/ Group Call
- Radio Check, Radio Inhibit/ Uninhibit
- AUX Output ID (Mobile Only) ^{*5}

5-tone

- Selective/ Group Call
- Status Message
- Emergency Call

^{*1} The maximum number of channels that can be configured for a transceiver in total is 1,024. With the Radio Feature License (KWD-5000CH) enabled, the maximum number of configurable channels can be extended to 4,000. The maximum number of Talkgroup IDs that can be configured in a P25 Trunking system is 512.

^{*2} The supported PC software and external devices need to be separately prepared for the transmitting transceiver.

^{*3} To send messages or data with serial communications, the supported PC software and external devices need to be separately prepared for the transmitting transceiver. In addition, to send the received messages or data to external devices, the supported PC software and external devices need to be separately prepared for the receiving transceiver.

^{*4} A sensor to detect the change of port status needs to be attached to the AUX Input port for the transmitting transceiver.

^{*5} To remotely control external devices according to the change of port status, the external devices need to be connected to the AUX Output port for the receiving transceiver.

^{*6} These trunking functions rely on the programming and operation of the system. Priority Monitor also requires NX subscriber settings.

^{*7} For KPG-D1N, "Wide" cannot be configured in **Channel Spacing** if a receive frequency or a transmit frequency is configured in the following ranges:

VHF: above 149.98750 MHz and less than 174.01250 MHz

UHF: above 420.98750 MHz and less than 470.01250 MHz

^{*8} The display is toggled between the Unit ID display and the display "ISSI Call" if the transceiver receives a Group Call from the transceiver in a different Home system. If the transceiver receives an Individual Call from the transceiver in a different Home system, the transceiver displays the Unit ID after "ISSI Call" appears for 500 ms.

In this case, if Over-the-air Alias is enabled, the Unit ID Name appears instead of the Unit ID when the transceiver receives all of the data required to display the Unit ID Name.

However, the Unit ID Name of the received data cannot be stored because an ISSI Call is not supported for stacking.

Each time the transceiver receives a call, the transceiver displays the Unit ID Name if the transceiver receives all of the data required to display the Unit ID Name.

^{*9} These trunking functions rely on the programming and operation of the system.

Revision History

Date	Description
2015.11.30	1) Added NX-5900 (700/ 800 MHz model) as a supported model. 2) Added the information of KCH-20R (Featured Panel) as a supported Control Head. 3) Added KPG-36X and KPG-46X as supported programming cables. 4) Changed the description in "About this Manual" as follows: • Changed the version information • Changed the Left Up key to the [+] key • Added Radio Feature License 5) Added terms to "Abbreviations Used in this Document". 6) Added "About Multi RF Deck/ Multi Control Head". 7) Added option information to "About Options to Use the Functions Described in this Document". 8) Added supported functions to "Outline of this Transceiver". 9) Added references for the following functions in "CONTENTS BY PURPOSE": • VOX • Multi RF Deck/ Multi Control Head 10) Added "KCH-20R (Featured Panel)" and "External Microphone (KMC-25)" in "1 FUNCTIONS AND PANEL LAYOUT". 11) Added "Mobile (KCH-20R (Featured Panel))" in "1.3 About LCD". 12) Added "2.2 Connecting the Transceiver to a PC by Bluetooth". 13) Added the description of DFA Data Erase in the notes of "2.3 Writing the Configuration Data to the Transceiver". 14) Added the following items in "2.3 Writing the Configuration Data to the Transceiver": - Writing configuration data to multiple transceivers using Bluetooth communication - About the writing of configuration data in a Multi RF Deck/ Multi Control Head structure 15) Added "2.5 Writing Configuration Data Using Wireless Communication (OTAP)". 16) Added the Function Modes for using Mode Reset Timer to Table 3-3. 17) Added Direct Channel & OST to Table 3-4. 18) Added the description of the analog system in "Manual Dialing". 19) Added the description of the analog system and Table 3-6 in "3.7 Viewing the Receive History (Stack)". 20) Added "Scroll Display" in "3.8 Operating the Transceiver in Each Mode (Common Operation)". 21) Added the following items to Table 3-8: • Volume Control • Mobile (KCH-20R (Featured Panel)) 22) Added "3.10 Operations in a Single RF Deck/ Dual Control Head". 23) Added "3.11 Switching the Display". 24) Added the transmission power of NX-5900 to Table 4-2. 25) Added the information of an LTR Trunking system to the following items: 4.3 Channel Spacing 4.2 Transmit Power 4.4 Beat Shift - Using Sound to Notify the Timing to Start Communications (PTT Proceed Tone) - Using Sound to Notify the Other Party that the Communication Ends (PTT Release Tone) - External PTT (Data) - Data PTT - DTC - Available Functions for AUX Output Ports 12.2 Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert) - Available Functions for the PF Keys - Available Functions for Menu Mode 26) Added the description related to the "DFA" display in "4.5 Displaying the Signal Strength Level (RSSI Level) (Maintenance Display)". 27) Added the notes related to the behavior when in a Multi RF Deck/ Multi Control Head structure to the following items: 4.5 Displaying the Signal Strength Level (RSSI Level) (Maintenance Display) 5.5 Changing the Brightness of the Backlight (LCD Brightness) 5.7 Automatically Adjusting the Brightness Level of the LCD (Auto Dimmer)

Date	Description
2015.11.30	28) Added the items of Analog and LTR Trunking to Table 5-1. 29) Added the description of "Full Color White" in "5.6 Changing the Color Scheme of the Transceiver Display (Color Scheme)". 30) Added a supported icon to Table 5-2. 31) Added the description of "FleetSync ID" in "Power-on Text". 32) Added "Sub-LCD Display Priority" in "5.10 Display Functions of the Display". 33) Added the description of the screen size in Mobile (Featured Panel) in "5.12 Displaying a Bitmap Image When the Transceiver is Turned ON (Custom Start-up Screen)". 34) Added the description of the supported tones in "6.1 Tones that Sound When a User Operates the Transceiver or When the Transceiver Status Is Changed" and "6.2 Tones that Sound When the Transceiver Receives a Call". 35) Added notes and "About the Behavior When Using KAP-2" in "6.5 Using the Transceiver as a Megaphone (Public Address)". 36) Added "Microphone 7" to Table 6-13. 37) Changed the configuration range of "Microphone Sense/ External Microphone Sense". 38) Changed the configuration range of "Digital Audio Offset". 39) Added the function description for Mobile and the following items in "7 BATTERY". 7.6 Displaying the Remaining Battery Power When the Transceiver Is Turned ON (Power-on Battery Information) 7.7 Checking the Detailed Information of a Battery (Battery Information Display) 40) Added the information of MDC-1200/ FleetSync/ 2-tone/ DTMF to Table 9-2. 41) Added notes in "9.2 Recording Received Audio Automatically (Auto Recording)". 42) Added notes in "9.4 Storing the GPS Data (GPS Data Storage)". 43) Added notes in "10.1 Toggling Bluetooth On/ Off". 44) Added the description related to the device class of the transceiver in "About the Displayed Contents of a Bluetooth-compatible Device". 45) Added the following items in "10.2 Finding a Bluetooth-compatible Device (Bluetooth Find Device)": Configuring the Bluetooth Device Name of the Transceiver (Bluetooth Device Name) Checking the Bluetooth Device Name (Bluetooth Information) Responding to the Search of a Bluetooth-compatible Device (Bluetooth Discoverable) 46) Added the descriptions of Headset Profile and Serial Port Profile in "Receive a pairing request from a Bluetooth-compatible device". 47) Corrected the descriptions on the available operations in "10.4 Displaying a Bluetooth-compatible Device (Bluetooth My Devices)". 48) Added the description on the volume level of the received audio of a Bluetooth-compatible device in "Connecting by Headset Profile". 49) Added the description on how to reset a Headset Profile connection in "Resetting the Connection by Headset Profile". 50) Added "10.6 About Serial Port Profile (SPP Connection/ SPP Disconnection)". 51) Added "Determining the Speaker to Emit by Linking with the Microphone Hook (Off-hook Speaker Revert)" in "10.8 Resetting the GPS/ Bluetooth Device (GPS/Bluetooth Reset)". 52) Added "10.9 Configuring the Connection Destination of a Bluetooth-compatible Device (Bluetooth Interface Selection)". 53) Added the items of Analog Conventional/ LTR Trunking to Table 11-2. 54) Added the items of External PTT (PA) to Table 11-3. 55) Added "External PTT (PA)" to "11.2 D-sub 25-pin Connector". 56) Added the information of DTMF, 2-tone, and FleetSync in "Call 1 to Call 6" of "11.2 D-sub 25-pin Connector". 57) Added the following items to Table 11-8: - AUX Output ID 1 to AUX Output ID 3 - Encryption 58) Added "11.3 Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input)". 59) Added the description of Analog Conventional in "12.2 Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert)". 60) Added "16 MULTI RF DECK/ MULTI CONTROL HEAD". 61) Added "17 STRUCTURES OF MULTI RF DECK/ MULTI CONTROL HEAD". 62) Added "18 VOX". 63) Added supported functions in "Available Functions for the PF Keys". Added the note on the configuration restrictions of functions with "(Continuous)" in the function names. 64) Added Function Mode to "Table 1-2 Function Mode". 65) Added the note in "Available Functions for the PF Keys" about functions in common with Primary and Secondary. 66) Added supported functions in "Available Functions for Menu Mode". 67) Added "COM port Bluetooth" in "Available Functions for COM Port". 68) Added notes in "Available Functions for COM Port".

Date	Description
2015.11.30	69) Added the note in "Flow Control of the Communication Port (Flow Control)". 70) Added the keys of KCH-20R (Featured Panel) to the table in "Key Operations for Each Mode". 71) Changed the version number from 1.00 to 1.60.
2016.9.30	1) Added the DMR and 5-tone information in "About this Manual" and "How to Read the In-depth Manual". 2) Added "DMR CONVENTIONAL MODES" in "Outline of this Transceiver". 3) Added "5-tone" to "ANALOG MODES" in "Outline of this Transceiver". 4) Added the following items in "Mode Reset Timer": Forward Mode, Free-dial Entry Mode, Lone Worker ON/OFF Mode, My ID Mode, OVCM Mode, Remote Control Mode, Receive Entry Mode, SD Card Direct Access Mode 5) Added the description of the operation in a DMR Conventional system to Table 3-4. 6) Added "Free-dial Entry" to Table 3-4. 7) Added the DMR and 5-tone information in "3.7 Viewing the Receive History (Stack)". 8) Added "Mic Key" to Table 3-9. 9) Added the note about Mic Key in "3.9 Locking the Transceiver Keys (Key Lock)". 10) Added the description of the specifications in a DMR Conventional system in "4.3 Channel Spacing". 11) Added the description of the behavior when the Multi-System Roaming and Multi-System Hunt functions are used to "NXDN Trunking system" in "4.5 Displaying the Signal Strength Level (RSSI Level) (Maintenance Display)". 12) Added "DMR Conventional" to Table 5-1. 13) Added the description of LCD Brightness for Control Head 2 to the note in "5.5 Changing the Brightness of the Backlight (LCD Brightness)". 14) Added the description of Auto Dimmer for Control Head 2 to the note in "5.7 Automatically Adjusting the Brightness Level of the LCD (Auto Dimmer)". 15) Added the description of the following icons to Table 5-2: System Lock icon, OVCM icon 16) Added the following tones to Table 6-1: Transaction Confirmed Tone, Record Stopped Tone, Advanced GPS Report Error Tone, Low SD Memory Tone 17) Added the description of the following tones to Table 6-3: Transaction Confirmed Tone, Record Stopped Tone 18) Added the description of the following tones to Table 6-4: Advanced GPS Report Error Tone, Low SD Memory Tone 19) Added the description of various Alert Tones in a DMR Conventional system to Table 6-10. 20) Added "6.8 Using Voice Guidance (Voice Announcement)". 21) Added the description of the specifications in a DMR Conventional system in "7.5 Reducing Battery Consumption (Battery Saver)". 22) Replaced the diagram of Figure 9-1. 23) Added the description about Voice Memo in "Folder Structure of a microSD Card". 24) Added the following items in "9.1 About microSD Card": Configuring the Warning Behavior for the Remaining Memory Capacity (Low Memory Warning) Configuring the Storage Method of an Audio Data File (First-in First-out Deletion) 25) Added the description of the behavior when 5-tone signaling is used to Table 9-2. 26) Added notes in "9.2 Recording Received Audio Automatically (Auto Recording)". 27) Added "9.3 Recording Audio to a microSD Card (Voice Memo)". 28) Added and changed the description of the operation in "9.4 Playing Back the Recorded Audio (Playback)". 29) Added "Storing Audio Data in the Saved Folder" in "9.4 Playing Back the Recorded Audio (Playback)". 30) Added "9.6 Confirming microSD Card Contents via a PC (SD Card Direct Access)". 31) Added "Configuring the Headset Profile Connection Sequence (Bluetooth Headset Connection Type)" in "10.5 About Headset Profile (HSP Connection/ HSP Disconnection)". 32) Added the description of the behavior in a DMR Conventional system in "Using the Vibrator". 33) Added the description of the behavior in a DMR Conventional system and the description of the behavior when 5-tone signaling is used in "Available Functions for AUX Input Ports". 34) Added the description of the behavior in a DMR Conventional system in "Available Functions for AUX Output Ports". 35) Added the description of the behavior in a DMR Conventional system in "Conditions to Activate the Horn Alert". 36) Added "Configuring the Output Method of the Received Audio and Beep (Multi RF Deck Audio Output Type)" in "16.7 Audio Function".

Date	Description
2016.9.30	37) Added "16.18 Relaying the Received Signal (Mobile Relay Station)". 38) Added "17.1 Initial Configuration for Multi RF Deck/ Multi Control Head". 39) Added "17.13 About the Pin Arrangement for KCT-72 When an External Device is Connected". 40) Added the following items to Table 19-1: Call Interruption, Digit 10x Down, Digit 10x Up, Digit 1x Down, Digit 1x Up, Mobile Relay Station, OVCM, Receive Entry, Remote Control, RF Deck Down, RF Deck Up, System Down, System Down (Continuous), System Lock, System Select, System Up, System Up (Continuous), Transfer, Voice Memo 41) Added the following items to Table 19-2: Mobile Relay Station, Receive Entry, Remote Control, System Select, Voice Memo 42) Added the following items to Table 19-3: Bluetooth Headset Connection Type, OVCM, Receive Entry, Remote Control, System Lock, System Select, Transfer, Voice Memo 43) Corrected the description of the operation of "Playback Mode" in "20 KEY OPERATIONS FOR EACH MODE". 44) Added the following items in "21 BEEP LIST": Record Stopped Tone, Low SD Memory Tone 45) Changed the version number from 1.60 to 2.00.
2017.1.31	1) Changed the version information in "About This Manual". Added the information of KCH-21R (Handheld Control Head). 2) Added the operating portion of KCH-21R (Handheld Control Head) to "GENERAL FEATURES". 3) Added "KCH-21R (Handheld Control Head)" to "1.2 NX-5700/ NX-5800/ NX-5900". 4) Added "Mobile (KCH-21R (Handheld Control Head))" to "LCD" in "1.3 About LCD". 5) Added "Mobile (KCH-21R (Handheld Control Head))" to "Icons" in "1.3 About LCD". 6) Added the screen of KCH-21R (Handheld Control Head) to "Key Guide" in "1.3 About LCD". 7) Added "About Displayed Stack Data" to "3.7 Viewing the Receive History (Stack)". 8) Added "Mobile (KCH-21R (Handheld Control Head))" to Table 3-11. 9) Added the description of KCH-21R (Handheld Control Head) to "5.5 Changing the Brightness of the Backlight (LCD Brightness)". 10) Added the note in "5.7 Automatically Adjusting the Brightness Level of the LCD (Auto Dimmer)". 11) Added the size of the bitmap image that can be used for KCH-21R (Handheld Control Head) to "5.12 Displaying a Bitmap Image When the Transceiver is Turned ON (Custom Start-up Screen)". 12) Added the restriction of the Minimum Volume Type configuration to "Configuring the Minimum Volume Level (Minimum Volume)". 13) Changed "About the Behavior When Using KAP-2" to "About the Speaker to Emit Audio" in "6.5 Using the Transceiver as a Megaphone (Public Address)". 14) Added "Speaker 7" to Table 6-13. Changed the speakers that supports "Internal Speaker" and "Speaker 3". 15) Changed "Resetting the Recognition of microSD Card" to "Removing the microSD Card" in "9.1 About microSD Card". 16) Corrected the note in "About the Audio to Be Recorded". 17) Changed "Configuring the Headset Profile Connection Sequence (Bluetooth Headset Connection Type)" to "If Pairing of a Bluetooth-compatible Device Cannot Occur or If a Bluetooth-compatible Device Does Not Behave (Bluetooth Headset Connection Type)". Added the table description and the note. 18) Added the description of KCH-21R (Handheld Control Head) to "Connecting by Serial Port Profile". 19) Added the description of KCH-21R (Handheld Control Head) to "10.9 Configuring the Connection Destination of a Bluetooth-compatible Device (Bluetooth Interface Selection)". 20) Added the description of KCH-21R (Handheld Control Head) to "Light Sense" in "Available Functions for AUX Input Ports". 21) Added the note in "11.3 Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input)". 22) Added the description of KCH-21R (Handheld Control Head) to "15.6 Checking the Firmware Version (Transceiver Information Mode)".

Date	Description
2017.1.31	23) Added the description of KCH-21R (Handheld Control Head) to the following items: 16.1 Description 16.5 Basic Operations 16.16 Bluetooth Communication 17.9 Changing the Display Positions of a Channel Name and an Icon When Multi RF Deck View Is On "Multi RF Deck View" in "19.1 Available Functions for the PF Keys" 20 KEY OPERATIONS FOR EACH MODE 24) Added the description of communication ports to "Connecting the RF Deck by Using a D-sub 25-pin Cable". 25) Changed the DIP switch image in "About the Connection of the Control Head to the RF Deck". 26) Corrected "Adding an RF Deck" as follows: - Changed the reference described in the note of step 2. - Moved the note of step 5 to the operation procedure. - Corrected the note of step 5. 27) Changed the version number from 2.00 to 2.10.
2017.6.30	1) Changed the version information in "About This Manual". 2) Added the reference for "Optional Signaling LED" in "Indication and Display" of "CONTENTS BY PURPOSE". 3) Added "List+", "List-" and "View" to Table 1-1. 4) Added the note about Power-on Tone in "Turning the Transceiver ON". 5) Added "System Select Mode" to Table 3-3. 6) Changed the overall description in "3.7 Viewing the Receive History (Stack)". 7) Added the following items in "3.7 Viewing the Receive History (Stack)": - Configuring the Display Order of Data in Stack Mode (Stack Order) - Enabling the Storage of Redundant Data (Repeated Calls Stack) - Displaying the Caller ID when Displaying a Message (Caller ID for Message) - Displaying the Receive Channel (Channel Name (Message Display)) 8) Changed the function names as follows: - Latest Received Message Stack → Old Message Overwrite - ID/Message Stack with Time Stamp → Time Stamp 9) Added that the PTT switch is also locked in "3.9 Locking the Transceiver Keys (Key Lock)". 10) Added "PTT" to the configuration items in Table 3-18. 11) Added the description of a DMR Conventional system in "4.4 Beat Shift". 12) Changed "4.5 Displaying the Signal Strength Level (RSSI Level) (Maintenance Display)" to "4.5 Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)". Added the description related to the BER display. 13) Added "5.4 Optional Signaling LED". 14) Added the Encryption (ARC4) icon to Table 5-2. 15) Added "Configuring a tone which sounds when the transceiver is turned ON (Power-on Tone)" in "Power-on Tone". 16) Changed "Temporarily Reducing the Volume Level of the Speaker Microphone (Speaker Attenuation)" to "Temporarily Reducing the Volume Level of the Speaker (Speaker Attenuation)". Deleted the description of the supported models (Mobile is also supported). Added that the transceiver speaker and Bluetooth speaker are also supported. Corrected the note. 17) Corrected the note related to the microphone input line of the External PTT (PA) port in "6.5 Using the Transceiver as a Megaphone (Public Address)". 18) Corrected the note in "Conditions that enables audio data file and GPS data file to be stored in a microSD card". 19) Added the description related to the internal memory in "Configuring the Storage Method of an Audio Data File (First-in First-out Deletion)". Added the description related to the backing up of audio data. 20) Added the conditions of when Auto Recording does not start in "● If Auto Recording does not start because the maximum number of recordings has been reached". Deleted the description about the SELF TESTING display of the transceiver when audio data is deleted from the internal memory. 21) Added the notes in "● Deleting an audio data folder" of "9.4 Playing Back the Recorded Audio (Playback)". 22) Deleted the description about the SELF TESTING display of the transceiver when GPS data is deleted from the internal memory in the note of "9.5 Storing the GPS Data (GPS Data Storage)".

Date	Description
2017.6.30	23) Added "External Speaker" to Table 11-3. 24) Added "External Speaker" in "Available Functions for AUX Input Ports". 25) Added the description about Conventional Channel (DMR) in "TOR" to Table 11-8. 26) Added the note to "AUX Output Status Message 1 to AUX Output Status Message 3" in Table 11-8. 27) Added "Digital Mode" and "Out of Range" to Table 11-8. 28) Deleted "External PTT (PA) port" from the descriptions of "Modulation Line" in Table 11-9. 29) Added the note in "The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)". 30) Corrected the description of when the microSD card is not inserted in "Recording Received Audio Automatically (Auto Recording)". 31) Added the description of DMR Conventional in the following items of Table 19-1. Group Group + Short Message Group + Status Individual Individual + Short Message Individual + Status Short Message Status 32) Added "Manual Site Hunt" to Table 19-1. 33) Corrected the description of "Speaker Attenuation" in Table 19-1. "This function can be assigned only to the PF 1 and PF 2 keys on a microphone. Deleted ". Deleted "(Portable only)". 34) Corrected the description of "Stack Mode" in "20 KEY OPERATIONS FOR EACH MODE". 35) Corrected the descriptions of the operation to change the display of "Maintenance Display Mode (NXDN Trunking)" in "20 KEY OPERATIONS FOR EACH MODE". 36) Changed the version number from 2.10 to 2.20.
2017.9.29	1) Changed the version information in "About This Manual". 2) Added notes to " ● Confirming the message" in "3.7 Viewing the Receive History (Stack)". 3) Added the following tones in Table 6-1 and Table 6-3: In-service Tone Playback End Tone 4) Corrected the description for "Out of Range Tone" in Table 6-3. 5) Added notes to "6.6 Restricting Alert Tone When Consecutively Receiving a Call (Alert Tone Restriction from 2nd Call)". 6) Added description on voltage display in "7.6 Displaying the Remaining Battery Power When the Transceiver Is Turned ON (Power-on Battery Information)". 7) Added supported microphones and speakers in Table 7-13 and Table 7-14. 8) Added "Playing back the latest audio data" in " ● 9.4 Playing Back the Recorded Audio (Playback)". 9) Added "Playback (Last Recording)" in Table 19-1. 10) Added "Playback (Last Recording)" in Table 19-2. 11) Added "Playback End Tone" and "In-service Tone" to " ● Control Tone" in "21 BEEP LIST". 12) Changed the version number from 2.20 to 2.30.

Date	Description
2018.4.9	1) Changed the version information in "About This Manual". 2) Added the note to "Home Channel". 3) Added the note to "Direct Channel". 4) Revised "No. of Data that Can be Saved" in Table 3-6. 5) Added the note related to Over-the-Air Alias in "Caller ID Stack". 6) Changed the following function names: GPS Storage Interval → Interval GPS Data Record Format → Record Format (Manual/Auto) 7) Added the description of the behavior for the DMR Conventional Channel to "For a Conventional Channel (Analog/ NXDN/ DMR/ P25): " for "COR" in Table 11-8. 8) Added the description related to the manual storage of the GPS data in "9.5 Storing the GPS Data (GPS Data Storage)". Changed the structure. 9) Added the information of KCT-73 to "Modulation Line" in Table 11-9. 10) Added "Control Head Mic Input" and "Auto Microphone 7 Select" in Table 11-9. 11) Replaced Figure 16-77. 12) Described "GPS Data" of Table 16-13, Table 16-14, Table 16-15 for automatic and manual respectively. 13) Added "If "RF Deck Data A", "RF Deck Data B" or "RF Deck Data C" is configured in SD Card Selection:" in "16.17 microSD". 14) Added " ● RF Deck Data A/ RF Deck Data B/ RF Deck Data C" to "Formatting a microSD Card (Format SD Card)". 15) Added " ● RF Deck Data A/ RF Deck Data B/ RF Deck Data C" to "Resetting the Recognition of microSD Card (Eject SD Card)". 16) Added " ● RF Deck Data A/ RF Deck Data B/ RF Deck Data C" to "Recording Received Audio Automatically (Auto Recording)". 17) Added " ● RF Deck Data A/ RF Deck Data B/ RF Deck Data C" to "Playing Back the Recorded Audio (Playback)". 18) Added the description related to the manual storage of the GPS data and " ● RF Deck Data A/ RF Deck Data B/ RF Deck Data C" to "Storing the GPS Data (GPS Data Storage)". Changed the structure. 19) Added "Save GPS Data" in Table 19-1. 20) Added "Save GPS Data" in Table 19-3. 21) Changed the version number from 2.30 to 2.50.
2018.8.10	1) Changed the version information in "About this Manual". 2) Added the description of "Save GPS Data (the display on the transceiver of the GPS data stored on a microSD card)" in "8 GPS POSITION DISPLAY". 3) Added "8.3 Confirming the Location Information Stored in the microSD Card". 4) Added the description of "Bluetooth 4.0 (BLE)" to "10 BLUETOOTH COMMUNICATION". 5) Added the following items to "10 BLUETOOTH COMMUNICATION": 10.8 About Bluetooth Low Energy (Heart Rate Service/ Automatic Injury Detection Service/ Battery Service/ Device Information Service) 10.9 Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver (Heart Rate Service) 10.10 Notifying of Damage on a Bluetooth-compatible Device to the Transceiver (Automatic Injury Detection Service) 10.11 Confirming the Remaining Battery Power of a Bluetooth-compatible Device (Battery Service) 10.12 Confirming the Manufacturer Name, Model Number, Etc. of a Bluetooth-compatible Device (Device Information Service) 6) Added "19 READING THE LOG INFORMATION OF THE TRANSCEIVER (FIELD SUPPORT)". 7) Added "Save Log Data" in Table 20-1. 8) Added "Save Log Data" in Table 20-3. 9) Changed the version number from 2.50 to 2.60.

Date	Description
2019.6.28	1) Changed the version information in "About This Manual". 2) Added "DMR Tier III Trunking" and "DMR OTAP" to "DMR system". 3) Added "NX-5600H" and "NX-5700H" to "About the Notation of the Supported Models". 4) Added the following to "About Options to Use the Functions Described in this Document". - Portable: - KMC-70 (Speaker Microphone) - KMC-72 (Speaker Microphone) - Mobile: - KMC-65 (Microphone) - KMC-66 (Microphone with 12-Keypad) - KES-5A (External Speaker) - KCH-21R (Handheld Control Head) - KCT-77 (Remote Control Cable) 5) Added "L-VHF Model (NX-5600H)" and "VHF Model (NX-5700H)" to "Outline of This Transceiver". 6) Added "TRUNKING MODE" to "DMR DIGITAL MODES" in "Outline of This Transceiver". 7) Added the following to "1 FUNCTIONS AND PANEL LAYOUT". - NX-5600H - NX-5700H - KMC-70/ KMC-72 8) Deleted the description on forcibly turning the transceiver OFF from "Turning the Transceiver OFF". 9) Added "Dialing Mode" and "Redial Mode" to "Mode Reset Timer". 10) Added the description of a DMR-based Trunking system to "Group + Short Message" in "Keypad Operation". 11) Added "Dialing (DMR)" to "Keypad Operation". 12) Added "PF 3" to "Mic key" in "Portable" of Table 3-11. 13) Added the description of a DMR-based Trunking system to "4.1 Transmit/ Receive Frequencies". 14) Added the items of "DMR-based Trunking system" to "4.2 Transmit Power". 15) Added the items of "DMR-based Trunking system" to "4.3 Channel Spacing". 16) Added the cautionary note and "20.0 (Wide)" to Table 4-3. 17) Added "NX-5600H" and "NX-5700H" to the following Tables (only added "NX-5700H" to Table 4-4). - Table 4-1 - Table 4-2 - Table 4-4 18) Added the items of "DMR-based Trunking system" to "4.5 Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)". 19) Added or corrected the note in "4.5 Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)". 20) Added "4.6 Additional Functions for P25 Trunking System". 21) Added the description of a DMR-based Trunking system to "5.1 Busy LED". 22) Added "DMR-based Trunking" to Table 5-1. 23) Added the example and note of "Unit ID (Own) (NP-FIN-IN)/ DMR = 328-20-200" to "Power-on Text". 24) Added or corrected the note in "Sub-LCD Display". 25) Added "System Code" to Table 5-5. Also, added the description of a DMR-based Trunking system to "Site Number". 26) Added the following tones to "Warning Tone" in Table 6-1: - Group Subscription Invalid Indicator Tone - Trunking Tone - Invalid Dialing Entry Tone - Anomaly Detection Tone - Anomaly Detection Release Tone

Date	Description
2019.6.28	27) Added the following tones and the description of a DMR-based Trunking system to Table 6-4: Group Subscription Invalid Indicator Tone Trunking Tone Invalid Dialing Entry Tone Anomaly Detection Tone Anomaly Detection Release Tone 28) Added "DMR-based Trunking" to Table 6-10. 29) Added the following items to "6.4 Functions Related to the Volume Configuration": Reducing the Audio Output to the External Speaker (External Speaker 4W) Configuring Whether or Not to Reduce the Noise (Noise Blanker (Analog)) Notifying of the Transmit Error by the Display and a Tone 30) Added or corrected the note in "6.5 Using the Transceiver as a Megaphone (Public Address)". 31) Added "Table 6-14 Speaker to Emit Audio When Public Address Is Used (NX-5600H/ NX-5700H)" to "About the Speaker to Emit Audio". 32) Added the following to Table 6-15: Speaker 1: KMC-70 Speaker 2: KMC-72, KES-5A 33) Added the following to Table 6-16: Microphone 1: KMC-65, KMC-66 Microphone 5: KMC-70, KMC-72 34) Added "Microphone 7" to Table 6-17. 35) Deleted "(8.5 V)" from "Threshold (8.5 V)" of "7.3 Warning the Battery Power of the Vehicle Battery Is Low (Battery Warning)". 36) Added "Table 7-4 Threshold of the Battery Power" to "7.3 Warning the Battery Power of the Vehicle Battery Is Low (Battery Warning)". 37) Added the items of "DMR-based Trunking (Power Save)" to "7.5 Reducing Battery Consumption (Battery Saver)". 38) Added or corrected the note of "Playing back the audio data" in "9.4 Playing Back the Recorded Audio (Playback)". 39) Added or corrected the note in "Connecting by Headset Profile". 40) Added "Reconnecting by Bluetooth Low Energy" to "10.8 About Bluetooth Low Energy (Heart Rate Service/ Automatic Injury Detection Service/ Battery Service/ Device Information Service)". 41) Added the description of a DMR-based Trunking system to "Automatic Status Transmission" and "Status Request Message Response". 42) Added "DMR-based Trunking" to Table 11-2. 43) Added "NX-5600H" and "NX-5700H" to each item of "16 MULTI RF DECK/ MULTI CONTROL HEAD". 44) Changed the version number from 2.60 to 4.00.
2019.11.29	1) Changed the version information in "About this Manual". 2) Added "NX-5800H" to "About the Notation of the Supported Models". 3) Added "UHF Model (NX-5800H)" to "Outline of This Transceiver". 4) Added "NX-5800H" to "1 FUNCTIONS AND PANEL LAYOUT". 5) Changed the supported system of "2.6 Writing Configuration Data Using Wireless Communication (OTAP)" from "DMR Tier III Trunking system" to "DMR-Based Trunking system". 6) Added "NX-5800H" to the following Tables: Table 4-1 Table 4-2 Table 4-4 7) Migrated the contents of "4.6 Additional Functions for P25 Trunking System" to P25 FUNC. 8) Added the note to "DMR Tier III Trunking (Power Save)" of "7.5 Reducing Battery Consumption (Battery Saver)". 9) Added the description related to the "Remote Control" display to "External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice)". 10) Added "NX-5800H" to each item of "16 MULTI RF DECK/ MULTI CONTROL HEAD". 11) Added the description related to automatic transmission while the transceiver is in Emergency Mode to "16.15 Communications in an Emergency (Emergency)". 12) Added the note related to the High Power model (NX-5600H/ NX-5700H/ NX-5800H) to the following items: 9.6 Confirming microSD Card Contents via a PC (SD Card Direct Access) 15.4 Changing the Configuration of the Transceiver (Front Panel Programming Mode) 13) Changed the version number from 4.00 to 4.20.

Date	Description
2020.7.10	1) Changed the version information in "About This Manual". 2) Deleted the description of not supporting the frequency range between 450 MHz and 520 MHz in "NX-5800H" from the following items: About the Notation of the Supported Models Table 4-1 Transmit/ Receive Frequency Range and Step Size 3) Added the following to "Mobile" in "About Options to Use the Functions Described in This Document". KMC-60 (Microphone) KMC-62 (Microphone with 16-Keypad) 4) Replaced the image of "Figure 16-10 RF Deck Selection". 5) Added the following to "Microphone 2" in Table 6-16. Mobile: KMC-60, KMC-62 6) Corrected the note in "9.6 Confirming microSD Card Contents via a PC (SD Card Direct Access)". 7) Changed the version number from 4.20 to 4.30.
2021.4.23	1) Changed the version information in "About This Manual". 2) Added the information related to NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S to the following items: About This Manual (Radio Feature License) About the Notation of the Supported Models Outline of This Transceiver About NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S About Options to Use the Functions Described in This Document 1.1 NX-5200/ NX-5200S/ NX-5300/ NX-5300S/ NX-5400 1.2 NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900 3.10 Operations in a Single RF Deck/ Dual Control Head Structure 4.1 Transmit/ Receive Frequencies 4.2 Transmit Power 4.3 Channel Spacing 16 MULTI RF DECK/ MULTI CONTROL HEAD 17 STRUCTURING A MULTI RF DECK/ MULTI CONTROL HEAD 20.1 Available Functions for the PF Keys (Table 20-2 Function Mode) 3) Added the note related to NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S to the following items: 5.7 Changing the Color Scheme of the Transceiver Display (Color Scheme) 11.3 Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input) 15.4 Changing the Configuration of the Transceiver (Front Panel Programming Mode) 15.5 Overwriting the Firmware (Firmware Programming Mode) 4) Changed the version number from 4.30 to 4.40.
2021.9.21	1) Changed the version information in "About This Manual". 2) Added "P25 Enhanced Encryption" to Radio Feature License. 3) Added "ARC4 Encryption Option" to "GENERAL" in "P25 DIGITAL MODES". 4) Added "P25 Trunking OTAP" to "2.6 Writing Configuration Data Using Wireless Communication (OTAP)". 5) Corrected the procedure in "Adding an RF Deck" of "17.2 Adding an RF Deck/ Control Head". 6) Changed the version number from 4.40 to 4.50.
2022.5.19	1) Changed the version information in "About This Manual". 2) Added "IP connection of OTAP (IP Based Packet Data format)" to "Writing Configuration Data Using Wireless Communication (OTAP)". 3) Changed the version number from 4.50 to 4.60.
2022.9.16	1) Changed the version information in "About This Manual". 2) Added the description of when the OTAP function is used in a Trunking 2.5 system in "2.6 Writing Configuration Data Using Wireless Communication (OTAP)". 3) Added the note in "4.5 Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)". 4) Added "13.4 Restricting the Functions of KPG-D1/ D1N (Read FPU Data Inhibition)". 5) Changed the version number from 4.60 to 5.00.
2023.6.9	1) Changed the version information in "About This Manual". 2) Added an NXDN Conventional system and an NXDN Site Roaming system for the supported systems in "Out of Range Tone". 3) Added the note in "9.4 Playing Back the Recorded Audio (Playback)". 4) Changed the version number from 5.00 to 5.10.

Date	Description
2024.8.30	1) Changed the version information in "About This Manual". 2) Added the information related to NX-5200LG/ NX-5300LG to the following items: About the Notation of the Supported Models Outline of This Transceiver 1 FUNCTIONS AND PANEL LAYOUT Table 4-1 Transmit/ Receive Frequency Range and Step Size Table 4-2 Transmit Power Table 4-4 Channel Spacing (P25 Trunking) 3) Added "About NX-5200LG/ NX-5300LG". 4) Added the note related to NX-5200LG/ NX-5300LG to the following items: LCD 5.7 Changing the Color Scheme of the Transceiver Display (Color Scheme) Table 5-2 Icon List 8 GPS POSITION DISPLAY 9 STORING RECORDED AUDIO/ GPS DATA 15.4 Changing the Configuration of the Transceiver (Front Panel Programming Mode) 15.5 Overwriting the Firmware (Firmware Programming Mode) 5) Added "Emergency Cancel" to "Table 20-1 Available Functions for the PF Keys". 6) Changed the version number from 5.10 to 5.20.
2025.10.29	1) Changed the version information in "About This Manual". 2) Added the following to Radio Feature License. INDOOR LOCATION LICENSE (KWD-5020 -IL) 3) Added the information related to Indoor Location to the following items: About NX-5200LG/ NX-5300LG About NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S 4) Added the reference for Indoor Location to "CONTENTS BY PURPOSE". 5) Added "BLE Beacon Display Mode" to Table 3-3. 6) Added the description of BLE Scan to "Bluetooth Icon" in Table 5-2. 7) Added the description of BLE Scan to "Bluetooth Connection Icon" in Table 5-2. 8) Added "Custom" to Table 6-24. 9) Added "Table 6-25 Automatic Configuration Using the ANR Preset (Portable: If an external microphone other than KMC-54WD/ KMC-70 is used)". 10) Added "Table 6-26 Automatic Configuration Using the ANR Preset (Portable: If an external microphone is connected using Bluetooth)". 11) Added "Table 6-27 Automatic Configuration Using the ANR Preset (Mobile)". 12) Added "10 Indoor Location". 13) Added the description of BLE Scan to "Resetting the Connection by Bluetooth Low Energy". 14) Corrected the image of Figure 11-11 Status Request Message Response 2. 15) Added the following to "21.1 Available Functions for the PF Keys": BLE Beacon Display (Portable Only) BLE Scan (Portable Only) Send the Location Data (Portable Only) 16) Added the following to "21.2 Available Functions for Menu Mode": BLE Beacon Display (Portable Only) BLE Scan (Portable Only) Send the Location Data (Portable Only) 17) Added "BLE Beacon Display" to Table 21-2. 18) Added "BLE Beacon Display" to Table 21-6. 19) Added the description of Data + Location Data Output to "21.4 Available Functions for COM Port". 20) Added "BLE Beacon Display Mode" to "22 KEY OPERATIONS FOR EACH MODE". 21) Changed the version number from 5.20 to 5.30.

Basic Configurations for Using the Transceiver	Configuring Various Functions for the Transceiver Frequencies and signaling for transmission and reception, channel data, including the transmit power, and other functions required for various communications, such as an Individual Call or a Group Call, can be configured by using KPG-D1/ D1N. GETTING STARTED Page 20	Assigning Functions to the Keys on the Transceiver Various functions can be assigned to the PF keys on the transceiver. Available Functions for the PF Keys Page 464
	Writing the Configuration Data to the Transceiver The data configured by using KPG-D1/ D1N can be written to the transceiver. Writing the data configured by using KPG-D1/ D1N to the transceiver allows the transceiver to work according to the configuration data. Writing the Configuration Data to the Transceiver Page 22	Reading the Configuration Data from the Transceiver The configuration data in the transceiver can be read into KPG-D1/ D1N. By reading the configuration data written in the transceiver into KPG-D1/ D1N, the configuration data can be changed or written to another transceiver. Reading the Configuration Data from the Transceiver Page 23

Transmission/ Reception	Changing Transmit Power The transmission power of the transceiver can be changed to high power, medium power, or low power. Transmit Power Page 81	Changing the Input Sensitivity of the Microphone The input sensitivity of the microphone can be changed. Microphone Sense/ External Microphone Sense Page 139
	Using Function Keys Pressing a key to which a function is assigned can activate the assigned function or place the transceiver in various Function Modes. Using Function Keys Page 32	Viewing the Receive History Various received messages and callers who made calls can be viewed. Viewing the Receive History (Stack) Page 52
	Executing a Function by Selecting the Function from the Menu Selecting functions in Menu Mode activates various functions or places the transceiver in various Function Modes. Using Menu Mode Page 40	Transmitting Just by Audio Input to a Microphone By using the VOX function, audio can be transmitted just by audio input into a microphone without pressing the PTT switch. VOX Page 458

Indication and Display	Lighting the LED While Transmitting and Receiving The transceiver can light or flash the LED while the transceiver is transmitting or receiving. Busy LED Page 93 Transmit LED Page 93 Selective Call Alert LED Page 94 Optional Signaling LED Page 95	Displaying the Transceiver Received Signal Strength The received signal strength of the transceiver can be displayed on the transceiver display. Displaying the Signal Strength (Signal Strength Indicator) Page 104
	Displaying a Bitmap Image When the Transceiver is Turned ON A desired bitmap image can be displayed on the transceiver display when the transceiver is turned ON. Displaying a Bitmap Image When the Transceiver is Turned ON (Custom Start-up Screen) Page 109	Displaying the Remaining Battery Power Level (Portable Only) A user can be notified on the level of the remaining battery power on the LCD and by LED. Displaying the Remaining Battery Power Level (Battery Indicator) Page 154

Sound	Tones Used for the Transceiver Various tones sound from the transceiver according to the operation of the transceiver. Tones that Sound When a User Operates the Transceiver or When the Transceiver Status Is Changed Page 110	Changing the Calling Alert Tone Tones that sound from the transceiver when the transceiver receives a call using optional signaling or a status message can be changed to the desired tone. Tones that Sound When the Transceiver Receives a Call Page 119

Indoor Location	Using the Indoor Location Function Indoor Location is the function to manage the position of the transceiver by using Bluetooth. Indoor Location Page 193

Security

Using a Password to Protect the Transceiver

A user can set a password to the transceiver so that the transceiver cannot be used by others without the user's permission.

Password for Transceiver Operation (Transceiver Password)

Page 294

Using a Password to Protect the Configuration Data of the Transceiver

To prevent the configuration data of the transceiver from being altered without the user's permission, or to prevent the configuration data written in the transceiver from being diverted, a password can be set for the configuration data.

Password When Reading Configuration Data in a PC (Read Authorization Password)

Page 295

Password for Writing Configuration Data (Overwrite Password)

Page 296

Functions of Transceivers for Vehicles

Turning the Transceiver ON or OFF by Linking with a Vehicle Ignition

For Mobile, the transceiver can automatically be turned ON or OFF by linking with the status of the port linked with the vehicle ignition by using the ignition-linked function.

Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port (Ignition Sense)

Page 287

Turning the Headlights On of the Vehicle or Making the Horn Sound When the Transceiver Receives a Call

For Mobile, by using the horn alert function, the transceiver can turn the headlights On of a vehicle to which the transceiver is connected or make the horn sound when the transceiver receives a call.

Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert)

Page 288

Operating in a Multi RF Deck System by Connecting Multiple Control Heads and Transceivers

By connecting 1 or 2 Control Heads to multiple mobile transceivers (RF Decks), 1 Multi RF Deck system can be structured.

MULTI RF DECK/ MULTI CONTROL HEAD

Page 308

Other Convenient Functions

Locking the Transceiver Keys

By locking the transceiver keys, a user can avoid erroneous operation of the transceiver caused by physically contacting the transceiver while carrying it around the waist, etc.

Locking the Transceiver Keys (Key Lock)
Page 73

Reducing Battery Consumption (Portable Only)

The power consumption of the transceiver can be reduced by setting the transceiver receiving intermittently.

Reducing Battery Consumption (Battery Saver)
Page 157

Recording the Received or Transmitted Audio (Optional)

By using the internal memory of the transceiver or by using a microSD card or microSDHC card mounted on the transceiver, the transmitted or received audio can be recorded. The recorded audio can be played back on the transceiver.

Recording Transmitted and Received Audio Automatically (Auto Recording)
Page 175

Displaying the Location Information of the Transceiver

By using an internal or optional GPS receiver unit, the transceiver can display the own location information on the display.

GPS POSITION DISPLAY
Page 161

1.1 NX-5200/ NX-5200S/ NX-5200LG/ NX-5300/ NX-5300S/ NX-5300LG/ NX-5400

● Full Key Model



● Standard Key Model



Figure 1-1 NX-5200/ NX-5200S/ NX-5200LG ^{*1}/ NX-5300/ NX-5300S/ NX-5300LG ^{*1}/ NX-5400 Front View

^{*1} For NX-5200LG/ NX-5300LG, only Full Key Model is available.

1 Selector The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel. 2 Lever Switch The preassigned function will be activated or will be changed to the active state. 3 Power Switch/ Volume Control The transceiver can be turned ON by rotating the Power switch. The volume level of the speaker sound can be adjusted. 4 Transmit LED/ Busy LED These LEDs light when the transceiver transmits or receives a signal. 5 AUX Key The preassigned function will be activated or will be changed to the active state. 6 Side 1 Key The preassigned function will be activated or will be changed to the active state. 7 Speaker The received audio and the Alert Tone sound from the speaker.	8 PTT Switch Pressing the PTT switch allows transmitting. 9 Built-in Microphone 10 LCD The channel number and the transceiver's status appear on this display. The LCD is displayed in monochrome for NX-5200S/ NX-5200LG/ NX-5300S/ NX-5300LG. 11 Side 2 Key The preassigned function will be activated or will be changed to the active state. 12 Side 3 Key The preassigned function will be activated or will be changed to the active state. 13 [▲]/[▼] Key The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel. 14 [□] (Menu) Key The preassigned function will be activated or will be changed to the active state. In this manual, the [□] (Menu) key is described as the Menu ([□]) key.

15 [↶] (Back) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [↶] (Back) key is described as the **Back** ([↶]) key.

16 [◀]/[▶] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

17 [○] (Function) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [○] (Function) key is described as the **Function** ([○]) key.

18 [🏠] (Home) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [🏠] (Home) key is described as the **Home** ([🏠]) key.

19 Keypad

The transceiver can be operated by pressing a key.

20 [A]/[B]/[C] Key

The preassigned function will be activated or will be changed to the active state.

External Microphone (KMC-25)

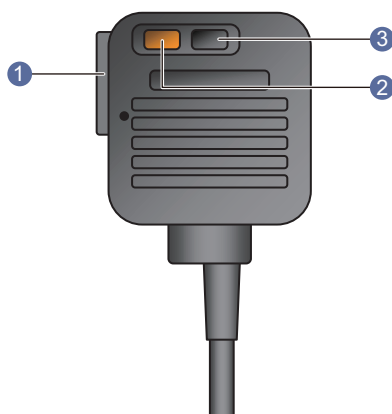


Figure 1-2 KMC-25

1 PTT Switch

Pressing the **PTT** switch allows transmitting.

2 PF 1 Key

The preassigned function will be activated or will be changed to the active state.

3 PF 2 Key

The preassigned function will be activated or will be changed to the active state.

External Microphone (KMC-70/ KMC-72)



Figure 1-3 KMC-70/ KMC-72

1 PTT Switch

Pressing the **PTT** switch allows transmitting.

2 PF 1 Key

The preassigned function will be activated or will be changed to the active state.

3 PF 3 Key (KMC-70 only)

The preassigned function will be activated or will be changed to the active state.

4 PF 2 Key

The preassigned function will be activated or will be changed to the active state.

1.2 NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900

KCH-19 (Basic Panel)



Figure 1-4 NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900 Front View (KCH-19 (Basic Panel))

1 [] (Power) Switch

The transceiver is turned ON when this switch is pressed and the transceiver is turned OFF when this switch is pressed again. In this manual, the [] (Power) switch is described as the **Power** switch.

2 [+]/ [-] Key

The preassigned function will be activated or will be changed to the active state. It is normally used for the volume adjustment of the speaker.

3 LCD

The channel number and the transceiver's status appear on this display.
The LCD is displayed in monochrome for NX-5700S/ NX-5800S.

4 [▲]/ [▼] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

5 Speaker

The received audio and the Alert Tone sound from the speaker.

6 Transmit LED/ Busy LED

These LEDs light when the transceiver transmits or receives a signal.

7 Illumination Sensor

The sensor is for automatically adjusting the luminance of the LCD depending on the brightness of the environment.

8 [] (Home) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Home) key is described as the **Home** ([]) key.

9 [] (Menu) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Menu) key is described as the **Menu** ([]) key.
The default of the [] (Menu) key is the Menu function. If the configuration is changed using KPG-D1/ D1N, a newly configured function will be activated. Unless the Menu function is reassigned to the [] (Menu) key, Menu Mode cannot be activated even if the [] (Menu) key is pressed.

10 [] (Back) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Back) key is described as the **Back** ([]) key.

11 [◀]/ [▶] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

12 [○] (Function) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [○] (Function) key is described as the **Function** ([○]) key.

13 AUX Key

The preassigned function will be activated or will be changed to the active state.

KCH-20R (Featured Panel)

※ Not supported for NX-5700S/ NX-5800S.



Figure 1-5 NX-5600H/ NX-5700/ NX-5700H/ NX-5800/ NX-5800H/ NX-5900 Front View (KCH-20R (Featured Panel))

1 [] (Power) Switch

The transceiver is turned ON when this switch is pressed and the transceiver is turned OFF when this switch is pressed again. In this manual, the [] (Power) switch is described as the Power switch.

2 [+] / [-] Key

The preassigned function will be activated or will be changed to the active state.

3 LCD

The channel number and the transceiver's status appear on this display.

4 [] / [] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

5 [] / [] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

6 [A] / [B] / [C] Key

The preassigned function will be activated or will be changed to the active state.

7 AUX Key

The preassigned function will be activated or will be changed to the active state.

8 Illumination Sensor

The sensor is for automatically adjusting the luminance of the LCD depending on the brightness of the environment.

9 Transmit LED

This LED lights when the transceiver transmits a signal.

10 Busy/ Status LED

This LED lights or flashes according to the status, such as while the transceiver is receiving a signal, and when the transceiver receives a call.

11 [] (Home) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Home) key is described as the **Home** ([]) key.

12 [] (Menu) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Menu) key is described as the **Menu** ([]) key. The default of the [] (Menu) key is the Menu function. If the configuration is changed using KPG-D1/ D1N, a newly configured function will be activated. Unless the Menu function is reassigned to the [] (Menu) key, Menu Mode cannot be activated even if the [] (Menu) key is pressed.

13 [] (Back) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Back) key is described as the **Back** ([]) key.

14 [] / [] Key

The preassigned function will be activated or will be changed to the active state.

15 [] (Function) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [] (Function) key is described as the **Function** ([]) key.

16 []/[] Key

The preassigned function will be activated or will be changed to the active state.

17 Volume Control

The volume level of the speaker sound can be adjusted.

18 Selector

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

KCH-21R (Handheld Control Head)

KCH-21R is the Handheld Control Head that can be used by connecting to Mobile. By using KCH-21R, the transceiver can be operated in hand as Portable.

※ Not supported for NX-5700S/ NX-5800S.



Figure 1-6 KCH-21R (Handheld Control Head) Front View

1 [A] Key

The preassigned function will be activated or will be changed to the active state.

2 [B] Key

The preassigned function will be activated or will be changed to the active state.

3 Transmit LED/ Busy LED

These LEDs light when the transceiver transmits or receives a signal.

4 Power Switch

The transceiver is turned ON when this switch is pressed and the transceiver is turned OFF when this switch is pressed again.

5 AUX Key

The preassigned function will be activated or will be changed to the active state.

6 Built-in Microphone

7 Speaker

The received audio and the Alert Tone sound from the speaker.

8 LCD

The channel number and the transceiver's status appear on this display.

9 [▲]/[▼] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

10 [□] (Menu) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [□] (Menu) key is described as the **Menu** ([□]) key.

11 [↶] (Back) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [↶] (Back) key is described as the **Back** ([↶]) key.

12 [◀]/[▶] Key

The preassigned function will be activated or will be changed to the active state. It is normally used to change the zone or channel.

13 [○] (Function) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [○] (Function) key is described as the **Function** ([○]) key.

14 [🏠] (Home) Key

The preassigned function will be activated or will be changed to the active state. In this manual, the [🏠] (Home) key is described as the **Home** ([🏠]) key.

15 Keypad

The transceiver can be operated by pressing a key.



Figure 1-7 KCH-21R (Handheld Control Head) Side View

16 Side 1 Key

The preassigned function will be activated or will be changed to the active state.

17 PTT Switch

Pressing the PTT switch allows transmitting.

18 Side 2 Key

The preassigned function will be activated or will be changed to the active state.

19 Side 3 Key

The preassigned function will be activated or will be changed to the active state.

20 [^]/[v] Key

The preassigned function will be activated or will be changed to the active state. It is normally used for the volume adjustment of the speaker.

1.3 About LCD


LCD

The LCD of the transceiver is as follows. The contents that appear on the LCD varies depending on the transceiver's status.

Portable


● Basic Frame

This frame is used to display the name, such as the channel name. Various icons indicating the transceiver's status appear in the icon display area.

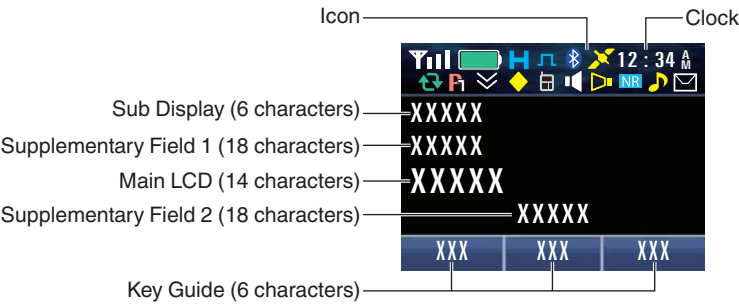


● Function Mode Frame 1

This frame is used to display the Function Mode, such as Individual Call Mode and Status Mode. The number, such as the list number or channel number, appears at the right end of the title line.

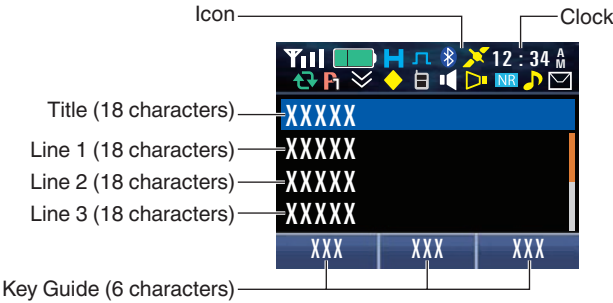


● Function Mode Frame 2

This frame is used to display the Function Mode, such as Status Mode. The number, such as the list number or channel number, appears at the right end of the title line. The icon can be displayed at the right side of each line.

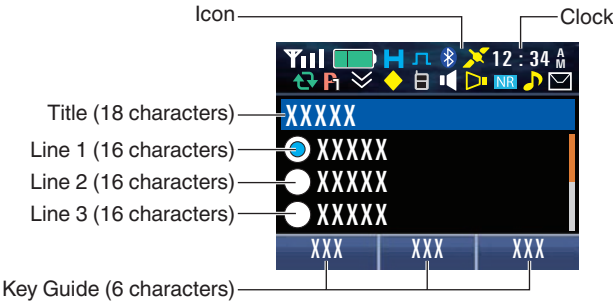

● Category Icon Frame

This frame is used to display the Menu Category in Icon Mode. Displays vary depending on the configuration in **Menu Icon Size**. The following screens are display examples if **Menu Icon Size** is configured “Large”. (Refer to [Using Menu Mode.](#))

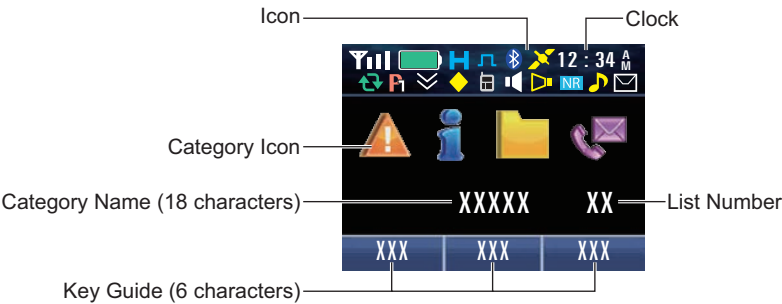

● Popup Display

The popup appears when the adjustment of the volume level or the operation of Key Lock occurs.




Note

- The LCD is displayed in monochrome for NX-5200S/ NX-5200LG/ NX-5300S/ NX-5300LG.

Mobile (KCH-19 (Basic Panel))


● Basic Frame

This frame is used to display the name, such as the channel name. Various icons indicating the transceiver’s status appear in the icon display area.

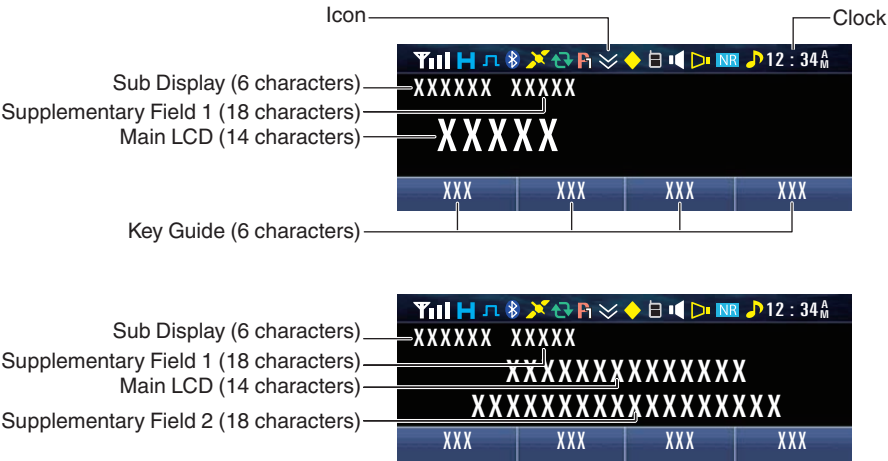


● **Function Mode Frame 1**

This frame is used to display the Function Mode, such as Individual Call Mode and Status Mode. The number, such as the list number or channel number, appears at the right end of the title line.

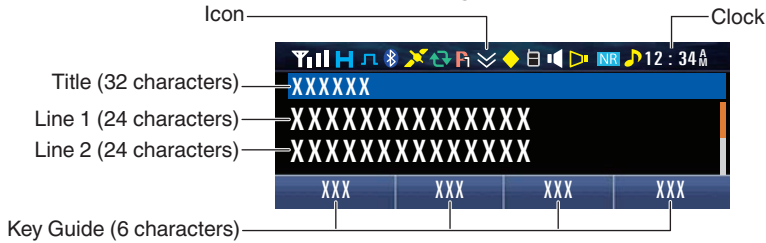

● **Function Mode Frame 2**

This frame is used to display the Function Mode, such as Status Mode. The number, such as the list number or channel number, appears at the right end of the title line. The icon can be displayed at the right side of each line.

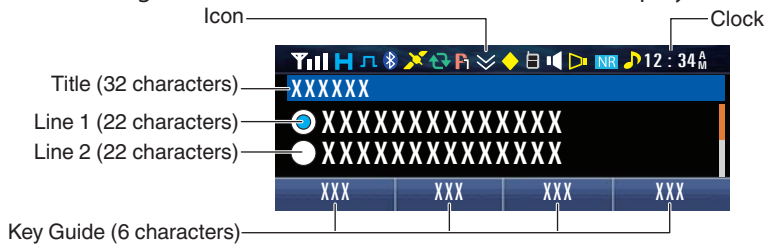


● **Category Icon Frame**

This frame is used to display the Menu Category in Icon Mode.




● **Message Frame**

This frame is used to display the message, such as the Short Message.

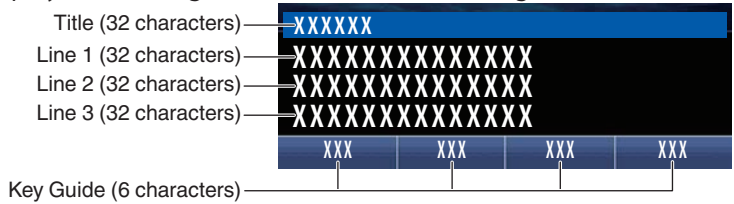

● **Popup Display**

The popup appears when the adjustment of the volume level or the operation of Key Lock occurs.

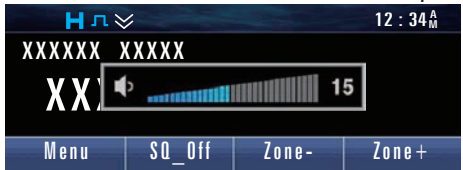


Note

- The LCD is displayed in monochrome for NX-5700S/ NX-5800S.

Mobile (KCH-20R (Featured Panel))


● Basic Frame

This frame is used to display the name, such as the channel name. Various icons indicating the transceiver’s status appear in the icon display area.

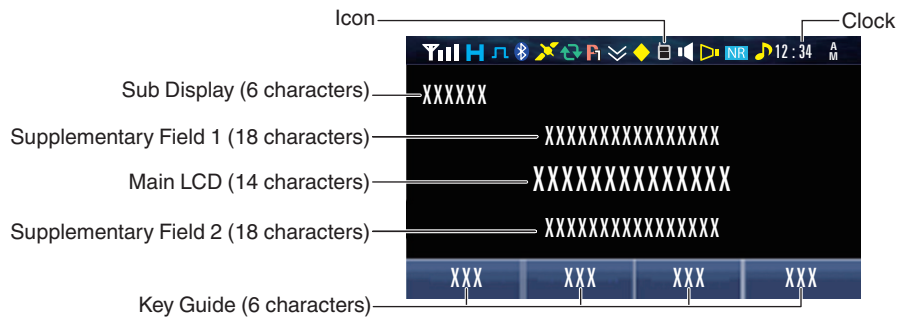


● Function Mode Frame 1

This frame is used to display the Function Mode, such as Individual Call Mode and Status Mode. The number, such as the list number or channel number, appears at the right end of the title line.

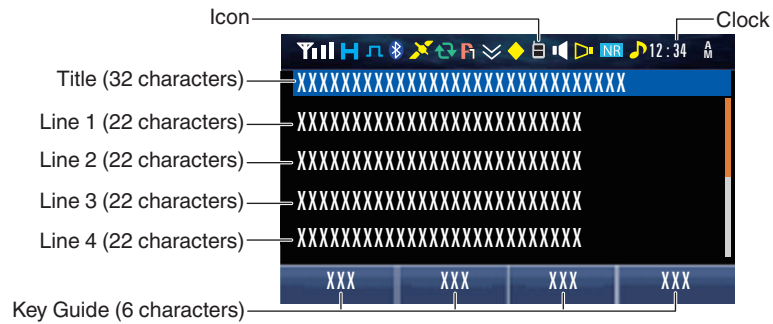


● Function Mode Frame 2

This frame is used to display the Function Mode, such as Status Mode. The number, such as the list number or channel number, appears at the right end of the title line. The icon can be displayed at the right side of each line.

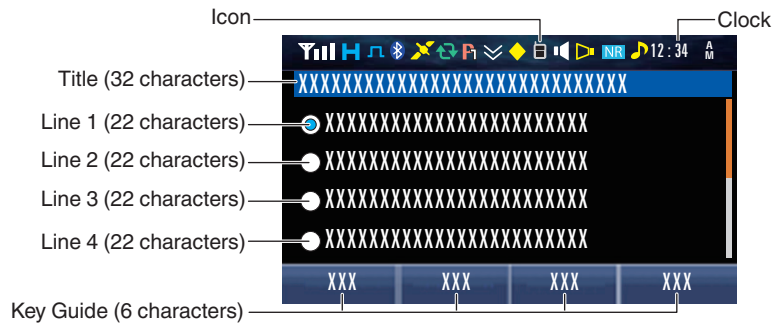


● Category Icon Frame

This frame is used to display the Menu Category in Icon Mode.

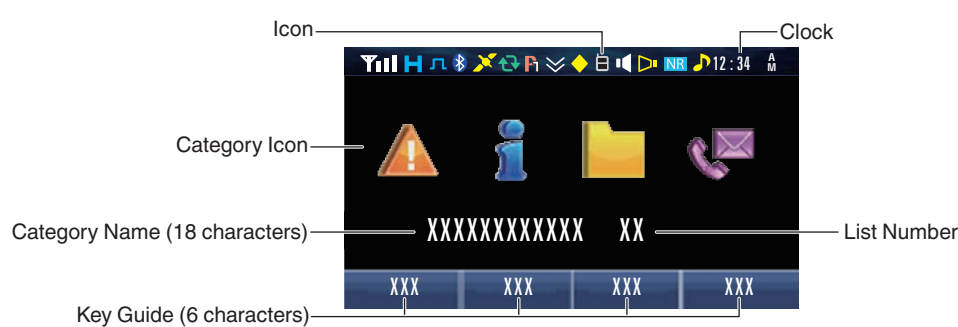


● Message Frame

This frame is used to display the message, such as the Short Message.

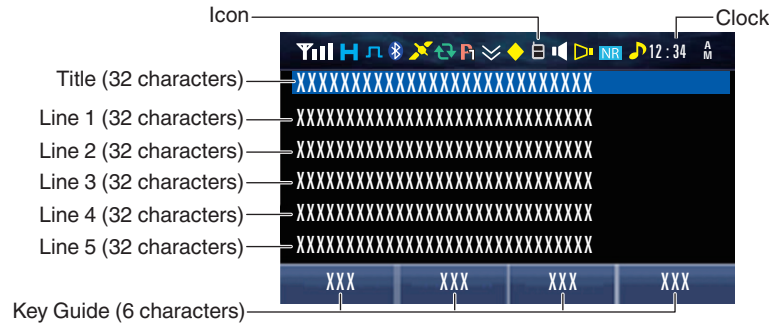


● Popup Display

The popup appears when the adjustment of the volume level or the operation of Key Lock occurs.

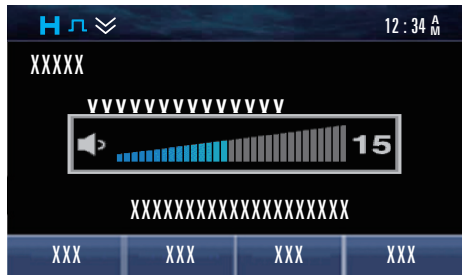

● Dual Frame


This frame is used to display the channel name in the Dual RF Deck structure. This frame appears when Multi RF Deck View is On.

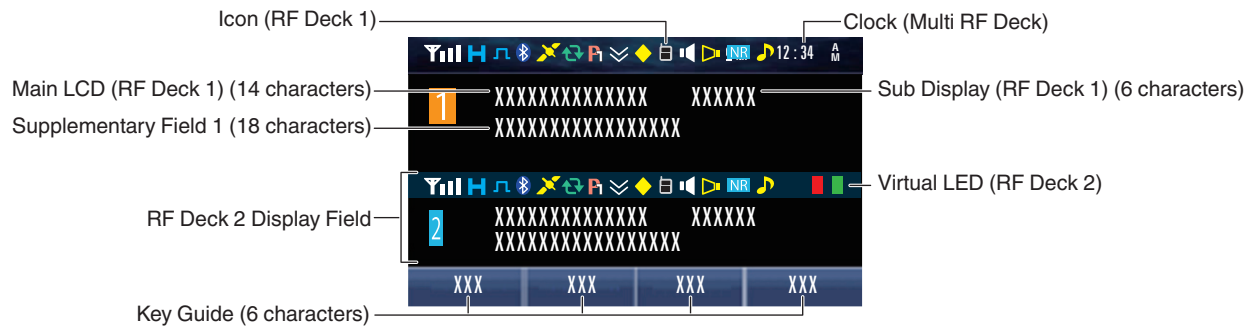

Other than the clock display and virtual LED, the display specifications of RF Deck 1 and RF Deck 2 are the same.

● Triple Frame

This frame is used to display the channel name in the Triple RF Deck structure. This frame appears when Multi RF Deck View is On.

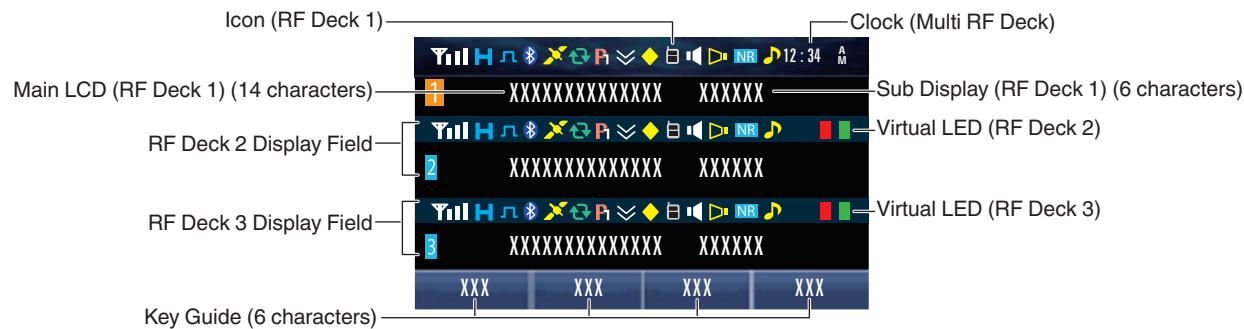


Other than the clock display and virtual LED, the display specifications of RF Deck 1, RF Deck 2 and RF Deck 3 are the same.

Mobile (KCH-21R (Handheld Control Head))


● Basic Frame

This frame is used to display the name, such as the channel name. Various icons indicating the transceiver’s status appear in the icon display area.

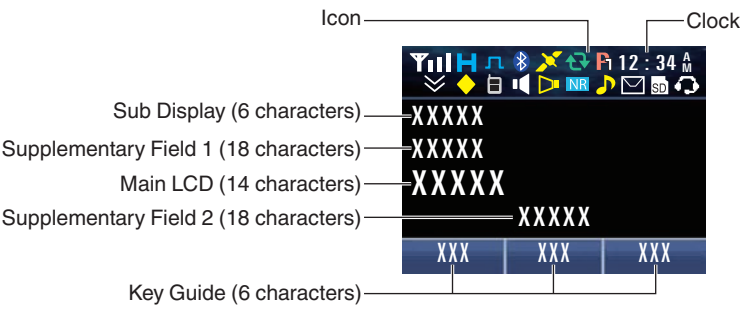


● Function Mode Frame 1

This frame is used to display the Function Mode, such as Individual Call Mode and Status Mode. The number, such as the list number or channel number, appears at the right end of the title line.

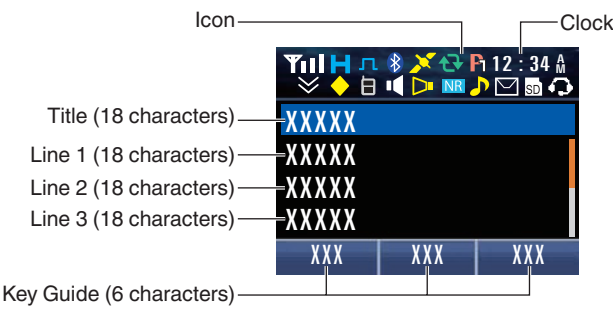


● Function Mode Frame 2

This frame is used to display the Function Mode, such as Status Mode. The number, such as the list number or channel number, appears at the right end of the title line. The icon can be displayed at the right side of each line.

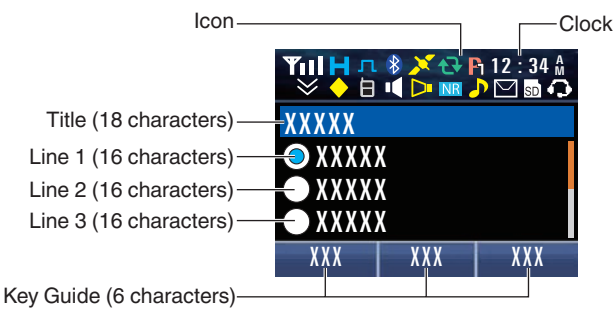

● **Category Icon Frame**

This frame is used to display the Menu Category in Icon Mode.

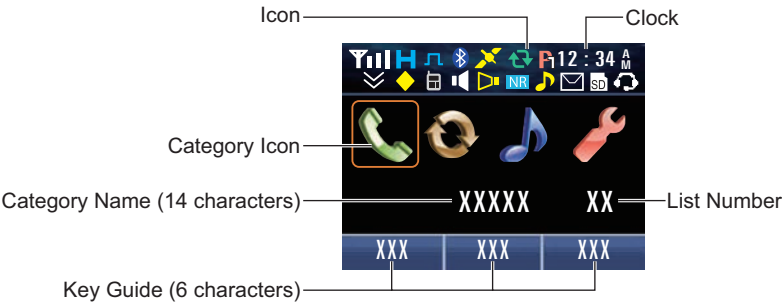


● **Popup Display**

The popup appears when the adjustment of the volume level or the operation of Key Lock occurs.




● **Dual Frame**

This frame is used to display the channel name in the Dual RF Deck structure. This frame appears when Multi RF Deck View is On.

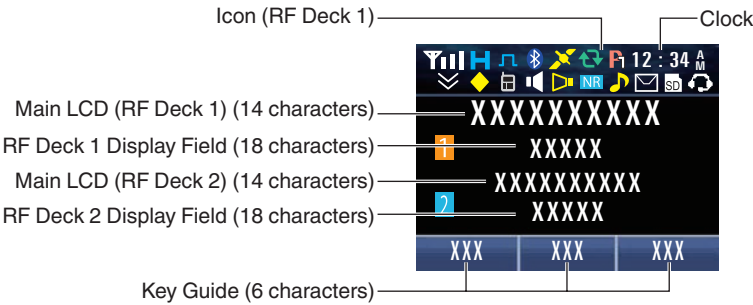

● **Triple Frame**

This frame is used to display the channel name in the Triple RF Deck structure. This frame appears when Multi RF Deck View is On.

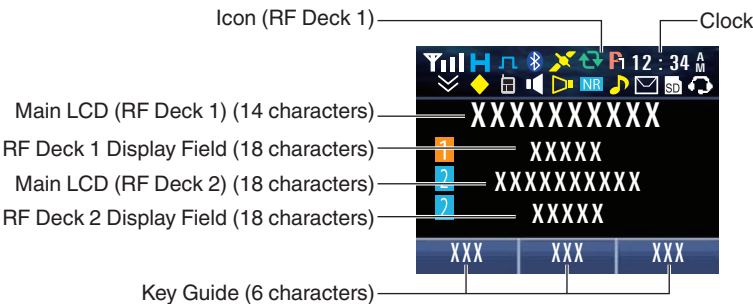


Other than the clock display and virtual LED, the display specifications of RF Deck 1, RF Deck 2 and RF Deck 3 are the same.


Icons

Various icons indicating the transceiver’s status appear in the icon display area when a channel name is displayed. Refer to “The Icons on the LCD” for details of each icon.


● Portable



● Mobile (KCH-19 (Basic Panel)/ KCH-20R (Featured Panel))

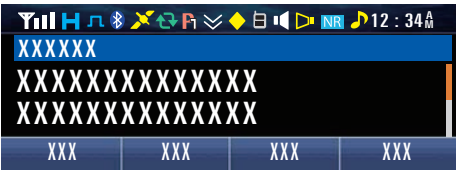

● Mobile (KCH-21R (Handheld Control Head))



Key Guide

The key guide is displayed at the bottom of the LCD.

For Portable, the key guide displays the functions that function when the **Menu** ([]), [] or **Back** ([]) key is pressed.

For Mobile, the key guide displays the functions that function when the **Menu** ([]), **Back** ([]) or [], [] key is pressed.

The text that appears on the display varies depending on the transceiver's status.


● PF Key

Functions assigned to each key will appear while the channel name appears. (Refer to [Available Functions for the PF Keys.](#))

Portable:



Mobile (KCH-19 (Basic Panel)/ KCH-20R (Featured Panel)):

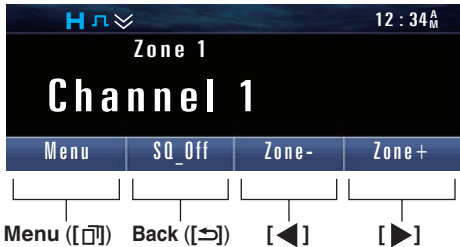


Mobile (KCH-21R (Handheld Control Head)):




● Function Mode

Functions that can be used in each mode appear while the transceiver is in Function Mode, such as Selcall Mode, Status Mode and Stack Mode. However, the key guide for the **Up** key does not appear if the function for selecting the list or code is assigned to the [▲] key or [▼] key.


Portable:



Mobile (KCH-19 (Basic Panel)/ KCH-20R (Featured Panel)):

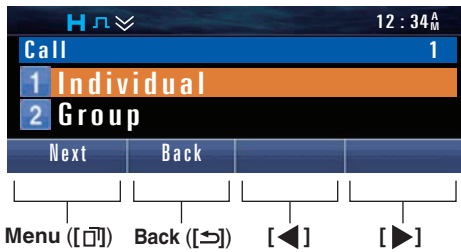

Mobile (KCH-21R (Handheld Control Head)):



The following are key guides that appear while the transceiver is in Function Mode. (Refer to [Function Mode](#).)

Table 1-1 Key Guide (Function Mode)

Key Guide	Operation
OK	Determines the data of the entered characters, code, or list.
Select	Determines the data of the selected characters, code, or list.
Delete	Deletes the data of the selected characters, code, or list.
Confirm	Authenticates the entered password.
Exit	Aborts the Function Mode.
Next	Proceeds to the next step.
Back	Goes back to the previous step.
Prev (Mobile only)	Restores the previous display.
Play	Starts the playback of audio data.
Pause	Stops recording.
Conn	Enters the state to confirm connection with the device.
Discon	Enters the state to confirm disconnection with the device.
Call	Initiates the call.
Send	Sends the data.
Page	Initiates the Paging Call.
Cancel	Cancels the operation.
◀Disp (Mobile only)	Switches the display.
Disp▶ (Mobile only)	Switches the display.
◀ (Mobile only)	Selects a category.
▶ (Mobile only)	Selects a category.
◀◀ (Mobile only)	Plays back the audio data from the beginning.
▶▶ (Mobile only)	Plays back the next audio data from the beginning.
List+	Selects list data.
List-	Selects list data.
View	Switches to the Short Message View display.

Note

- The key guide which appears while the transceiver is in Function Mode is only for the functions that can be activated.
- Key Guide for a function assigned to and activated by pressing and holding a **PF** key appears only if no function is assigned to the same key.

Example 1) "KeyLck" appears as Key Guide in the following case: Function = None, Hold = Key Lock

Example 2) "Light" appears as Key Guide in the following case: Function = Backlight, Hold = Key Lock

When the transceiver is turned ON after the power source is attached to the transceiver, the transceiver starts up. To make the transceiver ready for use, the configuration data needs to be created using KPG-D1/ D1N and written to the transceiver.

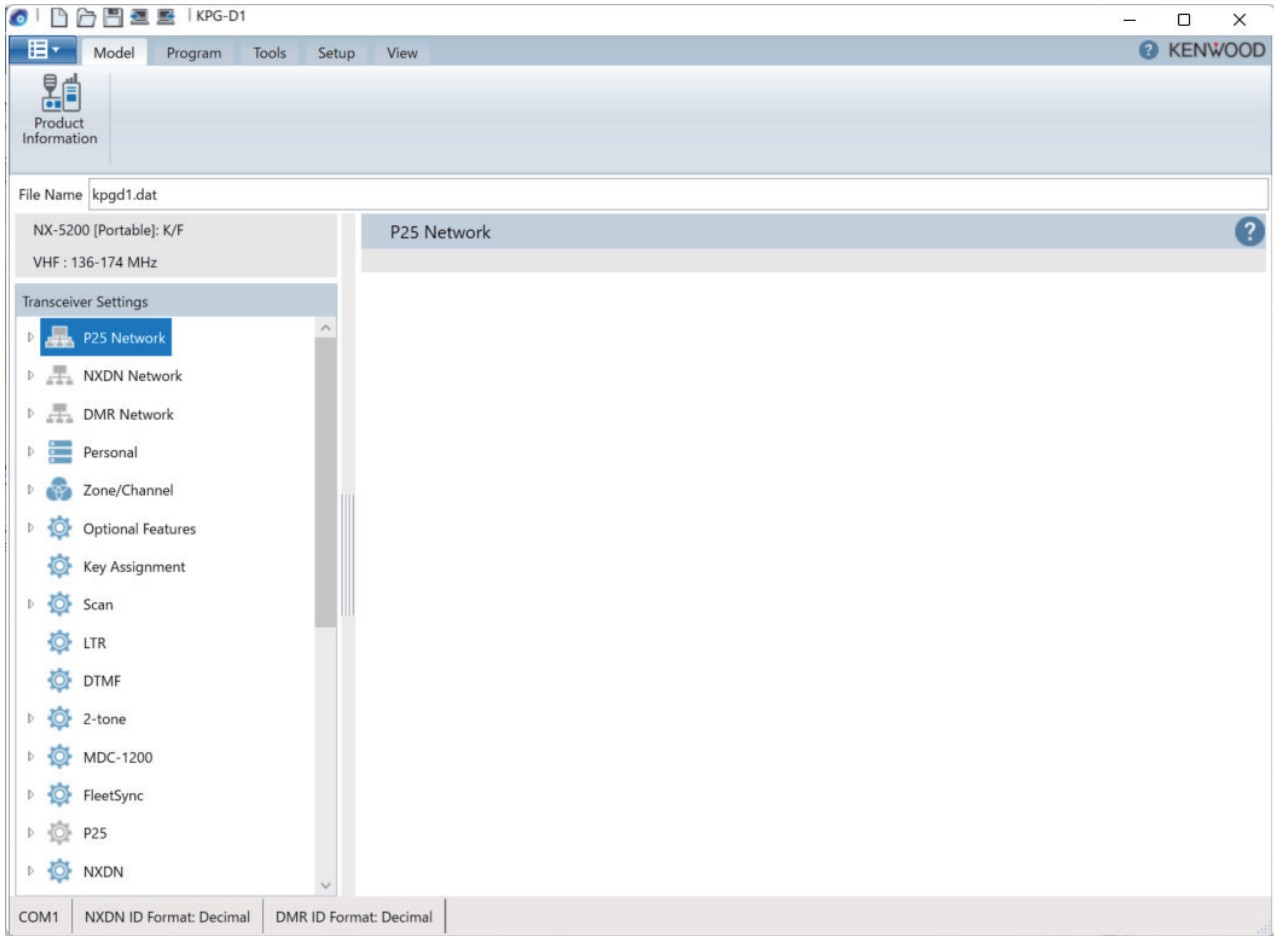


Figure 2-1 KPG-D1/ D1N Main Window

By using KPG-D1/ D1N, the zone and channel data needs to be configured and then the parameters for various functions can be configured. Refer to the help texts for configuration methods.

2.1 Connecting the Transceiver to a PC

To write the configuration data to or read the configuration data from the transceiver via serial communications by using a programming cable, "Programming Cable" needs to be selected from **Communication Method** of **COM port**. Also, the transceiver and a PC with KPG-D1/ D1N installed need to be connected by using the programming cable.

Portable

The transceiver and a PC need to be connected by using the KPG-36U/ KPG-36X programming cable. Refer to the figure below.

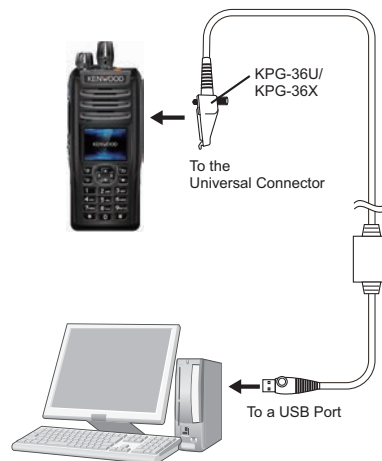


Figure 2-2 Connection of the Transceiver (Portable) and a PC

Mobile

The transceiver and a PC need to be connected by using the KPG-46U/ KPG-46X programming cable. Refer to the figure below.

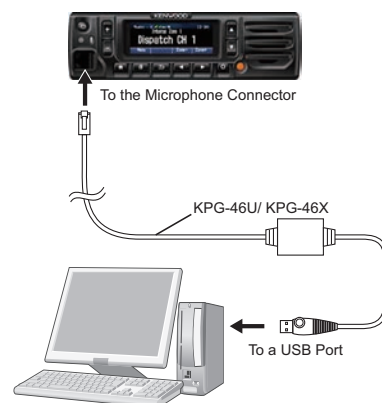


Figure 2-3 Connection of the Transceiver (Mobile) and a PC

Note

- For NX-5600H/ NX-5700H/ NX-5800H, the transceiver and a PC can also be connected by connecting the Type-B USB cable to the USB Micro Terminal. To use the USB Micro Terminal mounted on NX-5600H/ NX-5700H/ NX-5800H, the KPG-46X USB driver must be installed on a PC.

Configuration using KPG-D1/ D1N

Configuring **Communication Method** ( See Setup > COM port)

2.2 Connecting the Transceiver to a PC by Bluetooth

To write the configuration data to the transceiver or to read the configuration data from the transceiver by using Bluetooth communication, "Bluetooth SPP" needs to be selected from **Communication Method** of **COM port** and a Bluetooth-compatible device (the transceiver) to be written with the configuration data needs to be selected in **Device List**.

Note

- To connect the transceiver to a PC by Bluetooth, a connection by Serial Port Profile of Bluetooth is required. Refer to "[About Serial Port Profile \(SPP Connection/ SPP Disconnection\)](#)" about a connection by Serial Port Profile.

Configuration using KPG-D1/ D1N

- Configuring **Communication Method** ([See](#) Setup > COM port)
- Selecting a Bluetooth-compatible device (the transceiver) in **Device List** ([See](#) Setup > COM port > Bluetooth SPP)

2.3 Writing the Configuration Data to the Transceiver

Clicking the "Write" button in **Program** of KPG-D1/ D1N displays **Write Data to the Transceiver**. Clicking the "Write" button of **Write Data to the Transceiver** enters FPU Programming Mode and starts writing the configuration data to the transceiver.

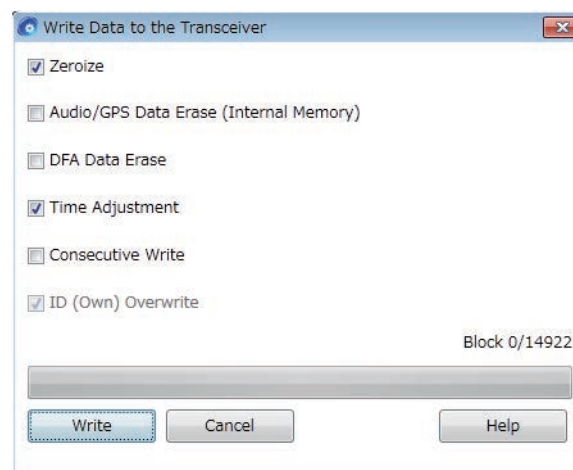


Figure 2-4 Write Data to the Transceiver

Note

- The transceiver behaves as follows according to the configuration in **Write Data to the Transceiver**:
 - Clicking on **Zeroize** and writing deletes the Encryption Key configuration in the SCM.
 - Clicking on **Time Adjustment** and writing automatically configures the transceiver to the time configured in a PC. Refer to "[ADJUSTING THE TIME ON THE TRANSCEIVER](#)" for the operations to manually adjust the time of the transceiver after writing the configuration data.
 - Clicking on **Audio/GPS Data Erase (Internal Memory)** and writing deletes the audio data and GPS data stored on the transceiver.
 - Clicking on **DFA Data Erase** and writing deletes the Direct Frequency Assignment information stored on the transceiver. If **NXDN Type-C Trunking** is disabled, **DFA Data Erase** does not appear.
 - Clicking on **Consecutive Write** and writing does not close **Write Data to the Transceiver** even when the writing completes, and various IDs can be changed and written in other transceiver.
 - Clicking on **ID (Own) Overwrite** and writing overwrites various ID data on the transceiver by the ID data configured by KPG-D1/ D1N. Clicking off **ID (Own) Overwrite** and writing can write configuration data on the transceiver without overwriting various IDs configured in the transceiver.

Writing configuration data to multiple transceivers using Bluetooth communication

To write configuration data to multiple transceivers by using Bluetooth communication, click the “Multi Write (Bluetooth)” button. A Bluetooth-compatible device (the transceiver) is detected in **Write Data to Multiple Transceiver (Bluetooth)**, and the configuration data can be written to the transceiver by Bluetooth communication.

About the writing of configuration data in a Multi RF Deck/ Multi Control Head structure

Refer to “**Configuring the FPU Data and Writing the FPU Data to Each RF Deck**” in “Multi RF Deck/ Multi Control Head” for the writing of configuration data in a Multi RF Deck/ Multi Control Head structure for Mobile.

2.4 Reading the Configuration Data from the Transceiver

To change the data configured in the transceiver, read the configuration data from the transceiver to KPG-D1/ D1N, and then write the configuration data to the transceiver after the configuration data has been changed. Clicking the “Read” button in **Program** of KPG-D1/ D1N displays **Read Data from the Transceiver**. Clicking the “Read” button of **Read Data from the Transceiver** enters FPU Programming Mode and starts reading the configuration data to the transceiver.

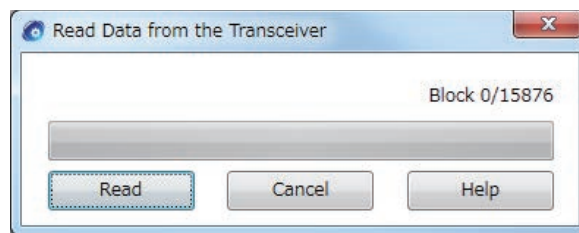


Figure 2-5 Read Data from the Transceiver

2.5 Embedding a Message in the Transceiver (Embedded Message)

The message can be written to the transceiver as part of the configuration data by using KPG-D1/ D1N.

Embedded Message

Embedded Message can be used to store a maximum of 64 characters in the transceiver. The transceiver profile information, such as the control number and the file name of the configuration data written in the transceiver, can be embedded.

The message can be written to the transceiver by using KPG-D1/ D1N. The message written in the transceiver is stored as a part of the configuration data.

The embedded messages can be read from the transceiver by using KPG-D1/ D1N.

Configuration using KPG-D1/ D1N

Configuring **Embedded Message** ( See Transceiver Settings > Embedded Message)

Embedded Message with Password

Embedded Message with Password can be used to store with a password a maximum of 64 alphanumeric characters and symbols in the transceiver.

The transceiver profile information, such as the control number and the file name of configuration data written in the transceiver, can be embedded with a password.

The message and the password can be written to the transceiver by using KPG-D1/ D1N. The **Embedded Message with Password** is stored in the transceiver as independent data from the configuration data.

The password needs to be entered to write a message to the transceiver written with a password. The message cannot be written to the transceiver unless the correct password is entered.

The embedded messages can be read from the transceiver by using KPG-D1/ D1N.

Configuration using KPG-D1/ D1N

Configuring **Embedded Message with Password** ( See Transceiver Settings > Embedded Message with Password)

2.6 Writing Configuration Data Using Wireless Communication (OTAP)

OTAP (Over-The-Air Programming) is the function to write configuration data to the transceiver using wireless communications. This function enables configuration data for the transceiver to be updated by remotely controlling from the base station.

OTAP can be used in a communication system which supports NEXEDGE, P25, or DMR digital communication (an NXDN Conventional system, an NXDN Trunking system, a P25 Conventional system, a P25 Trunking system, a DMR Conventional system, or a DMR-Based Trunking system).

To use this function, the PC application software, OTAP MANAGER (KPG-180AP) is required to manage configuration data of KPG-D1/ D1N and transmit the configuration data to each subscriber unit via the base station transceiver.

To use the OTAP function in a Trunking 2.5 system, the firmware of the transceiver, FPU (KPG-D1/ D1N), and OTAP MANAGER (KPG-180AP) need to be updated to the following versions:

Firmware of the transceiver: 5.00.00 or later

FPU (KPG-D1/ D1N): V 5.00 or later

OTAP MANAGER (KPG-180AP): V 5.00 or later

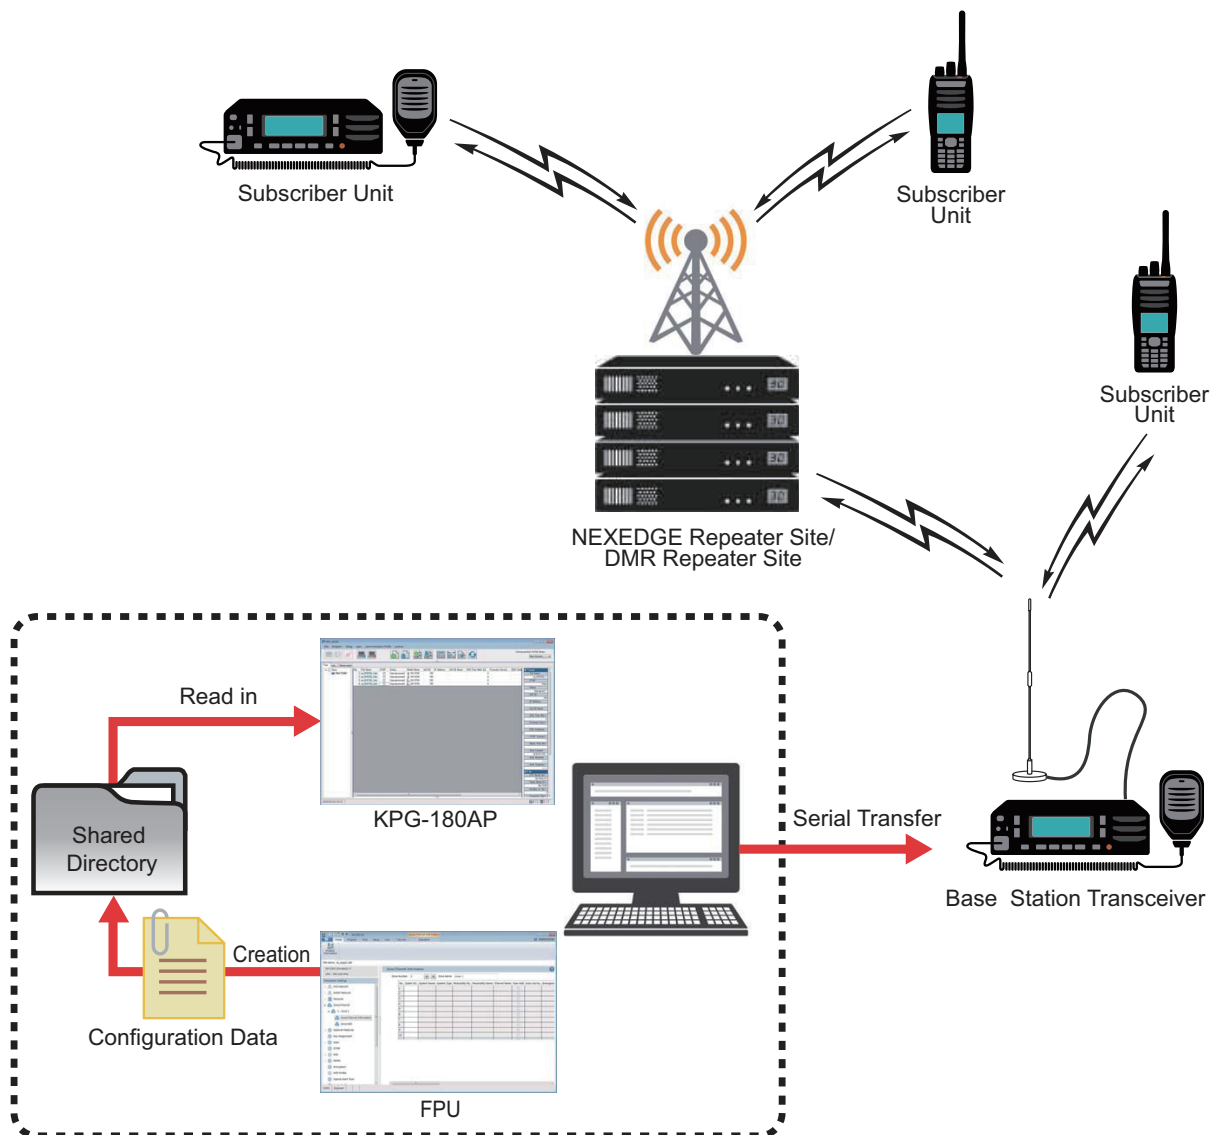


Figure 2-6 Example of the System Structure

The transceiver for which OTAP is enabled can be used in a system where OTAP is incorporated. The subscriber unit can write the received configuration data into the unit and enable the configuration data. The base station transceiver can send the configuration data to the subscriber unit according to the request from OTAP MANAGER. Refer to OTAP MANAGER (KPG-180AP) Basic Operations supplied with KPG-180AP (Ver 5.00 or later) for the details of this function.

Configuration using KPG-D1/ D1N

- Configuring **P25 OTAP** to be enabled or disabled ( **See** Model > Product Information > Feature Selection > P25)
- Configuring **NXDN OTAP** to be enabled or disabled ( **See** Model > Product Information > Feature Selection > NXDN)
- Configuring **DMR OTAP** to be enabled or disabled ( **See** Model > Product Information > Feature Selection > DMR)

IP Based Packet Data Format

OTAP communication by the IP Based Packet Data format only supports an IP connection in a Trunking 2.5 system and DMR Tier III Trunking system and does not support a serial connection.

To perform the OTAP communication by the IP Based Packet Data format, etc., the PC application software, OTAP MANAGER (KPG-180AP) is required.

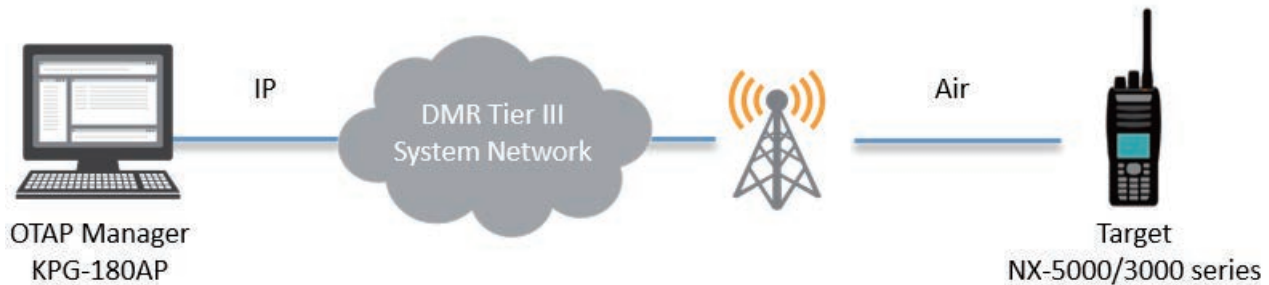


Figure 2-7 IP Connection of OTAP by the IP Based Packet Data Format

In addition, to perform the OTAP communication by the IP Based Packet Data format, etc., the following items need to be configured in KPG-D1/ D1N:

- IP Packet Data Services
- DMR Air Interface IP Address
- OTAP Port (DMR)

Note

- To use communication by the IP Based Packet Data format, use a third-party repeater which supports communication by the IP Based Packet Data format.
- OTAP Port (DMR) is the reception port configuration for OTAP data from KPG-180AP. Configure the same value as the port configuration in KPG-180AP. If a value which is different from the port configuration in KPG-180AP is configured, the transceiver cannot receive OTAP data from KPG-180AP.
- Refer to OTAP MANAGER (KPG-180AP) Basic Operations supplied with KPG-180AP (Ver 5.00 or later) for the details of the IP connection structure of OTAP.

Configuration using KPG-D1/ D1N

- Configuring **DMR OTAP** to be enabled or disabled (See Model > Product Information > Feature Selection > DMR)
- Configuring **IP Packet Data Services** to be enabled or disabled (See Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Packet Data)
- Configuring **DMR Air Interface IP Address** (See Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Packet Data)
- Configuring **OTAP Port** (See Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Packet Data > OTAP)

P25 Trunking OTAP

P25 Trunking OTAP only supports an IP connection and does not support a serial connection. Therefore, the structure where the transceiver behaves as the base is not supported.

The PC application software OTAP MANAGER (KPG-180AP) is also required when the P25 Trunking OTAP function is used. This section describes OTAP in a P25 Trunking system. Refer to “[Writing Configuration Data Using Wireless Communication \(OTAP\)](#)” for OTAP in anything other than a P25 Trunking system.

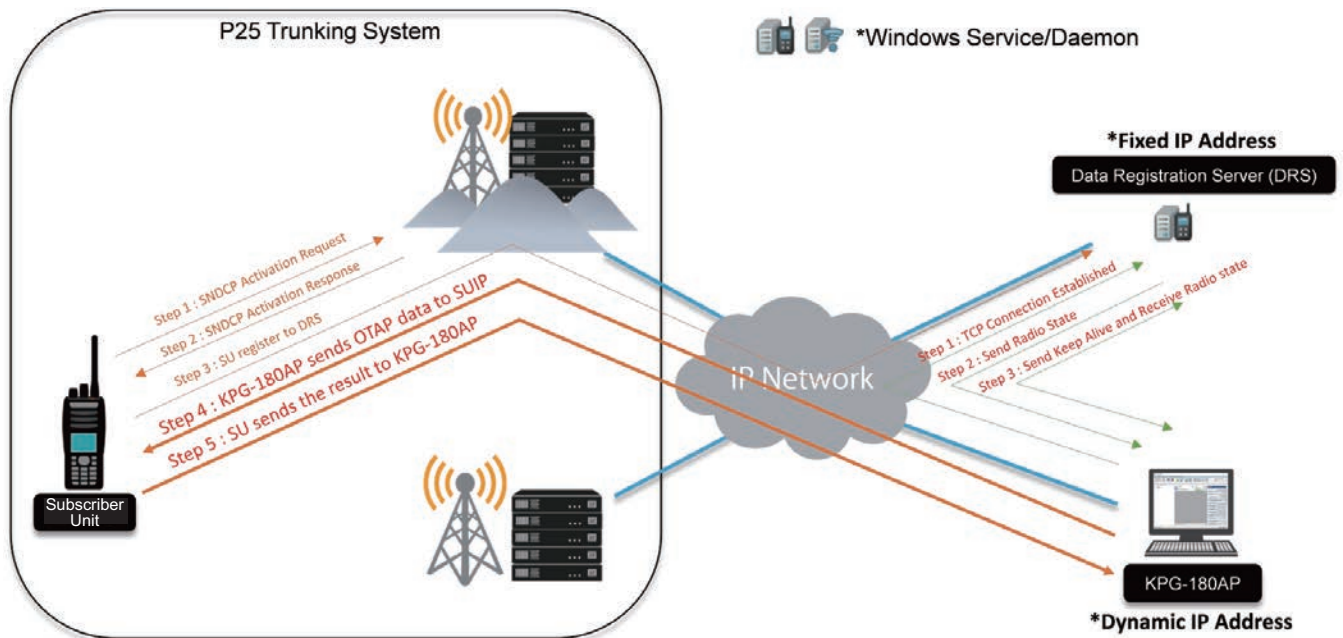


Figure 2-8 Example of the P25 Trunking OTAP Structure

For P25 Trunking OTAP, the following items in KPG-D1/ D1N need to be preconfigured based on the system structure.

- Registration Server IP Address
- Registration Server Port
- OTAP Port (P25)

Note

- To use P25 Trunking digital communication, use a third-party repeater which supports P25 Trunking digital communication.
- OTAP Port (P25) is the reception port configuration for OTAP data from KPG-180AP. Configure the same value as the port configuration in KPG-180AP. If a value which is different from the port configuration in KPG-180AP is configured, the transceiver cannot receive OTAP data from KPG-180AP.
- P25 Trunking OTAP does not support encrypted communications. (Refer to P25 FUNC P25 Packet Data Communication.)
- Refer to OTAP MANAGER (KPG-180AP) Basic Operations supplied with KPG-180AP (Ver 4.00) for the details of the P25 Trunking OTAP function.

Configuration using KPG-D1/ D1N

- Configuring **P25 OTAP** to be enabled or disabled ([See](#) Model > Product Information > Feature Selection > P25)
- Configuring **Registration Server IP Address** ([See](#) Transceiver Settings > Personal > Personal Features > P25 Trunking > Packet Data)
- Configuring **Registration Server Port** ([See](#) Transceiver Settings > Personal > Personal Features > P25 Trunking > Packet Data)
- Configuring **OTAP Port** ([See](#) Transceiver Settings > Personal > Personal Features > P25 Trunking > Packet Data > OTAP)

3.1 Turning the Transceiver ON/ OFF

Turning the Transceiver ON

For Portable, rotating the **Power** switch clockwise causes the transceiver to be turned ON.

For Mobile, pressing the **Power** switch causes the transceiver to be turned ON. Also, the transceiver can be turned ON by linking to the status of the Ignition Sense port of a vehicle. (Refer to [Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port \(Ignition Sense\)](#).)

- **If the data is written to the transceiver and the password is not configured**



Turn the transceiver ON.

A Power-on Tone A (1 beep) sounds from the transceiver, and then an animated logo appears for 500 ms.

If **Custom Start-up Screen** is configured, a Power-on Tone A (1 beep) sounds from the transceiver when the transceiver is turned ON and the bitmapped image configured for the transceiver appears for 2 sec. (Refer to [Displaying a Bitmap Image When the Transceiver is Turned ON \(Custom Start-up Screen\)](#).)

If **Power-on Text** is configured, the Power-on Text appears for 2 sec after "SELF TESTING" appears. (Refer to [Power-on Text](#).)

The transceiver enters User Mode, and then the channel name appears.



Note

- The animated logo appears only if **Custom Start-up Screen** is not configured.

● If the data is written to the transceiver and the transceiver's password is configured

1 Turn the Transceiver ON.

A Power-on Tone A (1 beep) sounds from the transceiver, and then an animated logo appears for 500 ms.


If **Custom Start-up Screen** is configured, a Power-on Tone A (1 beep) sounds from the transceiver when the transceiver is turned ON and the bitmapped image configured for the transceiver appears for 2 sec. (Refer to [Displaying a Bitmap Image When the Transceiver is Turned ON \(Custom Start-up Screen\)](#).)



"Password" appears after "SELF TESTING" appears. (Refer to [Password for Transceiver Operation \(Transceiver Password\)](#).)

Note

- The animated logo appears only if **Custom Start-up Screen** is not configured.
- In the following cases, if the transceiver is turned ON, the transceiver enters Transceiver Password Mode:
 - If **Transceiver Password** is configured, "Transceiver Password" is not assigned to any of the **PF** keys, and "Transceiver Password" is not configured in Menu Mode
 - When "Transceiver Password" is assigned to one of the **PF** keys, or when "Transceiver Password" is configured for Menu Mode, if the transceiver is turned OFF while the transceiver is in Transceiver Password Mode





2 Enter a password.

Refer to ["Entering or Deleting a Code"](#) for entry methods.

When the correct password is entered, a Password Authorization Tone (2 beeps) sounds from the transceiver, and then the password protection of the transceiver is disabled.

If **Power-on Text** is configured, the Power-on Text appears for 2 sec. (Refer to [Power-on Text](#).)

The transceiver enters User Mode, and then the channel name appears.



Note

- If the firmware is not written to the transceiver correctly, the transceiver will enter Firmware Programming Mode. In this case, write the firmware to the transceiver again.
- “UNPROGRAM” appears on the main display if no data is written to the transceiver. In this case, data needs to be written to the transceiver by using KPG-D1/ D1N.
- In a Multi RF Deck system, pressing the **Power** switch for 1000 ms causes the transceiver to be turned ON.
- The Power-on Tone A tone when the transceiver is turned ON can be created as desired using KPG-D1/ D1N.
- The High Power model (NX-5600H/ NX-5700H/ NX-5800H) cannot be activated if Control Head is not connected.

Turning the Transceiver OFF

For Portable, rotate the **Power** switch counterclockwise until it clicks to turn the transceiver OFF.

For Mobile, pressing the **Power** switch while the transceiver is turned ON causes the transceiver to be turned OFF. Also, the transceiver can be turned OFF according to the status of the vehicle engine, either switched On or Off. (Refer to [Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port \(Ignition Sense\)](#).)

Power Switch Status Memory

Supported Models: Mobile

Power Switch Status Memory is the function to configure whether to store the **Power** switch status (ON or OFF) when the power source is disconnected from the transceiver.

Whether to turn the transceiver ON when the power source is connected to the transceiver depends as below on the configuration in **Power Switch Status Memory**:

Table 3-1 Power Switch Status Memory

Configuration	Description
Enabled	Enables the capability to retain the ON- or OFF-state of the Power switch. By disconnecting the power source while the transceiver Power switch is in the ON state and then by reconnecting the power source, the transceiver is turned ON and starts up. Even if the power source is reconnected after the power source is disconnected while the transceiver Power switch is in the OFF state, the transceiver remains turned OFF. In this case, the transceiver does not start up unless the Power switch is pressed.
Disabled	Disables the capability to retain the ON- or OFF-state of the Power switch. Regardless of the previous ON- or OFF-state of the Power switch, the transceiver power is turned ON by connecting the power source to the transceiver.

Configuration using KPG-D1/ D1N

Configuring **Power Switch Status Memory** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Others)

3.2 Adjusting the Volume Level

Portable

Rotating the **Volume** control clockwise increases the volume level from the speaker, and rotating the **Volume** control counterclockwise decreases the volume level from the speaker.

Mobile

Pressing the **Volume Up** key increases the volume level in steps of 1. Pressing the **Volume Down** key decreases the volume level in steps of 1. KCH-20R (Featured Panel) is operated by using the Volume control just as Portable.

If "Volume Up (Continuous)" or "Volume Down (Continuous)" is assigned to the **Volume Up** key or **Volume Down** key, the volume level is increased or decreased continuously every 100 ms by pressing and holding the **Volume Up** key or **Volume Down** key.

3.3 Using Function Keys

The following functions can be assigned to each key of the transceiver using KPG-D1/ D1N. Pressing a key to which a function is assigned can activate the assigned function or place the transceiver in various Function Modes. (Refer to [Available Functions for the PF Keys](#).)

Following are the configuration examples for each key of the transceiver.

Table 3-2 Configuration Examples for Keys

Key	Function	2nd Function	Hold Function	Hold Delay
Home ([])	Home Channel	None	Home Channel Select	3.0
Back ([])	Key Lock	Autodial	None	1.0
AUX	Function	None	None	1.0

A function can be assigned to Function, 2nd Function and Hold of each key on the transceiver.

● Function

The function is activated by pressing a key.

In the configuration example above, pressing the **Home** ([]) key, **Back** ([]) key, or **AUX** key activates the function assigned to each key.

If a key to which Function is assigned is pressed, the transceiver waits for a function assigned to 2nd Function to be activated.

● 2nd Function

The function is activated by pressing a key to which the function is assigned to 2nd Function after the **Function** key is pressed.

In the configuration example above, pressing the **Back** ([]) key after the **AUX** key is pressed activates the Autodial function.

● Hold

The function is activated by pressing and holding a key for the length of time configured for Hold Delay.

In the configuration example above, pressing and holding the **Home** ([]) key for 3 sec activates the Home Channel Select function.

Note

- The two functions, Primary and Secondary, can be assigned to each key on the transceiver. Which function is used can be configured for each zone or channel.

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

Mode Reset Timer

Mode Reset Timer is the timer for canceling the standby status of further key entry in Function Mode, and for canceling the function activation status of 2nd Function. By using this function, Function Mode does not need to be disabled manually.

The function also helps by canceling the Function Mode automatically so as not to remain in Function Mode for too long a time.

The transceiver has some special Function Modes. When the transceiver enters one of these modes, a preprogrammed display appears on the main display and sub-display and the **Mode Reset Timer** starts counting down the time. If no key is pressed before the amount of time configured in **Mode Reset Timer** expires, the transceiver returns to the previous mode.

If a **Function** key is pressed, the transceiver waits for a function configured for 2nd Function to be activated, and then **Mode Reset Timer** starts counting down. If no key is pressed before the amount of time configured in **Mode Reset Timer** expires, the transceiver cancels waiting for the function to be activated. **Mode Reset Timer** can be extended by key operation.

Mode Reset Timer is used for the following Function Modes:

Table 3-3 Objective Function Modes for Mode Reset Timer

2-tone Mode
Activity Detection Mode * ¹
ANR Preset Mode * ¹
Audio Profile Mode * ¹
Auto Dimmer Mode * ¹
Autodial Mode
Autodial Programming Mode
AUX Mode * ¹
AUX A/B/C Mode * ¹
Battery Information Display Mode * ¹
BLE Beacon Display Mode
Bluetooth Mode * ¹
Bluetooth Device Mode * ¹
Bluetooth Find Device Mode * ¹
Bluetooth Headset Connection Type Mode
Bluetooth Information Mode * ¹
Bluetooth My Devices Mode * ¹
Bluetooth Speaker Mode * ¹
Broadcast Mode * ¹
Channel Entry Mode
Clock Mode * ¹
Clock Adjustment Mode
Color Scheme Mode * ¹
Dialing Mode
Direct Channel & OST Mode
Display Format Mode * ¹
Eject SD Card Mode
External Mic Sense Mode * ¹
External Speaker Mode
Fixed Volume Mode * ¹
Format SD Card Mode
Forward Mode
Free-dial Entry Mode

GPS Mode *1
GPS/Bluetooth Reset Mode *1
GPS Position Display Mode
Group Call Mode
Group ID Entry Mode
High Transmit Power Mode *1
Horn Alert Mode *1
Individual Call Mode
Intercom Mode *1
IP Address Mode *1
Key Delete Mode
Keyset Select Mode
Language Mode *1
LCD Brightness Mode *1
Lone Worker ON/OFF Mode
Low Transmit Power Mode
Maintenance Display Mode
Master Volume Control Mode *1
Medium Transmit Power Mode *1
Menu Mode
Mic Sense Mode *1
Microphone Type Mode *1
Monitor Mode *1
Multi RF Deck View Mode *1
My ID Mode
OST Mode *1
OST List Mode
OVCN Mode
Playback Mode
Priority-channel Select Mode
Public Address Mode *1
Radio Check Mode *1
Radio Inhibit Mode *1
Radio Uninhibit Mode *1
Receive Entry Mode
Redial Mode
Remote Control Mode
RF Deck Select Mode *1
RX Audio Equalizer (High) Mode *1
RX Audio Equalizer (High Midrange) Mode *1
RX Audio Equalizer (Middle) Mode *1
RX Audio Equalizer (Low Midrange) Mode *1
RX Audio Equalizer (Low) Mode *1
RX Audio Gain Control Mode *1

Scan Mode ^{*1}
Scan Delete/Add Mode ^{*1}
Scan Normal Mode ^{*1}
Scan Program Mode
Scrambler/Encryption Mode ^{*1}
Scrambler/Encryption Code Mode
SD Card Direct Access Mode
Selcall Mode
Short Message Mode
Site Lock Mode ^{*1}
Site Select Mode
Speaker 1-2 Mute Mode ^{*1}
Speaker Type Mode ^{*1}
Squelch Level Mode
Squelch Off Mode ^{*1}
Stack Mode
Status Mode
Surveillance Mode ^{*1}
System Select Mode
Talk Around Mode ^{*1}
Talkgroup ID Select Mode
Task Request Confirmation Mode
Text Messaging Mode
Transceiver Password Mode ^{*2}
TX Audio Equalizer (High) Mode ^{*1}
TX Audio Equalizer (High Midrange) Mode ^{*1}
TX Audio Equalizer (Middle) Mode ^{*1}
TX Audio Equalizer (Low Midrange) Mode ^{*1}
TX Audio Equalizer (Low) Mode ^{*1}
TX Audio Gain Control Mode ^{*1}
Unselected RF Deck Speaker Mode ^{*1}
Unselected Speaker Offset Mode ^{*1}
Vibrator Mode ^{*1}
VOX Mode ^{*1}
VOX Gain Level Mode ^{*1}
Zone Delete/Add Mode ^{*1}

^{*1} Modes entered only from Menu Mode.

^{*2} "Input Password" reappears on the display when the duration configured in **Mode Reset Timer** elapses.

Configuration using KPG-D1/ D1N

Configuring **Mode Reset Timer** ( See Transceiver Settings > Optional Features > Optional Features 1 > Others)

Keypad Operation

The keypad operating method can be selected according to the user's purpose.

Functions can be assigned to the keypad by using KPG-D1/ D1N. The following is the list of the functions that can be assigned to the transceiver for Keypad Operation:

Table 3-4 Keypad Operation

Configuration	Description
None	Pressing a key on the keypad of the transceiver causes the Key-entry Error Tone (1 beep) to sound, but it has no effect on the transceiver.
Channel Entry	Pressing a key on the keypad can directly specify a channel. (Refer to Changing the Channel by Specifying the Number (Channel Entry) .)
Group ID/Channel Entry	In an NXDN Trunking system, pressing the [0] key to [9] key on the transceiver's keypad can directly specify the Group ID in the NXDN Trunking system. (Refer to Changing the Group ID by Specifying the ID (Group ID Entry) (NXDN Trunking System Only) .) In a system other than an NXDN Trunking system, pressing the [0] key to [9] key on the transceiver's keypad can directly specify the channel number. (Refer to Changing the Channel by Specifying the Number (Channel Entry) .)
OST	Pressing a key on the keypad can directly select the OST from the OST List 1 to OST List 40.
Autodial	In a P25 Trunking system, NXDN Trunking system, DMR-based Trunking system, NXDN Conventional system, DMR Conventional system, or Analog Conventional system, pressing the [0] key to [9] key on the keypad allows the transceiver to enter Autodial Mode. In Autodial Mode, the transceiver can transmit by selecting a DTMF code from Autodial List or directly entering a DTMF code. However, the transceiver behavior on a control channel varies as below depending on the configuration in Telephone Interconnect (List Only, Unlimited or Answer Only). (Refer to P25 FUNC Configuring the Transmission and Reception Behaviors of a Telephone Call (Telephone Interconnect).) Answer Only: The transceiver cannot enter Autodial Mode on a control channel. Unlimited: If the transceiver enters Autodial Mode on a control channel, the transceiver can transmit by selecting a DTMF code from the Autodial List when Autodial List is configured. If Autodial List is not configured, the transceiver can transmit by directly entering a DTMF code. List Only: If the transceiver enters Autodial Mode on a control channel, the transceiver can transmit by selecting a DTMF code from the Autodial List when Autodial List is configured. If Autodial List is not configured, the transceiver cannot transmit a DTMF code. If Store & Send is disabled and Autodial List is configured, transmission of a DTMF code on a communication channel, regardless of the configuration in Telephone Interconnect , allows the transceiver to transmit by selecting a DTMF code from Autodial List . If Store & Send is enabled, the transceiver can transmit by directly entering a DTMF code.
Keypad Auto PTT	Every time a key on the keypad is pressed, the DTMF code is instantly sent.
Short Message	Pressing the [0] key to [9] key on the keypad enters Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message.
Status	Pressing the [0] key to [9] key on the keypad enters Status Mode. In Status Mode, a status configured in the Status List in a P25 Trunking system, an NXDN system, or a DMR system can be selected. Also, in an NXDN system or a DMR system, a status can be sent by directly entering a status.
Individual	Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in a P25 system, NXDN system, or DMR system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID.

Configuration	Description
Individual + Short Message	NXDN system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in an NXDN system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID. Then, pressing the [►] key while the transceiver is in Individual Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. P25 system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in an P25 system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID. Then, in a P25 Conventional system, pressing the [►] key while the transceiver is in Individual Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. DMR system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in a DMR system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID. Then, pressing the [►] key while the transceiver is in Individual Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message.
Individual + Status	NXDN system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in an NXDN system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID. Then, pressing the [►] key while the transceiver is in Individual Call Mode allows the transceiver to enter Status Mode. In Status Mode, a Status Message can be sent by selecting a status configured in NXDN Status List or by directly entering a status number. P25 system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in an P25 system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID. DMR system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Individual Call Mode in a DMR system. In Individual Call Mode, a call can be initiated by selecting an Individual ID configured in the Individual ID List or directly entering an Individual ID. Then, pressing the [►] key while the transceiver is in Individual Call Mode allows the transceiver to enter Status Mode. In Status Mode, a status can be sent by selecting a status configured in the DMR Status List or directly entering a status.
Group	NXDN Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Group Call Mode in an NXDN Conventional system. In Group Call Mode, a Group Call can be initiated by selecting a Group ID registered in the Group ID List. P25 Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Talkgroup ID Select Mode in a P25 Conventional system. In Talkgroup ID Select Mode, the Talkgroup ID configured for a channel can be changed. DMR Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Group Call Mode in an DMR Conventional system. In Group Call Mode, a Group Call can be initiated by selecting a Group ID registered in the Group ID List.

Configuration	Description
Group + Short Message	NXDN Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Group Call Mode in an NXDN Conventional system. In Group Call Mode, a call can be initiated by selecting a Group ID registered in the Group ID List. Then, pressing the [►] key while the transceiver is in Group Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. NXDN Trunking system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Short Message Mode in an NXDN Trunking system. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. P25 Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Talkgroup ID Select Mode in a P25 Conventional system. In Talkgroup ID Select Mode, the Talkgroup ID configured for a channel can be changed. DMR Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Group Call Mode in an DMR Conventional system. In Group Call Mode, a Group Call can be initiated by selecting a Group ID registered in the Group ID List. Then, pressing the [►] key while the transceiver is in Group Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. DMR-based Trunking system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Short Message Mode in a DMR-based Trunking system. In Short Message Mode, a Short Message can be sent by directly entering a Short Message.
Group + Status	NXDN Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Group Call Mode in an NXDN Conventional system. In Group Call Mode, a call can be initiated by selecting a Group ID registered in the Group ID List. Then, pressing the [►] key while the transceiver is in Group Call Mode allows the transceiver to enter Status Mode. In Status Mode, a Status Message can be sent by selecting a status configured in NXDN Status List or by directly entering a status number. NXDN Trunking system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Status Mode in an NXDN Trunking system. In Status Mode, a Status Message can be sent by selecting a status configured in NXDN Status List or by directly entering a status number. P25 Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Talkgroup ID Select Mode in a P25 Conventional system. In Talkgroup ID Select Mode, the Talkgroup ID configured for a channel can be changed. DMR Conventional system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Group Call Mode in an DMR Conventional system. In Group Call Mode, a Group Call can be initiated by selecting a Group ID registered in the Group ID List. Then, pressing the [►] key while the transceiver is in Group Call Mode allows the transceiver to enter Status Mode. In Status Mode, a status can be sent by selecting a status configured in the DMR Status List or directly entering a status. DMR-based Trunking system: Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Status Mode in a DMR-based Trunking system. In Status Mode, a status can be sent by selecting a status configured in the DMR Status List or directly entering a status.
Direct Channel & OST	Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Direct Channel & OST Mode. If the Menu ([□]) or the [*] key is pressed in Direct Channel & OST Mode, the transceiver migrates to the channel of the entered number. Or, if the Back ([↶]) or the [#] key is pressed in Direct Channel & OST Mode, the transceiver migrates to the OST list of the entered number, and this OST list number is configured after the OST list number is displayed for 2 sec.
Dialing (DMR)	Pressing the [0] key to [9] key, [*] key or [#] key on the keypad allows the transceiver to enter Dialing Mode in a DMR-based Trunking system. In Dialing Mode, a Dialing code can be sent by entering a Dialing code.
Free-dial Entry	Pressing the [0] key to [9] key on the keypad allows the transceiver to enter Free-dial Entry Mode. In Free-dial Entry Mode, a 5-tone code can be sent by directly entering a 5-tone code.

Note

- Refer to each Function Reference for details about various calls.
- To directly enter an Individual ID or status in an NXDN system, P25 system, or DMR Conventional system, Manual Dialing needs to be enabled using KPG-D1/ D1N. (Refer to **Manual Dialing**.)
- Refer to “**Available Functions for the PF Keys**” for the description on FleetSync or MDC-1200.

Configuration using KPG-D1/ D1N

Configuring **Keypad Operation** ( **See** Transceiver Settings > Key Assignment > General > Keypad)

Manual Dialing

Manual Dialing is the function to directly enter an Individual ID or status number in an NXDN system or DMR system. In a P25 system, this function can directly enter an Individual ID. In an analog system, this function can directly enter a Fleet/ ID or an MDC-1200 ID.

If **Manual Dialing** is enabled, an Individual ID, Fleet/ ID, or status number can directly be entered and a call can be initiated using the keypad, [▲], or [▼] key.

Configuration using KPG-D1/ D1N

- Configuring **Manual Dialing (P25 Conventional)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > P25 Conventional > P25)
- Configuring **Manual Dialing (NXDN Conventional)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > NXDN Conventional > NXDN)
- Configuring **Manual Dialing (P25 Trunking)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > P25 Trunking > General)
- Configuring **Manual Dialing (NXDN Trunking)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > NXDN Trunking > General)
- Configuring **Manual Dialing (DMR Conventional)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > DMR Conventional > DMR)
- Configuring **Manual Dialing (DMR-based Trunking)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > DMR-based Trunking > General)
- Configuring **Manual Dialing (FleetSync)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > Analog Conventional > Analog > FleetSync)
- Configuring **Manual Dialing (MDC-1200)** to be enabled or disabled ( **See** Transceiver Settings > Personal > Personal Features > Analog Conventional > Analog > MDC-1200)

3.4 Using Menu Mode

Menu Mode allows a selecting a function in the menu format and activating the function.

Since a maximum of 64 functions can be configured for a maximum of 12 categories, many functions can be used in Menu Mode.


Operating the transceiver

The following procedure is an example of the user operation in Menu Mode. Displays and operation methods vary depending on the configuration in **Menu Icon Size**.

● If “Large” is configured in Menu Icon Size

1 Press the **Menu** ([]) key.


The transceiver enters Menu Mode and then category icons appear.



2 Select a category by pressing the [] key, [] key, [] key, or [] key.


Note

- If other function icons are in the rows below and the [] key is pressed while the focus is at the right end of the current row, the function icons in the row directly below appear and the focus moves to the left end of this row directly below. If other function icons are not in the rows below and the [] key is pressed while the focus is at the right end of the current row, a Rollover Tone (1 beep) sounds from the transceiver, and then the focus moves to the left end of the current row.
- If other function icons are in the rows above and the [] key is pressed while the focus is at the left end of the current row, the function icons in the row directly above appear and the focus moves to the left end of this row directly above. If other function icons are not in the rows above and the [] key is pressed while the focus is at the left end of the current row, a Rollover Tone (1 beep) sounds from the transceiver, and then the focus moves to the right end of the current row.




3 Press the **Menu** ([]) key, or [] key.

The Function List for the selected category appears.



4 Select the function to be started from the Function List by pressing the [▲] key or [▼] key.




5 Press the Menu ([□]) key, or [*] key.

The selected function functions.



Options for a function such as “On” and “Off” can be selected by pressing the [▲] key or [▼] key, followed by pressing the Menu ([□]) key or [*] key to confirm the selected state.




Example: Low Transmit Power


● If “Small” is configured in Menu Icon Size

1 Press the Menu ([□]) key.

The transceiver enters Menu Mode and then the Category List appears.




2 Select the Category List by pressing the [▲] key or [▼] key.




3 Press the **Menu** ([]) key, or [*****] key.

The Function List for the selected category appears.



4 Select the function to be started from the Function List by pressing the [**▲**] key or [**▼**] key.



5 Press the **Menu** ([]) key, or [*****] key.

The selected function functions.



Options for a function such as “On” and “Off” can be selected by pressing the [**▲**] key or [**▼**] key, followed by pressing the **Menu** ([]) key or [*****] key to confirm the selected state.



Example: Low Transmit Power

 Note

- The category does not appear in Menu Mode when only one category is configured. When the transceiver enters Menu Mode, the functions registered in Menu Mode appear.
- Refer to “**KEY OPERATIONS FOR EACH MODE**” for the operation of each key in Menu Mode.

Configuration using KPG-D1/ D1N

Configuring Menu Mode ( **See** Transceiver Settings > Key Assignment > Menu)

3.5 Changing the Zone-channel

The Zone-channel can be changed using the **Selector** (Portable only) or **PF** keys.

Changing the Zone

The zone can be changed by operating the **Selector** (Portable only) or **PF** keys.

Portable

- **Changing the zone according to the number indicated by the pointer of the Selector**

Rotating the **Selector** causes the transceiver to migrate to the zone having the same number specified by the **Selector**.

Zones that can be selected are limited to zone 1 to zone 16.

If an unprogrammed zone is selected, "*****" appears on the display.

This behavior can be realized by installing a stopper on the **Selector**, enabling **16 Zone/Channel Selector**, and assigning the Zone Select function to the **Selector**. (Refer to [Available Functions for the Selector](#).)

- **Changing the zone regardless of the number indicated by the pointer of the Selector**

Rotating the **Selector** clockwise increases the zone number in steps of 1. Rotating the **Selector** counterclockwise decreases the zone number in steps of 1.

If an unprogrammed zone is selected, the zone will be skipped.

This behavior can be realized by disabling **16 Zone/Channel Selector** and assigning the Zone Up/ Down function to the **Selector**. (Refer to [Available Functions for the Selector](#).)

- **Changing the zone by using the PF key**

Pressing the **Zone Up** key increases the zone number in steps of 1. Pressing the **Zone Down** key decreases the zone number in steps of 1.

If "Zone Up (Continuous)" or "Zone Down (Continuous)" is assigned to the **Zone Up** key or **Zone Down** key, the zone number is increased or decreased continuously every 200 ms by pressing and holding the **Zone Up** key or **Zone Down** key.

If an unprogrammed zone is selected, the zone will be skipped.

- **Changing the zone by using the Lever switch**

Positioning the **Lever** switch to the [A] position migrates the transceiver to the zone configured in **Zone A (Lever A Position)**.

Positioning the **Lever** switch to the [B] position migrates the transceiver to the zone configured in **Zone B (Lever B Position)**.

Note

- The operation for changing the zone changes depending on the configuration in **Rollover/End Stop**. (Refer to [Rollover/End Stop](#).)

Mobile

Pressing the **Zone Up** key increases the zone number in steps of 1. Pressing the **Zone Down** key decreases the zone number in steps of 1. KCH-20R (Featured Panel) is operated by using the Selector just as Portable.

If "Zone Up (Continuous)" or "Zone Down (Continuous)" is assigned to the **Zone Up** key or **Zone Down** key, the zone number is increased or decreased continuously every 200 ms by pressing and holding the **Zone Up** key or **Zone Down** key.

If an unprogrammed zone is selected, the zone will be skipped.

Note

- The operation for changing the zone changes depending on the configuration in **Rollover/End Stop**. (Refer to [Rollover/End Stop](#).)

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **16 Zone/Channel Selector** to be enabled or disabled ( [See](#) Transceiver Settings > Key Assignment > Top/Side)
- Configuring **Zone A (Lever A Position)** ( [See](#) Transceiver Settings > Key Assignment > Zone Select)
- Configuring **Zone B (Lever B Position)** ( [See](#) Transceiver Settings > Key Assignment > Zone Select)

Changing the Channel

The channel can be changed using the **Selector** (Portable only) or **PF** keys.

Portable

- **Changing the channel according to the number indicated by the pointer of the Selector**

Rotating the **Selector** causes the transceiver to migrate to the channel having the same number specified by the **Selector**. Channels that can be selected are limited to channel 1 to channel 16.

If an unprogrammed channel is selected, "*****" appears on the display.

This behavior can be realized by installing a stopper on the **Selector**, enabling **16 Zone/Channel Selector**, and assigning the Channel Select function to the **Selector**. (Refer to [Available Functions for the Selector](#).)

- **Changing the channel regardless of the number indicated by the pointer of the Selector**

Rotating the **Selector** clockwise increases the channel number in steps of 1. Rotating the **Selector** counterclockwise decreases the channel number in steps of 1.

If an unprogrammed channel is selected, the channel will be skipped.

This behavior can be realized by disabling **16 Zone/Channel Selector** and assigning the Channel Up/ Down function to the **Selector**. (Refer to [Available Functions for the Selector](#).)

- **Using the PF keys**

Pressing the **Channel Up** key increases the channel number in steps of 1. Pressing the **Channel Down** key decreases the channel number in steps of 1.

If "Channel Up (Continuous)" or "Channel Down (Continuous)" is assigned to the **Channel Up** key or **Channel Down** key, the channel number increases or decreases continuously at 200 ms intervals by pressing and holding the **Channel Up** key or **Channel Down** key.

If an unprogrammed channel is selected, the channel will be skipped.

Note

- The operation for changing the channel changes depending on the configuration in **Rollover/End Stop**. (Refer to [Rollover/End Stop](#).)

Mobile

Pressing the **Channel Up** key increases the channel number in steps of 1. Pressing the **Channel Down** key decreases the channel number in steps of 1. KCH-20R (Featured Panel) is operated by using the Selector just as Portable.

If "Channel Up (Continuous)" or "Channel Down (Continuous)" is assigned to the **Channel Up** key or **Channel Down** key, the channel number increases or decreases continuously at 200 ms intervals by pressing and holding the **Channel Up** key or **Channel Down** key.

If an unprogrammed channel is selected, the channel will be skipped.

Note

- The operation for changing the channel changes depending on the configuration in **Rollover/End Stop**. (Refer to [Rollover/End Stop](#).)

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **16 Zone/Channel Selector** to be enabled or disabled ( [See](#) Transceiver Settings > Key Assignment > Top/Side)

Rollover/End Stop

Rollover/ End Stop is the method to configure how a zone or channel migrates when changing the zone or channel using the **PF** keys or **Selector** on the transceiver.

The zone or channel migrates as below depending on the configuration using KPG-D1/ D1N when changing the zone or channel using the **PF** keys or **Selector** on the transceiver.

Table 3-5 Rollover/End Stop

Configuration	Description
Rollover	A Rollover Tone (1 beep) sounds from the transceiver and the transceiver migrates to the zone or channel having the lowest number when attempting to increase the zone or channel number while the zone or channel having the largest number is selected. The transceiver migrates to the zone or channel having the largest number when attempting to decrease the zone or channel number while the zone or channel having the lowest number is selected.
End Stop	The zone or channel in the range between the highest and lowest numbers can be selected. The zone or channel number is not looped. A Stop Tone (1 beep) sounds from the transceiver and the transceiver does not migrate to a different zone or channel when attempting to increase the zone or channel number while the zone or channel having the largest number is selected. Also, a Stop Tone (1 beep) sounds from the transceiver and the transceiver does not migrate to a different zone or channel when attempting to decrease the zone or channel number while the zone or channel having the lowest number is selected.

Configuration using KPG-D1/ D1N

Configuring **Rollover/End Stop** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Others)

Changing the Channel by Specifying the Number (Channel Entry)

Channel Entry can be used to directly migrate to the channel to be used.

For use of this function, pressing the **Channel Entry** or **Group ID/Channel Entry** keys causes the transceiver to enter Channel Entry Mode.

● Using the Channel Entry key

The channel number in the current zone can be specified by directly entering numbers after pressing the **Channel Entry** key.

Also, if "Channel Entry" is configured in **Keypad Operation**, the channel number can be specified by pressing the **[0]** key to **[9]** key on the keypad even if the **Channel Entry** key is not pressed.

● Using the Group ID/Channel Entry key

While a zone other than an NXDN Trunking system zone is selected, the channel in the current zone can be specified by directly entering numbers after pressing the **Group ID/Channel Entry** key.


Also, if "Group ID/Channel Entry" is configured in **Keypad Operation**, the channel can be specified by pressing the **[0]** key to **[9]** key on the keypad while a zone other than an NXDN Trunking system zone is selected.

The transceiver automatically recognizes the digits of the highest channel number configured for the transceiver. The channel number can be entered within this range of digits.

Operating the transceiver

1 Press the **Channel Entry** key, or press the **Group ID/Channel Entry** key after selecting a zone other than an NXDN Trunking system zone.

The transceiver enters Channel Entry Mode.
The following operations are identical even if the transceiver enters Channel Entry Mode by using the keypad.



2 Enter the channel number.

The following are examples for entering a channel number by using the keypad.

- If the maximum channel number has 3 digits:
To make a call on channel 250, press the **[2]**, **[5]** and **[0]** keys in this order.
To make a call on channel 90, press the **[0]**, **[9]** and **[0]** keys in this order.
To make a call on channel 7, press the **[0]**, **[0]** and **[7]** keys in this order.
- If the maximum channel number has 2 digits:
To make a call on channel 90, press the **[9]** and **[0]** keys in this order.
To make a call on channel 7, press the **[0]** and **[7]** keys in this order.
- If the maximum channel number has 1 digit:
To make a call on channel 7, press the **[7]** key.
If the maximum number of digits is entered, the transceiver exits Channel Entry Mode and then migrates to the channel of the entered channel number.

3 Press the **Menu** (**[F]**) key.

The transceiver exits Channel Entry Mode and then migrates to the channel of the entered number.
If there is no channel of the entered channel number, a Key-entry Error Tone (1 beep) sounds from the transceiver, and then the transceiver exits Channel Entry Mode.

Note

- Refer to “**KEY OPERATIONS FOR EACH MODE**” for key operations for entering the channel number in Channel Entry Mode.
- The channel number selected before the transceiver enters Channel Entry Mode appears on the display, such as “[001]”.
- Pressing the **Menu** (**[F]**) or **[*]** key while no channel number is entered causes the transceiver to exit Channel Entry Mode and then to return to this channel number.
- If the transceiver exits Channel Entry Mode by pressing the **Home** (**[H]**) key, the transceiver returns to the channel selected before the transceiver entered Channel Entry Mode.
- Pressing the **PTT** switch while in Channel Entry Mode causes the transceiver to transmit on the channel selected before the transceiver entered Channel Entry Mode.
- If the channel is changed while in Channel Entry Mode, pressing the **PTT** switch initiates transmission on the channel to which the transceiver has changed.
- If no key is pressed before the amount of time configured in **Mode Reset Timer** elapses, the transceiver exits Channel Entry Mode and then returns to the channel selected before the transceiver entered Channel Entry Mode.

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)

Changing the Group ID by Specifying the ID (Group ID Entry) (NXDN Trunking System Only)

Group ID Entry is the function to migrate the transceiver to the channel with the Group ID which is directly selected and to be used in an NXDN Trunking system.

The Group ID to be used can be specified by directly entering a Group ID after pressing the **Group ID/Channel Entry** key when a zone in an NXDN Trunking system is selected.

Also, if "Group ID/Channel Entry" is configured in **Keypad Operation**, the Group ID can be specified by pressing the **[0]** key to **[9]** key on the keypad while a zone in an NXDN Trunking system is selected.

By specifying a Group ID configured for a zone in an NXDN Trunking system, the transceiver can migrate to a channel with the Group ID.


The transceiver automatically recognizes the digits of the highest Group ID in all the zones in an NXDN Trunking system configured for the transceiver.

Operating the transceiver

1

Press the **Group ID/Channel Entry** key after an NXDN Trunking system zone is selected.

The transceiver enters Group ID Entry Mode.
The following operations are identical even if the transceiver enters Group ID Entry Mode by using the keypad.



2

Enter a Group ID.

The following are examples for entering a Group ID by using the keypad.

- If the maximum Group ID has 5 digits:
To enter Group ID 21250, press the **[2]**, **[1]**, **[2]**, **[5]** and **[0]** keys in this order.
To enter Group ID 1250, press the **[0]**, **[1]**, **[2]**, **[5]** and **[0]** keys in this order.
To enter Group ID 250, press the **[0]**, **[0]**, **[2]**, **[5]** and **[0]** keys in this order.
To enter Group ID 90, press the **[0]**, **[0]**, **[9]** and **[0]** keys in this order.
To enter Group ID 7, press the **[0]**, **[0]**, **[0]**, **[0]** and **[7]** keys in this order.
- If the maximum Group ID has 4 digits:
To enter Group ID 1250, press the **[1]**, **[2]**, **[5]** and **[0]** keys in this order.
To enter Group ID 250, press the **[0]**, **[2]**, **[5]** and **[0]** keys in this order.
To enter Group ID 90, press the **[0]**, **[0]**, **[9]** and **[0]** keys in this order.
To enter Group ID 7, press the **[0]**, **[0]**, **[0]** and **[7]** keys in this order.
- If the maximum Group ID has 3 digits:
To enter Group ID 250, press the **[2]**, **[5]** and **[0]** keys in this order.
To enter Group ID 90, press the **[0]**, **[9]** and **[0]** keys in this order.
To enter Group ID 7, press the **[0]**, **[0]** and **[7]** keys in this order.
- If the maximum Group ID has 2 digits:
To enter Group ID 90, press the **[9]** and **[0]** keys in this order.
To enter Group ID 7, press the **[0]** and **[7]** keys in this order.
- If the maximum Group ID has 1 digit:
To enter Group ID 7, press the **[7]** key.

If the maximum number of digits is entered, the transceiver exits Group ID Entry Mode and then migrates to the channel of the entered Group ID.

3 Press the **Menu** ([]) key.

The transceiver exits Group ID Entry Mode and then migrates to the channel of the entered Group ID. If there is no channel with the entered Group ID, a Key-entry Error Tone (1 beep) sounds from the transceiver, and then the transceiver exits Group ID Entry Mode.

Note

- Refer to “**KEY OPERATIONS FOR EACH MODE**” for key operations for entering the Group ID in Group ID Entry Mode.
- Pressing the **PTT** switch while in Group ID Entry Mode causes the transceiver to transmit on the channel selected before the transceiver entered Group ID Entry Mode. If the channel is changed while in Group ID Entry Mode, pressing the **PTT** switch initiates transmission on the channel to which the transceiver has changed.

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

Changing the Channel with a Single Touch

The channel can be changed with a single touch by using the Home Channel or Direct Channel function.

Home Channel

Home Channel is the function to migrate the transceiver to a preconfigured channel by pressing the **Home Channel** key.

The transceiver can move to and from channels in the same zone.

Also, pressing the **Home Channel Select** key can change the Home Channel.

Or, pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the Home Channel can be changed by selecting “Home Channel Select”. (Refer to [Using Menu Mode](#).)

Note

- If the **Home Channel** key is pressed during the scan, the transceiver pauses scanning while the transceiver is migrating to the Home Channel, and then a Scan Stop Tone (2 beeps) continuously sounds from the transceiver at 30-sec intervals.
- **Priority Monitor ID** of NXDN Trunking functions according to the configuration for the Home Channel to which the transceiver migrates.

Operating the transceiver

● Migrating to the Home Channel


1 Press the **Home Channel** key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver migrates to the Home Channel configured for the selected zone. “Home” appears on the display.



2 Press the **Home Channel** key again.

A Key Beep B (2 beeps) sounds from the transceiver, and then the transceiver returns to the previous channel.



● Changing the Home Channel

1 Select the channel to be configured as the Home Channel.



2 Press the **Home Channel Select** key.

A Key Beep C (3 beeps) sounds from the transceiver, and then the Home Channel is changed. "Home" appears on the display at the same time.



Configuration using KPG-D1/ D1N

- Configuring **Home Channel** ( **See** Transceiver Settings > Zone/Channel > Zone Edit > General)
- Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)

Direct Channel

Direct Channel is the function to migrate the transceiver to a preconfigured channel by pressing one of the **Direct Channel 1** to **Direct Channel 5** keys. The transceiver can move to and from channels in each zone.

Also, pressing one of the **Direct Channel 1 Select** to **Direct Channel 5 Select** keys can change the Direct Channel.

Or, pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the Direct Channel can be changed by selecting one of "Direct Channel 1 Select" to "Direct Channel 5 Select". (Refer to [Using Menu Mode.](#))

Note

- If the Return function is enabled, pressing one of the **Direct Channel 1** to **Direct Channel 5** keys during the scan pauses scanning while the transceiver is migrating to the Direct Channel, and then a Scan Stop Tone (2 beeps) continuously sounds from the transceiver at 30-sec intervals.
- **Priority Monitor ID** of NXDN Trunking functions according to the configuration for the channel to which the transceiver migrates.

Operating the transceiver


● Migrating to the Direct Channel

Press one of the **Direct Channel 1** to **Direct Channel 5** keys.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver migrates to the Direct Channel regardless of the selected zone. "DRn" appears on the display. The selected Direct Channel number is entered in "n".



If the same Direct Channel key is pressed again while the **Return** function is enabled, a Key Beep B (2 beeps) sounds from the transceiver, and then the transceiver returns to the previous channel.



● Changing the Direct Channel

1 Select the channel to be configured as the Direct Channel.



2 Press one of the **Direct Channel 1 Select** to **Direct Channel 5 Select** keys.

A Key Beep C (3 beeps) sounds from the transceiver, and then the Direct Channel is changed. "DRn" appears on the display at the same time.



Configuration using KPG-D1/ D1N

- Configuring **Direct Channel** (See Transceiver Settings > Key Assignment > Direct Channel)
- Configuring the **Return** function to be enabled or disabled (See Transceiver Settings > Key Assignment > Direct Channel)
- Assigning functions to the **PF** keys on the transceiver (See Transceiver Settings > Key Assignment)

3.6 Transmitting/ Receiving

The **PTT** switch can be used to transmit and receive.

Receiving

Received audio sounds from the speaker when the transceiver receives a signal and conditions to unmute the speaker are satisfied. To respond, speak into the microphone while pressing the **PTT** switch.

Transmitting

Transmitting can be initiated by selecting the desired Zone-channel and then pressing the **PTT** switch. Audio is transmitted by speaking into the microphone while pressing the **PTT** switch. Releasing the **PTT** switch terminates transmitting.

Conditions to unmute the speaker while receiving, the transceiver behavior while transmitting, or communication methods, such as an individual call or group call, vary according to the system in use. Refer to each Function Reference for communication methods in each system.

In addition, for Mobile, various communications can be done using the external ports of the transceiver. Refer to “**D-sub 25-pin Connector**” for the function of the external ports of Mobile.

Note

- Audio characteristics of the microphone and speaker for transmitting and receiving can be configured in **Audio Profile**. (Refer to **Configuring Audio Profile (Audio Profile)**.)

3.7 Viewing the Receive History (Stack)

In Stack Mode, the incoming call history (Caller ID) can be viewed. In an analog system (FleetSync/ MDC-1200/ 5-tone), an NXDN system, or a DMR system, in addition to the incoming call history, received Status Messages and Short Messages can be viewed in Stack Mode. Received IDs and messages are stored in the stack memory of the transceiver.

In order to store the received IDs and various messages in the stack memory of the transceiver, Caller ID Stack, Status Message Stack, or Short Message Stack needs to be individually enabled by using KPG-D1/ D1N.

The “” icon appears if messages are stored in the transceiver. If there is an unread message, the “” icon blinks. Pressing the **Stack** key causes the transceiver to enter Stack Mode. Or, pressing the **Menu** key causes the transceiver to enter Menu Mode, and then selecting “Stack” will cause the transceiver to enter Stack Mode. (Refer to [Using Menu Mode](#).)

The maximum number of stack data that can be stored

● Caller ID/ Status Message

A maximum of 250 Caller IDs and Status Messages in total can be stored in the stack memory.

Note

- Depending on the configuration of **Old Message Overwrite**, the stack data is deleted or stored like the following examples: (Refer to [Stack Procedure of the Receive History \(Old Message Overwrite\)](#).)

If the configuration is to automatically delete the old data:

Assume that one voice call and 249 Status Messages are stored, and that the voice call is the oldest data. In this case, if a newly received Status Message is stored, the data of the voice call is deleted and 250 Status Messages are stored.

If the configuration is not to automatically delete the old data:

Assume that 250 Status Messages are stored. In this case, even if a new voice call is received, the voice call is not stored because 250 Status Messages are stored.

● Short Message

The maximum number of Short Message data that can be stored in the transceiver stack memory varies as follows depending on the configuration of **Short Message Stack** in each communication protocol.

Table 3-6 No. of Short Message Data That can be Stored

Short Message Stack Configuration				No. of Data that Can be Saved
FleetSync	NXDN	P25	DMR	
Disabled	Disabled	Disabled	Disabled	0
Enabled	Disabled	Disabled	Disabled	128
Disabled	Enabled	Disabled	Disabled	128 ^{*1} / 48 ^{*2}
Enabled	Enabled	Disabled	Disabled	128 ^{*1} / 48 ^{*2}
Disabled	Disabled	Enabled	Disabled	64
Enabled	Disabled	Enabled	Disabled	64
Disabled	Enabled	Enabled	Disabled	64 ^{*1} / 48 ^{*2}
Enabled	Enabled	Enabled	Disabled	64 ^{*1} / 48 ^{*2}
Disabled	Disabled	Disabled	Enabled	32
Enabled	Disabled	Disabled	Enabled	32
Disabled	Enabled	Disabled	Enabled	32
Enabled	Enabled	Disabled	Enabled	32
Disabled	Disabled	Enabled	Enabled	32
Enabled	Disabled	Enabled	Enabled	32

^{*1} If **Extended Short Message** is disabled

^{*2} If **Extended Short Message** is enabled

Operating the transceiver

● Confirming the message


1 Press the **Stack** key.

A Key Beep A (1 beep) sounds from the transceiver and the transceiver enters Stack Mode. The subsequent operations are identical even if the transceiver enters Stack Mode by pressing the **Menu** key.

The display when the transceiver enters Stack Mode varies depending on the configurations of **Caller ID Stack**, **Status Message Stack**, and **Short Message Stack** in each communication protocol, and depending on the presence of stored data.

- **If data is stored with 2 items or more among Caller ID Stack, Status Message Stack, and Short Message Stack enabled**

The category display appears. Proceed to step 2.




- **If data is stored with only Caller ID Stack enabled**

The list of stored Caller IDs appears. Proceed to step 3.




- **If data is stored with only Status Message Stack enabled**

The list of stored Status Messages appears. Proceed to step 3.



- **If data is stored with only Short Message Stack enabled**


The list of stored Short Messages appears. Proceed to step 3.



Note

- If no data is stored, "Empty" appears on the display for 1 sec and the transceiver cannot enter Stack Mode.
- If at least one system whose **Signaling Type** is 5-tone is configured, the transceiver determines that **Caller ID Stack**, **Status Message Stack**, and **Short Message Stack** are all enabled, and the transceiver migrates to the category display.
- Selecting a Short message that is unable to fit a single screen activates horizontal scrolling up to 100 characters.

2 Select any of the “Caller ID”, “Status Message”, or “Short Message” categories and press the **Menu** ([]) key or [*****] key.



The list for the selected category appears.

 Note

- If no data is stored, a Key Beep A (1 beep) sounds from the transceiver and “Empty” appears on the display.



The number of the stored stack data appears at the upper right of the display. Depending on the type of stack data, the following icons appear at the left end of each stack data:

Table 3-7 Stack Mode


Message Type	Display	
	Unread	Read
Caller ID		
Status Message		
Short Message		
Unread Stack		-

3 Press the [] key or [] key to select the data and confirm.

Refer to “**Selecting or Clearing Data from a List**” for selection methods. For Short Message, if the **Menu** ([]) key or [*****] key is pressed, a Key Beep A (1 beep) emits from the transceiver and the selected Short Message appears.

 Note

- If the Short Message does not fit on one screen, press the [] key or [] key to scroll lines up and down, and confirm the entire message.



● Switching the message display

Press the [◀] key, or [▶] key.

The display switches as follows:

[◀] key:


- Caller ID
Caller ID List → Receive Channel List → Receive Date and Time List → Caller ID List → ...
- Status/ Short Message
Status/ Short Message List → Caller ID List → Receive Channel List → Receive Date and Time List → Status/ Short Message List → ...

[▶] key:

- Caller ID
Caller ID List → Receive Date and Time List → Receive Channel List → Caller ID List → ...
- Status/ Short Message
Status/ Short Message List → Receive Date and Time List → Receive Channel List → Caller ID List → Status/ Short Message List → ...

● Status/ Short Message list

The received Status Messages and Short Messages are displayed.




● Caller ID Name list

The ID Names of the transceivers which sent messages are displayed. If a Caller ID is displayed, press the **PTT** switch to respond. (Only if the type of the stored message is Caller ID.)




● Receive channel list

The channel names of the transceivers which received messages are displayed.



● Receive date and time list

The dates and times of received messages are displayed.



Note

- The receive date and time list is displayed only if **Time Stamp** is enabled. (Refer to **Time Stamp**.)
- Refer to “**Selecting or Clearing Data from a List**” for instructions on how to clear a message.
- For Caller ID Stack, if **System Type** of the selected channel when the transceiver enters Stack Mode does not match **System Type** of the stack data, a Warning Tone A (continuous beep) sounds from the transceiver and transmission is unavailable even if the **PTT** switch is pressed. Also in this case, even if the **Menu** ([]) key is pressed, a Key-entry Error Tone (1 beep) sounds from the transceiver and transmission is unavailable.

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)
- Configuring **Caller ID Stack (P25)** to be enabled or disabled ( **See** Transceiver Settings > P25 > P25 Information > General > Stack)
- Configuring **Caller ID Stack (NXDN)** ( **See** Transceiver Settings > NXDN > NXDN Information > General > Stack)
- Configuring **Caller ID Stack (FleetSync)** ( **See** Transceiver Settings > FleetSync > FleetSync Information > General > Stack)
- Configuring **Caller ID Stack (MDC-1200)** ( **See** Transceiver Settings > MDC-1200 > MDC-1200 Information > General > Stack)
- Configuring **Status Message Stack (NXDN)** to be enabled or disabled ( **See** Transceiver Settings > NXDN > NXDN Information > General > Stack)
- Configuring **Short Message Stack (NXDN)** to be enabled or disabled ( **See** Transceiver Settings > NXDN > NXDN Information > General > Stack)
- Configuring **Caller ID Stack (DMR)** ( **See** Transceiver Settings > DMR > DMR Information > General > Stack)
- Configuring **Status Message Stack (DMR)** to be enabled or disabled ( **See** Transceiver Settings > DMR > DMR Information > General > Stack)
- Configuring **Short Message Stack (DMR)** to be enabled or disabled ( **See** Transceiver Settings > DMR > DMR Information > General > Stack)
- Configuring **Status Message Stack (FleetSync)** to be enabled or disabled ( **See** Transceiver Settings > FleetSync > FleetSync Information > General > Stack)
- Configuring **Short Message Stack (FleetSync)** to be enabled or disabled ( **See** Transceiver Settings > FleetSync > FleetSync Information > General > Stack)

Configuring the Display Order of Data in Stack Mode (Stack Order)

Stack Order is the display order of data in Stack Mode.

Depending on the configuration of **Stack Order**, the data is displayed in Stack Mode as follows:

Table 3-8 Stack Order

Configuration	Description
Descending	The newest data appears on the first line of the list.
Ascending	The oldest data appears on the first line of the list.

Configuration using KPG-D1/ D1N

Configuring **Stack Order** ( See Transceiver Settings > Optional Features > Optional Features 1 > Stack)

Enabling the Storage of Redundant Data (Repeated Calls Stack)

Repeated Calls Stack is the function to enable the storage of redundant data.

If **Repeated Calls Stack** is enabled, a Caller ID or message is stored as new data in the stack memory of the transceiver even if the same Caller ID or message has been previously received.

Configuration using KPG-D1/ D1N

Configuring **Repeated Calls Stack** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 1 > Stack)

Displaying the Caller ID when Displaying a Message (Caller ID for Message)

Caller ID for Message is the function to display the Caller ID of the stored data when the Status Message or Short Message is displayed in Stack Mode.

Configuration using KPG-D1/ D1N

Configuring **Caller ID for Message** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 1 > Stack > Message Display)

Displaying the Receive Channel (Channel Name (Message Display))

Channel Name (Message Display) is the function to display the receive channel of the stored data in Stack Mode.

Configuration using KPG-D1/ D1N

Configuring **Channel Name (Message Display)** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Stack > Message Display)

Stack Procedure of the Receive History (Old Message Overwrite)

Old Message Overwrite is the method to store the received Caller IDs, Status Messages, and Short Messages in the stack memory of the transceiver.

Table 3-9 Old Message Overwrite

Configuration	Description
Enabled	The transceiver stores a received ID or message in the stack memory in the order of receipt to the maximum number of received IDs and messages. If IDs or messages are received in excess of the maximum number of received IDs and messages, the oldest stored ID or message is deleted and the new ID or message is stored in the stack memory. In Stack Mode, the newest stack data is displayed as list number 1.
Disabled	The transceiver stores a received ID or message in the stack memory in the order of receipt to the maximum number of received IDs and messages. If IDs or messages are received in excess of the maximum number of received IDs and messages, the ID or message is not stored in the stack memory. In Stack Mode, the oldest stack data is displayed as list number 1.

Configuration using KPG-D1/ D1N

Configuring **Old Message Overwrite** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Stack)

Caller ID Stack

Caller ID Stack is the function to store IDs of callers in the stack memory.

The transceiver can store a maximum of 250 Caller IDs.

By selecting a Caller ID and pressing the **PTT** switch while in Stack Mode, the transceiver can respond to the Caller ID.

When the transceiver receives a call, the “” icon blinks to notify that the ID is being saved. If the transceiver enters Stack Mode, a user can check the stored IDs.

About the Caller ID Stack configuration

The transceiver behaves as follows according to the configuration in **Caller ID Stack**:

Table 3-10 Caller ID Stack

Configuration	Description
None	The Caller ID is not stored even if a call is received.
Individual Call	Only the Caller ID of an Individual Call or Paging Call is stored.
Any Call	The Caller IDs of all calls are stored. However, the Caller IDs of Unaddressed Calls and Broadcast Group Calls are not stored in a DMR system.

Note

- The transceiver stores in combination a maximum of 250 Caller IDs and Status Messages in the stack memory. If no Status Message is stored, the transceiver stores up to 250 Caller IDs.
- If a Unit ID Name is received by the **Over-the-Air Alias** function, the Unit ID Name is also stored in the stack memory.
- The storage method varies depending on the configurations in **Old Message Overwrite** and **Repeated Calls Stack**.
- In an NXDN system, if the transceiver receives a Group Call from a telephone, the Caller ID is replaced with “Phone Call” and stored in the stack memory.
- In a DMR system, if the transceiver receives a Group Call from a telephone, the Caller ID is replaced with “PABX” or “PSTN” and stored in the stack memory.
- In an NXDN system and DMR system, the Caller ID stored in the stack memory by the transceiver receiving a Group Call from a telephone cannot be called.
- In a DMR Conventional system, if the transceiver receives an Individual Call from a telephone, the Caller ID is replaced with “PABX” or “PSTN” and stored in the stack memory.
- In a DMR Conventional system, the Caller ID stored in the stack memory by the transceiver receiving an Individual Call from a telephone cannot be called.

Configuration using KPG-D1/ D1N

- Configuring **Caller ID Stack (P25)** to be enabled or disabled ( [See](#) Transceiver Settings > P25 > P25 Information > General > Stack)
- Configuring **Caller ID Stack (NXDN)** ( [See](#) Transceiver Settings > NXDN > NXDN Information > General > Stack)
- Configuring **Caller ID Stack (FleetSync)** ( [See](#) Transceiver Settings > FleetSync > FleetSync Information > General > Stack)
- Configuring **Caller ID Stack (MDC-1200)** ( [See](#) Transceiver Settings > MDC-1200 > MDC-1200 Information > General > Stack)
- Configuring **Caller ID Stack (DMR)** ( [See](#) Transceiver Settings > DMR > DMR Information > General > Stack)

Time Stamp

Time Stamp is the function to store a Caller ID, Status Message or Short Message with the stamp of the received time in the stack memory.

Configuration using KPG-D1/ D1N

Configuring **Time Stamp** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Stack > Message Display)

Message Memory

Message Memory is the function to retain the stored Caller IDs, Status Messages, or Short Messages in the stack memory of the transceiver even after the transceiver is turned OFF.

Configuration using KPG-D1/ D1N

Configuring **Message Memory** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Stack)

Clear Caller ID Stack on Reply

Clear Caller ID Stack on Reply is the function to clear a Caller ID from the stack memory of the transceiver if the Caller ID stored in the stack memory is selected and called.

This function is used if not storing used Caller IDs in the stack memory of the transceiver.

If this function is enabled, a Caller ID is cleared from the stack memory of the transceiver if the Caller ID stored in the stack memory is selected and called. The Caller ID is cleared from the stack memory even if a call cannot be initiated since the channel is busy. If the transceiver receives a response from the target party, the Caller ID is not stored in the stack memory while the **Auto Reset Timer** is counting down.

Also, the Caller ID of the calling party is store in the stock memory when the transceiver receives a call, but the Caller ID is cleared from the stack memory if a response is initiated while the **Auto Reset Timer** is counting down. Subsequently, the Caller ID is not stored in the stack memory even if a call from the same party is received while the **Auto Reset Timer** is counting down.

Note

- This function can be used only in an NXDN system and DMR system.

Configuration using KPG-D1/ D1N

- Configuring **Clear Caller ID Stack on Reply (NXDN)** to be enabled or disabled ( **See** Transceiver Settings > NXDN > NXDN Information > General)
- Configuring **Clear Caller ID Stack on Reply (DMR)** to be enabled or disabled ( **See** Transceiver Settings > DMR > DMR Information > General)


3.8 Operating the Transceiver in Each Mode (Common Operation)

This section describes operations common to transceivers, such as list selection, character entry, etc.

Selecting or Clearing Data from a List

This section explains operations using operating examples for Individual Call Mode and Playback Mode.

- **Selecting data from a list by using the [▲] key or [▼] key**

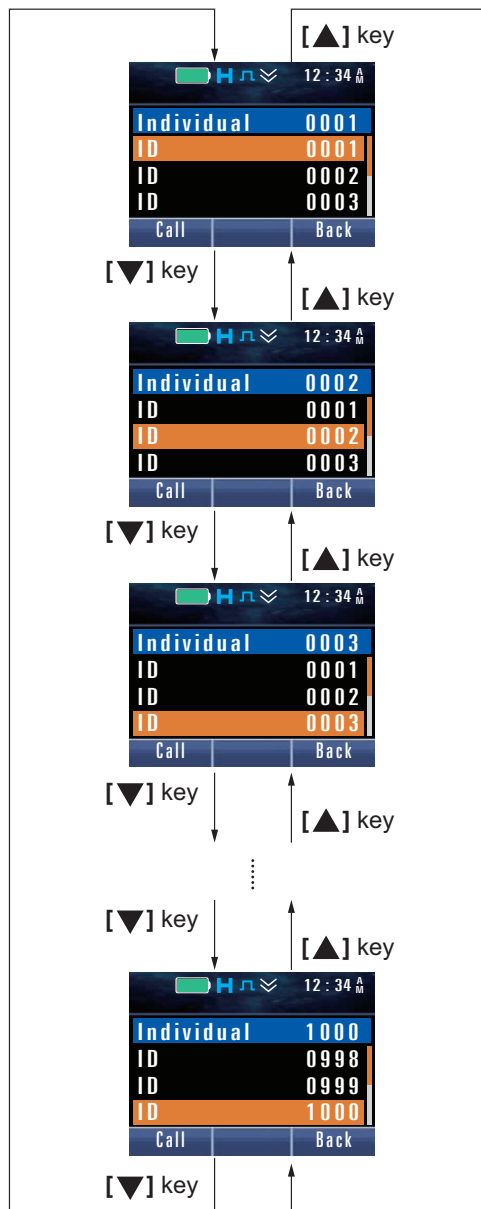

 Note

- The list number automatically scrolls up or down continuously while the [▲] key or [▼] key is pressed and held.
- The displays above are the displays when **Individual Call Acknowledge Request** in an NXDN Conventional system is enabled.

● Selecting data from a list by using the keypad (Shortcut Entry)

The following are the operation examples for selecting "ID 0002", "ID 0024" or "ID 0245" from a Unit ID List in Individual Call Mode:

Selecting "ID 0002":


Press the key on the keypad in order: [0], [2], Then press the **Menu** ([$\square$]) key or [*] key (OK) to confirm.

Selecting "ID 0024":

Press the key on the keypad in order: [0], [2], [4]. Then press the **Menu** ([$\square$]) key or [*] key (OK) to confirm.

Selecting "ID 0245":

Press the [0], [2], [4], and [5] keys on the keypad in this order.

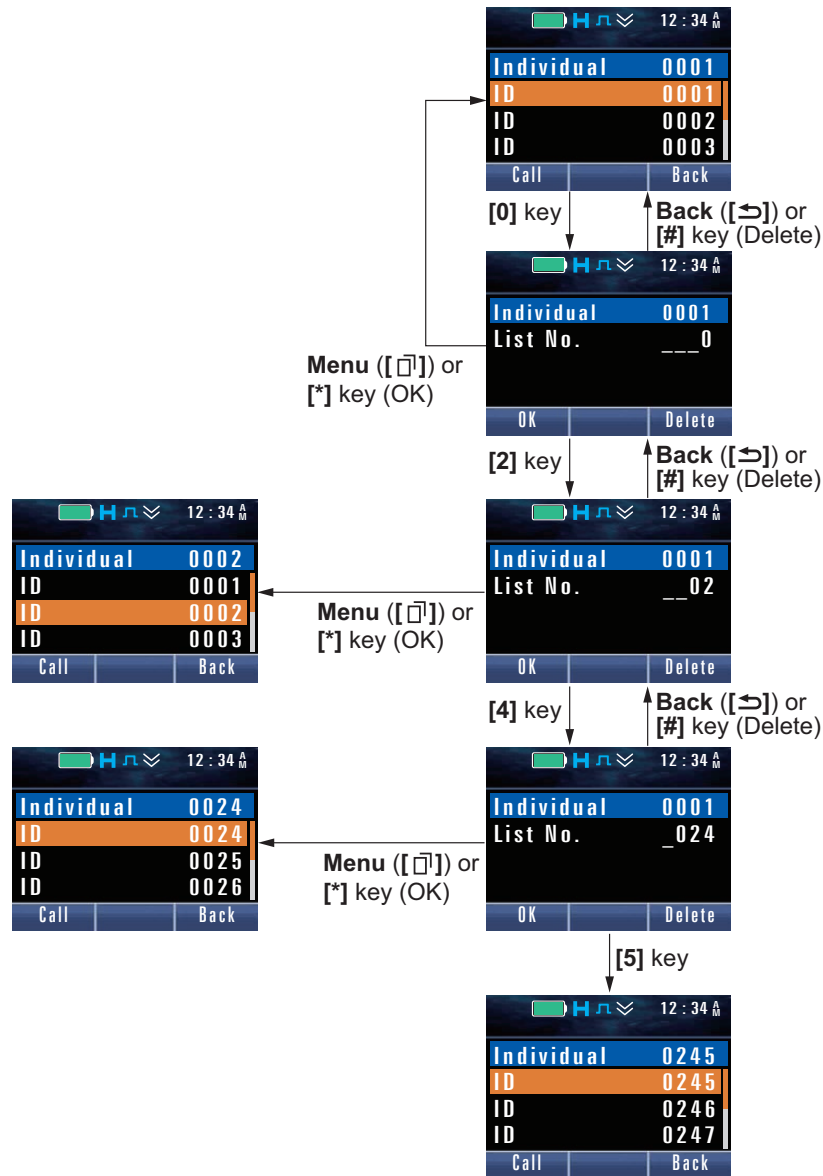


Note

- The following are the main keys to be used for these operation examples:
 - To confirm a selection: **Menu** ([$\square$]) key or [*] key
 - To delete one character: the **Back** ([$\rightarrow$]) key or [#] key
- The number of digits to be entered varies as follows depending on the highest list number configured in the transceiver:
 - If the highest list number is lower than 10: one digit
 - If the highest list number is 10 or higher and lower than 100: two digits
 - If the highest list number is 100 or higher and lower than 1000: three digits
 - If the highest list number is 1000 or higher: four digits
- If the entered number does not exist when it is determined, the transceiver restores the previous display prior to entering the number.
- The displays above are the displays when **Individual Call Acknowledge Request** in an NXDN Conventional system is enabled.

● Clearing data from a list

The following are the operation examples for clearing recorded data in Playback Mode:

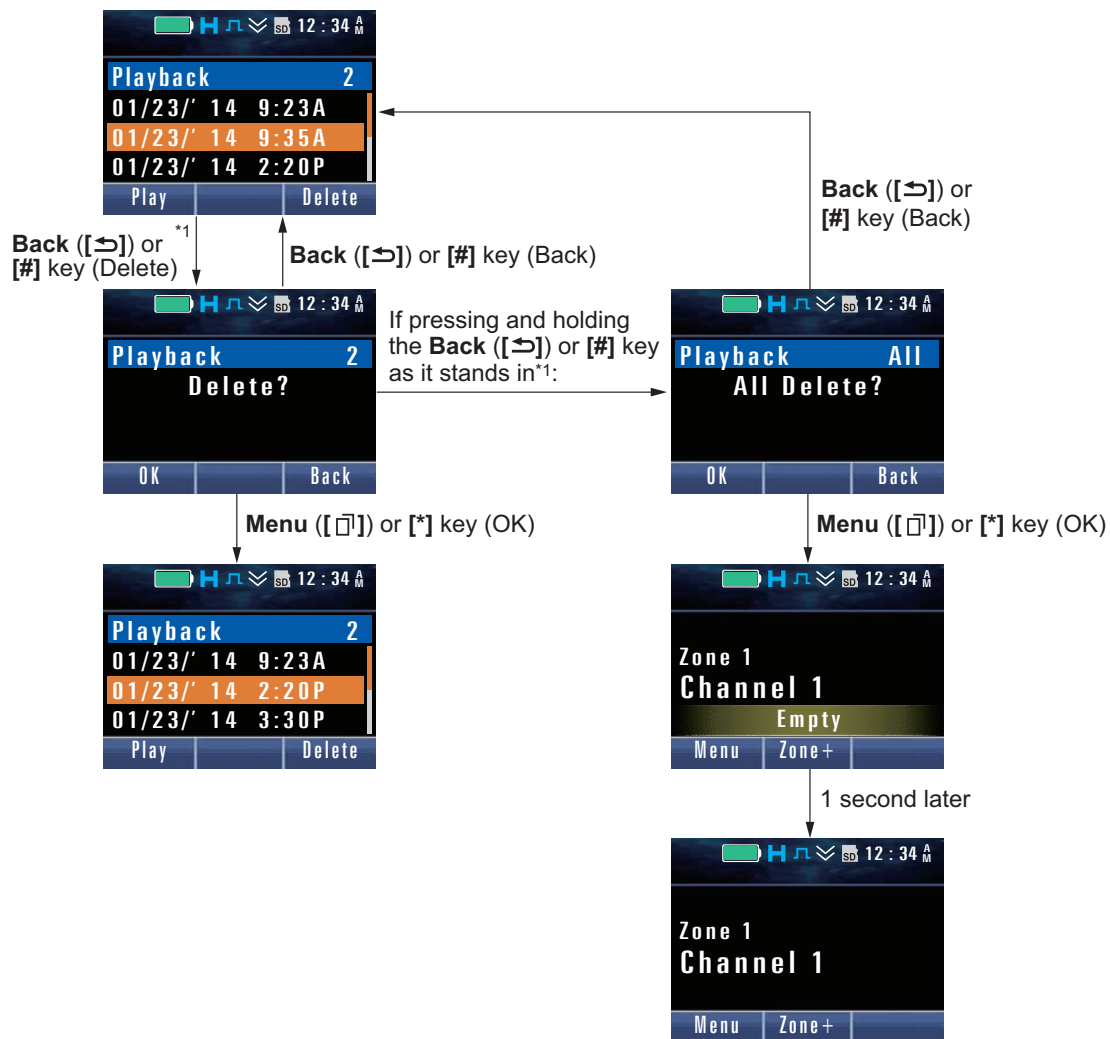

Note


- The following are the main keys to be used for these operation examples:
 - To clear one piece of data: Press the **Back** ([↩]) key or **#** key.
 - To clear all data: Press and hold the **Back** ([↩]) key or **#** key.
 - To confirm a selection: **Menu** ([□]) key or ***** key

Entering or Deleting a Code

This section explains operations using operating examples for Individual Call Mode. The displays used in this section are the displays when **Individual Call Acknowledge Request** in an NXDN Conventional system is enabled.

● Entering a code using the [▲] key or [▼] key

The following is the operation example to enter "ID 12" in Individual Call Mode:

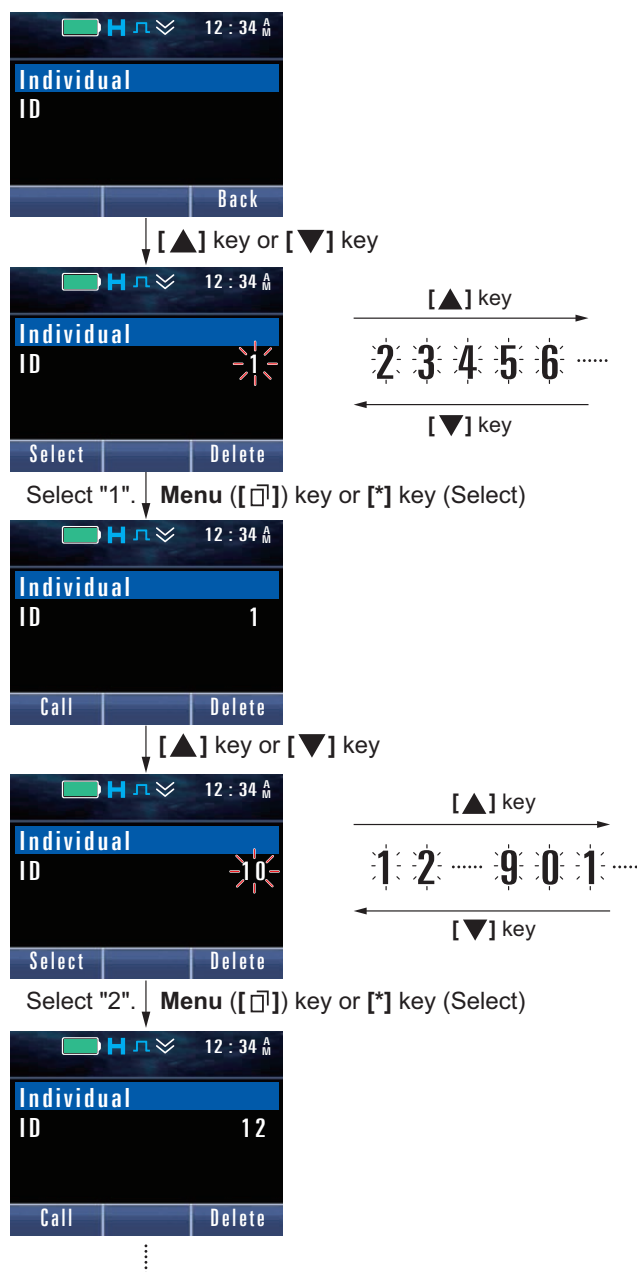


Note

- The following are the main keys to be used for these operation examples:
To select a code: [▲] key or [▼] key
To confirm a selection: **Menu** ([□]) key or [*] key
- Pressing and holding the [▲] key or [▼] key increases or decreases the code continuously while the key is pressed.
- The code that can be entered varies depending on the mode and the number of entered digits.


● Entering a code using the keypad

The following is the operation example to enter "ID 12" in Individual Call Mode:

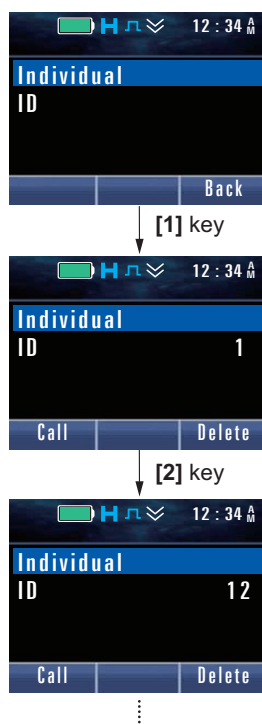

● Deleting the entered code

Pressing the **Back** ([↶]) key or [#] key clears the lowest digit of the code. If the **Back** ([↶]) key or [#] key remains pressed and held, all the codes are cleared.

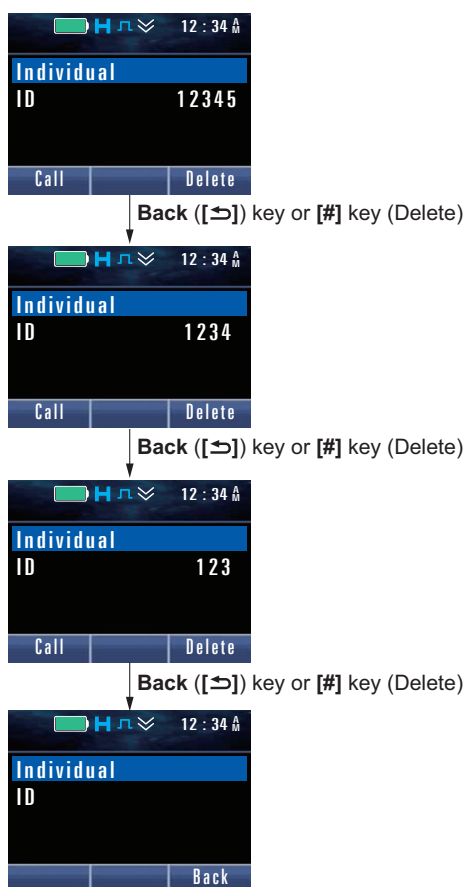


Entering or Deleting Characters

This section explains operations using operating examples for Short Message Mode.

● Entering characters using the [▲] key or [▼] key

The following is the operation example to enter "JVC" in Short Message Mode.

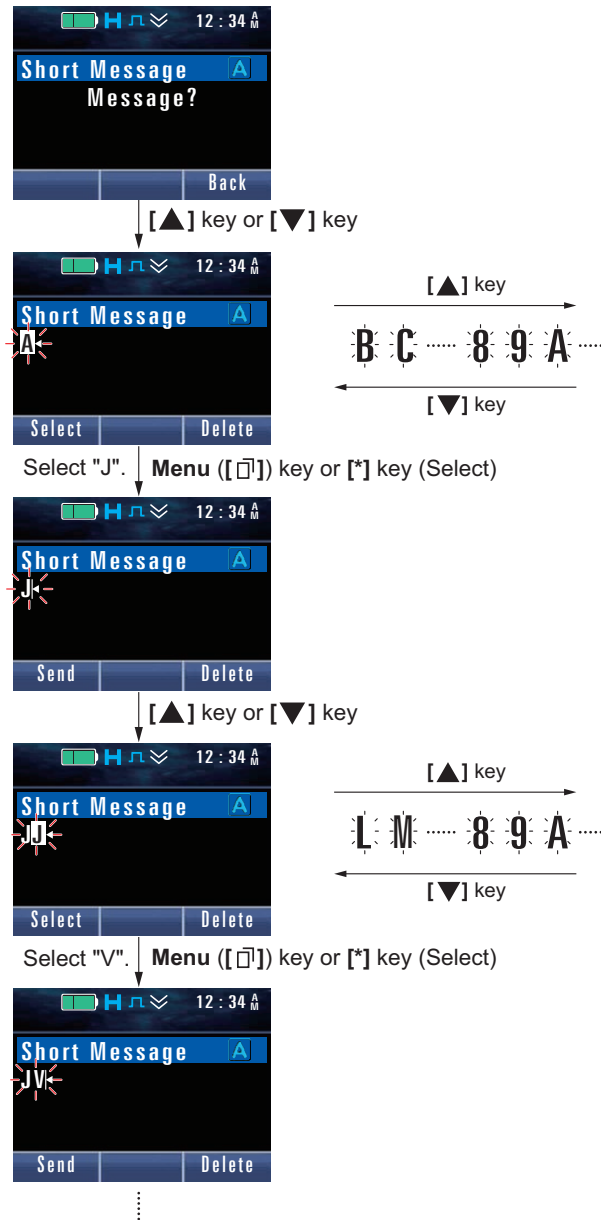


Note

- The following are the main keys to be used for these operation examples:
 - To select a character: [▲] key or [▼] key
 - To confirm a selection: **Menu** ([□]) key or [*] key
- Pressing and holding the [▲] key or [▼] key scrolls the character up or down.
- Characters to be entered can be changed by the configuration in **Character Entry**. (Refer to [Character Entry](#).)
- ◀ at the end of the entered string of text is the mark indicating the end position.

● Entering characters using the keypad

The following is the operation example to enter "KENWOOD" in Short Message Mode.

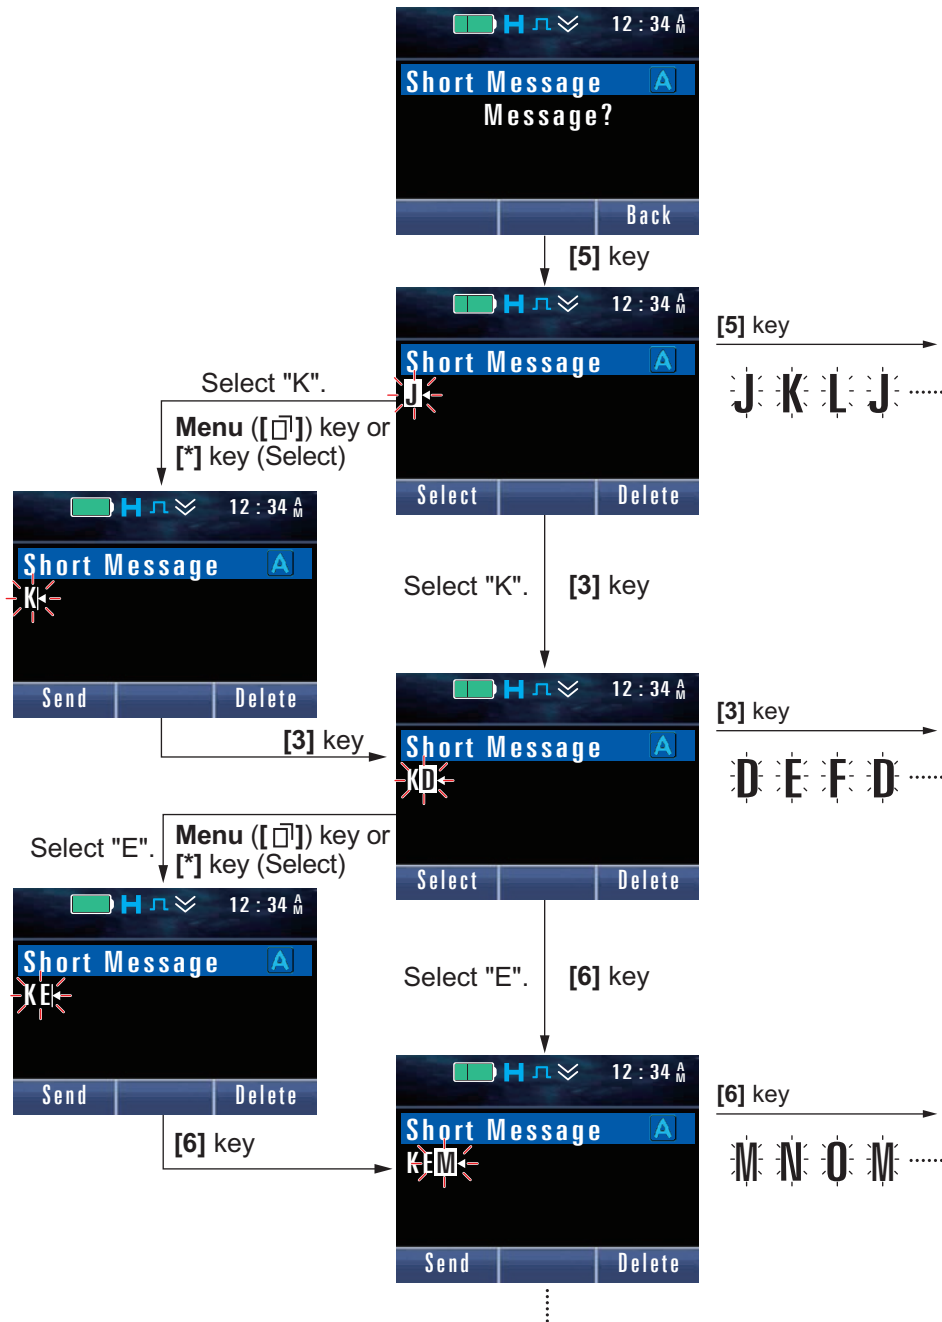


Note

- The following are the main keys to be used for these operation examples:
To select a character: each key on the keypad
To confirm a selection: **Menu** ([□]) key or [*] key
- Characters to be entered can be changed by the configuration in **Character Entry**. (Refer to [Character Entry](#).)

● Moving the cursor

Press the [◀] key to move the cursor to the left, and press the [▶] key to move it to the right. Pressing and holding the [◀] key or [▶] key moves the cursor continuously while the key is pressed.

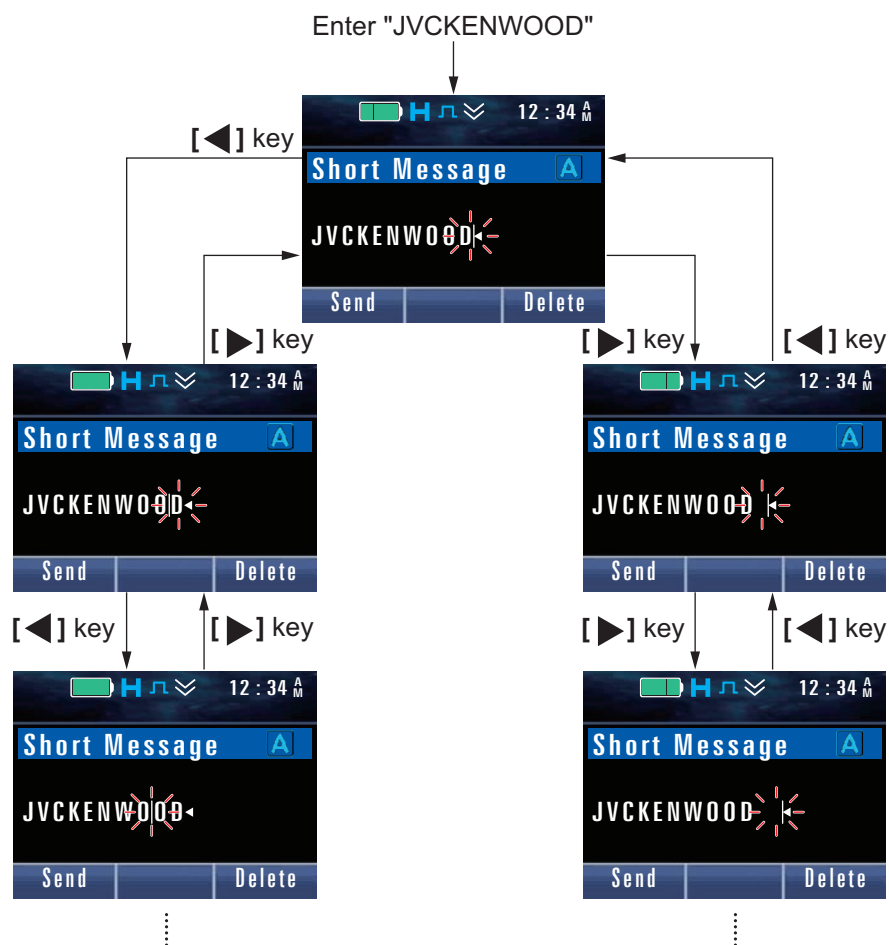


● Deleting characters

Pressing the **Back** ([↵]) key or **[#]** key deletes one character. If the **Back** ([↵]) key or **[#]** key remains pressed and held, all the characters are deleted.



● Inserting characters

The following is the operation example to correct “JVCKEOD” to “JVCKENWOOD” in Short Message Mode.

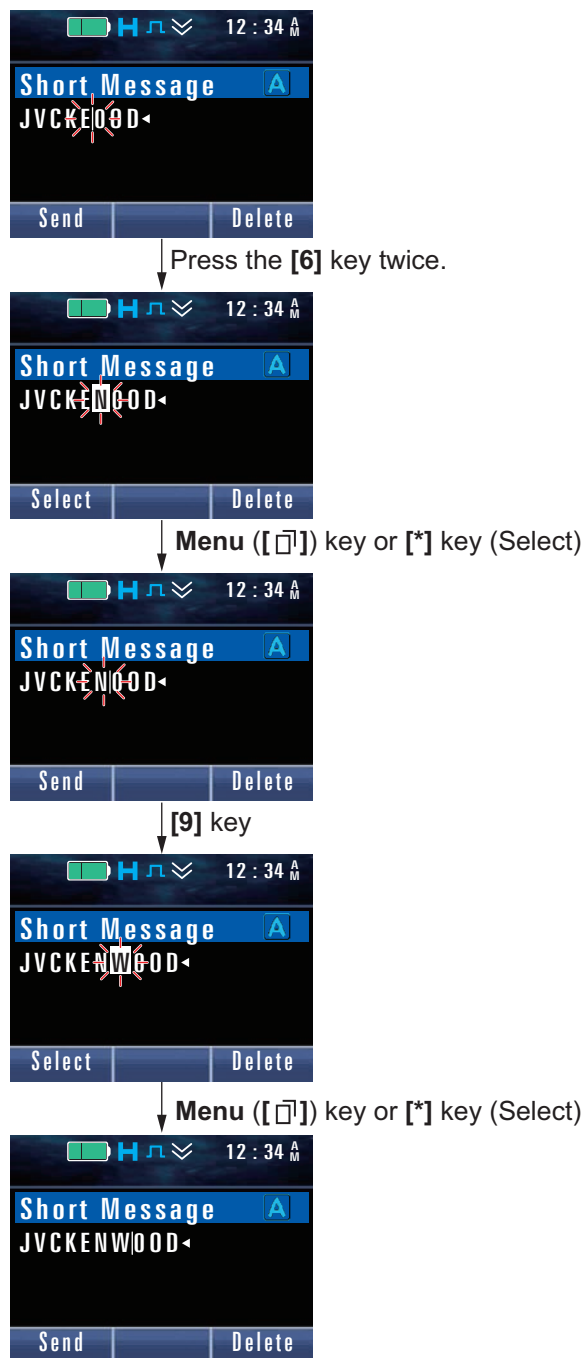


Note

- The following are the main keys to be used for these operation examples:
 To select a character: each key on the keypad
 To confirm a selection: **Menu** ([□]) key or [*] key
- Characters to be entered can be changed by the configuration in **Character Entry**. (Refer to [Character Entry](#).)


Scroll Display

An example of the display of DTMF code (0123456789ABCD0123456789ABCD) is as follows:


Autodial Programming Mode




1 second later




200 ms later



200 ms later



1 second later



Character Entry

Character Entry is the function to enter alphanumeric characters and symbols using the [0] key to [9] key, [▲] key or [▼] key.

The [0] key to [9] key, [▲] key or [▼] key on the keypad can be used to enter symbols and lowercase characters. The number of key operations for entering characters can be minimized by configuring only necessary characters.

A maximum of 16 alphanumeric characters and symbols, namely 8 characters of **Capital Font** and 8 characters of **Small Font**, can be configured for each of the [0] key to [9] key on the keypad.

A maximum of 80 alphanumeric characters and symbols can be configured for the [▲] key or [▼] key on the keypad.

Character Entry can be used to enter a message in Short Message Mode.

Operating the Transceiver (Operation Examples for Portable)

● If "AaBbCc...Zz" is configured for the Up key and Down key

Each time the **Up** key is pressed, a focused letter varies in the predetermined order.



Each time the **Down** key is pressed, a focused letter varies in the opposite order to the predetermined order.

● If "ABCabc2" is configured for the [2] key

Each time the [2] key is pressed, a focused letter varies in the predetermined order.



Note

- When the **Function** ([O]) key or [*] key is pressed, the entry mode switches as follows:
Uppercase characters > lowercase characters > numbers > uppercase characters ...
- If the [▲] key/[▼] key is configured as "Line Up/Down", the [▲] key/[▼] key can be used to move the cursor up and down but cannot be used to enter characters.
- Refer to "**Operating the Transceiver in Each Mode (Common Operation)**" for operation methods.

Configuration using KPG-D1/ D1N

Configuring **Character Entry** (See Transceiver Settings > Key Assignment > Character Entry)

3.9 Locking the Transceiver Keys (Key Lock)

Key Lock is the function to disable the transceiver key operation.

This function prevents the incorrect operation of the transceiver by physical contact while carrying the transceiver, such as around the waist.

Pressing the **Key Lock** key toggles Key Lock between activated and deactivated.

Even if a key on the transceiver is pressed while the Key Lock is enabled, a Key-entry Error Tone (1 beep) sounds from the transceiver, but it has no effect on the transceiver. If the **PTT** switch is operated, a Warning Tone sounds from the transceiver.

If the **Selector** or **Volume** control is operated, no tone sounds.

Whether each key operation is targeted for the Key Lock can be configured by using KPG-D1/ D1N. The following keys are targeted for the Key Lock when each configuration is enabled:

Table 3-11 Key Lock

Portable/ Mobile	Configuration	Keys targeted for the Key Lock
Portable	PTT	PTT switch of the transceiver
	Selector	Selector
	Front Key	Menu ([]), Back ([]), Function ([]), Home ([]), [ >], [], [], [ >], [0] to [9], [*], [#], Microphone Key
	Top/Side Key	AUX, Side 1, Side 2, Side 3
	Mic Key	PF 1, PF 2, PF 3
	Volume Control	Volume control (excludes the ON/ OFF of power)
Mobile (KCH-19 (Basic Panel))	PTT	PTT switch of the front microphone
	Head Key	Menu ([]), Back ([]), Function ([]), Home ([]), [ >], [], [], [ >], [+], [-], AUX , Microphone Key
	Mic Key	PF 1, PF 2
Mobile (KCH-20R (Featured Panel))	PTT	PTT switch of the front microphone
	Selector	Selector
	Head Key	Menu ([]), Back ([]), Function ([]), Home ([]), [ >], [], [], [ >], [+], [-], AUX , [], [], [], [], Microphone Key
	Mic Key	0 to 9, *, #, A to D
	Volume Control	Volume Control
Mobile (KCH-21R (Handheld Control Head))	PTT	PTT switch of KCH-21R
	Front Key	Menu ([]), Back ([]), Function ([]), Home ([]), [ >], [], [], [ >], [0] to [9], [*], [#], AUX
	Top/Side Key	Side 1, Side 2, Side 3, [A], [B], [>], []

Note

- Keys assigned with the following functions can be used even while the Key Lock is enabled:

- Emergency
- Backlight
- LCD Brightness
- Battery Status
- Call Response
- Clear
- Function
- Key Lock (does not function in a Multi RF Deck/ Multi Control Head structure for Mobile.)
- Monitor
- Monitor Momentary
- Squelch Off
- Squelch Off Momentary
- Zeroize

Also, the following function even while the Key Lock is enabled:


- **Lever** switch (Portable only)
- Mic Hook (Mobile only)
- AUX Input port (Mobile Only)
- Manual Dialing
- Power ON/ OFF

Operating the transceiver

● Activating the Key Lock

Press the **Key Lock** key while the Key Lock is disabled.


The Key Lock is enabled.



● Deactivating the Key Lock

Press the **Key Lock** key while the Key Lock is enabled.

The Key Lock is disabled.

**Note**

- If **Mic Key** is enabled, activating the Key Lock locks the microphone keys.

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **Key Lock** to be enabled or disabled ( [See](#) Transceiver Settings > Key Assignment > General > Key Lock)
- Configuring **Mic Key** to be enabled or disabled ( [See](#) Transceiver Settings > Key Assignment > General > Key Lock)

Auto Key Lock Timer

Auto Key Lock Timer is the function to automatically enable the Key Lock when no key is operated after the Key Lock is disabled.

If no key is operated for the amount of time configured in **Auto Key Lock Timer** after the Key Lock is disabled, the Key Lock is automatically enabled.

Either 15 sec or 30 sec can be configured in **Auto Key Lock Timer** by using KPG-D1/ D1N.

Note

- If the Key Lock function is assigned to the **Lever** switch, the Auto Key Lock function does not function.

Configuration using KPG-D1/ D1N

Configuring **Auto Key Lock Timer** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Others)

3.10 Operations in a Single RF Deck/ Dual Control Head Structure

Supported Models: Mobile

By connecting 2 Control Heads to 1 mobile transceiver (RF Deck), a Single RF Deck/ Dual Control Head system can be structured.

“RF Deck” indicates NX-5600H/ NX-5700/ NX-5700H/ NX-5800/ NX-5800H/ NX-5900, and “Control Head” indicates Basic Panel (KCH-19), Featured Panel (KCH-20R), and Handheld Control Head (KCH-21R).

The Single RF Deck/ Dual Control Head system structure is not supported for NX-5700S/ NX-5800S.

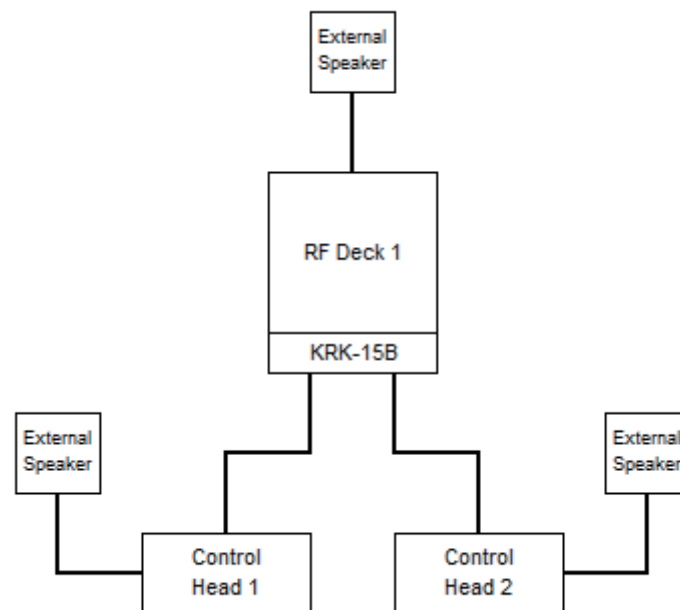


Figure 3-1 Diagram of the Single RF Deck/ Dual Control Head Structure


- If the structure for Mobile is Dual Control Head, the same content appears on each display as the basic behavior, and each Control Head behaves together according to the operations of each Control Head. However, each display does not display the same content depending on the functions such as **Transmit Audio Monitor**.
- The **PF** keys are configured to each Control Head and behave.
- Either Control Head operates the same RF Deck.
- In the following states, each Control Head displays the same contents (display mirroring) according to the basic behavior of Dual Control Head operations, and any Control Head can be operated.
 - Standby screen
 - Service mode (except Front Panel Programming Mode and Radio Mode Selection Mode)
 - Display while Zeroizing
 - When without password entry of Transceiver Password Mode (while displaying Input Password)
 - When without password entry of Front Panel Programming Mode (while displaying Input Password)
 - Mobile Relay Station Mode
- The operation and display specifications in a Dual Control Head structure does not depend on the combination of Control Heads. Even if the Control Heads to be used are the same type or different types, the specifications are the same.

About the Behavior in Function Mode While in a Dual Control Head Structure


The display and operation in Function Mode while in a Dual Control Head structure are as follows:

Display in Function Mode

- A Control Head (operating side) operated to enter the mode by the operation such as of the **PF** keys displays the Function Mode display of the appropriate function. If the operation of Control Head 1 (operating side) is enabled, "Head 1 in Use" appears on the other Control Head 2 (non-operating side). If the operation of Control Head 2 (operating side) is enabled, "Head 2 in Use" appears on the other Control Head 1 (non-operating side). Also, because configuration change operations are unavailable in the non-operating Control Head, nothing appears in Key Guide. Moreover, for the title display area, only the names of operating functions appear, and the list numbers do not appear.




Control Head 1 (operating side)




Control Head 2 (non-operating side)

- In Menu Mode, the non-operating Control Head appears in the Function Mode Frame regardless of the configuration in **Menu Icon Size**.



Control Head 1 (operating side)



Control Head 2 (non-operating side)

Operation in Function Mode

- The key operations are available for the operating Control Head according to the operation specifications of the mode.
- Even if a specified key is pressed (such as the operation of the OK or Back key), a Key-entry Error Tone sounds from the non-operating Control Head, and the non-operating Control Head does not respond at all because the configuration operation cannot be done. Also, the function does not behave even if the function is assigned to this key.
- The operation to exit the mode is available even for the non-operating Control Head. However, if the operating Function Mode is Transceiver Password Mode, Front Panel Programming Mode, or Radio Mode Selection Mode, the mode cannot be exited by the non-operating Control Head.
- The operation of the **PTT** switch is available for the non-operating Control Head. Pressing the **PTT** switch ends Function Mode and starts transmission. However, if the selected channel supports **Selcall on PTT**, transmission is executed according to the configuration in **Selcall on PTT**.
- The operation of the **PTT** switch is unavailable for the non-operating Control Head in the following Function Modes:
 - Transceiver Password Mode
 - Scan Program Mode
 - Front Panel Programming Mode
 - Radio Mode Selection Mode
- A differing mode cannot be entered in each Control Head.

About the Reception Display of a Short Message When in a Dual Control Head Structure

If a Short Message is received while in a Dual Control Head structure, the same content appears for each Control Head. The available key operations are also the same. The Short Message display can be exited by each Control Head, and the timing of ending the message display is the same.

Also, the automatic scrolling behavior of the message display behaves according to the specifications of each displaying Control Head. Even if in a Dual Control Head structure using Control Heads of differing types, the automatic scrolling behavior behaves according to the display specification of each Control Head.

About Featured Panel Operations

The operation of the [] key/ [] key of the front panel changes depending on the mode status in a Featured Panel (KCH-20R).

In Function Mode or Menu Category Mode, the [] key/ [] key operates in the same manner as the [] key/ [] key when operated. In other modes, the [] key/ [] key operates according to the function assigned to the [] key/ [] key when operated.

Keys other than the [] key/ [] key behave according to the specifications of each key regardless of the status.

3.11 Switching the Display Language

The language of the characters that appear on the transceiver display and of the voice guide can be configured as a language other than English, such as Spanish or French. Also, the language can be changed by the operation of the transceiver, such as from English to Spanish or from French to English.

The language to be used for the string of text of **Display Customization** and for the audio of **Voice Announcement** (**Voice Announcement Type** = Standard) can be configured in **Voice and Display Language** of KPG-D1/ D1N.

Table 3-12 Voice and Display Language

Configuration	Description
Language 1	Configures the main language to be used. After the configuration data is written to the transceiver, the language configured in Language 1 is applied for the characters that appear on the transceiver display and for the voice guide, as long as the language is not changed by operating the transceiver. The languages that can be configured are as follows: Traditional Chinese (China) ^{*1} , English, Spanish (Spain), Spanish (Latin America), French, German, Italian, Dutch, Russian, Portuguese (Brazil)
Language 2	Configures the language that is changed by the transceiver operation. From the following languages, a language other than the language of Language 1 can be configured: English, Spanish (Spain), Spanish (Latin America), French, German, Italian, Dutch, Russian, Portuguese (Brazil) If the language is not changed by the transceiver operation, "None" is configured.
Language 3	Configures the language that is changed by the transceiver operation. From the following languages, a language other than the languages of Language 1 and Language 2 can be configured: English, Spanish (Spain), Spanish (Latin America), French, German, Italian, Dutch, Russian, Portuguese (Brazil) If the language is not changed by the transceiver operation, or if switching is only with 2 languages, "None" is configured.

^{*1} Supported by Firmware A only. However, K-type Firmware A supports only ASCII characters. A-type supports Traditional Chinese as before.

In Menu Mode, the language of the characters that appear on the display and of the voice guide can be changed. Pressing the **Menu** key causes the transceiver to enter Menu Mode, and then selecting "Language" can change the language to a language that is configured in **Language 1** to **Language 3**. (Refer to [Using Menu Mode](#).)

Note

- The language configuration changed by key operation is stored in the transceiver.
- If "User Programmable" is configured in **Voice Announcement Type**, by changing the language by key operation, the changed language is applied to only the display. In this case, the language used for the voice guide is not changed.

Configuration using KPG-D1/ D1N

Configuring **Voice and Display Language** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1)

4.1 Transmit/ Receive Frequencies

Transmit and receive frequencies are pairs of frequencies used for transmitting and receiving.

In Analog Conventional, P25 Conventional, NXDN Conventional, and DMR Conventional systems, transmit and receive frequencies can be configured for each channel (Personality).

In a P25 Trunking system, transmit and receive frequencies to be used for communication with a repeater structuring the P25 Trunking system can be configured in the **Trunked Channel Plan** table of the P25 Trunking system.

In an NXDN Trunking system, transmit and receive frequencies to be used for communication with a repeater structuring the NXDN Trunking system can be configured in the **Frequency Table** of the NXDN Trunking system.

In a DMR-based Trunking system, transmit and receive frequencies to be used for communication with a repeater structuring the DMR-based Trunking system can be configured in the **Frequency Table** of the DMR-based Trunking system.

Table 4-1 Transmit/ Receive Frequency Range and Step Size

Model	Transmit/ Receive Frequencies	
	Range	Step
NX-5600H	39 MHz to 50 MHz	3.125 kHz, 5 kHz, 6.25 kHz
NX-5200/ NX-5200S/ NX-5200LG/ NX-5700/ NX-5700H/ NX-5700S	136 MHz to 174 MHz	2.5 kHz, 3.125 kHz, 5 kHz, 6.25 kHz, 7.5 kHz
NX-5300/ NX-5300S/ NX-5300LG/ NX-5800/ NX-5800H/ NX-5800S	450 MHz to 520 MHz 380 MHz to 470 MHz	3.125 kHz, 5 kHz, 6.25 kHz
NX-5400/ NX-5900	763 MHz to 870 MHz	6.25 kHz, 12.5 kHz

Configuration using KPG-D1/ D1N

- Configuring the transmit and receive frequencies for a channel ( **See** Transceiver Settings > Zone/Channel > Channel Edit)
- Configuring the transmit and receive frequencies in the **Trunked Channel Plan** table of a P25 Trunking system ( **See** Transceiver Settings > P25 Network > Trunked Channel Plan)
- Configuring the transmit and receive frequencies in the **Frequency Table** of an NXDN Trunking system ( **See** Transceiver Settings > NXDN Network > Frequency Table)
- Configuring the transmit and receive frequencies in the **Frequency Table** of a DMR-based Trunking system ( **See** Transceiver Settings > DMR Network > Frequency Table)

4.2 Transmit Power

Transmit Power is the transmission power of the transceiver. A user can use the transceiver by switching the transmission power to high power, medium power or low power.

If the transceiver is located near repeaters or target party, a user can change the transmission power to low power in order to avoid causing unnecessary radio interference to other transceivers. Also, for Portable, the battery operating time of the transceiver is extended by reducing power consumption.

Medium power can be adjusted as desired by a dealer between low power and high power. The transmission power can be switched among 3 levels and used by adjusting medium power.

Table 4-2 Transmit Power

Model	Transmit Power		
	Low	Medium	High
NX-5200	1 W	Depends on the adjustment ^{*1}	6 W
NX-5200S	1 W	Depends on the adjustment ^{*1}	6 W
NX-5200LG	1 W	Depends on the adjustment ^{*1}	6 W
NX-5300	1 W	Depends on the adjustment ^{*1}	5 W
NX-5300S	1 W	Depends on the adjustment ^{*1}	5 W
NX-5300LG	1 W	Depends on the adjustment ^{*1}	5 W
NX-5400	1 W	Depends on the adjustment ^{*1}	3 W
NX-5600H	25 W	70 W	110 W
NX-5700	5 W	Depends on the adjustment ^{*1}	50 W
NX-5700H	25 W	50 W	110 W
NX-5700S	5 W	Depends on the adjustment ^{*1}	50 W
NX-5800	5 W	Depends on the adjustment ^{*1}	45 W
NX-5800H	25 W	50 W	100 W
NX-5800S	5 W	Depends on the adjustment ^{*1}	45 W
NX-5900	2 W	Depends on the adjustment ^{*1}	If the transmit frequency is 806 MHz or lower: 30 W If the transmit frequency exceeds 806 MHz: 35 W

^{*1} The default value is the same value as low power.

The "H" icon appears in the icon display area of the transceiver when a channel configured "High" for the transmission power is selected, the "M" icon appears in the icon display area of the transceiver when a channel configured "Medium" for the transmission power is selected, and the "L" icon appears in the icon display area of the transceiver when a channel configured "Low" for the transmission power is selected.

The methods of configuring the transmission power and changing the transmission power by using the transceiver vary depending on the system as follows:

Analog Conventional/ P25 Conventional/ NXDN Conventional/ DMR Conventional/ LTR Trunking system

In Analog Conventional, P25 Conventional, NXDN Conventional, DMR Conventional, and LTR Trunking systems, "High", "Medium", or "Low" can be configured for the transmission power on each channel (Personality).

The transmission power can be switched among "High", "Medium", or "Low" by the following methods:

● Low Transmit Power

The transmission power can be switched to "Low" by selecting a channel where "High" or "Medium" is configured for the transmission power and operating one of the following:

- Press the **Low Transmit Power** key.
- Select "On" or "Off" after pressing the **Menu** key to enter Menu Mode and then selecting "Low Transmit Power".

With one of the operations, the transmission power of the selected channel is "Low" by enabling **Low Transmit Power**, and the transmission power of the selected channel returns to the previous configuration ("High" or "Medium") by disabling **Low Transmit Power**.

● Medium Transmit Power

The transmission power can be switched to "Medium" by selecting a channel where "High" or "Low" is configured for the transmission power and operating one of the following:

- Select "On" or "Off" after pressing the **Menu** key to enter Menu Mode and then selecting "Medium Transmit Power".

The transmission power of the selected channel is "Medium" by enabling **Medium Transmit Power**, and the transmission power of the selected channel returns to the previous configuration ("High" or "Low") by disabling **Medium Transmit Power**.

● High Transmit Power

The transmission power can be switched to "High" by selecting a channel where "Medium" or "Low" is configured for the transmission power and operating one of the following:

- Press the **High Transmit Power** key.
- Select "On" or "Off" after pressing the **Menu** key to enter Menu Mode and then selecting "High Transmit Power".

With one of the operations, the transmission power of the selected channel is "High" by enabling **High Transmit Power**, and the transmission power of the selected channel returns to the previous configuration ("Medium" or "Low") by disabling **High Transmit Power**.

P25 Trunking/ NXDN Trunking/ DMR-based Trunking system

In P25 Trunking, NXDN Trunking and DMR-based Trunking systems, "High", "Medium", "Low", or "Auto" can be configured for the transmission power in each system.

If "Auto" is configured for the transmission power, the transceiver automatically switches the transmission power to "High" or "Low" by comparing the threshold value of signal strength level configured in **Power Threshold** with the current received signal strength level.

Also, the transmission power can be switched manually among "High", "Medium", or "Low" by the following methods:

● Low Transmit Power

The transmission power can be switched to "Low" by selecting a channel in a system where "High", "Medium", or "Auto" is configured for the transmission power and operating one of the following:

- Press the **Low Transmit Power** key.
- Select "On" or "Off" after pressing the **Menu** key to enter Menu Mode and then selecting "Low Transmit Power".

With one of the operations, the transmission power of the system to which the selected channel belongs is "Low" by enabling **Low Transmit Power**, and the transmission power of the system to which the selected channel belongs returns to the previous configuration ("High", "Medium", or "Auto") by disabling **Low Transmit Power**.

● Medium Transmit Power

The transmission power can be switched to "Medium" by selecting a channel in a system where "High", "Low", or "Auto" is configured for the transmission power and operating one of the following:

- Select "On" or "Off" after pressing the **Menu** key to enter Menu Mode and then selecting "Medium Transmit Power".

The transmission power of the system to which the selected channel belongs is "Medium" by enabling Medium Transmit Power, and the transmission power of the system to which the selected channel belongs returns to the previous configuration ("High", "Low", or "Auto") by disabling Medium Transmit Power.

● High Transmit Power

The transmission power can be switched to "High" by selecting a channel in a system where "Medium", "Low", or "Auto" is configured for the transmission power and operating one of the following:

- Press the **High Transmit Power** key.
- Select "On" or "Off" after pressing the **Menu** key to enter Menu Mode and then selecting "High Transmit Power".

With one of the operations, the transmission power of the system to which the selected channel belongs is "High" by enabling **High Transmit Power**, and the transmission power of the system to which the selected channel belongs returns to the previous configuration ("Medium", "Low", or "Auto") by disabling **High Transmit Power**.

Note

- Enabling one of High Transmit Power, **Medium Transmit Power**, and **Low Transmit Power** automatically disables the configurations of the other transmission powers.

Configuration using KPG-D1/ D1N

- Configuring **Transmit Power (Personality)** in an Analog Conventional system ( [See](#) Transceiver Settings > Personal > Personality > Analog Conventional)
- Configuring **Transmit Power (Channel Edit)** in an Analog Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > Analog Conventional)
- Configuring **Transmit Power (Personality)** in a P25 Conventional system ( [See](#) Transceiver Settings > Personal > Personality > P25 Conventional > General)
- Configuring **Transmit Power (Channel Edit)** in a P25 Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > P25 Conventional > General)
- Configuring **Transmit Power (Personality)** in an NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personality > NXDN Conventional > General)
- Configuring **Transmit Power (Channel Edit)** in an NXDN Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > NXDN Conventional > General)
- Configuring **Transmit Power (Personality)** in a DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personality > DMR Conventional > General)
- Configuring **Transmit Power (Channel Edit)** in a DMR Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > DMR Conventional > General)
- Configuring **Transmit Power** in a P25 Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > P25 Trunking > General)
- Configuring **Transmit Power** in an NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > General)
- Configuring **Transmit Power** in a DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > General)
- Configuring the **Power Threshold** in a P25 Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > P25 Trunking > General > RSSI Setting)
- Configuring the **Power Threshold** in an NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > General > RSSI Settings)
- Configuring the **Power Threshold** in a DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > General > RSSI Settings)
- Configuring **Transmit Power (Personality)** in an LTR Trunking system ( [See](#) Transceiver Settings > Personal > Personality > LTR Trunking)
- Configuring **Transmit Power (Channel Edit)** in an LTR Trunking system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > LTR Trunking)

4.3 Channel Spacing

Channel Spacing is the channel spacing used by the transceiver to transmit and receive.

Channel spacing is the spacing of frequencies between adjacent channels.

Bandwidths of the channel spacing are as follows:

Table 4-3 Channel Spacing

Channel Spacing	Bandwidth
25.0 (Wide) ^{*1} 25.0 (Wide 5k) ^{*2}	25.0 kHz
20.0 (Wide) ^{*3} 20.0 (Wide 4k) ^{*4}	20.0 kHz
12.5 (Narrow)	12.5 kHz
6.25 (Very Narrow) ^{*5}	6.25 kHz

^{*1} Available for the K-type NX-5200/ NX-5200S/ NX-5300/ NX-5300S/ NX-5400/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S only.

^{*2} Available for the K-type NX-5400/ NX-5900 and all E-type models only.

^{*3} Available for NX-5600H only.

^{*4} Available for the K-type NX-5400/ NX-5900 and all E-type models only.

^{*5} Not available for NX-5600H.

The available channel spacing varies as follows depending on the communication system:

Analog Conventional system

In an Analog Conventional system, "25.0 (Wide 5k)", "20.0 (Wide)", "20.0 (Wide 4k)", or "12.5 (Narrow)" can be configured for the channel spacing on each channel (Personality). However, for NX-5600H (Low Band), the channel spacing is fixed at "20.0 (Wide)".

LTR Trunking system

In an LTR Trunking system, "25.0 (Wide 5k)", "20.0 (Wide 4k)" or "12.5 (Narrow)" can be configured for the channel spacing in each system.

P25 Conventional system

In a P25 Conventional system, the channel spacing is fixed at "12.5 (Narrow)".

NXDN Conventional system

In an NXDN Conventional system, "12.5 (Narrow)" or "6.25 (Very Narrow)" can be configured for the channel spacing on each channel (Personality). However, for NX-5600H (Low Band), the channel spacing is fixed at "12.5 (Narrow)".

DMR Conventional system

In a DMR Conventional system, the channel spacing is fixed at "12.5 (Narrow)".

P25 Trunking system

The channel spacing can be configured in the Trunked Channel Plan table of a P25 Trunking system within the following range:

Table 4-4 Channel Spacing (P25 Trunking)

Model	Channel Spacing
NX-5200/ NX-5200LG/ NX-5700/ NX-5700H	2.50 kHz to 127.50 kHz
NX-5300/ NX-5300LG/ NX-5800/ NX-5800H	5.00 kHz to 125.00 kHz
NX-5400/ NX-5900	6.25 kHz to 125.00 kHz

NXDN Trunking system

In the Frequency Table of an NXDN Trunking system, “12.5 (Narrow)” or “6.25 (Very Narrow)” can be configured for the channel spacing.

DMR-based Trunking system

In a DMR-based Trunking system, the channel spacing is fixed at “12.5 (Narrow)”.

Note

- For KPG-D1N, “25.0 (Wide 5k)” cannot be configured for the channel spacing if a receive frequency or transmit frequency is configured in the following ranges:
VHF: above 149.98750 MHz and less than 174.01250 MHz
UHF: above 420.98750 MHz and less than 470.01250 MHz

Configuration using KPG-D1/ D1N

- Configuring **Channel Spacing (Personality)** in an Analog Conventional system ( [See](#) Transceiver Settings > Personal > Personality > Analog Conventional)
- Configuring **Channel Spacing (Channel Edit)** in an Analog Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > Analog Conventional)
- Configuring **Channel Spacing (Personality)** in a P25 Conventional system ( [See](#) Transceiver Settings > Personal > Personality > P25 Conventional > General)
- Configuring **Channel Spacing (Channel Edit)** in a P25 Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > P25 Conventional > General)
- Configuring **Channel Spacing (Personality)** in an NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personality > NXDN Conventional > General)
- Configuring **Channel Spacing (Channel Edit)** in an NXDN Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > NXDN Conventional > General)
- Configuring **Channel Spacing (Personality)** in a DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personality > DMR Conventional > General)
- Configuring **Channel Spacing (Channel Edit)** in a DMR Conventional system ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > DMR Conventional > General)
- Configuring **Channel Spacing** in a P25 Trunking system ( [See](#) Transceiver Settings > P25 Network > Trunked Channel Plan)
- Configuring **Channel Spacing** in an NXDN Trunking system ( [See](#) Transceiver Settings > NXDN Network > Frequency Table > Frequency Edit)
- Configuring **Channel Spacing** in a DMR-based Trunking system ( [See](#) Transceiver Settings > DMR Network > Frequency Table > Frequency Edit)
- Configuring **Channel Spacing** in an LTR Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > LTR Trunking > General)

4.4 Beat Shift

Beat Shift is the function to eliminate the influences of heterodyning in the SCM caused by internal oscillators.

Due to the transceiver's circuit configuration, the harmonics of the oscillators may interfere with reception depending on the receive frequency. The interference to reception can be avoided by slightly shifting the frequency of the oscillator in the SCM.

The clock frequency of the SCM is shifted on the channel where **Beat Shift** for the SCM is enabled.

In P25 Conventional, NXDN Conventional, and DMR Conventional systems, **Beat Shift** can be configured for each channel (Personality).

In an NXDN Trunking system, **Beat Shift** can be configured in the Frequency Table of the NXDN Trunking system.

In an LTR Trunking system, **Beat Shift** can be configured for each repeater CH (frequency) structuring the LTR Trunking system.

In Analog Conventional, P25 Trunking and DMR-based Trunking systems, **Beat Shift** cannot be configured.

Configuration using KPG-D1/ D1N

- Configuring **Beat Shift** in a P25 Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personality > P25 Conventional > General > Beat Shift)
- Configuring **Beat Shift** in a P25 Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > P25 Conventional > General > Beat Shift)
- Configuring **Beat Shift** in an NXDN Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personality > NXDN Conventional > General > Beat Shift)
- Configuring **Beat Shift** in an NXDN Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > NXDN Conventional > General > Beat Shift)
- Configuring **Beat Shift** in a DMR Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personality > DMR Conventional > General)
- Configuring **Beat Shift** in a DMR Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > DMR Conventional > General)
- Configuring **Beat Shift** in an NXDN Trunking system to be enabled or disabled ( [See](#) Transceiver Settings > NXDN Network > Frequency Table)
- Configuring **Beat Shift (SCM)** in an LTR Trunking system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > LTR Trunking > Repeater Information)

4.5 Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)

Maintenance Display is the function to check the signal strength level (RSSI level), site information, and simplified BER by displaying them on the transceiver's LCD as rough indications when structuring a system or executing maintenance of the system.

Pressing the **Maintenance** key places the transceiver in Maintenance Display Mode.

Or, the transceiver can also be placed in Maintenance Display Mode by selecting "Maintenance" after placing the transceiver in Menu Mode by pressing the **Menu** key.

About BER

The BER in this function is used for an area check, and for a status check when an abnormal noise sounds.

The area check can also be checked by signal strength, but the signal strength may appear higher if an interfering signal, etc. are close-by.

Because communication is actually unavailable at the location where the BER deteriorates even if the signal strength is sufficient, the BER can be used to check an area for actual use, and as a guide to measure the sensitivity capability. In this way, the purpose of use of the BER in this function differs from the purpose of use of the BER measurement in Test Mode.

Analog Conventional, P25 Conventional, NXDN Conventional, and DMR Conventional systems


1

Press the **Maintenance** key.


The transceiver enters Maintenance Display Mode and then the RSSI level appears. Display of the RSSI level is renewed every 500 ms.

The following operations are the same even if the transceiver enters Maintenance Display Mode by pressing the **Menu** key:


If the RSSI level is -96 dBm



If the RSSI level is less than -120 dBm



If the RSSI level is more than -70 dBm



For Mobile, ">-80dBm" appears if the RSSI level is more than -80 dBm.

2

Press the **Home** ([]) key to exit the mode.

If Maintenance Display Mode is entered by using the **Menu** key, pressing and holding the **Home** ([]) key restores Menu Mode.

NXDN Trunking system

1 Press the **Maintenance** key.

The transceiver enters Maintenance Display Mode, and then the channel number of the control channel currently acquired or the channel number of the selected channel appears in the title line. The RSSI level appears in the first line and the site number or site name appears in the second line.

- If a channel of DFA is selected, "DFA" appears instead of a channel number.
- If the transceiver is in a Roaming System by using the SKF for roaming in the Multi-System Roaming function, "Roam" appears instead of a channel number.

The following operations are the same even if the transceiver enters Maintenance Display Mode by pressing the **Menu** key:



2 Switch the frequency display or channel.

- **Switching to the frequency display**

Pressing the [▶] key switches the display to the frequency display.

Pressing the [◀] key while the RSSI/ BER display is displayed switches the display to the frequency display. The receive frequency of the control channel currently acquired or the receive frequency of the selected channel appears in the first line, and the transmit frequency appears in the second line.



- **Switching to the RSSI/ BER display**

Pressing the [◀] key switches the display to the RSSI/ BER display.

Pressing the [▶] key while the frequency display is displayed switches the display to the RSSI/ BER display. The BER appears on the second line.



- **Switching the display when Multi-System Hunt is enabled**

If **Multi-System Hunt** is enabled, pressing the [◀] key toggles the display in the following order:



RSSI/ Site Number Display → RSSI/ BER Display → System Name/ Site Number Display → Frequency Display → ...

Pressing the [▶] key toggles the display in the following order:

RSSI/ Site Number Display → Frequency Display → System Name/ Site Number Display → RSSI/ BER Display → ...

- **Switching channels**
Pressing the [▲] key or [▼] key switches the channel number of the channel configured in **Frequency Table**. If the selected channel number satisfies the conditions to acquire a control channel, the channel number or site name appears in the second line of the display.


If the selected channel number does not satisfy the conditions for acquiring a control channel, the transceiver enters the Out of Service state, and then the RSSI icon blinks. In this case, the site number or site name does not appear.



P25 Trunking system

1 Press the Maintenance key.

The transceiver enters Maintenance Display Mode, and then the channel number of the control channel currently acquired or the channel number of the selected channel appears in the title line. The RSSI level appears in the first line and the RFSS ID or Site ID appears in the second line. The following operations are the same even if the transceiver enters Maintenance Display Mode by pressing the **Menu** key:




2 Switch the frequency display, ID/ channel number display or channel.


- **Switching to the frequency display**
Pressing the [▶] key switches the display to the frequency display.
Pressing the [◀] key while the ID/ channel number display is displayed switches the display to the frequency display. The receive frequency of the control channel currently acquired or the receive frequency of the selected channel appears in the first line, and the transmit frequency appears in the second line.
- **Switching to the RSSI/ BER display**
Pressing the [◀] key switches the display to the RSSI/ BER display.
Pressing the [▶] key while the ID/ channel number display is displayed switches the display to the RSSI/ BER display. The BER appears on the second line.
- **Switching to the ID/ channel number display**
Pressing the [▶] key while the frequency display is displayed switches the display to the ID/ channel number display. Pressing the [◀] key while the RSSI/ BER display is displayed switches the display to the ID/ channel number display.
In the first line, the channel ID and channel number of the receive channel specified by the system when the control channel is acquired appear. If no control channel is acquired, "***_****" appears.
In the second line, the channel ID and channel number of the transmit channel specified by the system when the control channel is acquired appear. If no control channel is acquired, "***_****" appears.

- **Switching channels**
Pressing the [▲] key or [▼] key switches the channel number.
If Adjacent Channel information is retained in the transceiver, Adjacent Channels and Normal Hunt Channels can be selected starting from the first Adjacent Channel.
If Adjacent Channel information is not retained in the transceiver, Normal Hunt Channels can be selected starting from the channel number of the currently selected Normal Hunt Channel.


Registration is started by selecting a Normal Hunt Channel or Adjacent Channel which can acquire a control channel, and then pressing the **Menu** ([□]I) key or [*] key.




When an Adjacent Channel is selected



When a Normal Hunt Channel is selected




If the selected channel number does not satisfy the conditions for acquiring a control channel, the transceiver enters the Out of Service state, and then the RSSI icon blinks. In this case, the site number or site name does not appear.



DMR-based Trunking system

1 Press the **Maintenance** key.


The transceiver enters Maintenance Display Mode, and then the Frequency No. of the acquired control channel or the Frequency No. of the selected channel appears in the title line. The RSSI level appears in the first line, and the Site ID or site name appears in the second line. The following operations are the same even if the transceiver enters Maintenance Display Mode by pressing the **Menu** key:



2 Switch the display such as of the frequency or switch the channel.

- **Switching to the frequency display**

Pressing the [▶] key switches the display to the frequency display. Pressing the [◀] key while the RSSI/ BER display is displayed switches the display to the frequency display. The receive frequency of the control channel currently acquired or the receive frequency of the selected channel appears in the first line, and the transmit frequency appears in the second line.




- **Switching to the RSSI/ BER display**

Pressing the [▶] key while the frequency display is displayed switches the display to the RSSI/ BER display. Pressing the [◀] key while the Power Save display is displayed switches the display to the RSSI/ BER display. The BER appears on the second line.



- **Switching to the Power Save display (Trunking 2.5 system, DMR Tier III Trunking system only)**



Pressing the [◀] key switches the display to the Power Save display. Pressing the [▶] key while the RSSI/ BER display is displayed switches the display to the Power Save display. The configuration status of Power Save of the transceiver, either enabled or disabled, appears in the first line. The status of Power Save appears in the second line.



● Switching channels

Pressing the [▲] key or [▼] key causes the list number configured in Normal Hunt Control Channel to be increased or decreased, and the transceiver behaves according to the configuration of the list number. If the selected channel number satisfies the conditions to acquire a control channel, the Site ID or site name appears in the second line of the display.

If the selected channel number does not satisfy the conditions for acquiring a control channel, the transceiver enters the Out of Service state, and then the RSSI icon lights. In this case, the Site ID or site name does not appear.



Note

- In an NXDN Trunking system, if the transceiver is in Failsoft mode, the channel number of the Failsoft channel appears. In this case, the site number or site name does not appear. In a P25 Trunking system, if the transceiver is in Failsoft mode, the channel number and site number or the site name does not appear.
- If the transceiver is in a Roaming System by using the SKF for roaming in the Multi-System Roaming function, Failsoft does not function.
- In P25 Trunking, NXDN Trunking and DMR-based Trunking systems, pressing the **PTT** switch while the transceiver is in Maintenance Display Mode starts a Group Call with the Maintenance Display Mode displayed. If the transceiver migrates to a traffic channel, the display of the channel number is changed to the channel number of the traffic channel. If the transceiver receives a Group Call while in Maintenance Display Mode, the transceiver receives the Group Call with the Maintenance Display Mode displayed in the same way.
- The **PTT** switch can be used even if the transceiver is in Maintenance Display Mode. However, in P25 Trunking, NXDN Trunking and DMR-based Trunking systems, the **PTT** switch cannot be used if the transceiver is in the Out of Service state.
- While this function is in use, Battery Saver is disabled (Portable only, except DMR-based Trunking).
- For the signal strength (RSSI Level), the display is renewed at intervals of 500 ms.
- In NXDN Trunking and DMR-based Trunking systems, a Key-entry Error Tone sounds and the channel cannot be changed even if the [▲] key or [▼] key is pressed while a traffic channel is switched by a communication.
- If the transceiver enters Maintenance Display Mode while the Site Lock is enabled, the Site Lock is temporarily disabled. In this case, the Site Lock is enabled when the transceiver exits Maintenance Display Mode.
- If the transceiver enters Maintenance Display Mode while the transceiver is outside of the communication area, the channel number retained in the transceiver appears.
- When the transceiver is in Maintenance Display Mode, the ID display in **Caller ID Display** of NXDN or P25 and the message display when a Status/ Short Message is received are not displayed.
- Maintenance Display does not function in a Multi RF Deck/ Multi Control Head structure for Mobile.
- In a DMR-based Trunking system, the following behaviors cannot be done if the transceiver is in Maintenance Display Mode:
 - Background Hunt
 - Passive Scan
 - Vote Now
 - The following behavior when the control channel is migrated (Example: Behavior of the Control Channel Switching. When P_Move is received by using Active Hunt, if another channel is changed to the control channel while a control channel becomes a traffic channel in Composite Control Channel)

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

The transceiver has the following indicator and display.

- LED (TX/ Busy)
- LCD
- Selective Call Alert LED

5.1 Busy LED

Busy LED is the function to notify a user visually that the transceiver has received a signal.

The LED lights green while the transceiver is receiving a signal in an Analog Conventional system, P25 Conventional system,

NXDN Conventional system, and DMR Conventional system.

The LED lights only when the transceiver is on a traffic channel in P25 Trunking, NXDN Trunking and DMR-based Trunking systems. The Busy LED does not light when the transceiver is on a control channel.

Also, whether the Busy LED will light while the transceiver receives in Emergency Mode can be configured.

Configuration using KPG-D1/ D1N

- Configuring **Busy LED** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Display > LEDs)
- Configuring **Emergency LED** to be enable or disabled ( [See](#) Transceiver Settings > Emergency > Emergency Profile)

5.2 Transmit LED

Transmit LED is used to notify a user visually that the transceiver is transmitting.

The Transmit LED lights red while the transceiver is transmitting.

Also, whether the Transmit LED will light while the transceiver transmits in Emergency Mode can be configured.

Configuration using KPG-D1/ D1N

- Configuring **Transmit LED** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Display > LEDs)
- Configuring **Emergency LED** to be enable or disabled ( [See](#) Transceiver Settings > Emergency > Emergency Profile)

5.3 Selective Call Alert LED

Selective Call Alert LED is used to notify a user visually that the transceiver has received various calls.

When receiving various calls, such as P25, NXDN, or DMR Individual Calls and Group Calls, the LED can flash any of the following 7 colors, and the flashing color can be configured for each type of call:

- Yellow
- Purple
- Blue
- Light Blue
- Red
- Green
- White

Configuration using KPG-D1/ D1N

- Configuring **Selective Call Alert LED** in a P25 Conventional system ( [See](#) Transceiver Settings > P25 > P25 Information > Conventional)
- Configuring **Selective Call Alert LED** in an NXDN Conventional system ( [See](#) Transceiver Settings > NXDN > NXDN Information > Conventional)
- Configuring **Selective Call Alert LED** in a DMR Conventional system ( [See](#) Transceiver Settings > DMR > DMR Information > Conventional)
- Configuring **Selective Call Alert LED** in a P25 Trunking system ( [See](#) Transceiver Settings > P25 > P25 Information > Trunking)
- Configuring **Selective Call Alert LED** in an NXDN Trunking system ( [See](#) Transceiver Settings > NXDN > NXDN Information > Trunking)
- Configuring **Selective Call Alert LED** in a DMR-based Trunking system ( [See](#) Transceiver Settings > DMR > DMR Information > Trunking)

5.4 Optional Signaling LED

Optional Signaling LED is the function to notify visually by flashing the LED yellow when the received Optional Signaling matches the Optional Signaling configured in the transceiver, or that the transceiver is in the state of voice communication to a telephone.

A user can notice by the LED that the transceiver is receiving a call.

When Optional Signaling is no longer matching due to operation of the transceiver key or upon elapse of the time configured in **Auto Reset Timer**, the light of the LED goes off.

However, if **Selective Call Alert LED** or **Telephone Call Alert LED** is enabled, the LED flashes according to the configuration of **Selective Call Alert LED** or **Telephone Call Alert LED** even when **Optional Signaling LED** is enabled.

Configuration using KPG-D1/ D1N

- Configuring **Optional Signaling LED** in an NXDN Conventional system ( [See](#) Transceiver Settings > NXDN > NXDN Information > Conventional)
- Configuring **Optional Signaling LED** in a DMR Conventional system ( [See](#) Transceiver Settings > DMR > DMR Information > Conventional)
- Configuring **Optional Signaling LED** in a P25 Conventional system ( [See](#) Transceiver Settings > P25 > P25 Information > Conventional)
- Configuring **Optional Signaling LED** in an NXDN Trunking system ( [See](#) Transceiver Settings > NXDN > NXDN Information > Trunking)
- Configuring **Optional Signaling LED** in a DMR-based Trunking system ( [See](#) Transceiver Settings > DMR > DMR Information > Trunking)
- Configuring **Optional Signaling LED** in a P25 Trunking system ( [See](#) Transceiver Settings > P25 > P25 Information > Trunking)
- Configuring **Optional Signaling LED** of MDC-1200 ( [See](#) Transceiver Settings > MDC-1200 > MDC-1200 Information > General)
- Configuring **Optional Signaling LED** of FleetSync ( [See](#) Transceiver Settings > FleetSync > FleetSync Information > General)
- Configuring **Optional Signaling LED** of DTMF ( [See](#) Transceiver Settings > DTMF > Decode)
- Configuring **Optional Signaling LED** of 2-tone
 - ( [See](#) Transceiver Settings > 2-tone > 2-tone (Analog) > Decode (2-tone 1 to 4))
 - ( [See](#) Transceiver Settings > 2-tone > 2-tone (Digital) > Decode (2-tone 1 to 4))

5.5 Lighting the Backlight (Backlight)

Supported Models: Portable

The backlight is equipped on the back side of the LCD on the transceiver. By lighting the backlight, the LCD can be viewed in dark places or at night.

Pressing the **Backlight** key toggles the backlight between On and Off.

If **Auto Backlight** is enabled, the backlight lights when operating any key of the transceiver, or when receiving a call. The conditions for lighting the backlight by the Auto Backlight function can be configured by using KPG-D1/D1N.

- **PTT Press**

If **PTT Press** is enabled, the backlight lights when the **PTT** switch is pressed.

- **Any Key Operation**

If **Any Key Operation** is enabled, the backlight lights when any key other than the **PTT** switch is operated.

- **ID/Message Reception**

If **ID/Message Reception** is enabled, the backlight lights when the transceiver receives the following various calls and messages:

Table 5-1 List of Calls Lighting the Backlight when ID/Message Reception Is Enabled

NXDN	Conventional	Individual Call
		Individual Call Acknowledge Request
		Group Call
		Paging Call
		Status Message
		Short Message
	Trunking	Individual Call
		Individual Call (Message Trunked (Enhanced))
		Group Call/ Broadcast Group Call
		Group Call/ Broadcast Group Call (Message Trunked (Enhanced))
		Paging Call
		Telephone Call
		Status Message
		Short Message
P25	Conventional	Individual Call
		Group Call
		Emergency Call
	Trunking	Individual Call (No Availability Check)
		Individual Call (Availability Check)
		Paging Call
		Group Call/ Announcement Group/ Super Group Call
		System Call
		Telephone Call
		Emergency Call

DMR	Conventional	Individual Call
		Individual Call Acknowledge Request
		Group Call
		Paging Call
		Emergency Alarm
	Trunking	Individual Call
		Group Call/ Broadcast Group Call
		Emergency Alarm
		Telephone Call
Analog		Emergency Call (MDC-1200)
		Selcall (FleetSync/ MDC-1200)
		Call Alert (MDC-1200)
		Paging Call (FleetSync)
LTR Trunking		Selcall (FleetSync/ MDC-1200)
		Call Alert (MDC-1200)
		Paging Call (FleetSync)
		Emergency Call (MDC-1200)

After the backlight is turned On, the backlight will automatically be turned Off upon the elapse of the time configured in **Backlight Timer**. If a key is operated or the call of a condition to light is received before the time configured in **Backlight Timer** elapses, the lighting time of the backlight is extended by the time configured in **Backlight Timer**.

When "Off" is configured in **Backlight Timer**, the backlight is turned On until the **Backlight** key is pressed to turn the backlight Off.

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)
- Configuring **Auto Backlight** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display > Auto Backlight)

5.6 Changing the Brightness of the Backlight (LCD Brightness)

The transceiver can be used in dark places or at night by obscuring the brightness of the backlight.

The brightness of the backlight can be configured in **LCD Brightness** by using KPG-D1/ D1N. This configuration can be changed by operating the transceiver.

● LCD Brightness key

Pressing the **LCD Brightness** key gradates the brightness of the backlight as follows:

Portable:

High → Medium → Low → High ...

Mobile (KCH-19 (Basic Panel)/ KCH-20R (Featured Panel)):

Level 7 → Level 6 → Level 5 → Level 4 → Level 3 → Level 2 → Level 1 → Level 7 ...

Mobile (KCH-21R (Handheld Control Head)):

Level 7 → Level 6 → Level 5 → Level 4 → Level 3 → Level 2 → Level 1 → Off → Level 7 ...

● Menu key

Pressing the **Menu** key to enter Menu Mode, the brightness can be changed by executing “LCD Brightness” and then selecting the backlight brightness from the selections.

Portable:

High, Medium, Low

Mobile (KCH-19 (Basic Panel)/ KCH-20R (Featured Panel)):

Level 1, Level 2, Level 3, Level 4, Level 5, Level 6, Level 7

Mobile (KCH-21R (Handheld Control Head)):

Off, Level 1, Level 2, Level 3, Level 4, Level 5, Level 6, Level 7

Status of the backlight’s brightness that was changed is retained even after the transceiver is turned OFF.

Note

- In a Dual Control Head structure, the changed configuration is applied to the Control Head for which the configuration of **LCD Brightness** is changed. Also, **LCD Brightness** can be configured for each Control Head by using KPG-D1/ D1N. The configuration in **LCD Brightness** applies to Control Head 1, and the configuration in **LCD Brightness for Control Head 2** applies to Control Head 2.

Configuration using KPG-D1/ D1N

- Configuring **LCD Brightness** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)
- Configuring **LCD Brightness for Control Head 2** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)
- Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)

5.7 Changing the Color Scheme of the Transceiver Display (Color Scheme)

Color Scheme is the function to switch the color scheme of the LCD.

The color scheme of the LCD can be configured in **Color Scheme** by using KPG-D1/ D1N.

Pressing the **Menu** key to enter Menu Mode, and then executing "Color Scheme" and selecting the LCD color scheme from the selection can change the color scheme.

- **Full Color (default)**

Appears in a color scheme consisting of a maximum of 65,536 colors with a black background.

- **Full Color White**

Appears in a color scheme consisting of a maximum of 65,536 colors with a white background.

- **Monochrome Black**

Appears darkened as a black background in a monochrome color scheme consisting of 256 colors.

- **Monochrome White**

Appears brightened as a white background in a monochrome color scheme consisting of 256 colors.

The LCD color scheme that is changed is retained even after the transceiver is turned OFF.

Note

- To change the LCD color scheme by using the **Menu** key, **Color Scheme** needs to be configured in Menu Mode.
- For NX-5200S/ NX-5200LG/ NX-5300S/ NX-5300LG/ NX-5700S/ NX-5800S, the configuration in Color Scheme is fixed to "Monochrome White".

Configuration using KPG-D1/ D1N

Configuring **Color Scheme** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)

5.8 Automatically Adjusting the Brightness Level of the LCD (Auto Dimmer)

Supported Models: Mobile

Auto Dimmer is the function to automatically adjust the brightness level of the LCD depending on the brightness of the environment according to the brightness level sensor.

The sensor level of **Auto Dimmer** can be configured in **Auto Dimmer** by using KPG-D1/ D1N.

Pressing the **Menu** key causes the transceiver to enter Menu Mode, and then selecting "Auto Dimmer" can change the sensor level of **Auto Dimmer**.

- **Off**

The brightness level of the LCD is the brightness configured in **LCD Brightness** without **Auto Dimmer** functioning, and the brightness is not automatically adjusted.

- **Level 1 to Level 5**

The brightness level of the LCD is automatically adjusted by the brightness level sensor with **Auto Dimmer** functioning.

The sensitivity level of the brightness level sensor can be selected from 5 steps: Level 1 to Level 5. Level 5 is the maximum sensitivity, and the sensor is very sensitive to the brightness of the environment.

The configuration of **Auto Dimmer** that is changed is retained even after the transceiver is turned OFF.

Note

- This function can be used only if KCH-19 (Basic Panel) or KCH-20R (Featured Panel) is used.
- In a Dual Control Head structure, the changed configuration is applied to the Control Head for which the configuration of **Auto Dimmer** is changed. Also, **Auto Dimmer** can be configured for each Control Head by using KPG-D1/ D1N. The configuration in **Auto Dimmer** applies to Control Head 1, and the configuration in **Auto Dimmer for Control Head 2** applies to Control Head 2.
- **Auto Dimmer** is automatically disabled while the transceiver is in the following modes. After exiting the modes, **Auto Dimmer** behaves according to the configuration. When in Firmware Programming Mode, the transceiver behaves at the brightness level of High in **LCD Brightness** for Portable, and the transceiver behaves at the brightness level of Level 7 in **LCD Brightness** for Mobile. When in other modes, the transceiver behaves at the brightness level configured in **LCD Brightness**.
 - Test Mode
 - Clone Mode
 - Firmware Programming Mode
 - Transceiver Information Mode
 - FPU Programming Mode
 - Stun/Kill
 - Radio Inhibit
 - Emergency Mode (Emergency Mode Type = Silent)
 - Key Loader Mode
 - Radio Authentication Key Loader Mode

Configuration using KPG-D1/ D1N

- Configuring **Auto Dimmer** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)
- Configuring **Auto Dimmer for Control Head 2** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)

5.9 The Icons on the LCD

The following icons are displayed in the icon display area of the LCD:

Table 5-2 Icon List

Icons	Description
	• RSSI Icon Indicates the signal strength level.
	• Battery Status Icon (Portable only) Indicates the battery power level.
	• High Transmit Power Icon Appears when the channel configured to high power transmission is selected.
	• Medium Transmit Power Icon Appears when the channel configured to medium power transmission is selected.
	• Low Transmit Power Icon Appears when the channel configured to low power transmission is selected.
	• Analog Icon Appears when an analog channel is selected.
	• Digital Icon Appears when a digital Conventional channel is selected.
	• Analog (Mixed Mode) Icon Appears when a Mixed channel with "Analog" configured in Transmit Mode is selected.
	• Digital (Mixed Mode) Icon Appears when a Mixed channel with "Digital" configured in Transmit Mode is selected.
	• Bluetooth Icon Appears when the Bluetooth is enabled. There are 2 states as follows: Lighted: Bluetooth is enabled and BLE Scan is disabled BLE Scan is enabled (advertising) Blinking: Bluetooth is enabled (processing)
	• Bluetooth Connection Icon Appears when connected to a Bluetooth device. Appears when BLE Scan is enabled (not advertising).
	• GPS Icon Appears when the GPS is enabled. There are 2 states as follows: Lighted: GPS is enabled (positioning state) Blinking: GPS is enabled (non-positioning state)
	• Scan Icon The scan status appears. There are 2 states as follows: Lighted: Scanning Blinking: Scan is paused
	• Priority Scan Icon The priority scan status appears. There are 2 states as follows: Lighted: Priority scan is scanning Blinking: Priority scan is paused Note • For NX-5200S/ NX-5200LG/ NX-5300S/ NX-5300LG/ NX-5700S/ NX-5800S, the Scan icon and the Priority Scan icon are displayed in the same way because of the monochrome display. To determine if the display is for scan or for priority scan, "Scan" is displayed during the scan, and "Priority Scan" is displayed during the priority scan in the auxiliary area 2 of the LCD if "Scan" Displayed is enabled (the default value of "Scan" Displayed: Enabled).

Icons	Description
	- Priority-channel/ Priority Monitor ID Icon Appears when the Priority Channel or Priority Monitor ID is selected.  : Priority 1 Channel/ Priority Monitor ID 1  : Priority 2 Channel/ Priority Monitor ID 2  : Priority Monitor ID 3  : Priority Monitor ID 4
	Channel Add Icon Appears when the channel to be scanned is selected.
	Zone Add Icon Appears when the zone to be scanned is selected.
	Scrambler Icon Appears when the Scrambler is enabled.
	Encryption Icon Appears when the Encryption of the bit scrambling format is enabled. There are 2 states as follows: Lighted: No carrier message is received Blinking: When an encrypted carrier message is received Also, this icon lights when the transceiver is in the Key Fail state, even for Encryption in the AES/ DES format.
	Encryption (AES) Icon Appears when the Encryption (AES) is enabled. There are 2 states as follows: Lighted: When no carrier message is received or sent Blinking: When an encrypted carrier message is received
	Encryption (DES) Icon Appears when the Encryption (DES) is enabled. There are 2 states as follows: Lighted: When no carrier message is received or sent Blinking: When an encrypted carrier message is received
	Encryption (ARC4) Icon Appears when the Encryption (ARC4) is enabled. There are 2 states as follows: Lighted: When no carrier message is received or sent Blinking: When an encrypted carrier message is received
	Talk Around Icon Appears when the Talk Around is enabled.
	Monitor Open/ Squelch Off Icon Appears when the transceiver is unmuted, or when signaling is disabled.
	External Speaker Icon Appears when the external speaker is enabled.
	External Speaker (Internal + External) Icon (Mobile only) Appears when the internal speaker and external speaker are enabled.
	Noise Reduction Icon Appears when the Noise Reduction is enabled. There are 2 states as follows: Lighted: Noise Reduction is enabled Blinking: Noise Reduction is being executed
	Call Icon Indicates the status of the signaling. There are 2 states as follows: Lighted: The state where the PTT switch is pressed and the Optional Signaling is disabled. Blinking: The state where Optional Signaling matches (including when communications by NXDN or P25 Voice Call is determined)

Icons	Description
	• Message Stack Icon Appears when the received message is stored in the transceiver stack memory. There are 2 states as follows: Lighted: The state where no messages are unread Blinking: The state where one or more messages are unread
	• microSD Icon (when recognized) Appears when the microSD is recognized.
	• microSD Icon (when unrecognized) Appears when the microSD is not recognized.
	• VOX Icon Appears while VOX is activated.
	• Vibrator Icon (Portable only) Indicates the status of the Vibrator. There are 2 states as follows: Lighted: Vibrator is enabled Blinking: Vibrator is not operating
	• Horn Alert Icon (Mobile only) Appears when the Horn Alert is enabled.
	• Site Lock Icon Appears when the Site Lock is enabled.
	• System Lock Icon Appears when the System Lock is enabled.
	• Broadcast Icon Appears when the Broadcast is enabled.
	• Surveillance Icon Appears when the Surveillance is enabled.
	• Telephone ID Icon There are 2 states as follows: Lighted: Indicates the status of the Telephone ID and RIC (Repeater Interconnect). Blinking: Indicates the status of Auto Telephone Search.
	• Tactical Zone Icon Appears when Tactical Zone is selected.
	• AUX A Icon Appears when the AUX A port is active.
	• AUX B Icon (Mobile only) Appears when the AUX B port is active.
	• AUX C Icon (Mobile only) Appears when the AUX C port is active.
	• Public Address Icon (Mobile only) Appears when the Public Address is enabled.

Icons	Description
	- Intercom Icon (Mobile only) - Appears when Intercom is enabled in a Dual Control Head structure for Mobile.
	- Lone Worker Icon - Appears when the Lone Worker is enabled.
	- Activity Detection Icon (Portable only) - Appears when the Activity Detection is enabled.
	- OVCM Icon - Appears when OVCM is enabled.
	- Compander Icon - Appears when the Compander is enabled.
	- OST Icon - Appears when the OST is enabled.
	- Auto Recording Icon - Appears while the Auto Recording is executing.
	- Key Lock Icon - Appears when the Key Lock is enabled.
	- Task Request Icon - Lighted: All of the stored Task Request data are read. - Blinking: Some of the stored Task Request data are unread.

5.10 Displaying the Signal Strength (Signal Strength Indicator)

Signal Strength Indicator can be used to display the signal strength of the received signal.

The RSSI icon indicating the signal strength appears in the following manner depending on the signal level of the received signal.

Table 5-3 Signal Strength Indicator

Icons	Status	Signal Strength
	High	Above -80 dBm
	Medium	-95 dBm to -80 dBm
	Low	-110 dBm to -95 dBm
	Very weak While searching (DMR-based Trunking system)	With a carrier less than -110 dBm
Disabled	No signal	No carrier
	Blinking: Outside of the communication area (P25 Trunking/ NXDN Trunking) Lighted: Outside of the communication area (DMR-based Trunking system)	-

Note

- The signal strength references are rough indicators of room temperature.

Configuration using KPG-D1/ D1N

Configuring **Signal Strength Indicator** to be enabled or disabled (See Transceiver Settings > Optional Features > Optional Features 1 > Display)


5.11 Display Functions of the Display

The following functions are relevant to the display.

- Zone Name display
- Display Format
- Power-on Text
- Sub-LCD Display
- Sub-LCD Display Priority
- Clock Display

Zone Name Display

Zone Name Display is the function to display the Zone Name on the display.



Note

- If the Zone Name is not configured, the zone number is displayed.

Configuration using KPG-D1/ D1N

Configuring **Zone Name Display** to be enabled or disabled (See Transceiver Settings > Optional Features > Optional Features 1 > Display)

Display Format

Display Format is the function to display the Channel Name or both the zone number and channel number on the display.

Table 5-4 Display Format

Configuration	Description
Channel Name	Displays the Channel Name.
Zone-Channel Number	Displays both the zone number and channel number.

Pressing the **Display Format** key changes the display. Or, pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the display can be changed by selecting the "Display Format". (Refer to [Using Menu Mode](#).)

Configuration using KPG-D1/ D1N

- Configuring **Date Format** (See Transceiver Settings > Optional Features > Optional Features 1 > Display)
- Assigning functions to the **PF** keys on the transceiver (See Transceiver Settings > Key Assignment)

Power-on Text

Power-on Text is the function to display characters when the transceiver is turned ON.
If **Power-on Text** is configured, the configured characters appear for 2 sec when the transceiver is turned ON.
If "Text" is configured in **Message Type**, the configured text appears.

Example:

Power-on Text = "Truck 8649"



If "%" is used in a string of text when "Unit ID" is configured in **Message Type**, "%" appears replaced with the Unit ID (Own) of the system configured in **Preset System Number**.


Example:

Unit ID (Own)/ NXDN = 60000
Power-on Text = "Taxi %%%%%%%%%"



Example:

Unit ID (Own) (NP-FIN-IN)/ DMR = 328-20-200
Power-on Text = "RSQ %%%-%%%-%%%"
(If Fleet Dialing Plan is enabled in a DMR Tier III Trunking system or S-Trunking system)




Note

- In a DMR system, if Fleet Dialing Plan is disabled, "%" appears replaced with the Unit ID (Own) of the system configured in **Preset System Number**.
- In a DMR Tier III Trunking system and S-Trunking system, if Fleet Dialing Plan is enabled, "%" appears replaced with the Number Prefix (NP), Fleet Individual Number (FIN) and Individual Number (IN) of the system configured in the DMR Tier III Trunking system or S-Trunking system.

When “Unit ID Name” is configured in **Message Type**, the string of the Unit ID Name (Own) of the system configured in **Preset System Number** appears. If no Unit ID Name (Own) of the system is configured in **Preset System Number**, nothing appears.

Example:

Unit ID Name (Own) = “Truck 3012”




If “%” is used in a string of text when “FleetSync ID” is configured in **Message Type**, “%” appears replaced with the Fleet (Own) and ID (Own) of the system configured in **Preset System Number**.

Example:

Fleet (Own) = 110

ID (Own) = 1911

Power-on Text = “NYPD %%%-%%%”



Note

- Pressing a key while the Power-on Text appears causes the Power-on Text to disappear.
- The transceiver prioritizes the display of Power-on Text even while transmitting a Power-on Status Message.

Configuration using KPG-D1/ D1N

- Configuring **Power-on Text** and **Message Type** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Power-on)
- Configuring **Preset System Number** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Power-on)

Sub-LCD Display

Sub-LCD Display is the function to display the transceiver information on the display while the transceiver is in the normal state.

Table 5-5 Sub-LCD Display

Configuration	Description
None	Nothing appears.
Zone Number	The zone number appears.
Channel Number	The channel number appears.
OST List Number	The OST List number appears.
Site Number	For an NXDN Trunking system and P25 Trunking system, the Site No. of the fixed site appears while Site Lock is enabled. For a DMR-based Trunking system, the Site ID of the fixed site appears while Site Lock is enabled. The Site No. and Site ID of the current site appear if the transceiver has acquired a control channel while Site Lock is disabled. The Site No. and Site ID do not appear if the transceiver does not acquire a control channel while Site Lock is disabled.
System Code	The System Code of the fixed system appears while Site Lock is enabled. The System Code of the current system appears if the transceiver has acquired a control channel while Site Lock is disabled. The System Code does not appear if the transceiver does not acquire a control channel while Site Lock is disabled.

Note

- Site Number can be used only in an NXDN Trunking system and DMR-based Trunking system.
- System Code can be used only in an NXDN Trunking system.

Configuration using KPG-D1/ D1N

Configuring **Sub-LCD Display** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)

Sub-LCD Display Priority

Sub-LCD Display Priority is the function to display the sub-display prioritizing the display contents configured in **Sub-LCD Display**.

Table 5-6 Sub-LCD Display Priority

Configuration	Description
High	The number display configured in Sub-LCD Display has the highest priority. If a function to display on the sub-display is activated while a function number configured in Sub-LCD Display appears on the sub-display, after the string of text corresponding to the function is displayed for 1 sec, the number display configured in Sub-LCD Display is restored. However, if a function to display on the sub-display is activated while Sub-LCD Display is configured as follows, the string of text corresponding to the function is displayed until the function is reset: • When "None" is configured in Sub-LCD Display • When "OST List Number" is configured in Sub-LCD Display and nothing appears on the sub-display, such as when the OST function is disabled or when the transceiver is on a digital channel
Low	The number display configured in Sub-LCD Display has the lowest priority. If a function to display on the sub-display is activated, the string of text corresponding to the function is displayed until the function is reset.

Configuration using KPG-D1/ D1N

Configuring **Sub-LCD Display Priority** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Display)

Clock Display

Clock Display is the function to display the clock on the display.

Configuration using KPG-D1/ D1N

Configuring **Clock Display** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Display)

5.12 Customizing a Displayed Text String (Display Customization)

Using KPG-D1/ D1N, this function can be used to change a string of text which appears on the LCD of the transceiver, such as Function Mode and Key Guide.

The string of text that appears on the LCD of the transceiver can be changed to the function names used in other models.

Configuration using KPG-D1/ D1N

Changing the string of text that appears on the LCD of the transceiver ( [See](#) Transceiver Settings > Display Customization)

5.13 Displaying a Bitmap Image When the Transceiver is Turned ON (Custom Start-up Screen)

Custom Start-up Screen is the function to display a bitmap image when the transceiver is turned ON. The image of a company name, logo, or simple message can be converted into bitmap image data and it can be displayed for 2 sec when the transceiver is turned ON. (Refer to [Turning the Transceiver ON](#).)

Bitmap images of the following sizes can be used:

Portable: 240 horizontal dots, 180 vertical dots

Mobile (KCH-19 (Basic Panel)): 422 horizontal dots, 154 vertical dots

Mobile (KCH-20R (Featured Panel)): 400 horizontal dots, 240 vertical dots

Mobile (KCH-21R (Handheld Control Head)): 240 horizontal dots, 180 vertical dots

An image with 65,536 colors can be displayed.

Configuration using KPG-D1/ D1N

Configuring **Custom Start-up Screen** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Power-on)

6.1 Tones that Sound When a User Operates the Transceiver or When the Transceiver Status Is Changed

The following are the tones that sound from the transceiver:

Table 6-1 Tone List

Tone	Description and Type	Remarks
Power-on Tone	Power-on Tone A Power-on Tone B	The volume levels of each tone can be configured using KPG-D1/ D1N.
Control Tone	Key Beep A Key Beep B Key Beep C Key-entry Error Tone Rollover Tone Stop Tone Password Authorization Tone Queue Tone Free System Ringback Mode Tone Ringer Tone Priority-channel Tone Scan Stop Tone Individual Call Tone Fleet Call Tone Group Call Tone Search Mode Tone Out of Range Tone In-service Tone Call Request Tone OTAP Reactivation Tone Call In Progress Tone Disconnect Indication Tone Key Load Alert Tone Transaction Confirmed Tone Bluetooth Find Device Mode Tone Bluetooth Connect Tone Bluetooth Disconnect Tone Complete Tone Playback End Tone Record Stopped Tone	
Warning Tone	Warning Tone A Warning Tone B Warning Tone C Battery Warning Tone TOT Pre-alert Tone PLL Unlock Tone Busy Tone Busy Tone 2 Timed Power-off Pre-alert Tone A Timed Power-off Pre-alert Tone B Timed Power-off Pre-alert Tone C Call Queue Tone System Busy Tone System Search Tone System Search End Tone System Select Tone Call Invalid Tone Invalid Dial Tone Not Authorized Tone	

Tone	Description and Type	Remarks
Warning Tone	No Reply Tone Delay Tone Intercept Tone Intercept Tone 2 Deny Tone Call Fail Tone Call Deny Tone Lone Worker Tone Group-registration Invalid Tone Group Subscription Invalid Indicator Tone Call Processing Tone Network Failure Tone A Network Failure Tone B Man-down Pre-alert Stationary Pre-alert Tone Motion Pre-alert Tone Key Fail Alert Tone Trunking Tone Invalid Dialing Entry Tone Ignore Encryption Switch Alert Tone Site Trunking Tone Bluetooth No Response Tone Bluetooth Connect Denied Tone Bluetooth Connect Invalid Tone Bluetooth No Service Tone Battery Level Tone Advanced GPS Report Error Tone Low SD Memory Tone Anomaly Detection Tone Anomaly Detection Release Tone	The volume levels of each tone can be configured using KPG-D1/ D1N.
Locator Tone	Emergency Locator Tone	
Sidetone	Proceed Tone VOX Proceed Tone PTT ID Sidetone	
Alert Tone	Special Alert Tone Transmit Clear Alert Tone Site Trunking Alert Ack Wait Enter Tone Emergency Indicator Alert Tone	
Volume Level Tone	Fixed Volume Key Tone Volume Key Tone	
Transmit Tone	Transpond Tone Stun-on Tone Stun-off Tone PTT Release Tone Background Tone	

Power-on Tone

A Power-on Tone sounds from the transceiver when the transceiver is turned ON.

The volume level of Power-on Tone can be configured using KPG-D1/ D1N. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 6-2 Power-on Tone

Function	Description
Power-on Tone A	This tone sounds from the transceiver when the transceiver is turned ON.
Power-on Tone B (Mobile only)	This tone sounds when the transceiver is turned ON by pressing and holding the Power switch while "Ignition & Switch" is configured in Ignition Sense Type . In this case, Timed Power-off is not activated.

Configuring a tone which sounds when the transceiver is turned ON (Power-on Tone)

The tone pattern (frequency and length) for Power-on Tone A emitted from the transceiver when the transceiver is turned ON can be configured using KPG-D1/ D1N. If the tone of the Power-on Tone varies from the transceiver from other manufacturer, this function is useful for configuring the tone to the same as that of the transceiver from other manufacturer.

The default for a Power-on Tone A is a frequency of 1480 Hz and a tone length of 500 ms. The tone length can be extended up to 1000 ms.

Configuration using KPG-D1/ D1N

Configuring **Power-on Tone** ( [See](#) Transceiver Settings > Special Tone)

Control Tone

A Control Tone sounds when a function is activated by a user operating the transceiver.

The volume level of Control Tone can be configured using KPG-D1/ D1N. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 6-3 Control Tone

Function	Description
Key Beep A	This tone sounds from the transceiver when a function is enabled by pressing a key.
Key Beep B	This tone sounds from the transceiver when a function is disabled by pressing a key.
Key Beep C	This tone sounds from the transceiver when Home Channel or Direct Channel is changed using the Home Channel Select key or Direct Channel Select key, or when the time in the transceiver is changed in Clock Adjustment Mode.
Key-entry Error Tone	This tone sounds from the transceiver when the operation activated by pressing a key is denied.
Rollover Tone	This tone sounds from the transceiver when the lowest zone or channel number is selected. Also, this tone sounds if the lowest list number is selected in various list modes, or if the smallest font or lowest value is selected while entering characters or code. (Refer to Rollover/End Stop .)
Stop Tone	This tone sounds from the transceiver if "End Stop" is configured in Rollover/End Stop . This tone sounds from the transceiver if the zone or channel number is decreased while the zone or channel having the lowest number is selected. Or, this tone sounds from the transceiver if the zone or channel number is increased while the zone or channel having the lowest number is selected. (Refer to Rollover/End Stop .)
Password Authorization Tone	This tone sounds from the transceiver if the entered password matches the password preconfigured for the transceiver.
Queue Tone	This tone sounds from the transceiver while the transceiver is searching with the Auto Telephone in an LTR Trunking system for an available RIC repeater to be connected. This tone sounds from the transceiver every 1 sec until an available RIC repeater to be connected is found or Auto Telephone is terminated if the transceiver cannot find an available RIC repeater within 60 sec.

Function	Description
Free System Ringback Mode Tone	This tone sounds from the transceiver when the transceiver enters Free System Ringback Mode in an LTR Trunking system.
Ringer Tone	This tone sounds from the transceiver when a repeater is temporarily available in Free System Ringback Mode in an LTR Trunking system.
Priority-channel Tone	This tone sounds from the transceiver when the scan is paused on a Priority-channel.
Scan Stop Tone	Pressing the Home Channel key or Direct Channel key during the scan pauses the scan, and the transceiver migrates to the Home Channel or Direct Channel. Also, pressing the Channel Recall key during the scan pauses the scan, and the transceiver migrates to the last called Zone-channel. This tone sounds from the transceiver at 30-sec intervals while the scan pauses.
Individual Call Tone	This tone sounds from the transceiver when the transceiver initiates a FleetSync Individual Call.
Fleet Call Tone	This tone sounds from the transceiver when the transceiver initiates a FleetSync Fleet Call.
Group Call Tone	This tone sounds from the transceiver when the transceiver initiates a FleetSync Group Call.
Search Mode Tone	This tone sounds from the transceiver when the transceiver initiates Forced Search in an NXDN Trunking system. This tone sounds from the transceiver when the transceiver initiates System Search in a P25 Trunking system. This tone sounds from the transceiver when the transceiver starts searching for the repeaters that can be synchronized in a DMR Conventional system.
Out of Range Tone	NXDN Conventional/ NXDN Site Roaming/ DMR Conventional/ DMR Site Roaming system: This tone sounds from the transceiver when the transceiver is outside the service area. NXDN Trunking/ DMR-based Trunking/ P25 Trunking system: This tone sounds from the transceiver when no available control channel has been acquired even after 10 sec (60 sec in a DMR-based Trunking system) have elapsed since the search for a control channel has started. (Refer to NXDN FUNC Out of Range Indicator, DMR FUNC Out of Range Indicator, P25 FUNC Out of Range Indicator)
In-service Tone	This tone sounds from the transceiver when an available control channel has been acquired after the transceiver has sounded an Out of Range Tone (1 beep) when it continuously fails to acquire a control channel in the NXDN Trunking, DMR-based Trunking, or P25 Trunking system.
Call Request Tone	NXDN Conventional/ NXDN Trunking/ DMR Conventional/ DMR-based Trunking/ P25 Trunking system: This tone sounds from the transceiver when the transceiver initiates an Individual Call, Group Call, or Telephone Call by pressing the PTT switch. NXDN Conventional/ DMR Conventional system: This tone sounds from the transceiver when the transceiver initiates an Individual Call (Individual Call Acknowledge Request) by pressing the PTT switch.
OTAP Reactivation Tone	This tone sounds from the transceiver when OTAP Reactivation completes.
Call In Progress Tone	This tone sounds from the transceiver if the transceiver initiates a Telephone Call, Individual Call (Individual Call Acknowledge Request), Individual Call (Message Trunked (Enhanced)), or Group Call (Message Trunked (Enhanced)) and the transceiver is available for communications.
Disconnect Indication Tone	This tone sounds from the transceiver if the transceiver terminates communications with a Telephone Call, Individual Call (Message Trunked (Enhanced)), or Group Call (Message Trunked (Enhanced)).
Key Load Alert Tone	This tone sounds from the transceiver when Key Data is written to the transceiver or when Key Data is deleted from the transceiver.
Transaction Confirmed Tone	In a DMR Conventional system, this tone sounds from the transceiver when the transceiver detects that no carrier is present after sending a Call Interrupt request message.
Bluetooth Find Device Mode Tone	This tone sounds from the transceiver when Bluetooth Find Device is executed in Bluetooth Device Mode and a Bluetooth-compatible device is searched.
Bluetooth Connect Tone	This tone sounds from the transceiver when the transceiver successfully connects to a Bluetooth-compatible device.
Bluetooth Disconnect Tone	This tone sounds from the transceiver when the connection to a Bluetooth-compatible device is disconnected.

Function	Description
Complete Tone	This tone sounds from the transceiver when the transmission successfully sends a Status Message, Short Message, GPS data or Paging Call by operating the keys on the transceiver.
Playback End Tone	This tone sounds from the transceiver when the audio data playback triggered by the Playback (Last Recording) key has ended.
Record Stopped Tone	This tone sounds from the transceiver when the transceiver exits Voice Memo Mode.

Warning Tone

Warning Tone is a tone that sounds from the transceiver before or when the transceiver is disabled to transmit, when the transceiver becomes unable to transmit, or when the transceiver attempts to transmit while the transceiver is unable to transmit.

The volume level of Warning Tone can be configured using KPG-D1/ D1N. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 6-4 Warning Tone

Function	Description
Warning Tone A	This tone sounds from the transceiver while an unprogrammed channel is selected. This tone sounds from the transceiver until the PTT switch is released if the transmission is terminated by the Time-out Timer , or if the transceiver cannot transmit. This tone sounds from the transceiver until the PTT switch is released if Busy Channel Lockout is activated in an Analog Conventional system, P25 Conventional system and NXDN Conventional system.
Warning Tone B	This tone sounds from the transceiver when the VOX transmission is terminated by Time-out Timer .
Warning Tone C	This tone sounds from the transceiver when the automatic transmission is terminated by Time-out Timer .
Battery Warning Tone (Portable only)	This tone sounds from the transceiver when the Battery voltage level drops to the adjusted reduced-voltage level. (Refer to Warning that the Battery Voltage Is Low (Battery Warning) .)
TOT Pre-alert Tone	This tone sounds from the transceiver when the transmit inhibit period configured in Time-out Timer is about to expire.
PLL Unlock Tone	This tone sounds from the transceiver when PLL is unlocked.
Busy Tone	This tone sounds from the transceiver if data cannot be sent by pressing the PTT switch since the channel is busy.
Busy Tone 2	This tone sounds from the transceiver if data communication is disabled since the channel is busy. This tone sounds from the transceiver when the transceiver receives a response message from the system that notifies of the busy state of the receiving transceiver in NXDN Trunking and DMR-based Trunking systems.
Timed Power-off Pre-alert Tone A (Mobile only)	This tone sounds from the transceiver 1 min before the time preconfigured in Timed Power-off .
Timed Power-off Pre-alert Tone B (Mobile only)	This tone sounds from the transceiver 10 sec before the time preconfigured in Timed Power-off .
Timed Power-off Pre-alert Tone C (Mobile only)	This tone sounds from the transceiver 2 sec before the time preconfigured in Timed Power-off .
Call Queue Tone	This tone sounds from the transceiver when the transceiver receives a response message from the system that indicates a queued state in an NXDN Trunking system, DMR-based Trunking system, or P25 Trunking system.
System Busy Tone	This tone sounds from the transceiver when the transceiver receives a response message from the system indicating that no traffic channel is available in an NXDN Trunking system or DMR-based Trunking system.
System Search Tone	This tone sounds from the transceiver when the transceiver initiates System Search and changes the system in an LTR Trunking system.

Function	Description
System Search End Tone	This tone sounds from the transceiver when there is no repeater that can connect by using System Search in an LTR Trunking system.
System Select Tone	This tone sounds from the transceiver when the transceiver finds an available system by using System Auto Select and registration is successful in an NXDN Trunking system. This tone sounds from the transceiver when the transceiver searches for the repeaters that can be synchronized and a synchronized Personality is found in a DMR Conventional system.
Call Invalid Tone	This tone sounds from the transceiver when the transceiver receives from the system a response message, such as a response message that service is disabled, in an NXDN Trunking system, DMR-based Trunking system, or P25 Trunking system.
Invalid Dial Tone	While sending a Telephone Call in a P25 Trunking system, this tone sounds from the transceiver when the transceiver receives from the system a response message that service is disabled (Reason Code: \$40 or \$42).
Not Authorized Tone	While sending a Telephone Call in a P25 Trunking system, this tone sounds from the transceiver when the transceiver receives from the system a response message that service is disabled (Reason Code: \$41).
No Reply Tone	This tone sounds from the transceiver when the transceiver receives a message from the system notifying that no response has been received from the receiving transceiver in an NXDN Trunking system, DMR-based Trunking system, or P25 Trunking system.
Call Fail Tone	This tone sounds from the transceiver when the transceiver receives no message from the system in an NXDN Trunking system, DMR-based Trunking system, or P25 Trunking system.
Call Deny Tone	P25 Conventional system: This tone sounds from the transceiver when a Registration Response - Denied is received while the Rekey Request key is pressed and held with the registration (CAI Data Registration) unsuccessful. This tone sounds from the transceiver while the Rekey Request key is pressed and held with CAI Data Registration denied. P25 Trunking system: This tone sounds from the transceiver if the transceiver receives a rejection response message from the target transceiver when sending an Individual Call. NXDN Conventional system: In an Individual Call (Individual Call Acknowledge Request), this tone sounds from the transceiver if a cancellation notification message is received from the receiving transceiver while waiting to receive a response from the receiving transceiver. NXDN Trunking system: In an Individual Call (Message Trunked (Enhanced)), this tone sounds from the transceiver if a cancellation notification message is received from the receiving transceiver while waiting to receive a response from the receiving transceiver. DMR-based Trunking system: In an Individual Call, this tone sounds from the transceiver if a cancellation notification message is received from the receiving transceiver while waiting to receive a response from the receiving transceiver.
Lone Worker Tone	This tone sounds from the transceiver when the amount of time configured in Lone Worker Interval elapses after the transceiver enters Lone Worker Mode.
Group-registration Invalid Tone	In an NXDN Trunking system, this tone sounds at 30-sec intervals from the transceiver upon receipt of a response message from the system indicating a failure in Group ID registration.
Group Subscription Invalid Indicator Tone	In a DMR-based Trunking system, this tone sounds at 30-sec intervals from the transceiver upon receipt of a response message from the system indicating a failure in Group ID registration although registration was successful.
Call Processing Tone	NXDN Trunking/ DMR-based Trunking/ P25 Trunking system: When the transceiver initiates an Individual Call or Group Call by pressing the PTT switch, this tone sounds from the transceiver while the PTT switch is pressed and held. However, when sending an Individual Call (Message Trunked (Enhanced)) in an NXDN Trunking system, the tone from the transceiver continues to sound even if the PTT switch is released. NXDN Conventional system: This tone sounds from the transceiver when the transceiver initiates an Individual Call (Individual Call Acknowledge Request) by pressing the PTT switch. The tone from the transceiver continues to sound even if the PTT switch is released.

Function	Description
Network Failure Tone A	In an NXDN Trunking system and DMR-based Trunking system, this tone sounds at 5-sec intervals from the transceiver while the transceiver is in Network Failure Mode.
Network Failure Tone B	In an NXDN Trunking system and DMR-based Trunking system, this tone sounds from the transceiver when the transceiver exits Network Failure Mode.
Man-down Pre-alert (Portable only)	After the transceiver is detected to be in a tilted state by using the Man-down Detection function, this tone sounds from the transceiver when the time configured in Man-down Pre-alert elapses.
Stationary Pre-alert Tone (Portable only)	After the transceiver is detected to be in a stationary state by using the Stationary Detection function, this tone sounds from the transceiver when the time configured in Stationary Pre-alert elapses.
Motion Pre-alert Tone (Portable only)	After the transceiver is detected to be in a vigorously moving state by using the Motion Detection function, this tone sounds from the transceiver when the time configured in Motion Pre-alert elapses.
Key Fail Alert Tone	Upon transmission using the Encryption function by means of AES/DES, this tone sounds from the transceiver if no SCM is installed in the transceiver, or if the SCM is disabled, or if no encryption key data corresponding to the Multi-key List Number is configured on the SCM.
Trunking Tone	In a DMR-based Trunking system, if the transceiver is migrating to an Alternate Zone-Channel, this tone sounds from the transceiver when the transceiver returns to the control channel of a DMR-based Trunking system from the Alternate Zone-Channel.
Invalid Dialing Entry Tone	In a DMR-based Trunking system, this tone sounds from the transceiver when the disabled Dialing Code is entered and then the [#] key, PTT switch, or Menu ([F1]) key is pressed.
Ignore Encryption Switch Alert Tone	This tone sounds from the transceiver when the PTT switch is pressed while the enabled (Secure) or disabled (Clear) state of Encryption in a P25 system differs from the configuration in Encryption (Clear, Secure or Select) for the channel or the Talkgroup ID List.
Site Trunking Tone	This tone sounds from the transceiver when the system enters Site Trunking Mode in a P25 Trunking system.
Bluetooth No Response Tone	This tone sounds from the transceiver if no response is received from a Bluetooth-compatible device when approximately 10 sec elapses after pairing with the Bluetooth-compatible device is started.
Bluetooth Connect Denied Tone	This tone sounds from the transceiver if pairing is denied by a Bluetooth-compatible device after pairing is started.
Bluetooth Connect Invalid Tone	This tone sounds from the transceiver if the PIN Code or Fixed PIN entered in the transceiver is detected to be different from the PIN Code entered in a Bluetooth-compatible device after pairing with the Bluetooth-compatible device is started.
Bluetooth No Service Tone	This tone sounds from the transceiver if pairing occurs with a Bluetooth-compatible device which is not compatible with the transceiver.
Battery Level Tone	This tone sounds from the transceiver according to the battery status.
Delay Tone	This tone sounds from the transceiver between the 3rd and 6th attempts to access a repeater by pressing the PTT switch in an LTR Trunking system, in order to notify a user that the connection to the repeater has been delayed.
Intercept Tone	This tone sounds from the transceiver when the transceiver accesses a repeater by pressing the PTT switch in an LTR Trunking system, and a user fails to connect to the repeater.
Intercept Tone 2	This tone sounds from the transceiver when the PF key to which Call 1 to Call 6 is assigned is pressed or when the repeater is accessed for automatic transmission, such as of a Status Message, and the connection to the repeater fails in an LTR Trunking system.
Deny Tone	This tone sounds from the transceiver if the transceiver cannot connect to an available RIC repeater within 60 sec by using Auto Telephone in an LTR Trunking system.
Advanced GPS Report Error Tone	In an NXDN Trunking system, this tone sounds from the transceiver at 30-sec intervals when the channel for GPS data transmission becomes unavailable.
Low SD Memory Tone	This tone sounds from the transceiver when the available capacity on a microSD card becomes 10 % or less.
Anomaly Detection Tone	This tone sounds from the transceiver when the transceiver detects a transmission error by using the Transmit Error function and the transceiver displays the "Hot! Low Power" warning display. In a DMR system, the Transmit Error function cannot be used.
Anomaly Detection Release Tone	This tone sounds from the transceiver when the transmission error from the Transmit Error function is resolved and the "Hot! Low Power" warning display disappears from the transceiver.

Locator Tone

Locator Tone is the tone sounding from the transceiver before the transceiver starts automatic transmission in Emergency Mode, and after the transceiver ends automatic transmission in Emergency Mode.

The volume level of Locator Tone can be configured using KPG-D1/ D1N. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 6-5 Locator Tone

Function	Description
Emergency Locator Tone	A Locator Tone 1 sounds from the transceiver before the transceiver starts automatic transmission in Emergency Mode. A Locator Tone 2 sounds from the transceiver after the transceiver ends automatic transmission in Emergency Mode. In Emergency Mode, the transceiver repeats an automatic communication only the number of times configured in Emergency Cycle.

Sidetone

Sidetone sounds from the transceiver when the transceiver can communicate or the transceiver completes a transmission.

The volume level of Sidetone can be configured using KPG-D1/ D1N. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 6-6 Sidetone

Function	Description
Proceed Tone	This tone sounds from the transceiver when a connection to a repeater completes by pressing the PTT switch in a P25 Trunking system, NXDN Trunking system, or DMR-based Trunking system. In a P25 Conventional system, NXDN Conventional system, and DMR Conventional system, this tone is used to prevent missing the beginning of the audio to be transmitted. This tone can be used with Proceed Tone Delay Time at the same time.
VOX Proceed Tone	This tone sounds from the transceiver when the transceiver starts transmitting by using the VOX function.
PTT ID Sidetone	This tone sounds from the transceiver when the transceiver starts transmitting a FleetSync PTT ID and MDC-1200 PTT ID.

Alert Tone

Alert Tone sounds from the transceiver when the transceiver receives various types of calls, Status Message, or Short Message. (Refer to [Tones that Sound When the Transceiver Receives a Call](#).)

The volume level of Alert Tone can be configured using KPG-D1/ D1N. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 6-7 Alert Tone

Function	Description
Special Alert Tone	This tone sounds from the transceiver when the transceiver receives various types of calls, Status Message, or Short Message. A maximum of 8 types of tones can be arbitrarily configured or changed. (Refer to Configuring the Alert Tone (Special Alert Tone) .)
Transmit Clear Alert Tone	This tone sounds from the transceiver when the transceiver starts transmitting without encrypting audio data.
Site Trunking Alert	This tone sounds from the transceiver when the transceiver initiates a site trunking in a P25 Trunking system.
Ack Wait Enter Tone	This tone sounds from the transceiver when a Response Packet is received from the system when sending a P25 Rekey Request in a P25 system.
Emergency Indicator Alert Tone	This tone sounds from the transceiver when the transceiver receives an Emergency message in a P25 system.

Volume Level Tone

Volume Level Tone sounds from the transceiver when the volume level is changed.

Table 6-8 Volume Level Tone

Function	Description
Fixed Volume Key Tone	This tone sounds from the transceiver when the volume level is changed by using the Fixed Volume key.
Volume Key Tone (Mobile only)	This tone sounds from the transceiver when the volume level is changed by pressing the Volume Up key or Volume Down key.

Transmit Tone

Transmit Tone is a tone sent to the communicating party.

Table 6-9 Transmit Tone

Function	Description
Transpond Tone	This tone is sent to the other transceiver after receiving a call by 2-tone or DTMF code. This tone is sent to the other transceiver after receiving a call in an LTR Trunking system.
Stun-on Tone	This tone is sent to the other transceiver after receiving a Stun code.
Stun-off Tone	This tone is sent to the other transceiver after receiving a Revive code while the transceiver is in the Stun state.
PTT Release Tone	This tone is sent to the other transceiver when the PTT switch is pressed to send and then released after the call ends.
Background Tone	This tone is sent to the other transceiver every 1 sec during voice transmission in Emergency Mode.

6.2 Tones that Sound When the Transceiver Receives a Call

An Alert Tone sounds from the transceiver such as when the transceiver receives a call using an Individual Call or a Group Call, a Status Message, or a Short Message and notifies the user of the reception.

The Alert Tone pattern can be configured by selecting from 8 types of tones configured in **Special Alert Tone**. (Refer to **Configuring the Alert Tone (Special Alert Tone)**.)

Following are the types of Alert Tone.

Table 6-10 Alert Tone

P25 Conventional	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an Individual Call.
Alert Tone (Group Call)	This tone sounds from the transceiver when the transceiver receives a Group Call.
Alert Tone (All Group Call)	This tone sounds from the transceiver when the transceiver receives an All Group Call.
Alert Tone (Text Message Call)	This tone sounds from the transceiver when the transceiver receives a Text Message Call.
Alert Tone (Emergency Response)	If Alert Tone is enabled for Emergency Status Response , this tone sounds from the transceiver when the transceiver receives an Emergency Call.
P25 Trunking	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an Individual Call.
Alert Tone (Individual Call Incoming)	If Automatic Response is disabled, this tone sounds from the transceiver when the transceiver receives an Individual Call.
Alert Tone (Group Call)	This tone sounds from the transceiver when the transceiver receives a Group Call.
Alert Tone (System Call)	This tone sounds from the transceiver when the transceiver receives a System Call.
Alert Tone (Paging Call)	This tone sounds from the transceiver when the transceiver receives a Paging Call.
Alert Tone (Telephone Call)	This tone sounds from the transceiver when the transceiver receives a Telephone Call.
Alert Tone (Emergency Response)	If Alert Tone is enabled for Emergency Status Response , this tone sounds from the transceiver when the transceiver receives an Emergency Call.
NXDN Conventional	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an Individual Call.
Alert Tone (Individual Call Incoming)	If Automatic Response is disabled, this tone sounds from the transceiver when the transceiver receives an Individual Call (Individual Call Acknowledge Request).
Alert Tone (Group Call)	This tone sounds from the transceiver when the transceiver receives a Group Call.
Alert Tone (Paging Call)	This tone sounds from the transceiver when the transceiver receives a Paging Call.
Alert Tone (Status/Short Message Call)	This tone sounds from the transceiver when the transceiver receives a Status Message or a Short Message.
Alert Tone (Emergency Response)	If Alert Tone is enabled for Emergency Status Response , this tone sounds from the transceiver when the transceiver receives an Emergency Call.
Alert Tone (Task Request)	This tone sounds from the transceiver when the transceiver receives a Task Request message.

DMR Conventional	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an Individual Call.
Alert Tone (Group Call)	This tone sounds from the transceiver when the transceiver receives a Group Call.
Alert Tone (Broadcast Group Call)	This tone sounds from the transceiver when the transceiver receives a Broadcast Group Call.
Alert Tone (Paging Call)	This tone sounds from the transceiver when the transceiver receives a Paging Call.
Alert Tone (Status/ Short Message Call)	This tone sounds from the transceiver when the transceiver receives a Status Call/ Short Message Call.
Alert Tone (Emergency Response)	This tone sounds from the transceiver when the transceiver receives an Emergency Status.
Alert Tone (Task Request)	This tone sounds from the transceiver when the transceiver receives a Task Request message.
NXDN Trunking	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an Individual Call in an NXDN Trunking system.
Alert Tone (Individual Call Incoming)	If Automatic Response is disabled, this tone sounds from the transceiver when the transceiver receives an Individual Call (Message Trunked (Enhanced)).
Alert Tone (Telephone Individual Call)	This tone sounds from the transceiver when the transceiver receives a Telephone Individual Call in an NXDN Trunking system.
Alert Tone (Conference Group Call)	This tone sounds from the transceiver when the transceiver receives a Conference Group Call in an NXDN Trunking system.
Alert Tone (Broadcast Group Call)	This tone sounds from the transceiver when the transceiver receives a Broadcast Group Call in an NXDN Trunking system.
Alert Tone (Paging Call)	This tone sounds from the transceiver when the transceiver receives a Paging Call in an NXDN Trunking system.
Alert Tone (Telephone Group Call)	This tone sounds from the transceiver when the transceiver receives a Group Call from a telephone in an NXDN Trunking system.
Alert Tone (Status/Short Message Call)	This tone sounds from the transceiver when the transceiver receives a Status Message or a Short Message.
Alert Tone (Emergency Response)	If Alert Tone is enabled for Emergency Status Response , this tone sounds from the transceiver when the transceiver receives an Emergency Call.
Alert Tone (Task Request)	This tone sounds from the transceiver when the transceiver receives a Task Request message.

DMR-based Trunking	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an Individual Call in a DMR-based Trunking system.
Alert Tone (Individual Call Incoming)	This tone sounds from the transceiver when the transceiver receives an Individual Call (FOACSU behavior).
Alert Tone (Telephone Individual Call)	This tone sounds from the transceiver when the transceiver receives a Telephone Individual Call in a DMR-based Trunking system.
Alert Tone (Conference Group Call)	This tone sounds from the transceiver when the transceiver receives a Conference Group Call in a DMR-based Trunking system.
Alert Tone (Broadcast Group Call)	This tone sounds from the transceiver when the transceiver receives a Broadcast Group Call in a DMR-based Trunking system.
Alert Tone (Telephone Group Call)	This tone sounds from the transceiver when the transceiver receives a Group Call from a telephone in a DMR-based Trunking system.
Alert Tone (Status/Short Message Call)	This tone sounds from the transceiver when the transceiver receives a Status Message or a Short Message.
Alert Tone (Emergency Response)	If Alert Tone is enabled for Emergency Status Response , this tone sounds from the transceiver when the transceiver receives an Emergency Call.
Alert Tone (Task Request)	This tone sounds from the transceiver when the transceiver receives a Task Request message.
DTMF	
Alert Tone	This tone sounds from the transceiver when the transceiver receives a call using a DTMF code.
2-tone	
Alert Tone (Analog/ Digital)	This tone sounds from the transceiver when the transceiver receives a call using a 2-tone code.
MDC-1200	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives an MDC-1200 Individual Call.
Alert Tone (Group Call)	This tone sounds from the transceiver when the transceiver receives an MDC-1200 Group Call.
Alert Tone (Fleet Call)	This tone sounds from the transceiver when the transceiver receives an MDC-1200 Fleet Call.
Alert Tone (All Call)	This tone sounds from the transceiver when the transceiver receives an MDC-1200 All Call.
FleetSync	
Alert Tone (Individual Call)	This tone sounds from the transceiver when the transceiver receives a FleetSync Individual Call.
Alert Tone (Other Selective Calls)	This tone sounds from the transceiver when the transceiver receives a FleetSync Group Call, FleetSync Fleet Call, FleetSync Supervisor Call or FleetSync Broadcast Call.
Alert Tone (Paging Call)	This tone sounds from the transceiver when the transceiver receives a FleetSync Paging Call.
Alert Tone (Status/Short Message Call)	This tone sounds from the transceiver when the transceiver receives a FleetSync Status/Short Message Call.
Alert Tone (Emergency Response)	If Alert Tone is enabled for Emergency Status Response , this tone sounds from the transceiver when the transceiver receives a FleetSync Emergency Call.

Configuration using KPG-D1/ D1N

- Configuring various **Alert Tones** (P25 Conventional) ( [See](#) Transceiver Settings > P25 > P25 Information > Conventional > Alert Tone)
- Configuring various **Alert Tones** (P25 Trunking) ( [See](#) Transceiver Settings > P25 > P25 Information > Trunking > Alert Tone)
- Configuring various **Alert Tones** (NXDN Conventional) ( [See](#) Transceiver Settings > NXDN > NXDN Information > Conventional > Alert Tone)
- Configuring various **Alert Tones** (DMR Conventional) ( [See](#) Transceiver Settings > DMR > DMR Information > Conventional > Alert Tone)
- Configuring various **Alert Tones** (NXDN Trunking) ( [See](#) Transceiver Settings > NXDN > NXDN Information > Trunking > Alert Tone)
- Configuring various **Alert Tones** (DMR-based Trunking) ( [See](#) Transceiver Settings > DMR > DMR Information > Trunking > Alert Tone)
- Configuring various **Alert Tones** (DTMF) ( [See](#) Transceiver Settings > DTMF > Decode)
- Configuring various **Alert Tones** (2-tone (Analog)) ( [See](#) Transceiver Settings > 2-tone > 2-tone (Analog) > Decode (2-tone 1 to 4))
- Configuring various **Alert Tones** (2-tone (Digital)) ( [See](#) Transceiver Settings > 2-tone > 2-tone (Digital) > Decode (2-tone 1 to 4))
- Configuring various **Alert Tones** (2-tone (MDC-1200)) ( [See](#) Transceiver Settings > MDC-1200 > MDC-1200 Information > General > Call Alert > Alert Tone)
- Configuring various **Alert Tones** (2-tone (FleetSync)) ( [See](#) Transceiver Settings > FleetSync > FleetSync Information > General > Alert Tone)

Configuring the Alert Tone (Special Alert Tone)

Special Alert Tone is the alert tone pattern when receiving a call with the optional signaling. An Alert Tone that is suitable for a user's environment can be selected.

Special Alert Tone can be used to select an Alert Tone from 8 patterns of Alert Tones. An Alert Tone pattern consists of 16 tones.

Special Alert Tone can be configured by using KPG-D1/ D1N. The following table shows the configuration items for the Autodial List.

Table 6-11 Special Alert Tone

Special Alert Tone	Description
Frequency	The tone frequency can be configured. A frequency between 400 Hz and 2500 Hz can be configured in steps of 10 Hz. Gap can be configured if "No Tone" is selected.
Length	The tone length can be configured. A tone length between 10 ms and 2500 ms can be configured in steps of 10 ms. No tone sounds if 0 ms is configured.
Cycle	This function can be used to configure the number of times for the Alert Tone that sounds from the transceiver. A number from 1 to 255 can be configured for the number of times. The Alert Tone sounds from the transceiver until it is manually stopped if "Infinite" is configured. If it is intended for the Alert Tone to sound multiple times, the Alert Tone does not sound from the transceiver while the transceiver unmutes the speaker. Or, if the matching state of Optional Signaling is reset, Alert Tone will also be disabled.
Interval	This function can be used to configure the timing to repeat the Alert Tone that sounds from the transceiver. A time between 0 s and 255 s can be configured in steps of 1 s.

Configuration using KPG-D1/ D1N

Configuring **Special Alert Tone** ( See Transceiver Settings > Special Tone > Special Alert Tone)

6.3 Tones that Sound When the Communication Starts/ Ends

These tones sound when the communication starts or ends and notifies the user of it.

Using Sound to Notify the Timing to Start Communications (PTT Proceed Tone)

PTT Proceed Tone is the tone that sounds from the transceiver when the transceiver becomes available by a user pressing the **PTT** switch.

In an LTR Trunking system, P25 Trunking system, NXDN Trunking system, and DMR-based Trunking system, a user needs to start speaking when the repeater becomes available after pressing the **PTT** switch. Since this duration is not always the same, it is difficult for a user to know when to start speaking after pressing the **PTT** switch. In this case, if a user starts speaking when a PTT Proceed Tone (3 beeps) sounds from the transceiver, communication can be initiated without losing the beginning of a call.

In an Analog Conventional system, P25 Conventional system, NXDN Conventional system, and DMR Conventional system, the PTT Proceed Tone is used to delay the start of a voice call by the transmitting transceiver when reception takes time, such as when the receiving transceiver is scanning or when Battery Saver is used.

A PTT Proceed Tone (3 beeps) sounds from the transceiver when the length of time configured in **Proceed Tone Delay Time** elapses after the transceiver starts transmission and enters the enabled state to modulate the audio signals.

Note

- The transceiver does not transmit audio signals until the PTT Proceed Tone (3 beeps) stops sounding even if the transceiver transmits upon pressing the **PTT** switch.

Configuration using KPG-D1/ D1N

- Configuring **PTT Proceed Tone (NXDN Trunking)** to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > General)
- Configuring **PTT Proceed Tone (DMR-based Trunking)** to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > General)
- Configuring **PTT Proceed Tone (Personality) (P25 Trunking)** to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personality > P25 Trunking)
- Configuring **PTT Proceed Tone (Channel Edit) (P25 Trunking)** to be enabled or disabled ( [See](#) Transceiver Settings > Zone/Channel > Channel Edit > P25 Trunking)
- Configuring **PTT Proceed Tone (Conventional)** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > PTT Proceed Tone)
- Configuring **PTT Proceed Tone (LTR)** to be enabled or disabled ( [See](#) Transceiver Settings > LTR > PTT Proceed Tone)
- Configuring **Proceed Tone Delay Time** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > PTT Proceed Tone)

Using Sound to Notify the Other Party that the Communication Ends (PTT Release Tone)

PTT Release Tone is the function to notify the receiving party by audible tone that a communication ended by releasing the **PTT** switch when the communication ends. By using this function, the timing to transmit next is easily recognized because the end of the call on the target party can be notified by an audible tone.

The transceiver transmits the PTT Release Tone (1 beep) and then ends the actual transmission when the call finishes by releasing the **PTT** switch.

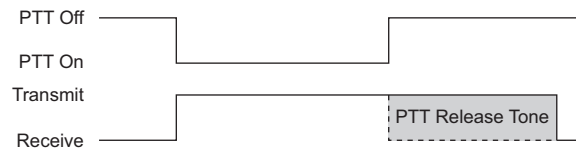


Figure 6-1 PTT Release Tone

The volume level of PTT Release Tone can be configured in **Transmit Tone Level**.

Configuration of PTT Release Tone in an LTR Trunking system

In an LTR Trunking system, the enabling and disabling of **PTT Release Tone** when transmitting a Dispatch ID and the enabling and disabling of **PTT Release Tone** when transmitting a Telephone ID can each be configured. This can be configured individually in order to avoid double beeping when using a Telephone ID, since some repeaters have a function similar to Telephone ID.

Note

- If EOT for DTMF or MDC-1200 is configured, the PTT Release Tone is sent after the EOT is sent. If EOT for FleetSync is configured, a PTT Release Tone is sent after the EOT is sent.

Configuration using KPG-D1/ D1N

- Configuring **PTT Release Tone (NXDN Trunking)** to be enabled or disabled ([See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > General)
- Configuring **PTT Release Tone (Personality) (P25 Trunking)** to be enabled or disabled ([See](#) Transceiver Settings > Personal > Personality > P25 Trunking)
- Configuring **PTT Release Tone (Channel Edit) (P25 Trunking)** to be enabled or disabled ([See](#) Transceiver Settings > Zone/Channel > Channel Edit > P25 Trunking)
- Configuring **PTT Release Tone (Conventional)** to be enabled or disabled ([See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional)
- Configuring **PTT Release Tone (LTR)** to be enabled or disabled ([See](#) Transceiver Settings > LTR > PTT Release Tone)
- Configuring **Transmit Tone Level** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Sound)

6.4 Functions Related to the Volume Configuration

The following functions are relevant to the volume configuration.

- Minimum Volume
- Maximum Volume
- Tone Volume Offset
- Tone Volume
- Selectable Tone Level
- Speaker Attenuation
- External Speaker 4W
- Noise Blanker (Analog)

Configuring the Minimum Volume Level (Minimum Volume)

Minimum Volume varies depending on the configuration in **Minimum Volume Type**.

- If “Preset” is configured in **Minimum Volume Type** (KCH-19 (Basic Panel)/ KCH-21R (Handheld Control Head) only):

Minimum Volume is the function to enable the volume level configured in **Minimum Volume** to be applied when the transceiver is turned ON again after the volume level is turned fully down and the transceiver is turned OFF.

- If “Lowest Limit” is configured in **Minimum Volume Type**:

Minimum Volume is the function to maintain an audible volume level even if the volume level is turned down.

The resulting audio volume prevents the user from failing to hear received audio even if the volume level is erroneously turned down fully. Turning up the volume causes the volume level to be increased from the audio level configured in **Minimum Volume**. If **Minimum Volume** is not configured, turning the volume level fully down will result in the audio being inaudible.

Configuration using KPG-D1/ D1N

- Configuring **Minimum Volume** ( See Transceiver Settings > Optional Features > Optional Features 1 > Sound > Audio Volume)
- Configuring **Minimum Volume Type** ( See Transceiver Settings > Optional Features > Optional Features 1 > Sound > Audio Volume)

Configuring the Maximum Volume Level (Maximum Volume)

Maximum Volume is the function to limit the volume level from exceeding the configured volume level even if the volume control is turned up.

This prevents a user from discomfort caused by an excessive volume level when wearing a headset.

Configuration using KPG-D1/ D1N

Configuring **Maximum Volume** ( See Transceiver Settings > Optional Features > Optional Features 1 > Sound > Audio Volume)

Configuring the Offset Value for Volume Level (Tone Volume Offset)

Tone Volume Offset is the function to adjust how much the standard tone volume level can be increased or decreased from the fixed volume position. This function can be used to adjust the volume level of a tone depending on the situation.

Configuration using KPG-D1/ D1N

Configuring **Tone Volume Offset** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Sound > Tone Volume)

Configuring the Volume Level of Various Tones (Tone Volume)

Tone Volume is the function to adjust the volume level of various tones.

This function can be used to maintain the volume level of the tones at a constant level depending on the situation or mute tones.

Tone Volume for the following tones can be configured using KPG-D1/ D1N:

- Power-on Tone
- Control Tone
- Warning Tone
- Alert Tone
- Sidetone
- Locator Tone

The following are the types of **Tone Volume** that can be configured:

Table 6-12 Available Tone Volume

Tone Volume	Description
Current	The Tone Volume varies in conjunction with the current volume level.
1 to 31	The tone sounds from the transceiver with a fixed tone volume. Higher values result in greater volume.
Off	The tone does not sound from the transceiver.
Selectable	The tone volume varies in conjunction with the Fixed Volume key. (Refer to Changing the Tone Volume Level with a Single Touch (Selectable Tone Level) .)

Configuration using KPG-D1/ D1N

Configuring **Tone Volume** of each tone ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Sound > Tone Volume)

Changing the Tone Volume Level with a Single Touch (Selectable Tone Level)

Selectable Tone Level is the function to enable the Tone Volume to be changed by using a **PF** key.

Pressing the **Fixed Volume** key causes the volume level to be changed to **Low Volume Level (Fixed Volume)** or **High Volume Level (Fixed Volume)** configured using KPG-D1/ D1N.

Or, pressing the **Menu** key to enter Menu Mode and then selecting "Fixed Volume" enables Tone Volume to be changed. (Refer to [Using Menu Mode](#).)

Operating the transceiver

1 Press the **Fixed Volume** key.

The tone volume switches in the following order: Low Volume Level (Fixed Volume) → High Volume Level (Fixed Volume) → Off → Low Volume Level (Fixed Volume) ...

2 Press the **Home** ([]) key to exit the mode.

If Menu Mode is entered by using the **Menu** key, pressing and holding the **Home** ([]) key restores Menu Mode.

Configuration using KPG-D1/ D1N

- Configuring **Low Volume Level (Fixed Volume)** and **High Volume Level (Fixed Volume)** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Sound > Tone Volume)
- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

Temporarily Reducing the Volume Level of the Speaker (Speaker Attenuation)

Speaker Attenuation is the function to temporarily reduce the volume levels of the speaker microphone, the speaker of the transceiver, and the Bluetooth speaker.

This function can be used while the transceiver is in use in a quiet place. This function is normally activated and the transceiver can pause **Speaker Attenuation** only if making an important call, such as an emergency call.

Pressing the **Speaker Attenuation** key toggles **Speaker Attenuation** between activated and deactivated.

Operating the transceiver

● Activating Speaker Attenuation

Press the **Speaker Attenuation** key while the Speaker Attenuation is deactivated.

Speaker Attenuation is activated and then the volume level will be decreased by approximately 10 dB.

● Deactivating Speaker Attenuation

Press the **Speaker Attenuation** key while the Speaker Attenuation is activated.

Speaker Attenuation is deactivated and then the volume level will restore to the previous level.

Note

- The status of **Speaker Attenuation** is retained even if the speaker microphone is removed while **Speaker Attenuation** is activated.

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the speaker microphone ( [See](#) Transceiver Settings > Key Assignment)

Reducing the Audio Output to the External Speaker (External Speaker 4W)

Supported Models: Mobile (NX-5600H/ NX-5700H/ NX-5800H only)

External Speaker 4W is the function to reduce the audio output to an external speaker of the High Power model (NX-5600H/ NX-5700H/ NX-5800H). This function is used such as when the volume of an external speaker is too loud and volume control is difficult.

If **External Speaker 4W** is enabled, the audio output is lowered from 12 W to 4 W.

Note

- **External Speaker 4W** cannot be configured for anything other than the High Power model (NX-5600H/ NX-5700H/ NX-5800H).
- **External Speaker 4W** can be configured in KPG-D1/ D1N only.

Configuration using KPG-D1/ D1N

Configuring **External Speaker 4W** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Sound > Audio Volume)

Configuring Whether or Not to Reduce the Noise (Noise Blanker (Analog))

Supported Models: Mobile (NX-5600H only)

Noise Blanker (Analog) allows you to reduce pulse noise such as ignition noise of a vehicle when the transceiver is receiving an analog channel, if this function is enabled.

Note

- The Noise Blanker function does not function when the transceiver is receiving a digital channel.
- **Noise Blanker (Analog)** cannot be configured for anything other than NX-5600H.
- **Noise Blanker (Analog)** can be configured in KPG-D1/ D1N only.


Configuration using KPG-D1/ D1N

Configuring **Noise Blanker (Analog)** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Sound)

Notifying of the Transmit Error by the Display and a Tone

Supported Models: Mobile (NX-5600H/ NX-5700H/ NX-5800H only)

The transceiver reduces the transmission power and continues transmission if the transceiver detects an error during voice communication. In this case, the “Hot! Low Power” warning appears on the display of the transceiver, and an Anomaly Detection Tone sounds from the transceiver. While the **PTT** switch is being pressed, or during voice communication using VOX, the warning display continues to display.

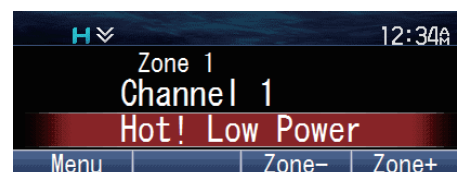

While an error is detected during voice communication, the transceiver reduces the transmission power to the following:

- High Power: 10 W
- Medium Power: 5 W
- Low Power: 2 W

If a transmission error is resolved while the error is detected during voice communication, the transmission power is restored to the power configured by using the FPU and the transceiver continues voice communication. In this case, the “Hot! Low Power” warning displayed on the display of the transceiver disappears, and an Anomaly Detection Release Tone sounds from the transceiver. If the **PTT** switch is released or voice communication using VOX ends while an error is detected during voice communication, the “Hot! Low Power” warning displayed on the display of the transceiver disappears. In this case, an Anomaly Detection Release Tone does not sound.

Note

- This function functions only in voice communication by using the **PTT** switch and VOX. This function does not function in a transmission by using a PC command, Data transmission, and Ack transmission, etc.
- In Surveillance Mode, although a warning display occurs, a warning tone such as an Anomaly Detection Tone and Anomaly Detection Release Tone does not sound.
- This function is disabled while the transceiver is under the following states:
 - Emergency Mode (Silent)
 - Remote Monitor

6.5 Using the Transceiver as a Megaphone (Public Address)

Supported Models: Mobile

Public Address enables the transceiver to be used in place of a megaphone.

Pressing and holding the **PTT** switch while **Public Address** is enabled causes the audio spoken into the microphone to be emitted from the external speaker for Public Address that is connected to the rear panel of the transceiver.

Operating the transceiver

● Enabling the Public Address

Press the **Public Address** key while Public Address is disabled.


Public Address is enabled, and then the "📢" icon appears.



● Disabling the Public Address

Press the **Public Address** key while Public Address is enabled.

Public Address is disabled, and then the "📢" icon disappears.

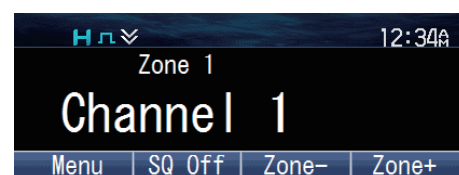

Note

- Pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the status of **Public Address** can be toggled between enabled and disabled by selecting "Public Address". (Refer to [Using Menu Mode](#).)
- Public Address** is automatically disabled if the channel is changed.
- To use Public Address, an optional KAP-2 and external speaker for Public Address are required.
- In an NXDN Trunking system (Message Trunked (Enhanced)), **Public Address** is disabled when the reception of a call is initiated by using a traffic channel, such as an Individual Call, Group Call, Broadcast Group Call, or Telephone Call. On the other hand, for Data Call, **Public Address** will not be disabled even if the transceiver receives a call.
- In a P25 Trunking system, **Public Address** is disabled if an Individual Call, Paging Call or Telephone Call is received.
- In a DMR-based Trunking system, **Public Address** is disabled when the reception of the call is initiated by using a traffic channel for a call such as an Individual Call, Group Call, Broadcast Group Call, or Telephone Call. On the other hand, for Data Call, **Public Address** will not be disabled even if the transceiver receives a call.
- Public Address** is disabled if a zone or channel is changed.
- In an NXDN Conventional system, if an Individual Call ACK request message is received when **Automatic Response** is disabled, **Public Address** is disabled.
- If **Public Address** is used by operating the **PTT** switch or External PTT (Voice) port, the configuration of **Modulation Line** (MI, MI2, DI) applies to the configuration of Mic Line. However, the Mic Lines of MI2 and DI cannot be used at the same time. Also, if **Public Address** is used by operating the External PTT (PA) port, MI2 Line is used as the microphone input line.
- If a Bluetooth-compatible device connecting by Headset Profile exists, the Mic Line of the Bluetooth-compatible device is enabled. Therefore, if audio is inputted into the Mic Line of the Bluetooth-compatible device by operating one of the **PTT** switch, External PTT (Voice) port, External PTT (PA) port, or the **PTT** switch of the Bluetooth-compatible device while **Public Address** is enabled, audio is emitted from the transceiver regardless of the configuration of **Bluetooth Speaker**.
- While audio is emitted from an external speaker by pressing the **PTT** switch when **Public Address** is enabled, only a signal of P25 Radio Inhibit/ Uninhibit and P25 Radio Check can be received.

- Even if **Public Address** is enabled and the **PTT** switch is pressed while Dropout Delay Time or Dwell Time of Scan is counting down, the timer is not extended.
- If **Public Address** is enabled and the **PTT** switch is pressed while the **Auto Reset Timer** of each call is counting down, the **Auto Reset Timer** extends while the **PTT** switch is pressed and held.

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

About the Speaker to Emit Audio

While **Public Address** is enabled, the speaker to emit audio when the **PTT** switch is pressed and the speaker to emit audio when an audio signal is received with the **PTT** switch released are as follows:

Table 6-13 Speaker to Emit Audio When Public Address Is Used (Other Than NX-5600H/ NX-5700H/ NX-5800H)

Connection Status of KES-5/ KES-5A	Connection Status of KES-3	Speaker to Emit Audio	
		When the PTT Switch Is Pressed	When an Audio Signal Is Received with the PTT Switch Released
Connected via KAP-2 (4-5 Pin Short)	Connected	KES-5/ KES-5A	KES-3 or the internal speaker ^{*1}
	Disconnected	KES-5/ KES-5A	Internal Speaker
Connected via KAP-2 (5-6 Pin Short)	Connected	KES-5/ KES-5A	KES-5/ KES-5A
	Disconnected	KES-5/ KES-5A	KES-5/ KES-5A
Disconnected	Connected	KES-3	KES-3 or the internal speaker ^{*1}
	Disconnected	KCH-19 (Basic Panel)/ KCH-20R (Featured Panel): Internal Speaker KCH-21R (Handheld Control Head): No speaker to emit audio	Internal Speaker

^{*1} Depends on the configuration in External Speaker.

Table 6-14 Speaker to Emit Audio When Public Address Is Used (NX-5600H/ NX-5700H/ NX-5800H)

External Speaker Configuration	Speaker to Emit Audio When the PTT Switch Is Pressed	Speaker to Emit an Audio Signal Received When the PTT Switch Is Released
Off	KES-5/ KES-5A (7-8 Pin (Molex 9 Pin ^{*1}) connection)	Internal Speaker
On	KES-5/ KES-5A (7-8 Pin (Molex 9 Pin ^{*1}) connection)	KES-5/ KES-5A (2-6 Pin (Molex 9 Pin ^{*1}) connection)
Internal + External	KES-5/ KES-5A (7-8 Pin (Molex 9 Pin ^{*1}) connection)	Internal Speaker + KES-5/ KES-5A (2-6 Pin (Molex 9 Pin ^{*1}) connection)

^{*1} Molex 9 Pin
2 Pin: ES2
6 Pin: ES1
7 Pin: OS1
8 Pin: OS2

6.6 Restricting Alert Tone When Consecutively Receiving a Call (Alert Tone Restriction from 2nd Call)

Alert Tone Restriction from 2nd Call is the function that disables the functions such as the storing of a Caller ID in the transceiver stack memory and the activation of various alerts, if the transceiver consecutively receives an Individual Call from the transceiver having the same Individual ID, or receives a Group Call with the same Group ID after the transceiver receives an Individual Call or a Group Call.

For instance, emitting an Alert Tone from the transceiver every time the transceiver repeatedly and frequently receives a call from the same party may be annoying. In that case, this function can be used to disable the Alert Tone from the transceiver even when the transceiver receives a call from the same party in succession.

This function prevents these functions from activating as follows even if these functions are enabled or configured to be enabled when the transceiver receives a call from the same party in succession.

- **Alert Tone**

An Alert Tone does not sound from the transceiver even if the transceiver receives a call from the same party in succession.

- **Selective Call Alert LED**

A Selective Call Alert LED does not blink even if the transceiver receives a call from the same party in succession.

- **Horn Alert (Mobile only)**

The headlights or the horn of a vehicle being connected to the Horn Alert port does not light or sound even if the transceiver receives a call from the same party in succession.

- **Caller ID Stack**

The Caller ID cannot be stored in the transceiver stack memory even if the transceiver receives a call from the same party in succession.

When the transceiver receives an Individual Call or Group Call using this function, the transceiver behaves as follows.

- **Behavior examples of when the transceiver receives an Individual Call**

If the transceiver receives an Individual Call, an Alert Tone does not sound from the transceiver even when the transceiver receives an Individual Call again from the transceiver having the same Individual ID before the time configured in **Auto Reset Timer** elapses.

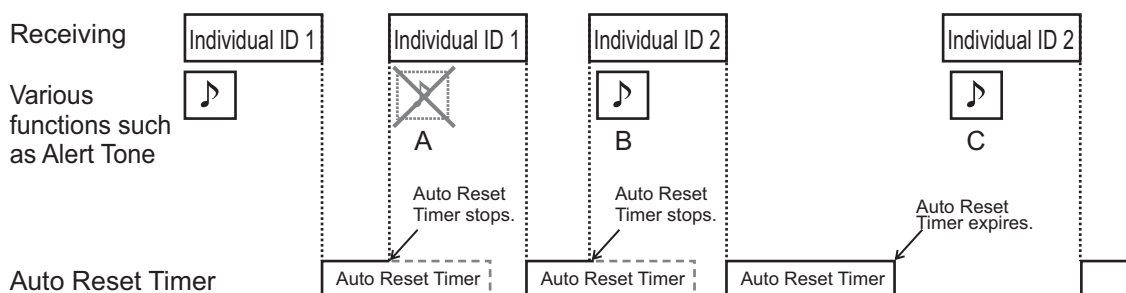


Figure 6-2 Alert Tone Restriction from 2nd Call (Individual Call)

A: The transceiver receives an Individual Call from the transceiver (Individual ID 1) having the same Individual ID before the time configured in **Auto Reset Timer** elapses, so that various functions such as Alert Tone will not be activated.

B: Even before the time configured in **Auto Reset Timer** elapses, the transceiver receives an Individual Call from the transceiver (Individual ID 2) having a different Individual ID, so that various functions such as Alert Tone will be activated.

C: Even if the transceiver receives an Individual Call from the transceiver (Individual ID 2) again, the time configured in **Auto Reset Timer** elapsed, so that various functions such as Alert Tone will be activated.

● Behavior examples of when the transceiver receives a Group Call

If the transceiver receives a Group Call, various functions such as Alert Tone are not activated when the transceiver receives a Group Call again using the same Group ID while the amount of time configured in **Auto Reset Timer** elapses.

In this case, even if the Individual ID of the transmitting transceiver is either the same or different, various functions such as Alert Tone will not be activated when the Group ID for the Group Call received second time or later is the same as the Group ID for the Group Call received first time.

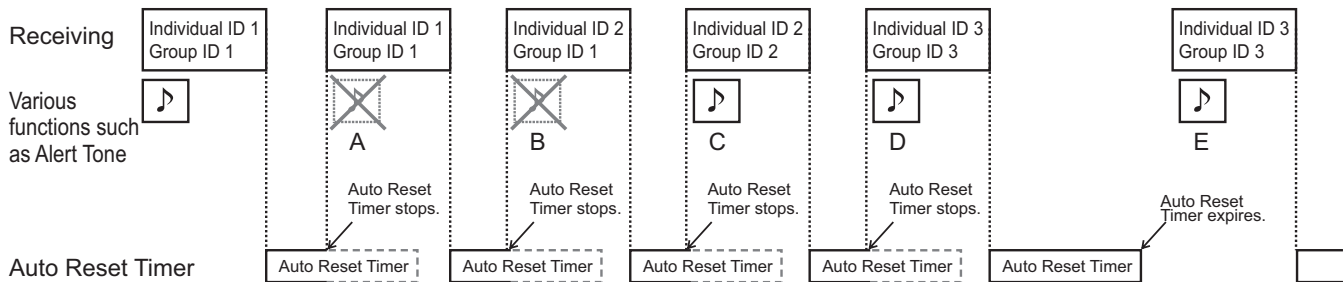


Figure 6-3 Alert Tone Restriction from 2nd Call (Group Call)

- A: The transceiver receives a Group Call using the same Group ID from the transceiver (Individual ID 1) having the same Individual ID before the time configured in **Auto Reset Timer** elapses, so that various functions such as Alert Tone will not be activated.
- B: Even if the transmitting transceiver has the different Individual ID, the transceiver receives a Group Call using the same Group ID before the time configured in **Auto Reset Timer** elapses, so that various functions such as Alert Tone will not be activated.
- C: Even if the transmitting transceiver has the same Individual ID, the transceiver receives a Group Call using the different Group ID before the time configured in **Auto Reset Timer** elapses, so that various functions such as Alert Tone will be activated.
- D: The transceiver receives a Group Call using the different Group ID from the transceiver having the different Individual ID before the time configured in **Auto Reset Timer** elapses, so that various functions such as Alert Tone will be activated.
- E: Even if the transceiver receives a Group Call using the same Group ID, the time configured in **Auto Reset Timer** has already elapsed, so that various functions such as Alert Tone will be activated.

Note

- If **Alert Tone Restriction from 2nd Call** is enabled, various functions such as Alert Tone will not be activated upon the reception of the second and subsequent calls from the same transceiver even if "Off" is configured in **Auto Reset Timer**.
- If "0" is configured in **Auto Reset Timer**, **Alert Tone Restriction from 2nd Call** does not function even when it is enabled.

Configuration using KPG-D1/ D1N

- Configuring **Alert Tone Restriction from 2nd Call** to be enabled or disabled ([See](#) Transceiver Settings > NXDN > NXDN Information > General)
- Configuring **Alert Tone Restriction from 2nd Call** to be enabled or disabled ([See](#) Transceiver Settings > DMR > DMR Information > General)

6.7 Configuring Audio Profile (Audio Profile)

The received audio sounds different depending on the usage environment of the transceiver, characteristics of devices, such as the microphone to be combined with the transceiver and external devices, or the tone of voice and manner of speaking of the speaker. Also, the received audio sounds different depending on the output method, such as using a speaker of the transceiver or an earphone, to hear the received audio.

By having multiple configuration states of audio characteristics and noise cancellation for transmission and reception, **Audio Profile** is the function to enable the transceiver to switch among preset audio profiles according to the usage environments, situations, and preferences of the transceiver.

By designating each configuration of each of the following category as one audio profile, a total of 6 types of audio profiles can be used by switching:

- General
- RX Audio Response
- TX Audio Response
- Active Noise Reduction

The configuration items included in each category are as follows:

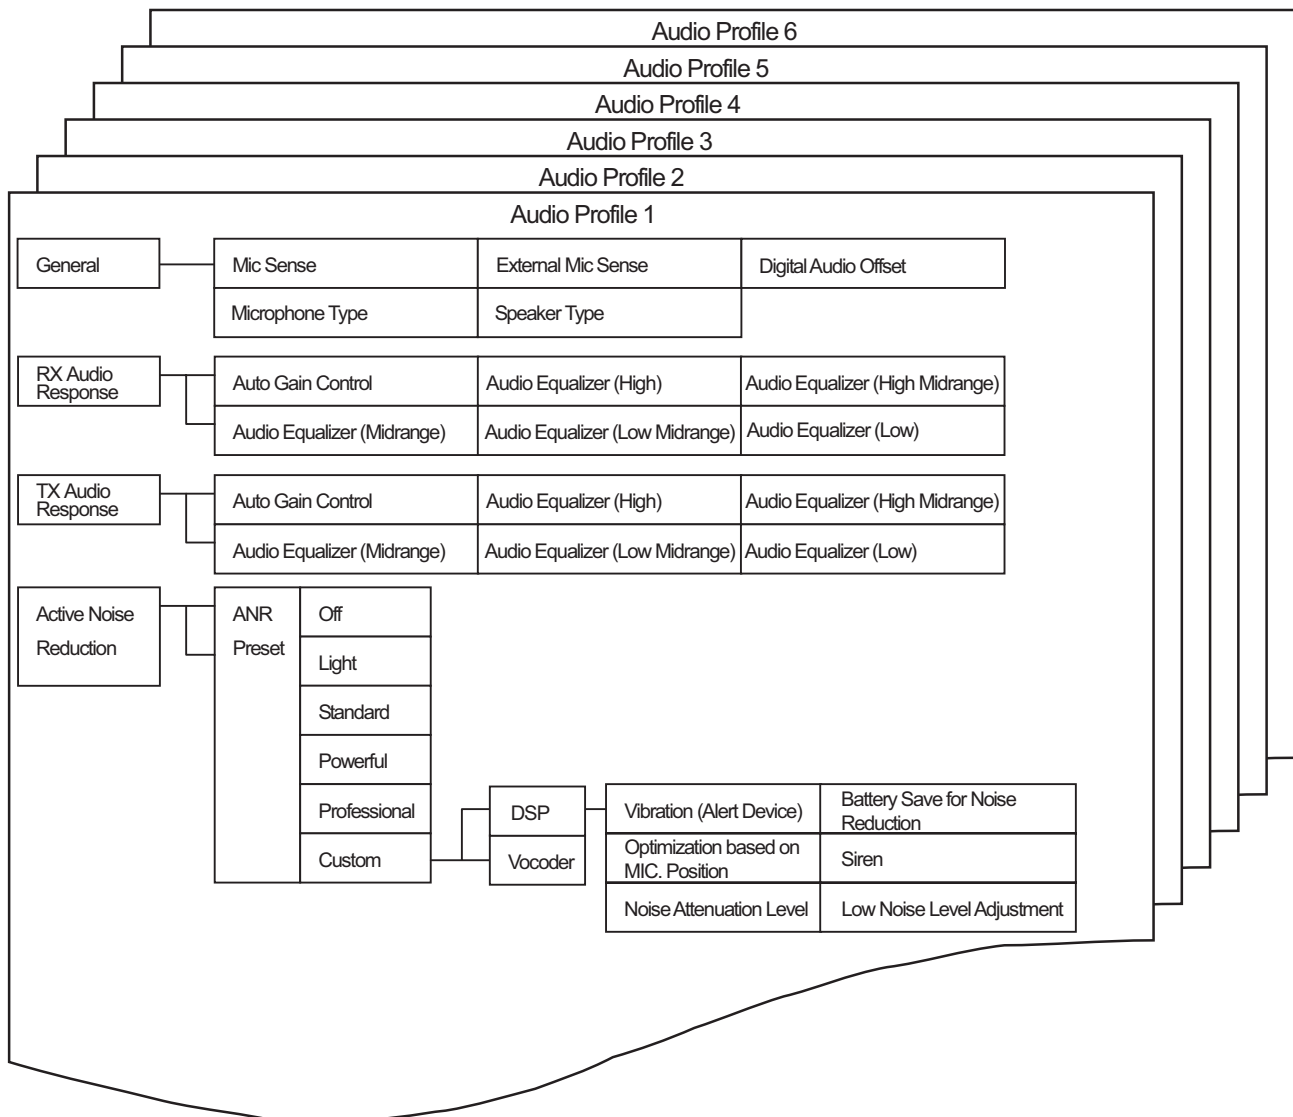


Figure 6-4 Audio Profile

An audio profile used for the transceiver can be configured using KPG-D1/ D1N. Also, the audio profile to be used can be changed in Audio Profile Mode by operating the transceiver.

Pressing the Menu key to enter **Menu Mode**, and then selecting "Audio Profile" places the transceiver in Audio Profile Mode. (Refer to [Using Menu Mode](#).)

Configuration using KPG-D1/ D1N

- Configuring **Audio Profile** ( [See](#) Transceiver Settings > Audio Profile)
- Configuring **Audio Profile Number** used for the transceiver ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Sound)

General

The following are the common functions of the audio profile:

- Speaker Type
- Microphone Type
- Microphone Sense
- External Microphone Sense
- Digital Audio Offset

Speaker Type (digital channels only)

Speaker Type is the function to configure the type of external speaker to be connected to the transceiver and keep the audio in optimum condition.

The external speakers to be connected to the transceiver have different audio characteristics. Using this function equalizes audio characteristics that differ for each speaker, and can correct the demodulated sound when a digital signal is received.

Table 6-15 Speaker Type

Speaker Type	Description
None	Disables the capability to adjust audio characteristics. This configuration is used when not wanting to change the audio characteristics.
Internal Speaker	Portable: Configuration is not available. Mobile: KCH-19 (Basic Panel)
Speaker 1	Enables the optimum audio characteristics of the following speakers: Portable: KMC-54WD, KMC-70 Mobile: KES-3  Note • For the High Power model (NX-5600H/ NX-5700H/ NX-5800H), configuration is not available because KES-3 is not supported.
Speaker 2	Enables the optimum audio characteristics of the following speakers: Portable: KMC-41, KMC-41D, KMC-42W, KMC-42WD, KMC-72 Mobile: KES-5, KES-5A

Speaker Type	Description
Speaker 3	Enables the optimum audio characteristics of the following speakers: Portable: KMC-25, KMC-47GPS, KMC-47GPSD Mobile: KCH-21R (Handheld Control Head)
Speaker 4	Enables the optimum audio characteristics of the following speakers: Portable: KHS-11, KHS-12, KHS-14 Mobile: Configuration is not available.
Speaker 5	Enables the optimum audio characteristics of the following speakers: Portable: KHS-15 Mobile: Configuration is not available.
Speaker 6	Enables the optimum audio characteristics of the following speakers: Portable: KMC-49 Mobile: Configuration is not available.

 Note

- If using an external speaker unlisted in the table above, configuring “None” in **Speaker Type** is recommended.
- Pressing the **Menu** key places the transceiver in Menu Mode, and then the transceiver enters External Speaker Type Mode by selecting “Speaker Type”. In External Speaker Type Mode, the configuration in **Speaker Type** can be changed.

Microphone Type (digital channels only)

Microphone Type is the function to configure the type of external microphone to be connected to the transceiver and keep the audio quality in optimum condition.

The external microphones to be connected to the transceiver have different audio characteristics. Use of this function equalizes audio characteristics and corrects the condition to be optimum for digitalization.

If Mobile is Dual Control Head, Control Head 1 reflects the configuration of **Microphone Type**, and Control Head 2 reflects the configuration of **Microphone Type for Control Head 2**.

Table 6-16 Microphone Type

Microphone Type	Description
None	Disables the capability to adjust audio characteristics. This configuration is used when not wanting to change the audio characteristics.
Microphone 1	Enables the optimum audio characteristics of the following microphones: Portable: KMC-54WD Mobile: KMC-35, KMC-36, KMC-65, KMC-66
Microphone 2	Enables the optimum audio characteristics of the following microphones: Portable: KMC-41, KMC-41D, KMC-42W, KMC-42WD Mobile: KMC-30, KMC-32, KMC-60, KMC-62
Microphone 3	Enables the optimum audio characteristics of the following microphones: Portable: KMC-25, KMC-47GPS, KMC-47GPSD Mobile: KMC-53
Microphone 4	Enables the optimum audio characteristics of the following microphones: Portable: KHS-11, KHS-12, KHS-14 Mobile: KMC-9C
Microphone 5	Enables the optimum audio characteristics of the following microphones: Portable: KHS-15, KMC-70, KMC-72 Mobile: KMC-27
Microphone 6	Enables the optimum audio characteristics of the following microphones: Portable: KMC-49 Mobile: KMC-28
Microphone 7	Enables the optimum audio characteristics of the following microphones: Portable: Configuration is not available. Mobile: KCT-73MIC

Microphone Type	Description
Microphone 8	Enables the optimum audio characteristics of the following microphones: Portable: Configuration is not available. Mobile: KCH-21R (Handheld Control Head)

Note

- If using an external microphone unlisted in the table above, configuring "None" in **Microphone Type** or **Microphone Type for Control Head 2** is recommended.
- Pressing the **Menu** key places the transceiver in Menu Mode, and then the transceiver enters Microphone Type Mode by selecting "Microphone Type". In Microphone Type Mode, the configuration in **Microphone Type** can be changed.
- If the structure for Mobile is Dual Control Head, the configuration of **Microphone Type** can be changed when Microphone Type Mode is entered by operating Control Head 1, and the configuration of **Microphone Type for Control Head 2** can be changed when Microphone Type Mode is entered by operating Control Head 2.

Microphone Sense/ External Microphone Sense

Microphone Sense and **External Microphone Sense** are the input sensitivity of the microphone.

Within the range between -20 dB and +20 dB, the microphone sensitivity of the internal microphone can be configured in **Microphone Sense**, and the microphone sensitivity of the external microphone can be configured in **External Microphone Sense**.

The appropriate level of microphone sensitivity for normal operation is 0 dB. Based on this level, the parameter of the microphone sensitivity can be configured.

On a digital channel, configuring **Digital Audio Offset** enables the transceiver to function after the offset value configured in Digital Audio Offset is added to or deleted from the configuration values in **Microphone Sense** and **External Microphone Sense**.

Note

- If a level lower than "0 dB" is configured in **Microphone Sense** or **External Microphone Sense**, Modulation Limiting (minimum) in Analog FM is lowered because the amplitude limit level is also simultaneously lowered.
- Pressing the **Menu** key places the transceiver in Menu Mode, and then the transceiver enters Mic Sense Mode by selecting "Mic Sense". In Mic Sense Mode, the configuration in **Microphone Sense** can be changed.
- Pressing the **Menu** key places the transceiver in Menu Mode, and then the transceiver enters External Mic Sense Mode by selecting "External Mic Sense". In External Mic Sense Mode, the configuration in **External Microphone Sense** can be changed.
- For Mobile, the Mic sensitivity of when "Mic Line" is configured for the Modulation Line can be configured in **Microphone Sense**, and the Mic sensitivity of when "MI2 Line" or the Mic Line of a Bluetooth-compatible device is configured for the Modulation Line can be configured in **External Microphone Sense**.

Configuration using KPG-D1/ D1N

- Configuring **Microphone Sense** ( **See** Transceiver Settings > Audio Profile > General > Microphone Sense)
- Configuring **External Microphone Sense** ( **See** Transceiver Settings > Audio Profile > General > Microphone Sense)

Digital Audio Offset

Digital Audio Offset is the function to enable the transceiver to function after the offset value configured in **Digital Audio Offset** is added to or deleted from the configuration values in **Microphone Sense** and **External Microphone Sense**. This function is used when the microphone level used on digital channels and the microphone level used on analog channels are to be configured separately.

The configuration range of **Digital Audio Offset** is between -10 dB and +6 dB. On a digital channel, the transceiver functions with the combined value of the configuration value in **Microphone Sense** or **External Microphone Sense** and the configuration value in **Digital Audio Offset**.

Configuration using KPG-D1/ D1N

Configuring **Digital Audio Offset** ( **See** Transceiver Settings > Audio Profile > General > Microphone Sense)

RX Audio Response

The following are the common functions of the audio profile related to reception:

- Auto Gain Control (RX Audio Response)
- Audio Equalizer (RX Audio Response)

These functions can be used only in a P25 system, NXDN system, and DMR system.

Auto Gain Control (RX Audio Response)

Auto Gain Control (RX Audio Response) is the function to adjust the volume level of the received audio. The received audio sounds better by amplifying or attenuating the received audio.

The volume level of the received audio may vary depending on the voice level of a user talking to the transmitting transceiver and the distance between the microphone and the mouth. In this case, this function allows a user to hear the received audio clearly since the received audio is automatically adjusted to a certain volume level according to the configuration for the volume level.

Table 6-17 Auto Gain Control (RX Audio Response)

Auto Gain Control	Description
Off	Auto Gain Control (RX Audio Response) is disabled and the volume level of the received audio is not automatically adjusted.
High	Auto Gain Control (RX Audio Response) is enabled and the volume level of the received audio is automatically adjusted to a certain level according to the configuration for the volume level. However, a background noise of the received audio may be played back loudly, or a howl may occur.
Low	Auto Gain Control (RX Audio Response) is enabled and the volume level of the received audio is automatically adjusted to a certain level according to the configuration for the volume level. However, the controlled volume level will be lower than the case if "High" is configured. Therefore, the range of the volume level to be automatically adjusted will be narrow, but the less effect on the background noise and howl will occur.

Note

- If **Auto Gain Control (RX Audio Response)** is disabled in the receiving transceiver but **Auto Gain Control (TX Audio Response)** is enabled in the transmitting transceiver, the volume level of the received audio is automatically adjusted to a certain level.
- Pressing the **Menu** key to enter Menu Mode, and then selecting "RX Auto Gain Control" places the transceiver in RX Auto Gain Control Mode. In RX Auto Gain Control Mode, the configuration in **Auto Gain Control (RX Audio Response)** can be changed.

Configuration using KPG-D1/ D1N

Configuring **Auto Gain Control (RX Audio Response)** ( See Transceiver Settings > Audio Profile > Advanced Settings > RX Audio Response (Digital))

Audio Equalizer (RX Audio Response)

Audio Equalizer (RX Audio Response) is the function to adjust audio characteristics to be applied to playing back the received audio.

The received audio may sound differently depending on the usage environment of the transceiver and whether to use a speaker or headphones to play back the received audio. Also, the received audio may sound differently depending on the effect of a microphone equipped with the transmitting transceiver and external connector devices. Use of this function allows a user to adjust according to user convenience or preference an audio characteristic of the received audio sounding from the speaker.

By using KPG-D1/ D1N, the received audible characteristics can be configured in the range between -10 dB and +10 dB for each of the High, High Midrange, Midrange, Low Midrange and Low audio frequency.

Table 6-18 Audio Equalizer (RX Audio Response)

Audio Equalizer	Description
High	The audible frequency characteristics for the high range can be configured.
High Midrange	The audible frequency characteristics for the middle to high range can be configured.
Midrange	The audible frequency characteristics for the middle range can be configured.
Low Midrange	The audible frequency characteristics for the middle to low range can be configured.
Low	The audible frequency characteristics for the low range can be configured.

Also, preset items with various types of received audio characteristics can be selected to be used as approximate indicators for configuration.

Table 6-19 Audio Equalizer (RX Audio Response) (Preset)

Preset	Description
Flat	This is a standard audio characteristic.
High Boost	This audio characteristic emphasizes the received audio range which is higher than Flat. The quality of the received audio will be clear with the focus on hearing conversations for certain.
Mid Boost	This audio characteristic emphasizes the audible frequency of received audio higher than Flat. The audio will have a more stable, less distorted, and well-rounded tone.
Low Boost	This audio characteristic minimizes the received audio range which is higher than Flat and emphasizes the low range. The quality of the received audio will be natural.
Low Cut	Suppresses the audio of 300 Hz or lower. The distortion of audio when played back can be suppressed, and the muffling can be prevented.

Note

- Pressing the **Menu** key to enter Menu Mode, and then selecting one of the following configurations places the transceiver in RX Audio Equalizer Mode. In RX Audio Equalizer Mode, the configuration of High, High Midrange, Midrange, Low Midrange or Low can be changed.
 - RX Audio Equalizer (High)
 - RX Audio Equalizer (High Midrange)
 - RX Audio Equalizer (Midrange)
 - RX Audio Equalizer (Low Midrange)
 - RX Audio Equalizer (Low)

Configuration using KPG-D1/ D1N

Configuring **Audio Equalizer (RX Audio Response)** ( **See** Transceiver Settings > Audio Profile > Advanced Settings > RX Audio Response (Digital))

TX Digital Audio Response

The following are the common functions of the audio profile related to transmission:

- Auto Gain Control (TX Audio Response)
- Audio Equalizer (TX Audio Response)

These functions can be used only in a P25 system, NXDN system, and DMR system.

Auto Gain Control (TX Audio Response)

Auto Gain Control (TX Audio Response) is the function to adjust the volume level of the transmitted audio. When the volume level of the transmitted audio is adjusted by automatically increasing or decreasing the microphone sensitivity, the transmitted audio can be heard clearly in the receiving transceiver.

The volume level of the transmitted audio may vary depending on the voice level of a user talking to the transmitting transceiver and the distance between the microphone and the mouth. In this case, the use of this function automatically adjusts the microphone sensitivity, so that the transmitted audio can be heard clearly in the receiving transceiver.

If the background noise is loud, the microphone sensitivity may not be properly adjusted. In this case, a user needs to hold the microphone closer and speaks loudly.

Table 6-20 Auto Gain Control (TX Audio Response)

Auto Gain Control	Description
On	Auto Gain Control (TX Audio Response) is enabled and the volume level of the transmitted audio is automatically adjusted to the proper volume level.
Off	Auto Gain Control (TX Audio Response) is disabled and the volume level of the transmitted audio is not automatically adjusted.

Note

- The transceiver enters Menu Mode by a user pressing the **Menu** key, and then the transceiver enters TX Auto Gain Control Mode by a user selecting "TX Auto Gain Control". In TX Auto Gain Control Mode, the configuration in **Auto Gain Control (TX Audio Response)** can be changed.

Configuration using KPG-D1/ D1N

Configuring **Auto Gain Control (TX Audio Response)** ( See Transceiver Settings > Audio Profile > Advanced Settings > TX Audio Response (Digital))

Audio Equalizer (TX Audio Response)

Audio Equalizer (TX Audio Response) is the function to adjust audio characteristics to be applied when the received audio is played back. **Audio Equalizer (TX Audio Response)** is applied to a transmitted audio played back by the receiving transceiver.

Also, the received audio may sound differently depending on an usage environment of the transceiver, and effects of a microphone equipped with the transceiver and external connector devices. Use of this function allows a user to select according to user convenience or preference an audio characteristic of the transmitted audio inputted to a microphone.

By using KPG-D1/ D1N, the transmitted audible characteristics can be configured in the range between -10 dB and +10 dB for each of the High, High Midrange, Midrange, Low Midrange and Low audio frequency.

Table 6-21 Audio Equalizer (TX Audio Response)

Audio Equalizer	Description
High	The audible frequency characteristics for the high range can be configured.
High Midrange	The audible frequency characteristics for the middle to high range can be configured.
Midrange	The audible frequency characteristics for the middle range can be configured.
Low Midrange	The audible frequency characteristics for the middle to low range can be configured.
Low	The audible frequency characteristics for the low range can be configured.

Also, preset items with various types of transmitted audio characteristics can be selected to be used as approximate indicators for configuration.

Table 6-22 Audio Equalizer (TX Audio Response) (Preset)

Preset	Description
Flat	This is a standard audio characteristic.
High Boost	This audio characteristic emphasizes the transmitted audio range which is higher than Flat. The quality of the transmitted audio will be clear with the focus on hearing conversations for certain.
Mid Boost	This audio characteristic emphasizes the audible frequency of transmitted audio higher than Flat. The audio will have a more stable, less distorted, and well-rounded tone.
Low Boost	This audio characteristic minimizes the transmitted audio range which is higher than Flat and emphasizes the low range. The quality of the transmitted audio will be natural.
Low Cut	Suppresses the audio of 300 Hz or lower. The distortion of audio when played back can be suppressed, and the muffling can be prevented.

 Note

- Pressing the **Menu** key to enter Menu Mode, and then selecting one of the following configurations places the transceiver in TX Audio Equalizer Mode. In TX Audio Equalizer Mode, the configuration of High, High Midrange, Midrange, Low Midrange or Low can be changed.
 - TX Audio Equalizer (High)
 - TX Audio Equalizer (High Midrange)
 - TX Audio Equalizer (Midrange)
 - TX Audio Equalizer (Low Midrange)
 - TX Audio Equalizer (Low)

Configuration using KPG-D1/ D1N

Configuring **Audio Equalizer (TX Audio Response)** ( **See** Transceiver Settings > Audio Profile > Advanced Settings > TX Audio Response (Digital))

Active Noise Reduction

Active Noise Reduction (ANR) is the function to cancel the noise component of the collected audio in order to improve the transmitted audio quality.

The noise cancellation function can be collectively configured according to the usage environment. Also, selecting "Custom" enables the detailed configuration of the noise cancellation function.

Table 6-23 ANR Preset

ANR Preset	Description
Off	The noise cancellation characteristics cannot be configured.
Light	Reduces the background noise. Reduces the background noise less effectively than "Standard". On an analog channel, the effect of the background noise reduction is the same as when "Off" is configured.
Standard	Reduces the background noise. Assuming a variety of environments, this configuration is for not deteriorating audio.
Powerful	Reduces the background noise more effectively than "Standard". Audio may be slightly suppressed. Also, since the position of the microphone is being detected even while not transmitting, this configuration is suitable for a user using the transceiver in a noisy environment or with the microphone on the shoulder.
Professional	Reduces the background noise. This configuration reduces noise of a specific environment, such as a siren, and is also harmless to audio. The optimal noise cancellation effect is available by having the mouth of a transmitting user and the microphone positioned at an appropriate distance when the transceiver is used. This configuration is suitable for use in a fire department and a police station.
Custom	The following various functions of noise cancellation can be configured: Vocoder: In Vocoder, whether the transceiver transmits on a digital channel with or without reducing and eliminating the noise component of the background noise can be configured. If the transceiver is used in a noisy environment, enabling this function allows the transceiver to transmit by reducing and eliminating the noise components in the background noise, so that the noise at the receiving transceiver is eliminated or reduced. However, a part of the voice component is also reduced, and this reduction may cause the received audio to be fuzzy. In such case, disabling this function results in the transmitted audio resembling an analog voice signal, so the audio on the receiving transceiver may sound natural. DSP: In DSP, whether to reduce and eliminate the background noise or not while transmitting can be configured. This configuration can be configured according to the situation of the background noise or usage environment. Using a microphone consisting of 2 microphones can be more effective. Noise Attenuation Level: In Noise Attenuation Level, the amount of noise reduction can be configured. The standard configuration is 0 dB, and the sound quality is balanced with the amount of noise reduction. If -20 dB is configured, the noise can be most effectively reduced while the sound quality degrades more easily. If +10 dB is configured, the noise is least effectively reduced while the sound quality degrades less. Low Noise Level Adjustment: In Low Noise Level Adjustment, whether to stop the noise cancellation process automatically in an environment where background noise is low can be configured. If this function is enabled, the degradation of sound quality can be prevented in an environment where background noise is low. Optimization based on Microphone Position (Portable only): Whether to optimize the noise cancellation process according to the positional relationship of the microphone and the mouth of a user can be configured. If this function is enabled, the positional relationship of the microphone and the mouth is detected and the noise cancellation process is optimized. This function is effective when the microphone is not held stable by a user or unable to be used in front of the mouth. If this function is disabled, the noise cancellation process is not optimized according to the microphone position. However, if the microphone is used in front of the mouth, optimized noise cancellation is available. This function is valid when an internal microphone or KMC-54 is used. Siren: In Siren, whether to remove the siren audio component when a siren audio is detected can be configured.

ANR Preset	Description
Custom	Vibrator (Alert Device) (Portable only): In Vibration (Alert Device), whether to delete the audio component of Vibration Noise when a Vibration Noise is detected can be configured. Vibration Noise is a periodic, abrupt sound emitting from a vibrating function being used, such as on a firefighting mask. Battery Save for Noise Reduction (Portable only): In Battery Save for Noise Reduction, whether to stop the noise cancellation process when the transceiver is not transmitting can be configured. If this function is enabled, the noise cancellation process functions while the transceiver is transmitting. This function takes longer to reduce the noise, but the function reduces battery power consumption. If this function is disabled, the noise cancellation process always functions, and the noise is reduced from the start of transmission. For Mobile, no configuration is required since the noise cancellation process always functions. However, microphones other than the microphone connected to the head may take time to reduce the noise in the same manner as when this function is enabled.

The following tables show the configurations of the functions configured for each mode of ANR Preset.

According to the configuration of the ANR Preset, each function of the noise cancellation characteristic is automatically configured as the following tables according to the type of a connected external microphone.

The tables related to ANR Preset are based on the type of microphone connection for Portable.

- Table 6-24 (Portable: If KMC-54WD/ KMC-70 is used, or if no external microphone is used)
- Table 6-25 (Portable: If an external microphone other than KMC-54WD/ KMC-70 is used)
- Table 6-26 (Portable: If an external microphone is connected using Bluetooth)
- Table 6-27 (Mobile)

Table 6-24 Automatic Configuration Using the ANR Preset
(Portable: If KMC-54WD/ KMC-70 is used, or if no external microphone is used)

Function	ANR Preset					
	OFF	Light	Standard	Powerful	Professional	Custom
Vocoder	Uncheck	Check	Check	Check	Check	User configuration
Digital Signal Processor	Uncheck	Uncheck	Check	Check	Check	User configuration
Noise Attenuation Level	0 dB	0 dB	0 dB	-6 dB	-6 dB	User configuration
Low Noise Level Adjustment	Uncheck	Uncheck	Check	Uncheck	Check	User configuration
Optimization based on Microphone Position	Uncheck	Uncheck	Check	Check	Uncheck	User configuration
Siren	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Vibration (Alert Device)	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Battery Save for Noise Reduction	Uncheck	Check	Check	Uncheck	Uncheck	User configuration

Table 6-25 Automatic Configuration Using the ANR Preset
 (Portable: If an external microphone other than KMC-54WD/ KMC-70 is used)

Function	ANR Preset					
	OFF	Light	Standard	Powerful	Professional	Custom
Vocoder	Uncheck	Check	Check	Check	Check	User configuration
Digital Signal Processor	Uncheck	Uncheck	Check	Check	Check	User configuration
Noise Attenuation Level	0 dB	0 dB	0 dB	-6 dB	-6 dB	User configuration
Low Noise Level Adjustment	Uncheck	Uncheck	Check	Uncheck	Check	User configuration
Optimization based on Microphone Position	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck
Siren	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Vibration (Alert Device)	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Battery Save for Noise Reduction	Uncheck	Check	Check	Uncheck	Uncheck	User configuration

Table 6-26 Automatic Configuration Using the ANR Preset
 (Portable: If an external microphone is connected using Bluetooth)

Function	ANR Preset					
	OFF	Light	Standard	Powerful	Professional	Custom
Vocoder	Uncheck	Check	Check	Check	Check	User configuration
Digital Signal Processor	Uncheck	Uncheck	Check	Check	Check	User configuration
Noise Attenuation Level	0 dB	0 dB	0 dB	-6 dB	-6 dB	User configuration
Low Noise Level Adjustment	Uncheck	Uncheck	Check	Uncheck	Check	User configuration
Optimization based on Microphone Position	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck
Siren	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Vibration (Alert Device)	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Battery Save for Noise Reduction	Check	Check	Check	Check	Check	Check

Table 6-27 Automatic Configuration Using the ANR Preset (Mobile)

Function	ANR Preset					
	OFF	Light	Standard	Powerful	Professional	Custom
Vocoder	Uncheck	Check	Check	Check	Check	User configuration
Digital Signal Processor	Uncheck	Uncheck	Check	Check	Check	User configuration
Noise Attenuation Level	0 dB	0 dB	0 dB	-6 dB	-6 dB	User configuration
Low Noise Level Adjustment	Uncheck	Uncheck	Check	Uncheck	Check	User configuration
Optimization based on Microphone Position	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck
Siren	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Vibration (Alert Device)	Uncheck	Uncheck	Uncheck	Uncheck	Check	User configuration
Battery Save for Noise Reduction	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck	Uncheck

Note

- Pressing the **Menu** key places the transceiver in Menu Mode, and then selecting "ANR Preset" places the transceiver in ANR Preset Mode. In ANR Preset Mode, the configuration in **ANR Preset** can be changed.

Configuration using KPG-D1/ D1N

Configuring **ANR Preset** ( **See** Transceiver Settings > Audio Profile > Active Noise Reduction (ANR))

6.8 Using Voice Guidance (Voice Announcement)

Voice Announcement is the function to notify the following contents by voice:

- The selected Zone-channel number when the transceiver is turned ON and the new Zone-channel number when the Zone-channel is changed (Refer to [Zone-Channel Guide](#).)
- The function status and transceiver status when the **PF** key is operated (Refer to [Function Guide](#).)
- The reception status (Refer to [Status Guide](#).)

To use these voice guidance functions, the voice guidance method needs to be configured in **Voice Announcement Type**.

Note

- The audio for **Voice Announcement** sounds from the speaker of the transceiver. However, if the external speaker is connected to the transceiver, the audio sounds from the external speaker.
- The volume for **Voice Announcement** is set according to the configuration in **Control Tone**. **Voice Announcement** does not function if "Off" is configured in **Control Tone**. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)
- **Voice Announcement** does not function while the transceiver is in Emergency Mode.
- **Voice Announcement** does not function if a zone or channel is changed by using the scan function.
- The received audio does not sound from the speaker while the audio for **Voice Announcement** sounds.

Configuring Voice Guidance Method (Voice Announcement Type)

Voice Announcement Type is the function to specify whether to execute various voice guidance by using fixed phrases or by using audio files arbitrarily configured by a user.

The transceiver behaves as follows according to the configuration in Voice Announcement Type:

Table 6-28 Voice Announcement Type

Configuration	Description
None	Voice guidance is not executed.
Standard	The Zone-channel number, key function status, and transceiver status are notified by using the fixed phrase audio. Voice guidance can be executed in 3 languages configured in Language 1 to Language 3 of Voice and Display Language. The languages that can be configured in Language 1 to Language 3 are as follows: English, Spanish (Spain), Spanish (Latin America), French, German, Italian, Dutch, Russian, Portuguese (Brazil), Traditional Chinese (China)
User Programmable	The Zone-channel name, key function status, transceiver status, and received status are notified by using the audio configured by a user. Configure the audio to be used by selecting from the audio files registered in Audio Library. Therefore, the audio files to be used for voice guidance need to be registered in Audio Library beforehand. Note • The audio file that can be registered in Audio Library is 8 k 16 bit monaural PCM data within 5 sec. When the total capacity of Audio Library reaches 3 MB, or when the total number of files reaches 240, no more audio files can be registered. To register a new audio file, a file registered in Audio Library needs to be deleted.

Configuration using KPG-D1/ D1N

- Configuring **Voice and Display Language** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1)
- Configuring **Voice Announcement Type** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Voice Announcement)
- Registering an audio file in **Audio Library** ( [See](#) Tools > Audio Library)

Zone-Channel Guide

Zone-Channel Guide is the function to notify by voice Zone-channel numbers such as the selected Zone-channel number when the transceiver is turned ON and the new Zone-channel number when the Zone-channel is changed.

If this function is enabled, the transceiver executes voice guidance according to the configuration in **Voice Announcement Type**. (Refer to [Configuring Voice Guidance Method \(Voice Announcement Type\)](#).)

● If “Standard” is configured in Voice Announcement Type:

When the transceiver is turned ON, when the zone is changed, or when the **Direct Channel** key (1 to 5) is operated, the new zone number and channel number are notified by voice as follows:

“Zone xxx, Channel yyy” (xxx: zone number, yyy: channel number)

If only one zone is configured in the transceiver, only a channel number is notified by voice as “yyy” (yyy: channel number).

When the channel is changed, or the **Home Channel** key is operated, the new channel number is notified by voice as “yyy” (yyy: channel number).

● If “User Programmable” is configured in Voice Announcement Type:

Whether to execute voice guidance can be configured for each zone and each channel.

Voice Announcement (Zone):

Table 6-29 Voice Announcement (Zone)

Configuration	Description
None	Voice guidance is not executed.
Audio file	Contents such as a zone name are notified by using the audio configured by a user. Configure the audio to be used by selecting from the audio files registered in Audio Library .

Voice Announcement (Channel):

Table 6-30 Voice Announcement (Channel)

Configuration	Description
None	Voice guidance is not executed.
Audio file	Contents such as a channel name are notified by using the audio configured by a user. Configure the audio to be used by selecting from the audio files registered in Audio Library .

When the transceiver is turned ON, when the zone is changed, or when the **Direct Channel** key (1 to 5) is operated, voice guidance is executed according to the configuration in **Voice Announcement** of the new zone and channel.

If only one zone is configured in the transceiver, voice guidance is executed according to the configuration in **Voice Announcement** of the new channel.

Also, when the channel is changed or when the **Home Channel** key is operated, voice guidance is executed according to the configuration in **Voice Announcement** of the new channel.

Configuration using KPG-D1/ D1N

- Configuring Zone-Channel Guide to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Voice Announcement)
- Configuring **Voice Announcement** for each zone ( **See** Transceiver Settings > Zone/Channel > Zone Edit > General)
- Configuring **Voice Announcement** for each channel ( **See** Transceiver Settings > Zone/Channel > Channel Edit)

Function Guide

Function Guide is the function to notify by voice the function status and transceiver status when the **PF** key is operated.

If this function is enabled, the transceiver executes voice guidance according to the configuration in **Voice Announcement Type**. (Refer to **Configuring Voice Guidance Method (Voice Announcement Type)**.)

● If “Standard” is configured in Voice Announcement Type:

The status of the following functions assigned to the **PF** keys is notified by voice:

Table 6-31 Voice Announcement (Zone)

Key Function	Voice Guidance Contents (in English)	
	Key Function On	Key Function Off
Encryption	Encryption On	Encryption Off
Home Channel	Home Channel	Channel No.
Horn Alert	Horn Alert On	Horn Alert Off
Key Lock	Key Locked	Key Unlocked
Low Transmit Power	RF Low Power On	RF Low Power Off
Public Address	Public Address On	Public Address Off
Scrambler	Scrambler On	Scrambler Off
Scan	Scan On	Scan Off
Scan Normal	Scan On	Scan Off
Send the GPS Data	Send GPS	-
Site Lock	Site Locked	Site Unlocked
Speaker Attenuation	Speaker Attenuation On	Speaker Attenuation Off
System Search	System Search	-
Talk Around	Talk Around On	Talk Around Off
Key Function	Transfer	-
Key Function On	Transfer On	-
Key Function Off	Transfer Off	-
VOX	VOX On	VOX Off

The following transceiver statuses are notified by voice:

Table 6-32 Function Guide (Transceiver Status)

Item	Transceiver Status	Voice Guidance Contents (in English)
Transceiver Password	The transceiver was operated when in Transceiver Password Mode.	"Radio Locked"
Key Lock	The transceiver was operated when the Key Lock was enabled.	"Key Locked"
FleetSync	The target party did not receive the data or message.	"Message Denied"
NXDN	The target party did not receive the data or message.	"Message Denied"
P25	The target party did not receive the status or text message.	"Message Denied"
DMR	The target party did not receive the data or message.	"Message Denied"

● If "User Programmable" is configured in Voice Announcement Type:

Function Guide (PF key):

Whether to execute voice guidance can be configured for each of the following key functions (On/ Off):

Table 6-33 Function Guide On/ Off

Key Function On	Key Function Off
Key Function Off	Encryption Off
Home Channel	-
Horn Alert On	Horn Alert Off
Key Locked	Key Unlocked
Low Transmit Power On	Low Transmit Power Off
Public Address On	Public Address Off
Scrambler On	Scrambler Off
Scan On	Scan Off
Scan Normal On	Scan Normal Off
Send the GPS Data	-
Site Lock On	Site Lock Off
Speaker Attenuation On	Speaker Attenuation Off
System Search	-
Talk Around On	Talk Around Off
VOX On	VOX Off

Table 6-34 On/ Off Configuration for Function Guide

Configuration	Description
None	Voice guidance is not executed.
Audio file	The function status when the PF key is operated is notified by audio configured by a user. Configure the audio to be used by selecting from the audio files registered in Audio Library .

Function Guide (Transceiver Status):

Whether to execute voice guidance can be configured for each of the following transceiver statuses:

Table 6-35 Function Guide (Transceiver Status)

Configuration	Description
Radio Locked	The transceiver was operated when in Transceiver Password Mode.
Status Message Denied	The target party did not receive the data or message.

Table 6-36 Configuration for Function Guide (Transceiver Status)

Configuration	Description
None	Voice guidance is not executed.
Audio file	The transceiver status is notified by using the audio configured by a user. Configure the audio to be used by selecting from the audio files registered in Audio Library .

Configuration using KPG-D1/ D1N

- Configuring **Function Guide** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Voice Announcement > Function Guide)
- Configuring voice guidance when the **PF** key is operated (On/ Off) ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Voice Announcement > Function Guide)
- Configuring voice guidance to notify the transceiver status (**Radio Locked/ Status Message Denied**) ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Voice Announcement > Function Guide)

Status Guide

Status Guide is the function to notify the received status by using the audio configured by a user.

To use this function, "User Programmable" needs to be configured in **Voice Announcement Type**.

(Refer to **Configuring Voice Guidance Method (Voice Announcement Type)**.)

Whether to execute voice guidance can be configured for each of the statuses registered in the Status List.

Also, whether to execute voice guidance can be configured when various Emergency Statuses (Emergency Status/ Man-Down Status/ Lone Worker Status/ Stationary Status/ Motion Status) are received.

Table 6-37 Voice Announcement (Status/ Emergency Status Response)

Configuration	Description
None	Voice guidance is not executed.
Audio file	Contents such as a status name are notified by using the audio configured by a user. Configure the audio to be used by selecting from the audio files registered in Audio Library .

If the transceiver receives a status, voice guidance is executed after an Alert Tone sounds from the transceiver. The number of times executing voice guidance corresponds to the configuration in **Cycle** of **Special Alert Tone**. However, if the Alert Tone is configured not to sound, the Alert Tone does not sound from the transceiver, and voice guidance is executed only once. (Refer to **Configuring the Alert Tone (Special Alert Tone)**.)

Configuration using KPG-D1/ D1N

- Configuring **Voice Announcement** for each Status List

FleetSync ( [See](#) Transceiver Settings > FleetSync > Status List)

NXDN ( [See](#) Transceiver Settings > NXDN > Status List)

P25 ( [See](#) Transceiver Settings > P25 > Status List)

DMR ( [See](#) Transceiver Settings > DMR > Status List)

- Configuring **Voice Announcement** of **Emergency Status Response**

FleetSync ( [See](#) Transceiver Settings > FleetSync > FleetSync Information > General > Emergency Status Response)

NXDN ( [See](#) Transceiver Settings > NXDN > NXDN Information > General > Emergency Status Response)

DMR ( [See](#) Transceiver Settings > DMR > DMR Information > General > Emergency Status Response)

For Portable, a user can be notified on the level of the remaining battery power on the LCD and by LED. And, a user can also use the function to save the battery consumption.

For Mobile, a user can be notified by the LED that the battery voltage of the vehicle battery is low.

7.1 Displaying the Remaining Battery Power Level (Battery Indicator)

Portable

Battery Indicator can be used to display a warning icon on the LCD and warn using LED when the remaining battery level is low.

Conditions to activate the **Battery Indicator** vary depending on the configuration in **Battery Warning**. (Refer to [Warning that the Battery Voltage Is Low \(Battery Warning\)](#).)

Mobile

Battery Indicator is the function to notify a user by the LED that transmission is restricted because the battery voltage of the vehicle battery is low.

Table 7-1 Battery Indicator

Configuration	Description
Off	Portable: The transceiver does not notify a user on the LCD and by LED when the remaining battery power is low. Mobile: The transceiver does not notify a user by the LED that transmission is restricted because the battery voltage of the vehicle battery is low.
LCD (Portable only)	The transceiver notifies a user by displaying the "Battery Status" icon on the LCD that the remaining battery power is low. Depending on the remaining battery capacity, the "Battery Status" icon displays the remaining battery level in 4 stages: Full, Sufficient, Low, and Very Low. However, the "Battery Status" icon does not appear if "While Transmitting" is configured in Battery Warning .
LED	Portable: The transceiver notifies a user by a flashing red LED that the remaining battery power is low. Mobile: The transceiver notifies a user by flashing the LED red that transmission is restricted because the battery voltage of the vehicle battery is low.
LCD & LED (Portable only)	The transceiver notifies a user by displaying the "Battery Status" icon on the LCD and by a flashing red LED at the same time that the remaining battery power is low. However, the "Battery Status" icon does not appear if "While Transmitting" is configured in Battery Warning .

For Portable, if "LCD" or "LCD & LED" is configured in **Battery Indicator**, the remaining battery power appears in 4 stages depending on the remaining battery capacity.

Table 7-2 Battery Status Icon (Portable only)

Icons	Status
	Full
	Sufficient
	Low
 (Flashing)	Very Low

Configuration using KPG-D1/ D1N

Configuring **Battery Indicator** ( See Transceiver Settings > Optional Features > Optional Features 1 > Battery)

7.2 Warning that the Battery Voltage Is Low (Battery Warning)

Supported Models: Portable

Battery Warning can be used to notify a user by emitting a beep or flashing the LED when the remaining battery power is low.

The transceiver always monitors whether the battery voltage goes low and notifies a user that the remaining battery power is low according to the configuration in **Battery Indicator** when the battery voltage level goes lower than the warning voltage level. (Refer to [Displaying the Remaining Battery Power Level \(Battery Indicator\)](#).)

Table 7-3 Battery Warning

Configuration	Description
While Transmit	The transceiver detects that the battery voltage is low while transmitting. When the battery voltage level goes lower than the warning voltage level (6.2 V), the transceiver notifies a user that the remaining battery power is low by a flashing red Transmit LED.
Always	The transceiver always detects whether the battery voltage goes low while the transceiver is in use. When the battery voltage goes below the warning voltage level (during transmission: 6.2 V, non-transmission: 7.0 V), the transceiver notifies a user that the remaining battery power is low according to the Battery Indicator configuration by changing the "Battery Status" icon, and by flashing a red Transmit LED.
Always - Late Warning	The transceiver always detects whether the battery voltage goes low while the transceiver is in use. When the battery voltage goes below the warning voltage level (during transmission: 6.2 V, non-transmission: 6.5 V), the transceiver notifies a user that the remaining battery power is low according to the Battery Indicator configuration by changing the "Battery Status" icon, and by flashing a red Transmit LED.

Also, if **Battery Warning Tone** is enabled, the transceiver notifies a user that the remaining battery power is low by making the Battery Warning Tone (3 beeps) sound from the transceiver if the **PTT** switch is not pressed when the battery voltage level goes lower than the warning voltage level.

Note

- This function cannot be activated if "Off" has been configured in **Battery Indicator**.

Configuration using KPG-D1/ D1N

- Configuring **Battery Warning** ( See Transceiver Settings > Optional Features > Optional Features 1 > Battery)
- Configuring **Battery Warning Tone** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 1 > Battery)

7.3 Warning the Battery Power of the Vehicle Battery Is Low (Battery Warning)

Supported Models: Mobile

Battery Warning for Mobile notifies a user by the LED or warning tone that a transmission is restricted because the battery power of the vehicle battery is low.

If the battery power of the vehicle battery goes lower than the threshold while the transceiver is not transmitting, the LED flashes red and a Battery Warning Tone sounds from the transceiver. If the battery power of the vehicle battery recovers to the threshold, the flashing of the LED and the Battery Warning Tone stop.

If the power of the vehicle battery is lower than the threshold when transmitting, transmission cannot occur. In this case, while the **PTT** switch is being pressed, a Warning Tone A (continuous beep) sounds from the transceiver. The threshold is not determined while transmitting.

Table 7-4 Threshold of the Battery Power

Models	Threshold
Other than NX-5600H/ NX-5700H/ NX-5800H	8.5 V
NX-5600H/ NX-5700H/ NX-5800H	9.0 V

Note

- For Mobile, **Battery Warning** cannot be configured by using KPG-D1/ D1N and always functions as above.

7.4 Displaying the Remaining Battery Power by Operating the Transceiver (Battery Status)

Supported Models: Portable

By flashing the LED red or emitting a Beep, **Battery Status** notifies a user of the remaining battery power by operating the key of the transceiver.

Battery Status is executed by pressing the **Battery Status** key.

Or, Battery Status is executed by selecting "Battery Status" after placing the transceiver in Menu Mode by pressing the **Menu** key. (Refer to [Using Menu Mode](#).)

If Battery Status is executed, the LED flashes red depending on the remaining battery power. Also, if **Battery Level Tone** is enabled, a Battery Level Tone (1 beep) sounds from the transceiver depending on the remaining battery power.

Table 7-5 Battery Status

Status	Number of LED Flashes	Number of Battery Level Tones
Full	4 times	4 times
Sufficient	3 times	3 times
Low	2 times	2 times
Very Low	1 time	1 time

Note

- If the following, Battery Status does not operate:
 - While the transceiver is in Emergency Mode
 - While the transceiver is transmitting
 - While the transceiver is executing Battery Warning
 - While the transceiver is in Transceiver Password Mode

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ([See](#) Transceiver Settings > Key Assignment)
- Configuring **Battery Level Tone** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Battery)

7.5 Reducing Battery Consumption (Battery Saver)

Supported Models: Portable

Analog Conventional/ P25 Conventional/ NXDN Conventional/ DMR Conventional

Battery Saver allows the transceiver to reduce power consumption by receiving intermittently.

The transceiver receives intermittently when there is no carrier and no key is pressed for 5 sec or more, or when the transceiver is in the following states:

● Analog Conventional channel

When there is a carrier, but the QT tone or DQT code does not match the tone or code preconfigured for the transceiver and no key is pressed for 5 sec or more

● P25 Conventional channel

When there is a carrier, but the NAC (Network Access Code) does not match the code preconfigured for the transceiver and no key is pressed for 5 sec or more

● NXDN Conventional channel

When there is a carrier, but the RAN (Radio Access Number) does not match the number preconfigured for the transceiver and no key is pressed for 5 sec or more

● DMR Conventional channel

When there is a carrier, but the Color Code does not match the code preconfigured for the transceiver and no key is pressed for 5 sec or more

Extension of the intervals for intermittent reception may reduce the battery consumption; however, interruptions to introductory parts of received audio may occur. To use **Battery Saver** effectively, there are systemic issues to consider, for instance, the duration from when the transceiver starts transmitting until the transceiver starts sending audio.

Intervals for intermittent reception are as follows.

Table 7-6 Duration of the Battery Saver

Save	No Carrier	Inconsistent Status of QT tone, DQT code, NAC code, RAN code, or Color Code
Off	Off	Off
Short	200 ms	400 ms
Medium	400 ms	800 ms
Long	800 ms	1600 ms




Figure 7-1 Battery Saver

Note

- Battery Saver does not function in an NXDN Trunking system.
- Battery Saver is not activated while the transceiver is scanning.

DMR Tier III Trunking (Power Save)

Battery Saver of the transceiver in a DMR Tier III Trunking system can be used by activating with the transceiver the Power Save function supported by the DMR Tier III Trunking system. The power consumption of the transceiver can be reduced by setting the transceiver receiving intermittently according to the timing managed by the system. The timing of reception by the transceiver is managed by the system.

If anything other than Off is configured in Battery Saver in KPG-D1, the transceiver requests Power Save to the system when the transceiver begins Registration. If the system supports Power Save, the system notifies the transceiver of the timing for receiving intermittently as a response. At the timing notified by the system, the transceiver will be receiving for 480 ms, and then will be in the paused state.

The following are the duration of the paused state.

Table 7-7 Duration of the Battery Saver (DMR Tier III Trunking)

Power Save	Duration of the Paused State
Short	480 ms
Medium	1440 ms
Long	3360 ms

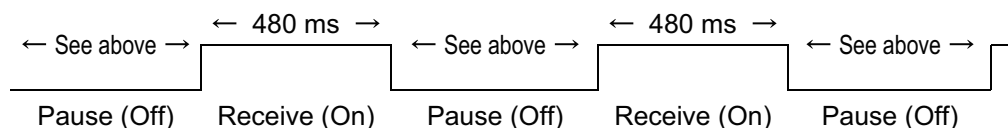


Figure 7-2 Battery Saver (DMR Tier III Trunking)

Note

- To make a Group Call, the Group ID of the transceiver targeted for **Power Save** must be registered in the system. Therefore, enable the configuration in **Group Subscription**.
- The **Power Save** function functions only in a DMR Tier III Trunking system.
- Battery Saver does not function while the transceiver is in Emergency Mode.
- Battery Saver functions even during Scan.
- Battery Saver continues to function even if a key is pressed.
- If the Registration key is pressed, the transceiver requests Power Save to a system even in the same system.
- Battery Saver does not function in a system where the transceiver does not request Registration.
- Battery Saver does not function outside of the communication area where the transceiver cannot receive a signal from a system.
- Whether the Battery Saver function is enabled can be checked in Maintenance Display Mode.
- Matching the configurations of Battery Saver in the transceivers used on the same system is recommended.
- The transceiver does not enter the paused state during communications.
- The battery life becomes longer as the paused time becomes longer. However, if a communication request arises for the transceiver in the paused state, it may take a long time to start communication, because the system waits for communication until the paused time of the transceiver ends.

Configuration using KPG-D1/ D1N


- Configuring **Battery Saver (Analog Conventional)** ([See](#) Transceiver Settings > Personal > Personal Features > Analog Conventional > General)
- Configuring **Battery Saver (P25 Conventional)** ([See](#) Transceiver Settings > Personal > Personal Features > P25 Conventional > General)
- Configuring **Battery Saver (NXDN Conventional)** ([See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > General)
- Configuring **Battery Saver (DMR Conventional)** ([See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > General)
- Configuring **Battery Saver (DMR-based Trunking)** ([See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > General)

7.6 Displaying the Remaining Battery Power When the Transceiver Is Turned ON (Power-on Battery Information)


Supported Models: Portable

Power-on Battery Information is the function to display the remaining capacity or voltage of an Intelligent Battery when the transceiver is turned ON. When using the transceiver, the remaining capacity or voltage of the battery can be checked with greater accuracy than the “Battery Status” icon.

If “Charge [%]” is configured in **Battery Information**, the remaining capacity of an Intelligent Battery appears for 2 sec when the transceiver is turned ON.



If “Voltage [V]” is configured in **Battery Information**, the voltage of an Intelligent Battery appears for 2 sec when the transceiver is turned ON.



Note

- When the transceiver is turned ON, the remaining capacity or voltage of the battery does not appear when the information of an Intelligent Battery cannot be acquired, such as when the transceiver is connected to the battery charger or when a battery other than an Intelligent Battery is used.
- For KNB-L11, the information of an Intelligent Battery can be acquired even when the transceiver is connected to the battery charger.

Configuration using KPG-D1/ D1N


Configuring **Battery Information** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Power-on)

7.7 Checking the Detailed Information of a Battery (Battery Information Display)

Supported Models: Portable

Battery Information Display is the function for checking the detailed information of an Intelligent Battery. The information of an Intelligent Battery, such as the battery consumption level and the performance temperature, can be checked.

By pressing the **Menu** key to enter Menu Mode, and then executing "Battery Information Display", Battery Information Display Mode is entered. (Refer to [Using Menu Mode.](#))



In Battery Information Display Mode, the following battery information is displayed:

Table 7-8 Battery Information Display Mode

Item	Appearance of the Display	Display Range	Description
Current Charge	Charge	0 % to 100 %	Indicates the charge status of an Intelligent Battery.
Cycle Count	Count	0 to 65535	Indicates the number of charges and discharges of an Intelligent Battery.
Battery Health	Health	0 % to 100 %	Indicates the degradation status of an Intelligent Battery.
Current Voltage	Voltage	0 V to 12.00 V	Indicates the voltage value of an Intelligent Battery.
Temperature	Temp.	Celsius: -60.0 °C to 100.0 °C Fahrenheit: -76.0 °F to 212.0 °F	Indicates the temperature of an Intelligent Battery.
Chemistry	Chem.	Li-ion, Ni-MH	Indicates the type of an Intelligent Battery.
Serial Number	Serial	10-digit alphanumeric character	Indicates the serial number of an Intelligent Battery.
Model Name	Model	KNB-L1, KNB-L2, KNB-L3, KNB-N4, KNB-LS5, KNB-LS6, KNB-L11	Indicates the model name of an Intelligent Battery.
Date of First Use	1st Used	Year/ Month/ Day	Indicates the date of first use of an Intelligent Battery. The order of the year, month and day depends on the configuration of Date Format. * If the values are not entered on the Battery Reader such as KAS-12, "--/--/--" is displayed.
Battery Alias	Alias	20 alphanumeric characters and symbols	Indicates the arbitrary string of text entered on the Battery Reader such as KAS-12. * Only ASCII codes 0x20 - 0x7E are enabled. A character code other than these ASCII codes will be replaced with one or more spaces.

Pressing the [▼] key can change the display in the following order:

Charge, Count, Health Display → Voltage, Temp., Chem. Display → Serial, Model, 1st Used Display → Alias Display → Charge, Count, Health Display → ...

Pressing the [▲] key can change the display in the following order:

Charge, Count, Health Display → Alias Display → Serial, Model, 1st Used Display → Voltage, Temp., Chem. Display → Charge, Count, Health Display → ...

Note

- "---" remains on the display if the information of an Intelligent Battery cannot be acquired such as when the transceiver is connected to the battery charger or when the battery other than an Intelligent Battery is used.
- For KNB-L11, the information of an Intelligent Battery can be acquired even when the transceiver is connected to the battery charger.
- Battery Information is not updated while the transceiver is in Battery Information Display Mode.
- Since KNB-N4 does not support **Battery Alias** and **Date of First Use**, "---" remains for these items even if reading is completed properly.

GPS Position Display has the following functions:

- Displays the current location (latitude and longitude) on the display of the transceiver
- Displays the altitude of the current location on the display of the transceiver
- Automatically toggles the display of the transceiver between displaying the current location (latitude and longitude) and the altitude display (KCH-19 (Basic Panel) only)
- Stores the GPS data in a microSD card of the transceiver.
- Displays the stored GPS data from a microSD card of the transceiver.

For example, a forest ranger or forest firefighter can use this function to monitor the current location and report the location to the base station in order to smoothly perform their tasks smoothly.

 Note

- A microSD card cannot be used for NX-5200LG/ NX-5300LG.

8.1 Configuring the GPS Position Display

The functions below related to GPS Position Display can be configured using KPG-D1/ D1N. The functions must be configured in the following order.

1) Communication port

To use the built-in GPS receiver unit, configure **Built-in GPS Receiver/Bluetooth** to be enabled.

To use an external GPS receiver unit, assign "GPS" to the communication port to which the GPS receiver unit is connected. (Refer to [Available Functions for COM Port.](#))

2) PF key

GPS Position Display needs to be assigned to a key on the transceiver.

Pressing the **GPS Position Display** key causes the transceiver to enter GPS Position Display Mode.

The transceiver also enters GPS Position Display Mode if "GPS Position Display" is selected after entering Menu Mode by pressing the **Menu** key. (Refer to [Using Menu Mode.](#))

3) Configuring displays in GPS Position Display Mode

- **Latitude and Longitude**

This function can be used to configure whether the latitudinal and longitudinal values appear on the transceiver display.

If this function is enabled, the latitudinal and longitudinal values appear on the transceiver display in GPS Position Display Mode. For the convenience of the user, the latitude and longitude display format can be selected from "Degrees, Minutes" and "Degrees, Minutes, Seconds".

If this function is disabled, the latitudinal and longitudinal values do not appear in GPS Position Display Mode.

• Altitude

This function can be used to configure whether the altitudinal value appears on the transceiver display. If this function is enabled, the altitudinal value appears on the transceiver display in GPS Position Display Mode. For convenience of the user, either meters or feet can be configured for the format to display the altitudinal value.

If this function is disabled, the altitudinal value does not appear in GPS Position Display Mode.


Configuration using KPG-D1/ D1N

- Configuring **COM port** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface > COM port)
- Configuring **Built-in GPS Receiver/Bluetooth** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth)
- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **Latitude and Longitude** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/ Bluetooth > GPS > GPS Position Display)
- Configuring **Altitude** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > GPS > GPS Position Display)

8.2 Displaying the Location Information

The transceiver enters GPS Position Display Mode if the **GPS Position Display** key is pressed or “GPS Position Display” is selected by pressing the **Menu** key while the transceiver is in standby mode.

For KCH-19 (Basic Panel), the transceiver automatically toggles between displaying the location (latitude and longitude) and the altitude approximately every 5 sec while in GPS Position Display Mode. Pressing the **Menu** ([]) key or [*] key aborts GPS Position Display Mode. (However, when a microSD card is inserted in the transceiver and when **Record Format** (Manual/Auto) is configured is excepted.)

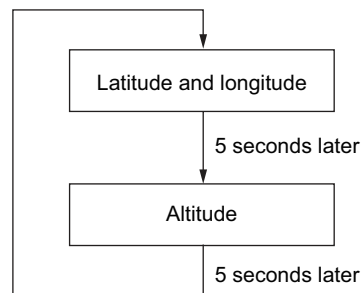

Note

- The transceiver cannot enter GPS Position Display Mode if the display that appears in GPS Position Display Mode is not configured.
- For KCH-19 (Basic Panel), pressing and holding the **Menu** ([]) key or [*] key pauses the automatic toggling of the display. Pressing and holding the **Menu** ([]) key or [*] key again resumes the automatic toggling of the display.

Operating the transceiver

1 Press the **GPS Position Display** key.


The transceiver enters GPS Position Display Mode.
The following operations are identical even if the transceiver enters GPS Position Display Mode by pressing the **Menu** key.
The following displays appear:

● **Latitude and Longitude Display**

“Degrees, Minutes” display



“Degrees, Minutes, Seconds” display



● **Altitude Display**

Meters display
“Altitude” is displayed in meters.



Feet display
“Altitude” is displayed in feet.




● **GPS Non-positioning Status Display**

The “X” icon blinks if 5 sec elapse after the transceiver receives non-positioning data from the GPS receiver unit and is not able to receive serial data.



“-” appears for all digits on the display if the transceiver receives no location data from the GPS receiver unit, such as immediately after the transceiver is turned ON.



2 Press the **Menu** ([]) key, or [*****] key.

GPS Position Display Mode is aborted. (However, when a microSD card is inserted in the transceiver and when **Record Format (Manual/Auto)** is configured is excepted.)

8.3 Confirming the Location Information Stored in the microSD Card

The GPS data stored in a microSD card can be displayed on the LCD display of the transceiver. Also, the GPS data of a microSD card can be deleted.


Refer to “[Storing the GPS Data \(GPS Data Storage\)](#)” for instructions on how to store GPS data to a microSD card.

Displaying the GPS Data File

By operating a key of the transceiver while GPS data appears, the GPS data contents stored on a microSD card can be displayed. The following conditions are required to display the GPS data contents stored on a microSD card.

- A microSD card is inserted.
- **Record Format (Manual/Auto)** is configured.

State of the standby display (The “SD” icon lights.)




State when the transceiver enters GPS Position Display Mode (While the position of the own transceiver appears)



Operating the transceiver


1 Press the [▶] key or [□] key in GPS Position Display Mode.

A Key Beep A (1 beep) sounds from the transceiver, and the GPS data file stored in the GPS_M folder of the microSD card appears.




2 Select the GPS data file, and then press the [▶] key or [□] key.

A Key Beep A (1 beep) sounds from the transceiver, and the GPS data appears.



3 Select the GPS data, and then press the [▶] key or [□] key.

A Key Beep A (1 beep) sounds from the transceiver, and the location information of the latitude, longitude, and altitude appears.



Deleting the GPS Data File


The GPS data stored on a microSD card of the transceiver can be deleted.

Operating the transceiver

● Deleting one GPS data file


1 Select the GPS data file to delete, and then press the Back ([↶]) key or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to delete the selected GPS data file appears.




2 Press the Menu ([□]) key, or [*] key.

A Key Beep B (2 beeps) sounds from the transceiver, and the GPS data file is deleted. After deletion, if a GPS data file exists in the GPS_M folder of a microSD card, the date and time of GPS data file creation appears.




After deletion, if a GPS data file does not exist in the GPS_M folder of a microSD card, the standby display screen is restored and "Empty" appears for 1 sec.




● Deleting all GPS data files

1 Press and hold the **Back** ([↶]) key, or **[*]** key.

A Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to delete the selected GPS data file appears.




If the same key further continues to be pressed and held in this state, a Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to delete all GPS data files appears.




2 Press the **Menu** ([☰]) key, or **[*]** key.

A Key Beep B (2 beeps) sounds from the transceiver, and all GPS data files are deleted. If deleting 20 or more GPS data files, "Deleting" appears on the transceiver screen while deleting.



After deletion, the standby display screen is restored, and then "Empty" appears for 1 sec.



Note

- If the following keys are pressed while deleting all of the GPS data files, a Key-entry Error Tone (1 beep) sounds from the transceiver, and the transceiver does not respond at all.
 - **Menu** ([☰]) key
 - **Back** ([↶]) key
 - **[*]** key
 - **[#]** key
- The display format of the date and time depends on Date Format and Time Format.

By using the internal memory of the transceiver or using a microSD card or microSDHC card mounted on the transceiver, audio can be recorded (**Auto Recording**) or played back (**Playback**), or functions such as **GPS Data Storage** can be used.

The recorded audio and acquired GPS data is stored in the internal memory of the transceiver or a microSD card or microSDHC card mounted on the transceiver.

Note

- A microSDXC card cannot be used.
- Hereinafter, microSD card and microSDHC card are referred to collectively as “microSD card”.
- A microSD card cannot be used for NX-5200LG/ NX-5300LG.

9.1 About microSD Card

If a microSD card is properly recognized after mounted on the transceiver, the “” icon appears. If the microSD card is properly recognized, audio data recorded by using Auto Recording and GPS data acquired by using GPS Data Storage can be stored in the microSD card.



If the microSD card is not properly recognized due to the following causes, the “” icon appears:

Table 9-1 Causes of microSD Card Not Being Recognized Properly

Cause	Description
A card other than a microSD card is inserted	“Unsupported SD” appears on the display. Insert a microSD card.
• The microSD card is not correctly inserted • The microSD card is corrupted • Management information in the microSD card is corrupted	“SD Card Error” appears on the display. In order to recognize the microSD card properly, execute one of the following methods: • Turn the transceiver OFF and then turn it ON again • Remove the microSD card and then insert it again • Change the microSD card
The file system of the microSD card is different from the file system of the transceiver	“File Sys Error” appears on the display. Format the microSD card.

Note

- If a microSD card is used for the first time on the transceiver, format the microSD card beforehand. (Refer to **Formatting a microSD Card**.)
- When the microSD card is removed from the transceiver, reset the recognition of the microSD card before removing. (Refer to **Removing the microSD Card**.)
- A microSD card manufactured by Toshiba, SanDisk or Panasonic is recommended.

Formatting a microSD Card

In order to use a microSD card on the transceiver, the microSD card needs to be formatted in advance in Format SD Card Mode.

Pressing the **Format SD Card** key places the transceiver in Format SD Card Mode. Or, pressing the **Menu** key to enter Menu Mode and then selecting “Format SD Card” places the transceiver in Format SD Card Mode. (Refer to [Using Menu Mode](#).)

Operating the transceiver


1 Press the **Format SD Card** key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters Format SD Card Mode.

The following operations are identical even if the transceiver enters Format SD Card Mode by pressing the **Menu** key.

Note


- In the following cases, pressing the Format SD Card key sounds a Key-entry Error Tone (1 beep) from the transceiver, and the transceiver does not enter Format SD Card Mode.
 - If no microSD card is inserted
 - If the microSD card is being accessed
 - If “Unsupported SD” is displayed



2 Press the **Menu** ([]) key, or [*****] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the screen to select whether to execute formatting appears.

3 Press the [**▲**] key or [**▼**] key and select “Start”.




4 Press the **Menu** ([]) key, or [*****] key.

The formatting starts after a Key Beep A (1 beep) sounds from the transceiver.

Note

- If the formatting fails, "Format Error" is displayed for 1 sec. Also, if the "  " icon appears before the formatting is executed, the "  " icon appears.

When the formatting completes, "Complete" is displayed.



Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

Removing the microSD Card

In order to avoid damage to a file stored in a microSD card or to avoid failure of the transceiver, the recognition of the microSD card needs to be reset in Eject SD Card Mode before removing the microSD card from the transceiver. If the recognition of a microSD card is reset, the transceiver enters the state where the microSD card can be safely removed.


Pressing the **Eject SD Card** key places the transceiver in Eject SD Card Mode. Or, pressing the **Menu** key to enter Menu Mode and then selecting "Eject SD Card" places the transceiver in Eject SD Card Mode. (Refer to [Using Menu Mode](#).)

Operating the transceiver

1 Press the **Eject SD Card** key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters Eject SD Card Mode.


The following operations are identical even if the transceiver enters Eject SD Card Mode by pressing the **Menu** key.



2 Press the **Menu** ([]) key, or [*****] key.

A Key Beep A (1 beep) sounds from the transceiver, and the screen to select whether to reset the recognition of the microSD card appears.

3 Press the [▲] key or [▼] key and select “Start”.



4 Press the Menu ([⏏]) key, or [*] key.

The recognition of the microSD card is reset after a Key Beep A (1 beep) sounds from the transceiver.



Configuration using KPG-D1/ D1N

Assigning functions to the PF keys on the transceiver (🔑See Transceiver Settings > Key Assignment)

Folder Structure of a microSD Card

If a microSD card is formatted, all the data in the microSD card is deleted, and then folders are created in the following structure:

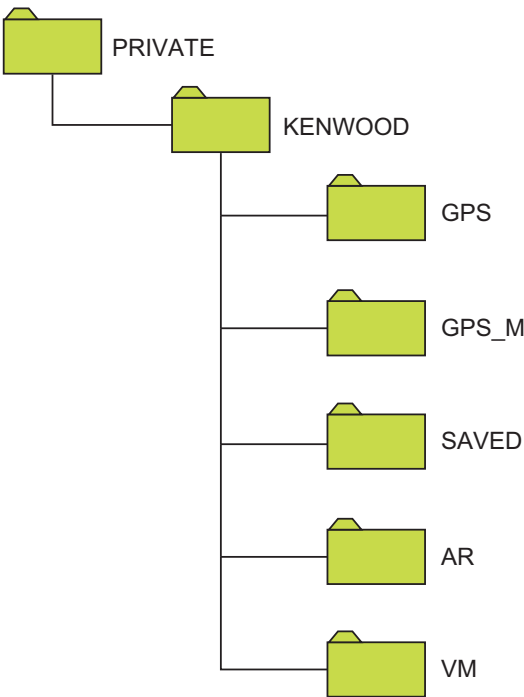


Figure 9-1 Folder Structure of a microSD Card

About file name

● GPS folder

GPS data files acquired by using **GPS Data Storage** are stored.

● GPS_M folder

GPS data files acquired by using **GPS Data Storage (Manual)** are stored.

● SAVED folder

Audio data files recorded by using **Auto Recording** or **Voice Memo** can be stored. (Refer to [Storing Audio Data in the Saved Folder.](#))

● AR folder

Audio data files recorded by using **Auto Recording** are stored.

● VM folder

Audio data files recorded by using **Voice Memo** are stored.

In each folder, a maximum of 250 files can be stored.

The following file name is automatically given to the file stored in each folder.

20140930_174530_AR_N65519.WAV



① Start date of storing

The year, month, and day of the date when storing started.

② Start time of storing

The time (hour, minute, and second) when storing started.

③ Function type

"AR" appears for an audio data file recorded by **Auto Recording**, "GPS" appears for a GPS data file stored by **GPS Data Storage**, and "VM" appears for an audio data file recorded by **Voice Memo**.

④ ID information

The ID information of the transmitting transceiver. This information is added only for an audio data file recorded by **Auto Recording** when receiving an Individual Call, and for an audio data file recorded by **Voice Memo**. The following is the ID information when an Individual Call is received. "----" appears if no ID information exists.

Table 9-2 ID Information

System	ID Information
MDC-1200	M + Unit ID
FleetSync	F + Fleet ID
NXDN	N + Unit ID
P25	A + Unit ID
DMR	D + Unit ID

Note

- In a DMR Tier III Trunking system and S-Trunking system, a DMR ID in the range between 1 and 16776415 is used for the Unit ID of ID information even if **Fleet Dialing Plan** is enabled.

⑤ Extension

".WAV" appears for an audio data file recorded by **Auto Recording**, and ".TXT" appears for a GPS data file stored by **GPS Data Storage**.

Conditions that enables audio data file and GPS data file to be stored in a microSD card

● Audio data file

In **Auto Recording** and **Voice Memo**, an audio data file is created for each recording. (Refer to [Recording Transmitted and Received Audio Automatically \(Auto Recording\)](#), [Recording Audio to a microSD Card \(Voice Memo\)](#).)

In order to create an audio data file, the following conditions needs to be satisfied:

- The number of audio data files that exist in the AR folder or VM folder is less than 250.
- The capacity for the length of time of 2 recording sessions in **Auto Recording** (Maximum Recording Length x 2) is available.
- The capacity for the length of time of 2 recording sessions in **Voice Memo** (10 minutes x 2) is available.
- If the clock count by RTC is paused, or if the clock of the transceiver is not configured, no file having "009999" at the beginning of the file name exists.

Note

- The method of storing an audio data file when the full capacity of a microSD card or the full capacity of the internal memory has been used varies depending on the configuration in **First-in First-out Deletion**. (Refer to [Configuring the Storage Method of an Audio Data File \(First-in First-out Deletion\)](#).)

● GPS data file

The GPS data acquired by using **GPS Data Storage** is stored in the GPS data file having the same date in the GPS folder. (Refer to [Storing the GPS Data \(GPS Data Storage\)](#).)

If no GPS data file exists or if the date of the file changes, a new GPS data file is created automatically.

If the clock count by RTC is paused, or if the clock of the transceiver is not configured, the GPS data is stored in the GPS data file of the file size less than 43 MB. If no GPS data file exists or if the file size reaches 43 MB, a new GPS data file is created automatically.

In order to create a GPS data file, the following conditions needs to be satisfied:

- The number of GPS data files that exist in the GPS folder is less than 250.
- A capacity for storing 86,400 GPS data is available. (If the capacity is not available, the oldest GPS data file is deleted to secure the required capacity.)
- If the clock count by RTC is paused, or if the clock of the transceiver is not configured, no file having "009999" at the beginning of the file name exists.

The GPS data acquired by using **GPS Data Storage (Manual)** is stored in the GPS data file having the same date in the GPS folder. (Refer to [Storing the GPS Data \(GPS Data Storage\)](#).)

If no GPS data file exists or if the date of the file changes, a new GPS data file is created automatically.

If the clock count by RTC is paused, or if the clock of the transceiver is not configured, the GPS data is stored in the GPS data file of the file size less than 128 KB. If no GPS data file exists or if the file size reaches 128 KB, a new GPS data file is created automatically.

In order to create a GPS data file, the following conditions needs to be satisfied:

- The number of GPS data files that exist in the GPS folder is less than 250.
- A capacity for storing 2,000 GPS data is available. (If the capacity is not available, the oldest GPS data file is deleted to secure the required capacity.)
- If the clock count by RTC is paused, or if the clock of the transceiver is not configured, no file having "009999" at the beginning of the file name exists.

Configuring the Warning Behavior for the Remaining Memory Capacity (Low Memory Warning)

Low Memory Warning is the function to warn that the available capacity is insufficient by the display or Alert Tone when the available capacity on a microSD card becomes 10 % or less.

The transceiver behaves as follows according to the configuration in **Low Memory Warning**:

Table 9-3 Low Memory Warning

Configuration	Description
Off	The transceiver does not warn even if the available capacity on a microSD card becomes 10 % or less.
Display	If the available capacity on a microSD card becomes 10 % or less, "Low SD Memory" appears on the display for 1 sec. After that, "Low SD Memory" appears for 1 sec at 10-sec intervals.
Display & Alert Tone	If the available capacity on a microSD card becomes 10 % or less, "Low SD Memory" appears on the display for 1 sec, and a Low SD Memory Tone (4 beeps) sounds from the transceiver simultaneously. After that, "Low SD Memory" appears for 1 sec at 10-sec intervals, and a Low SD Memory Tone (4 beeps) sounds from the transceiver simultaneously. However, a Low SD Memory Tone (4 beeps) does not sound from the transceiver if the transceiver is transmitting.

Configuration using KPG-D1/ D1N

Configuring **Low Memory Warning** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/ Memory)

Configuring the Storage Method of an Audio Data File (First-in First-out Deletion)

First-in First-out Deletion is the function to delete the oldest audio data file in order to store a new audio data file if the full capacity of the microSD card or the full capacity of the internal memory has been used.

The transceiver behaves as follows according to the configuration in **First-in First-out Deletion**:

Table 9-4 First-in First-out Deletion

Configuration	Description
Enabled	The transceiver deletes the oldest audio data file in the oldest folder and stores a new audio data file in the microSD card. The transceiver deletes the oldest audio data file stored in the internal memory and stores a new audio data file in the internal memory. When storing in the microSD card: The transceiver deletes the oldest audio data file in the oldest folder and stores a new audio data file in the microSD card. When storing in the internal memory: The transceiver deletes the oldest audio data file stored in the internal memory and stores a new audio data file in the internal memory. When the transceiver is turned OFF by the Power switch, the transceiver backs up the audio data recorded by Auto Recording.
Disabled	The audio data files stored in the microSD card or the internal memory are not deleted. The transceiver cannot record. When storing in the microSD card: The audio data files stored in the microSD card or the internal memory are not deleted. The transceiver cannot record. When storing in the internal memory: The transceiver backs up the audio data each time the transceiver records by Auto Recording.

Configuration using KPG-D1/ D1N

Configuring **First-in First-out Deletion** ( See Transceiver Settings > Optional Features > Optional Features 2 > microSD/ Memory)

Recording Time of a microSD Card

Refer to the following table for the recording time of a **microSD** card for **Voice Memo** and **Auto Recording**.

Table 9-5 Rough Indication of the Recording Time of a microSD Card

Capacity	Maximum Length of Recording Time (Approximate)
2 GB	35 h
4 GB	70 h
8 GB	140 h
16 GB	280 h
32 GB	560 h

9.2 Recording Transmitted and Received Audio Automatically (Auto Recording)

Auto Recording is the function to record transmitted or received audio automatically to the internal memory or to a microSD card. This function is used if the audio needs to be listened again after a part of the conversation is missed, or if the previous conversation needs to be kept as a record.

If a microSD card is mounted on the transceiver and the “” icon appears, the audio is recorded to the microSD card. If no microSD card is mounted on the transceiver, the audio is recorded to the internal memory.

To use this function, **Auto Recording** needs to be enabled by using KPG-D1/ D1N, and the method to start recording needs to be configured in **Recording Type**.

The transceiver starts recording as follows according to the configuration in **Recording Type**:

Table 9-6 Recording Type

Configuration	Description
All TX/RX Audio	If transmission or reception starts, the audio is recorded to the internal memory or a microSD card. If the recording starts, the timer for Maximum Recording Length is activated. When the amount of time configured in Maximum Recording Length elapses while recording, the recording ends.
Individual Call	If an Individual Call to the own transceiver is received and enters the matching state, the audio is recorded to the internal memory or a microSD card. If the recording starts, the timer for Maximum Recording Length is activated. When the amount of time configured in Maximum Recording Length elapses while recording, the recording ends. After the recording ends, while in the matching state, if an Individual Call from the same transceiver is received or if Talkback is activated, the recording does not start. However, if an Individual Call from a different transceiver to the own transceiver is received, the recording starts. The matching state indicates the following states: MDC-1200/ FleetSync/ NXDN Conventional/ DMR Conventional: The state that Optional Signaling matches NXDN Trunking/ P25 Conventional/ P25 Trunking/ DMR-based Trunking: The state that the ID Name or Unit ID of the transmitting transceiver is displayed 2-tone/ DTMF: The state that the 2-tone or DTMF code is received, and the Optional Signaling matches 5-tone: For 5-tone, the transceiver starts recording to the internal memory or microSD card if audio sounds from the speaker after the 5-tone sequence matches and Decode Format (MONF, MONO) is executed.

Note

- Maximum Recording Length is the maximum length of time for Auto Recording to record a single session. (Refer to [Configuring Recording Time \(Maximum Recording Length\)](#).)

Transceiver behavior

Caution

Do not disconnect the power source of the transceiver or remove the microSD card from the transceiver while the audio is recorded to the microSD card. Also, for Portable, be careful that the remaining battery power does not run out. The data may not be stored, or the data may be damaged.


Each screen is an example of the display when an Individual Call in an NXDN Conventional system is received and the received audio is recorded to a microSD card.

● Starting Auto Recording

If **Auto Recording** starts recording the received or transmitted audio at the timing configured in **Recording Type**, the “” icon blinks.

The recording start date and time is stored. Also, if “Individual Call” is configured in **Recording Type**, the ID information of the transmitting transceiver is stored.

When the amount of time configured in **Maximum Recording Length** elapses, the “” icon disappears and the recording ends.



● If Auto Recording does not start because the maximum number of recordings has been reached


“Memory Full” appears on the display for 1 sec. After that, “Memory Full” appears on the display for 1 sec at 10-sec intervals.



If the audio is recorded to the internal memory, **Auto Recording** does not start if **First-in First-out Deletion** is disabled, and if the maximum number of recordings has already been reached. Also, if the audio is recorded to a microSD card, **Auto Recording** does not start if the conditions for storing data in the microSD card are not satisfied. (Refer to [Conditions that enables audio data file and GPS data file to be stored in a microSD card.](#))

● If Auto Recording does not start because a file having the same file name exists

"SD Card Error" appears on the display for 1 sec.



If the audio is recorded to a microSD card, **Auto Recording** does not start if a file having the same file name exists in the AR folder.

Note

- If one of the following occurs during the recording, the timer for **Maximum Recording Length** stops and the recording ends:
 - The Gap timer elapses (the recording continues for 3 sec from when the transmission or reception completes. This duration of time is called the Gap timer.)
 - The channel or site is changed
 - Scanning starts or stops
 - The transceiver enters Emergency Mode
 - The data transmission starts
 - The **PTT** switch is pressed while **Public Address** is enabled (Mobile only)
 - The **PTT** switch is pressed while **Intercom** is enabled (only for a Dual Control Head structure of Mobile)
 - The **Clear** key is pressed and the communication ends
 - The DTMF code and "#" code are received, and the matching state of Optional Signaling is reset
- While **Priority Scan** or **Priority Monitor Scan** is activated, the transceiver behaves as follows:
 - Regardless of the configuration in **Recording Type**, the muted sound is recorded while **Lookback** is activated.
 - If "All TX/RX Audio" is configured in **Recording Type**, and if a signal of a Priority Channel is received while the received audio of a Normal Channel (which is not the Priority Channel) is recorded, the recording continues and the received audio of the Priority Channel is recorded.
 - If "Individual Call" is configured in **Recording Type**, and if a signal of a Priority Channel is received while the received audio of a Normal Channel is recorded, the recording of the Normal Channel ends, and then recording of the Priority Channel starts.
- During transmission, the audio is recorded via the Mic Line or MI2 Line.
- The recorded audio can be played back or deleted in Playback Mode. (Refer to [Playing Back the Recorded Audio \(Playback\)](#).)
- When transmitting data, **Auto Recording** does not start.
- Although a Transmit Tone is recorded, a Control Tone and Side Tone are not recorded.
- If "All TX/RX Audio" is configured in **Recording Type**, the ID information is not stored when **Auto Recording** is started.
- After the configuration data is written, the configuration values in Internal Memory of **Maximum Recording Length** before and after writing are compared for each RF Deck. If the configurations differ, the audio data recorded in the internal memory is deleted when the transceiver is turned ON.
- If the configuration data with **Audio/GPS Data Erase (Internal Memory)** enabled is written, the audio data recorded in the internal memory is deleted when the transceiver is turned ON.
- If **Auto Recording** is used with other functions such as GPS Data Storage, the beginning may be missing from the audio recorded by **Auto Recording**.

Configuration using KPG-D1/ D1N

- Configuring **Auto Recording** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory > Auto Recording)
- Configuring **Recording Type** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory > Auto Recording)

Configuring Recording Time (Maximum Recording Length)

Maximum Recording Length is the maximum length of time for **Auto Recording** to record a single session.

By using KPG-D1/ D1N, the maximum length of time for **Auto Recording** to record a single session can be configured for each the internal memory and a microSD card.

Table 9-7 Maximum Recording Length

Configuration	Description
Internal Memory	Either 30 sec or 60 sec can be configured for the maximum length of recording time for a single session when recording the transmitted or received audio to the internal memory. If 30 sec is configured, 4 recordings can be recorded. If 60 sec is configured, 2 recordings can be recorded. If the maximum number of recordings is reached, a further new recording is disabled.
microSD Card	The maximum length of recording time for a single session can be configured from 15 sec to 300 sec in 15-second increments when recording the transmitted or received audio to a microSD card mounted on the transceiver.

Configuration using KPG-D1/ D1N

Configuring **Maximum Recording Length** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory > Auto Recording > Maximum Recording Length)

9.3 Recording Audio to a microSD Card (Voice Memo)

Voice Memo is the function to record audio to a microSD card manually. The content of a conversation around the transceiver can be recorded.

If the transceiver is placed in Voice Memo Mode, the transceiver starts recording to the microSD card.

Pressing the **Voice Memo** key places the transceiver in Voice Memo Mode.


Or, the transceiver enters Voice Memo Mode when "Voice Memo" is executed after entering Menu Mode by pressing the **Menu** key.

Operating the transceiver

● Starting the recording


If "Voice Memo" is executed after the transceiver enters Menu Mode by pressing the **Voice Memo** key or the **Menu** key, a Key Beep A (1 beep) sounds from the transceiver, and the transceiver enters Voice Memo Mode. The transceiver starts recording to a microSD card.

The recording start date (year, month, and day), the recording start time (hour and minute), and the length of recording time appear on the display while the transceiver is in Voice Memo Mode.



● If recording does not start because the maximum number of recordings has been reached:

"Memory Full" appears on the display for 1 sec.



● Ending the recording

If 10 minutes elapse after recording starts, if any transceiver key is operated, or if the transceiver enters the following states, the transceiver exits Voice Memo Mode and recording ends:

- When the channel or site is changed
- When scanning is started or stopped
- When the transceiver enters Emergency Mode
- When the transceiver sends data (Recording is stopped if data is sent by user operation. Recording is not stopped if GPS data is automatically sent.)
- When the transceiver sends audio
- When the transceiver receives audio
- When the microSD card is removed

If 10 minutes elapse after recording starts and the transceiver exits Voice Memo Mode, a Record Stopped Tone (4 beeps) sounds from the transceiver, and "Record Stopped" appears on the display for 2 sec.



Note

- Recording does not start if the conditions for storing data in the microSD card are not satisfied. (Refer to [Conditions that enables audio data file and GPS data file to be stored in a microSD card.](#))
- **Voice Memo** records audio to the microSD card. Therefore, while recognition of the microSD card is not completed, while the microSD card is formatted, or while an audio file is deleted, a Key-entry Error Tone (1 beep) sounds from the transceiver and recording does not start even if the **Voice Memo** key is pressed.
- The maximum length of recording time is 10 minutes.
- **Mode Reset Timer** is extended while the transceiver is in Voice Memo Mode. Also, the VOX function is temporarily disabled.
- If the transceiver receives a request message for GPS data by using wireless communication while in Voice Memo Mode, the transceiver sends the GPS data to the base station after the transceiver exits Voice Memo Mode. (Refer to [Storing the GPS Data \(GPS Data Storage\).](#))
- If **Voice Memo** is used with other functions such as GPS Data Storage, the beginning may be missing from the audio recorded by **Voice Memo**.

About the Audio to Be Recorded

The following audio is recorded while the transceiver is in Voice Memo Mode.

Portable:

If a speaker microphone (such as KMC-54WD) is connected to the transceiver, the audio inputted to the microphone of the speaker microphone is recorded. If a speaker microphone is not connected, the audio inputted to the microphone of the transceiver is recorded.

Mobile:

The audio inputted to the Mic Line is recorded.

Note

- The inputted audio is recorded even if a Bluetooth-compatible headset is connected to the transceiver.
- For Mobile, the audio path of the Mic Line changes according to the configuration in **Control Head Mic Input**. (Refer to [Selecting the Audio Input Line If Detaching and Using Control Head \(Control Head Mic Input\).](#))

9.4 Playing Back the Recorded Audio (Playback)

If the transceiver enters in Playback Mode, the audio data recorded by using **Auto Recording** can be played back. Unnecessary recorded data can also be deleted.

Pressing the **Playback** key places the transceiver in Playback Mode. Or, the transceiver can also be placed in Playback Mode by selecting "Playback" after placing the transceiver in Menu Mode by pressing the **Menu** key. (Refer to **Using Menu Mode**.)

In Playback Mode, if a microSD card is mounted on the transceiver and the "SD" icon appears, only the audio data stored in the microSD card is displayed. If no microSD card is mounted on the transceiver, only the audio data stored in the internal memory is displayed.

Note

- The audio data cannot be removed from the internal memory and stored.

Operating the transceiver

● Playing back the audio data


1 Press the **Playback** key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters Playback Mode.

The subsequent operations are identical even if the transceiver enters Playback Mode by pressing the **Menu** key.

- **If a microSD card is not inserted in the transceiver:**

The audio data stored in the internal memory is displayed in a list.



- **If a microSD card is inserted in the transceiver:**

The category folders of audio data stored in the microSD card are displayed in a list.

Saved:


The audio data recorded by using Auto Recording or Voice Memo stored in the Saved folder is stored.

Auto Recording:

The audio data recorded by using Auto Recording is stored.

Voice Memo:

The audio data recorded by using Voice Memo is stored.



Selecting a category folder and pressing the **Menu** ([]) key displays the audio data folders stored in the category folder.

Selecting an audio data folder and pressing the **Menu** ([]) key displays the audio data stored in the audio data folder in a list.

 Note

- A folder in which no audio data is stored is not displayed.
- The oldest audio data is displayed as list number 1.
- Each list of audio data is displayed in the format of either the recording start date and time or the ID of the transmitting transceiver. Pressing the [] key or [] key can switch the display. The recording start date and time is displayed according to the configurations in **Date Format** and **Time Format**.
- If no audio data is stored, “Empty” is displayed for 1 sec.
- In a DMR Tier III Trunking system and S-Trunking system, if **Fleet Dialing Plan** is enabled, an ID is displayed in the Number Prefix (NP) - Fleet Individual Number (FIN) - Individual Number (IN) format. However, if the displayed ID and the ID of the transceiver are the same, the display of Number Prefix (NP) - Fleet Individual Number (FIN) is omitted. Also, if the ID cannot be converted to the Number Prefix (NP) - Fleet Individual Number (FIN) - Individual Number (IN) format, the ID is displayed in the format from UID 1 to UID 16776415. In other cases, the saved ID appears as it is.



2 Press the [] key or [] key to select the audio data, and then press the **Menu** ([]) key or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, the playback screen appears, and playback of the audio data starts.



If playback of the audio data having the last list number ends, the list display is restored.



● Playing back the latest audio data

Press the **Playback (Last Recording)** key. The transceiver emits a Key Beep A (1 beep) tone and enters Playback Mode.

The playback screen appears and the transceiver starts playing the latest audio data.



When the audio data playback ends, the standby display is restored.

If **Playback End Tone** is enabled, a Playback End Tone (3 beeps) is emitted from the transceiver.

Note

- If no audio data is stored, "Empty" is displayed on the standby display for 1 sec.

The following operations are enabled during playback:


Table 9-8 Operations during Playback

Transmission Operation	Description
Pause	Pressing the Menu ([) key or [*] key pauses the playback of audio data. Pressing the Menu ([) key or [*] key again resumes the playback of audio data. If the playback screen is displayed using the Playback (Last Recording) key, the Back ([) or [#] key can also operate in the same way.
Cue	Pressing the [) key cues to the beginning of the audio file being played back, and then starts the playback. If the [) key is pressed again before the playback of audio data starts, the playback starts after cueing to the beginning of the audio data of the previous list number. Pressing the [) key cues to the beginning of the audio data of the next list number, and then starts the playback. Pressing the [) key during playback of the audio data of the last list number ends the playback and the list display is restored. (If the playback screen is displayed by pressing the Playback (Last Recording) key, the standby display is restored.) If the playback is being paused, the audio data is cued while remaining in the paused state.
Rewind	While the [) key is pressed and held, the audio data being played back continues to rewind. Releasing the [) key starts the playback from the point. If the [) key continues to be pressed and held until the rewinding reaches the beginning of the audio data being played back, the rewinding pauses. Furthermore, if the [) key continues to be pressed and held, the rewinding is resumed from the end of the audio data which has the previous list number. If the rewinding reaches the beginning of the audio data with the list number 1, the rewinding ends and the audio data having the list number 1 is played back. If the playback is being paused, the audio data is rewound while remaining in the paused state.
Fast forward	While the [) key is pressed and held, the audio data being played back continues to fast-forward. Releasing the [) key starts the playback from the point. If the [) key continues to be pressed and held until the fast-forwarding reaches the end of the audio data being played back, the fast-forwarding pauses. Furthermore, if the [) key continues to be pressed and held, the fast-forwarding is resumed from the beginning of the audio data of the next list number. If the fast-forwarding reaches the end of the audio data having the last list number, the fast-forwarding and playback end and the list display is restored. (If the playback screen is displayed by pressing the Playback (Last Recording) key, the standby display is restored.) If the playback is being paused, the audio data is fast-forwarded while remaining in the paused state.
End of playback	Pressing the Back ([) key or [#] key restores the list display and the playback of the recorded data ends.

● Deleting an audio datum

1 Press the **Playback** key to display the audio data.


Refer to step 1 of “**Playing back the audio data**”.



2 Press the [▲] key or [▼] key to select the audio data to be deleted.


3 Press the **Back** ([↶]) key or [#] key after pressing the **Function** ([○]) key.

The screen to confirm whether to delete the audio data appears.



4 Press the **Menu** ([□]) key, or [*] key.


The delete process of the audio data starts. When the delete process completes, the list display is restored.



● Deleting all audio data


1 Press the **Playback** key to display the audio data.

Refer to step 1 of “**Playing back the audio data**”.




2 Press and hold the **Back** ([↶]) key or **[#]** key after pressing the **Function** ([○]) key.

The screen to confirm whether to delete all the audio data appears.



3 Press the **Menu** ([☐]) key, or **[*]** key.

The delete process of the audio data starts. When the delete process completes, the standby display is restored, and then “Empty” appears for 1 sec.



● Deleting an audio data folder

1 Press the **Playback** key to display the audio data folders in the microSD card.


Refer to step 1 of “**Playing back the audio data**”.



2 Press the [▲] key or [▼] key to select the audio data folder to be deleted.


3 Press the **Menu** ([□]) key or [*] key after pressing the **Function** ([○]) key.

The screen to confirm whether to delete the folder appears.



4 Press the **Menu** ([□]) key, or [*] key.

The delete process of the folder starts. When the delete process completes, the list display is restored.



Note

- Category folders cannot be deleted.
- If the **Menu** ([□]), **Back** ([↶]), [*] or [#] key is pressed while the audio data is being deleted, a Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not respond at all.

Configuration using KPG-D1/ D1N


- Assigning functions to the **PF** keys on the transceiver ([See](#) Transceiver Settings > Key Assignment)
- Configuring **Date Format** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Display)
- Configuring **Time Format** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Display)
- Configuring **Playback End Tone** to be enabled or disabled ([See](#) Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory)

Storing Audio Data in the Saved Folder

Audio data in the Auto Recording or Voice Memo folder can be copied and stored in the Saved folder.

1 Press the **Playback** key to display the audio data folders in the microSD card.


Refer to step 1 of “**Playing back the audio data**”.



2 Press the [▲] key or [▼] key to select the audio data folder to be stored.


3 Press the **Menu** ([□]) key or [*] key after pressing the **Function** ([○]) key.

The screen to confirm whether to store the audio data appears.



4 Press the **Menu** ([□]) key, or [*] key.

The storage process of the audio data starts. When the storage process completes, “Complete” appears on the display for 1 sec, and the list display is restored.



9.5 Storing the GPS Data (GPS Data Storage)

GPS Data Storage is the function to store the GPS data automatically or manually.

Caution

Do not disconnect the power source of the transceiver or remove the microSD card from the transceiver while the GPS data is stored in the microSD card. Also, for Portable, be careful that the remaining battery power does not run out. The data may not be stored, or the data may be damaged.

Automatically Storing the GPS Data

At the time intervals configured in Interval, the GPS data acquired from the GPS receiver unit is stored to both in the internal memory and microSD card.

The acquired data is temporarily stored in the RAM in the transceiver, and if 3 data are stored, the data are collectively stored in both the internal memory and microSD card. If 1 or 2 GPS data are temporarily stored in the RAM in the transceiver, the GPS data are deleted without being stored in the internal memory and microSD card when the transceiver is turned OFF.

A maximum of 7,000 GPS data can be stored in the internal memory. If the number of the GPS data reaches 7,000, the older 3,500 GPS data are deleted, so the actual number of the GPS data which can be stored in the internal memory is 3,500. In a microSD card, the GPS data of a maximum of 250 days or the GPS data with a size of the microSD card capacity can be stored. The GPS data is stored according to the output format configured in **Record Format (Manual/Auto)**. If no output format is configured, the GPS data is not stored.

Note

- The GPS data stored in the internal memory can be sent from the transceiver using wireless communication and be transferred to a PC.

Sending and transferring the GPS data

● Sending the GPS data using wireless communication

The transceiver sends the GPS data stored in the internal memory to the base station according to the specified period and specified number of data upon the receipt of a request message for the GPS data which is sent from the base station by using the NXDN or DMR air protocol.

Note

- While the transceiver is sending the GPS data using wireless communication, new GPS data is not stored even if the transceiver acquires the new GPS data from the GPS receiver unit.
- If the number of the stored GPS data does not reach the number of data specified by the request message for the GPS data which is sent from the base station, the transceiver sends all the stored GPS data to the base station.

● Transferring the GPS data to a PC

To transfer the GPS data to a PC, the transceiver and the PC must be connected by a serial cable.

The transceiver transfers the GPS data stored in the internal memory to the PC according to the specified period and specified number of data upon the receipt of a request message for the GPS data which is sent from the PC.

Note

- To transfer the GPS data to the PC, the GPS data request message must be controlled using a PC application. Also, Base Station Settings must be configured using KPG-D1/ D1N.
- While the transceiver is transferring the GPS data using a PC command, new GPS data is not stored even if the transceiver acquires the new GPS data from the GPS receiver unit.
- If the number of the stored GPS data does not reach the number of data specified by the request message for the GPS data which is sent from the PC, the transceiver sends all the stored GPS data to the PC.
- If the configuration data with **Audio/GPS Data Erase (Internal Memory)** enabled is written, the GPS data stored in the internal memory is deleted when the transceiver is turned ON.

Configuration using KPG-D1/ D1N

- Configuring **GPS Data Storage** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory > GPS Data)
- Configuring **Interval** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory > GPS Data Storage (Manual/Auto))
- Configuring **Record Format (Manual/Auto)** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory > GPS Data Storage (Manual/Auto))

Manually Storing the GPS Data

The GPS data acquired from the GPS receiver unit can be manually stored in a microSD card by pressing a key of the transceiver.

In a microSD card, the GPS data of a maximum of 250 days or the GPS data with a size of the microSD card capacity can be stored.

Operating the transceiver

The GPS data can be stored in a microSD card by one of the following methods:

● Save GPS Data

By pressing the **Save GPS Data** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Save GPS Data", one GPS data is stored in the microSD card.

After the completion of storage, a Key Beep A (1 beep) sounds from the transceiver, and "GPS Data Saved" appears on the display for 1 sec.



● GPS Position Display Mode

1 Press the **GPS Position Display** key.

Enters GPS Position Display Mode.

The following operations are identical even if the transceiver enters GPS Position Display Mode by pressing the **Menu** key.

2 Press the **Menu** ([]) or [*****] key.

One GPS data is stored in the microSD card.

After the completion of storage, a Key Beep A (1 beep) sounds from the transceiver, and "GPS Data Saved" appears on the display for 1 sec.



Note

- A single GPS data to be stored in the microSD card consists of the data acquired by the output format configured in **Record Format (Manual/Auto)** and by \$GPTXT.
- The GPS data is not stored in the following cases:
 - While in the non-positioning state
 - When the GPS function is disabled (Built-in GPS Receiver only)
 - When the microSD card is not properly recognized
 - When the microSD card has no available capacity

Configuration using KPG-D1/ D1N

Assigning the functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)

9.6 Confirming microSD Card Contents via a PC (SD Card Direct Access)

SD Card Direct Access is the function to make the PC recognize the microSD card that is inserted in the transceiver as a removal disk drive.

Connecting the transceiver to the PC by using the KPG-36X/ KPG-46X programming cable and placing the transceiver in SD Card Direct Access Mode can make the PC recognize the microSD card that is inserted in the transceiver as a removal disk drive.

By using this function, data stored in the microSD card can be read by the PC.


Operating the transceiver

- **If KCH-19 is attached to Portable or an RF Deck:**

1

Connect the transceiver to the PC by using the KPG-36X/ KPG-46X programming cable.


The screen to confirm whether to enter SD Card Direct Access Mode appears.

**2**

Press the [▲] key or [▼] key to select "Start", and then press the Menu ([□]) or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters SD Card Direct Access Mode.

If a microSD card is inserted in the SD card slot, the "SD" icon appears.




● If KCH-19 is not attached to the RF Deck:

1

Connect the transceiver to the PC by using the KPG-46X programming cable.


The screen to confirm whether to enter SD Card Direct Access Mode appears.

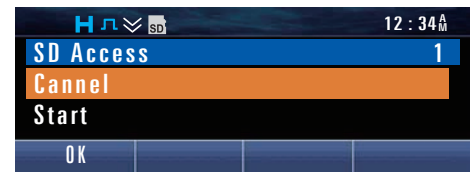

2

Press the [▲] key or [▼] key to select "Start", and then press the Menu ([□]) or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and a caution message appears.

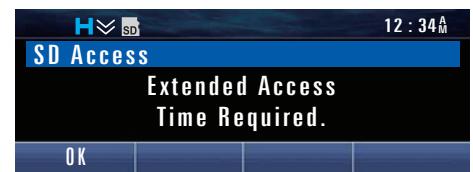

3

Press the Menu ([□]) key, or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters SD Card Direct Access Mode. If a microSD card is inserted in the SD card slot, the "SD" icon appears.



● If multiple SD card slots exist (Mobile only):

1

Connect the transceiver to the PC by using the KPG-46X programming cable.

The screen to confirm whether to enter SD Card Direct Access Mode appears.




2 Press the [▲] key or [▼] key to select “Start”, and then press the Menu ([□]) key or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and the SD card slots that can be selected appear.


Note

- In a Multi RF Deck/ Multi Control Head structure or in a Single RF Deck/ Single Control Head structure using KCH-20R, multiple SD card slots exist.

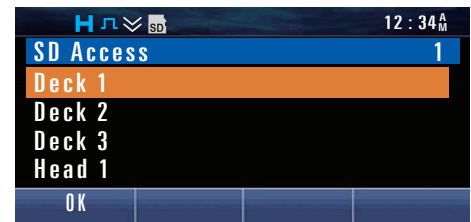


3 Press the [▲] key or [▼] key to select an SD card slot, and then press the Menu ([□]) key or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and a caution message appears.

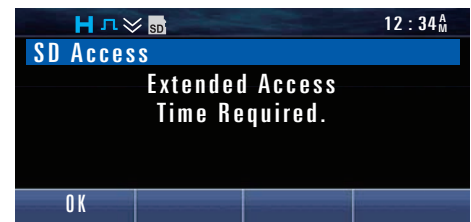

4 Press the Menu ([□]) key, or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters SD Card Direct Access Mode.
If a microSD card is inserted in the selected SD card slot, the “SD” icon appears.

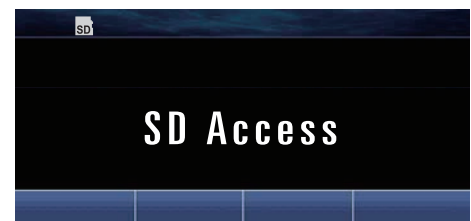

Note

- If the transceiver is turned OFF or the KPG-36X/ KPG-46X programming cable is removed, the transceiver exits SD Card Direct Access Mode. However, if the transceiver is turned OFF or the KPG-36X/ KPG-46X programming cable is removed while an audio file in the microSD card is being read by the PC, the data in the microSD card may be damaged. When exiting SD Card Direct Access Mode, execute the operation to remove the mass storage device on the Tray of Windows on the PC in advance.
- Do not format the microSD card on the PC. If the microSD card is formatted on the PC, each function of **Auto Recording**, **Voice Memo**, and **GPS Data Storage** may not function properly.
- When **Multi Control Head** is structured on the High Power model (NX-5600H/ NX-5700H/ NX-5800H), a confirmation screen appears on Control Head 1 if the USB Micro Terminal mounted on the High Power model is connected to a PC. After the confirmation screen appears, only operations on Control Head 1 are available.
- For the High Power model (NX-5600H/ NX-5700H/ NX-5800H), if the KPG-46X programming cable and a USB cable connected to the USB Micro Terminal are connected to a PC, **SD Card Direct Access** functions by the USB cable connected first to a PC.
- To use the USB Micro Terminal mounted on the High Power model (NX-5600H/ NX-5700H/ NX-5800H), the KPG-46X USB driver must be installed on a PC.

Configuration using KPG-D1/ D1N

Configuring **SD Card Direct Access** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 1 > Mode)

Supported Models: Portable

Indoor Location is the function to manage the position of the mobile station transceiver by using Bluetooth.

Place a beacon transmitter at each location indoors to use the Indoor Location function.

After beacon data from each beacon transmitter is received by using the BLE Scan function, the transceiver selects the data of the strongest signal strength level among the latest received signals, and sends the information of the beacon transmitter (hereafter referred to as BLE data) to the location server.

In other words, which beacon transmitter the transceiver is currently located close to is notified for the location server.

As shown in the figure below, there are 2 types of communication methods to send BLE data to the location server:

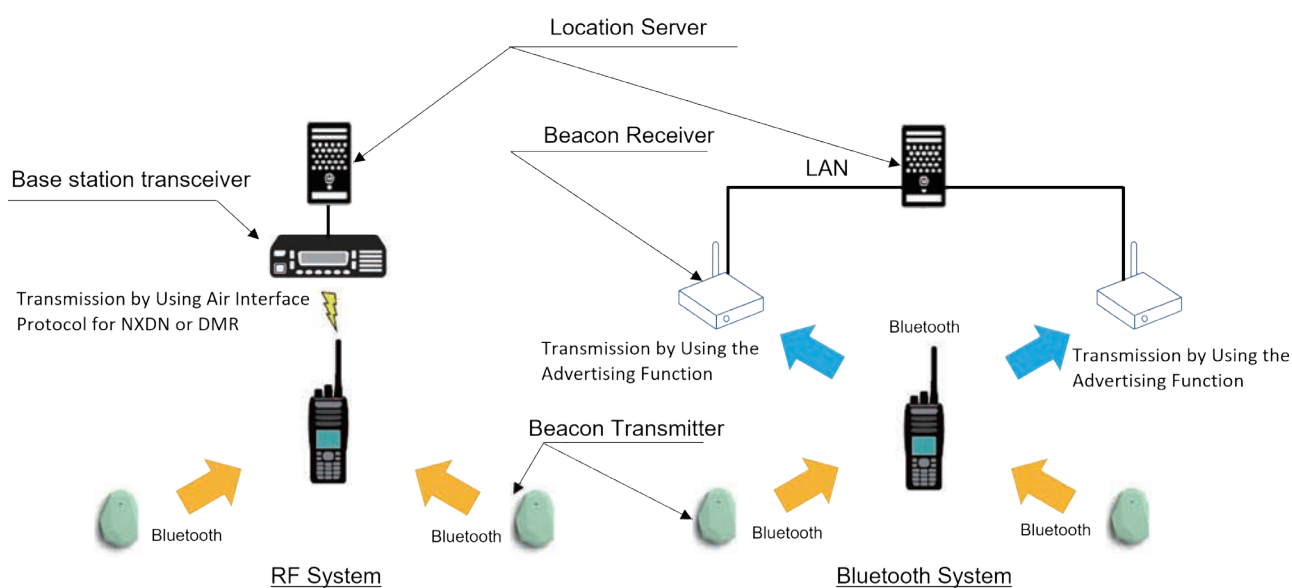


Figure 10-1 Communication Methods for Indoor Location Positioning by Using BLE

- RF System method

The BLE data is sent by using the NXDN or DMR Air Interface Protocol.

The repeater or base station transceiver receives the BLE data from the transceiver, and then transfers the BLE data to the location server via IP for the repeater and via serial for the base station transceiver.

- Because RF is shared with voice calls and other data communications, not occupying the RF with BLE data transmission needs to be considered. In the RF System method, the number of units that can be added is also restricted.
- To send BLE data, the behavior is based on the time information (hereafter, referred to as synchronization information) received from KAS-20E. Therefore, if the mobile station transceiver does not receive synchronization information from KAS-20E, the second and subsequent BLE data transmission for a Polling request from KAS-20E and the BLE data transmission by BLE Auto Report do not occur.

For details about the number of units that can be added, refer to the KAS-20E In-depth Manual.

- **Bluetooth System method**

The BLE data is sent by using the Bluetooth advertising function.

The beacon receiver receives the BLE data from the transceiver, and transfers the BLE data to the location server via IP.

Supported protocols

The supported protocols of each communication method of Indoor Location are listed below:

Table 10-1 Support of Protocols and Each Communication Method

Protocol	Bluetooth System method	RF System method
Analog Conventional	No	No
LTR Trunking	No	No
NXDN Conventional	Yes	Yes
NXDN Site Roaming	Yes	Yes
NXDN Trunking (NEXEDGE 1st Generation/ NEXEDGE 2nd Generation)	Yes	Yes
DMR Conventional	Yes	Yes
DMR Site Roaming	Yes	Yes
DMR-based Trunking (DMR Tier III Trunking)	Yes	No
DMR-based Trunking (Trunking 2.5)	Yes	No
P25 Conventional	No	No
P25 Voting	No	No
P25 Trunking	No	No

Yes: Supported

No: Not supported

For the RF System method, behavior occurs by using NXDN Air Interface Protocol in an NXDN system, and by using DMR Air Interface Protocol in a DMR system.

BLE advertising mode

BLE advertising mode is the mode to send beacon data, and sends the beacon data at regular intervals.

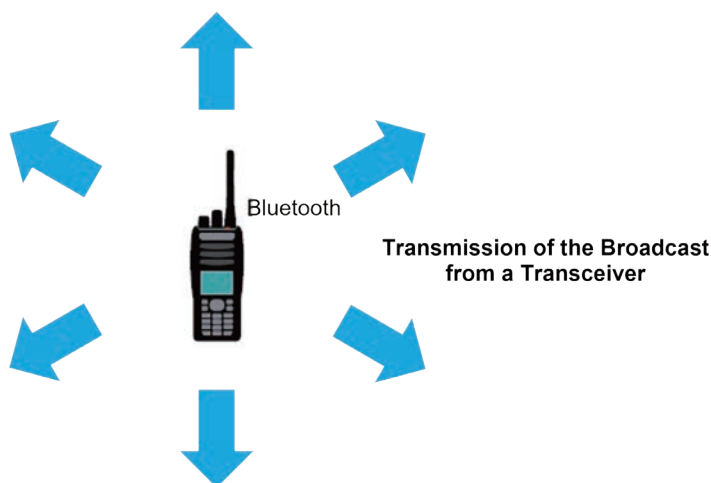


Figure 10-2 Advertising Mode

BLE Scan mode

BLE Scan mode is the mode to receive beacon data. During the behavior in this mode, the receiver is always in the state available to receive beacon data.

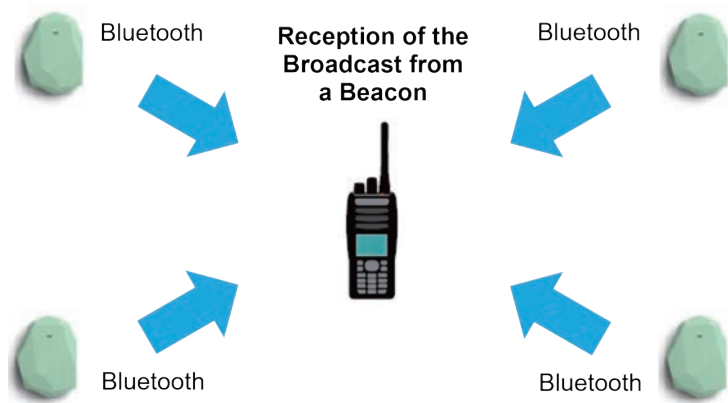


Figure 10-3 BLE Scan Mode

Note

- The software option of INDOOR LOCATION LICENSE (KWD-5020-IL) is required to use Indoor Location.
- For details about the Indoor Location function, refer to the KAS-20E Basic Operations or In-depth Manual.
- To use these functions, “Indoor Location” needs to be enabled in **Product Information** of the KPG-D1/ D1N.

Product Information

Model Name

NX-5200 [Portable]: K/F

Frequency

136-174 MHz

Zone-channel Format

Channel Table

P25

Off

NXDN

On

DMR

Off

Feature Selection

4000 Channel (KWD-5000CH)

Front Panel Programming (KWD-5001FP)

microSD (KWD-5002SD)

Bluetooth Data (KWD-5003BT)

Secure Cryptographic Module (KWD-5005AE)

DES 4 Keys (KWD-5006DE)

Multi RF Deck (KWD-5004MR)

Remote Control (KWD-5007RC)

Enhanced Encryption (KWD-5500EE)

Indoor Location (KWD-5020-IL)

P25

P25 Conventional (KWD-5100CV)

P25 Phase 1 Trunking (KWD-5101TR)

P25 Phase 2 Trunking (KWD-5102TR)

P25 Packet Data (KWD-5106DT)

P25 OTAR (KWD-5103RK)

P25 Voting Scan (KWD-5105VT)

P25 OTAP (KWD-5104AP)

P25 Enhanced Encryption (KWD-5107EE)

NXDN

☒ NXDN Conventional (KWD-5200CV)

☐ NXDN Type-C Trunking (KWD-5201TR)

☐ NXDN OTAP (KWD-5204AP)

DMR

☐ DMR Conventional (KWD-5300CV)

☐ S-Trunking (KWD-5300CV) *1

☐ DMR Tier III Trunking (KWD-5301TR)

☐ Trunking 2.5 (KWD-5300CV)

☐ Fleet Dialing Plan

☐ DMR OTAP (KWD-5304AP)

Read Configuration

OK

Cancel

Help

*1 Support for S-Trunking ended.

Figure 10-4 Product Information

- To use this function, **Bluetooth Data** needs to be enabled using KPG-D1/ D1N.
- To use this function, **Built-in GPS Receiver/Bluetooth** needs to be enabled using KPG-D1/ D1N.

Common FUNC (K, F)/Ver 5.30

CONTENTS

INDEX

195

- If the Indoor Location function is enabled, the configuration item that shares the configuration with the GPS function of KPG-D1/ D1N appears in the format that also uses “GPS/”, such as “GPS/BLE Time Mark”, for example. In In-depth Manual, the configuration item that shares the configuration with the GPS function of KPG-D1/ D1N is referred to with no “GPS/”, such as “BLE Time Mark”.
- In the Indoor Location function, the BLE Beacon/ BLE Gateway-compatible devices in the following URL can be used:
http://manual2.jvckenwood.com/com/help_ref/nx5000_series/compatible_model_list/CNMJSYnnzoitpv.html
- Bluetooth Low Energy (Heart Rate Service, Automatic Injury Detection, etc.) cannot be used during BLE Scan. Also, connection to a Bluetooth-compatible device by using HSP Connection or SPP Connection, etc. cannot be made.

Configuration using KPG-D1/ D1N

● Configuration common to NXDN and DMR

- Configuring **Beacon List** ( [See](#) Transceiver Settings > Indoor Location > General)
- Configuring **Beacon UUID** ( [See](#) Transceiver Settings > Indoor Location > General > Beacon List)
- Configuring **Send Location via** ( [See](#) Transceiver Settings > Indoor Location > General > Beacon List)
- Configuring **Minimum Valid Beacon Signal** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Common)
- Assigning the BLE Scan function to a **PF** key on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **BLE Scan Preset** to be enabled or disable ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth)
- Configuring **GPS Delay Time** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Common)
- Configuring **GPS Delay Time** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Common)
- Configuring **GPS Delay Time** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Common)
- Configuring **GPS Delay Time** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Common)
- Configuring **GPS Delay Time** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Common)
- Configuring **GPS Delay Time** in DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Common)

● Configuration of a Bluetooth System (NXDN and DMR)

- Configuring **BLE Scan Time** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Bluetooth System)

- Configuring **BLE Scan Time** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > NXDN Site Roaming Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Bluetooth System)
- Configuring **TX Power** ( [See](#) Transceiver Settings > Indoor Location > Bluetooth System)
- **Configuration of an RF System (NXDN)**
 - Configuring **GPS/BLE Report on Data Zone-Channel** in NXDN Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)
 - Configuring **GPS/BLE Report on Data System-Personality** in NXDN Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)
 - Assigning the Send the Location Data function to a **PF** key on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
 - Configuring **GPS/BLE Base ID Type** and **GPS/BLE Base ID** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE > NXDN)
 - Configuring **GPS/BLE Base ID Type** and **GPS/BLE Base ID** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
 - Configuring **GPS/BLE Base ID Type** and **GPS/BLE Base ID** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE)
 - Configuring **GPS/BLE Combination** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE > NXDN)
 - Configuring **GPS/BLE Combination** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
 - Configuring **GPS/BLE Combination** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
 - Configuring **GPS/BLE Report Mode** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)

- Configuring **GPS/BLE Report Mode** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
- Configuring **GPS/BLE Report Mode** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring **Number of Times** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)
- Configuring **Number of Times** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
- Configuring **Number of Times** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring **GPS/BLE Report Interval Time** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)
- Configuring **GPS/BLE Report Interval Time** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
- Configuring **GPS/BLE Report Interval Time** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring **GPS/BLE Time Mark** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)
- Configuring **GPS/BLE Time Mark** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
- Configuring **GPS/BLE Time Mark** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring **GPS/BLE Report Back to Requested ID** in NXDN Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE)
- Configuring **GPS/BLE Report Back to Requested ID** in NXDN Site Roaming system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
- Configuring **GPS/BLE Report Back to Requested ID** in NXDN Trunking system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring **GPS/BLE ACK Request** in NXDN Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > GPS/BLE > NXDN)
- Configuring **GPS/BLE ACK Request** in NXDN Site Roaming system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > GPS/BLE)
- Configuring **GPS/BLE ACK Request** in NXDN Trunking system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring Map Header (**\$PKPBD (KW)**) to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > BLE Base Station Settings)
- Configuring **GPS/BLE Report Channel Type** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)
- Configuring **BLE Data Zone-Channel** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking)
- Configuring **BLE Data System-Personality** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking)

- Configuring **GPS/BLE Report Priority (Over Group Call)** in NXDN Trunking system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > GPS/BLE > Standard GPS/BLE Report Mode)

● Configuration of an RF System (DMR)

- Configuring **GPS/BLE Report on Data Zone-Channel** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Configuring **GPS/BLE Report on Data System-Personality** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Assigning the Send the Location Data function to a **PF** key on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **GPS/BLE Base ID Type** and **GPS/BLE Base ID** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE > DMR)
- Configuring **GPS/BLE Base ID Type** and **GPS/BLE Base ID** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring **GPS/BLE Combination** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE > DMR)
- Configuring **GPS/BLE Combination** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring **GPS/BLE Report Mode** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Configuring **GPS/BLE Report Mode** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring **Number of Times** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Configuring **Number of Times** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring **GPS/BLE Report Interval Time** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Configuring **GPS/BLE Report Interval Time** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring **GPS/BLE Time Mark** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Configuring **GPS/BLE Time Mark** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring **GPS/BLE Report Back to Requested ID** in DMR Conventional system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)
- Configuring **GPS/BLE Report Back to Requested ID** in DMR Site Roaming system to be enabled or disabled ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > GPS/BLE)
- Configuring Map Header (**\$PKPBD (KW)**) to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > BLE Base Station Settings)
- Configuring **GPS/BLE Report with Voice** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE > DMR)
- Configuring **GPS/BLE Report with Voice** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > GPS/BLE)

10.1 Beacon List

Of the beacon data received by the transceiver, the transceiver uses only the data with a UUID registered in **Beacon List**.

Beacon List is an item to configure for the mobile station in Indoor Location.

Up to 31 UUIDs can be registered in **Beacon List**.

Whether an RF System or Bluetooth System is used for the communication method of each beacon can be selected by configuring **Send Location via**.

Table 10-2 Send Location via

Configuration	Description
RF System	Sends the BLE data by RF.
Bluetooth System	Sends the BLE data by Bluetooth.

When the beacon data having a registered UUID is received, the transceiver stores the data in the internal memory as a transmission candidate.

If the UUID of the received beacon data is not registered, the transceiver discards the received beacon data.

Configuration using KPG-D1/ D1N

- Configuring **Beacon List** ( **See** Transceiver Settings > Indoor Location > General)
- Configuring **Beacon UUID** ( **See** Transceiver Settings > Indoor Location > General > Beacon List)
- Configuring **Send Location via** ( **See** Transceiver Settings > Indoor Location > General > Beacon List)

10.2 Minimum Valid Beacon Signal

Minimum Valid Beacon Signal is the threshold value used to evaluate from the receive strength level (RSSI) whether to store the beacon data to the internal memory as the next transmission candidate or discard it when a beacon signal is received by the transceiver.

Minimum Valid Beacon Signal is an item to configure for the mobile station in Indoor Location.

The function is enabled in both an RF System and a Bluetooth System.

If the RSSI of when a beacon signal is received exceeds the threshold value configured in **Minimum Valid Beacon Signal**, the data is stored in the internal memory as the next transmission candidate.

In Minimum Valid Beacon Signal, a desired value from -110 dBm to -20 dBm can be configured.

Configuration using KPG-D1/ D1N

- Configuring **Minimum Valid Beacon Signal** in NXDN Conventional system ( **See** Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in NXDN Site Roaming system ( **See** Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in NXDN Trunking system ( **See** Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in DMR Conventional system ( **See** Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in DMR Site Roaming system ( **See** Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Common)
- Configuring **Minimum Valid Beacon Signal** in DMR-based Trunking system ( **See** Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Common)

10.3 BLE Scan

BLE Scan is the function for the transceiver to scan signals from beacon transmitters.

BLE Scan is the function to configure for the mobile station in Indoor Location.

BLE Scan is enabled in both an RF System and a Bluetooth System.

Press one of the following keys on the transceiver and enable **BLE Scan**:

- **BLE Scan key**

Pressing the **BLE Scan** key can toggle BLE Scan On and Off.

- **Menu key**

Pressing the **Menu** key causes the transceiver to enter Menu Mode, and then BLE Scan can be toggled On and Off by selecting "On" or "Off" after "BLE Scan" is executed.

BLE Scan can be toggled between enabled and disabled even on a channel of a system which does not support Indoor Location.

Even if BLE Scan is enabled, BLE Scan does not function on a channel of a system which does not support Indoor Location. However, the "Bluetooth" icon appears.

With BLE Scan On, BLE Scan Time is activated.

With BLE Scan Off, BLE Scan Time is stopped.

During the BLE Scan, if the beacon signal of a UUID registered in the Beacon List and with a receive strength level stronger than the **Minimum Valid Beacon Signal** configuration is received, the beacon data is stored in the internal memory of the transceiver. After the length of time configured in **BLE Scan Time** elapses, the transceiver searches from the beacon data stored in the internal memory for the beacon data received within the last 20 seconds with the strongest receive strength level.

If the **Send Location via** configuration of the beacon data that is the search target is "Bluetooth System", the switch to the advertising behavior is made to send BLE data in a Bluetooth System. BLE Scan automatically stops when the switch to the advertising behavior is done. The advertising behavior is maintained for 1 second, and then the BLE Scan behavior resumes. The data to be advertised is the incorporation of the Major/ Minor value of the received beacon data and the RSSI value of when reception occurs.

If the **Send Location via** configuration of the beacon data that is the search target is "RF System", the advertising behavior does not occur, and BLE Scan resumes.

If a beacon signal with the receive strength level stronger than the **Minimum Valid Beacon Signal** configuration cannot be received, BLE Scan resumes without the advertising behavior occurring.

The default for BLE Scan can be configured by using the **BLE Scan Preset** configuration of the KPG-D1/ D1N. However, because the On/ Off status of BLE Scan is backed up in the transceiver, the On/ Off status of BLE Scan for the next time that the power is turned on and later is retained in the transceiver.

- **If BLE Scan Preset is enabled**

The transceiver turns ON with the On status for BLE Scan.

- **If BLE Scan Preset is disabled**

The transceiver turns ON with the Off status for BLE Scan.

Operating the transceiver



1 Press the **BLE Scan** key.

The BLE Scan function is enabled after a Key Beep A (1 beep) sounds from the transceiver and the “” icon appears.
If BLE Scan is activated while Bluetooth is disabled, the BLE Scan function will be enabled after Bluetooth is activated. The transceiver activates BLE Scan Time. If a beacon signal with the Bluetooth System configured in the **Send Location via** configuration becomes a transmission target after the beacon signal is received during the BLE Scan, the advertising behavior occurs for 1 second when the BLE Scan Time elapses. The advertising stops when 1 second elapses, and the transceiver resumes BLE Scan.

The “” icon appears during the BLE Scan, and the “” icon appears during the BLE advertising.

Note


- The “” icon remains if the transceiver cannot be turned on normally.




2 Press the **BLE Scan** key.

The BLE Scan function is disabled after a Key Beep B (2 beeps) sounds from the transceiver, the “” icon disappears, and the “” icon appears. If the BLE Scan function is disabled, BLE Scan Time and TX Interval are stopped. The enabled or disabled state of Bluetooth returns to the state before BLE Scan is activated.
If Bluetooth returns to the enabled state, reconnection to the BLE device is executed.

If Bluetooth returns to the disabled state



If Bluetooth returns to the enabled state



Note

- If the following operations are attempted during the BLE Scan behavior, a Key-entry Error Tone (1 beep) sounds from the transceiver, and the operations cannot be performed. Stop the BLE Scan when the following operations are executed:
 - When Bluetooth is executed from Menu Mode
 - When Bluetooth Find Device is executed from Menu Mode
 - When Bluetooth My Device is executed from Menu Mode
 - When Bluetooth Discoverable is executed from Menu Mode
 - When the **Bluetooth** key is pressed
 - When the **Bluetooth Connect/ Disconnect** key is pressed
- If the operation to enable BLE Scan is performed while the transceiver is connected to a Bluetooth device, the transceiver disconnects from the Bluetooth device and BLE Scan is enabled. At this time, the display “Disconnected” due to disconnecting the Bluetooth device is not executed.

- If the operation to enable BLE Scan is executed during the following modes, a Key-entry Error Tone (1 beep) sounds, and BLE Scan is not executed:
 - Bluetooth Speaker Mode
 - Bluetooth Find Device Mode
 - Bluetooth Discoverable Mode
 - Bluetooth Information Mode

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** key on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **BLE Scan Preset** to be enabled or disable ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/ Bluetooth > Bluetooth)

10.4 BLE Scan Time

BLE Scan Time is the function to configure the BLE Scan behavior time of while a Bluetooth System behaves. **BLE Scan Time** is an item to configure for the mobile station in Indoor Location, and is the function of the Bluetooth System method. The length of time that BLE Scan functions is configured by using the KPG-D1/ D1N. The configuration range of **BLE Scan Time** is 100 ms to 10000 ms.

The transceiver performs the BLE scan for the length of time configured in **BLE Scan Time**. The beacon data stored in the internal memory is checked when the BLE Scan ends, and if the beacon data that satisfies the advertising transmission conditions exists, the transceiver migrates to the advertising behavior. If the advertising transmission conditions are not satisfied, the current BLE Scan is maintained.

The configuration of the FPU is not applied in Emergency Mode. In Emergency Mode, the BLE Scan behavior time is fixed at 1 sec. Also, the last beacon data sent is advertised even if the advertising transmission conditions are not satisfied.

Configuration using KPG-D1/ D1N

- Configuring **BLE Scan Time** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Bluetooth System)
- Configuring **BLE Scan Time** in DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Bluetooth System)

10.5 TX Interval

During the Bluetooth System behavior, if the same beacon data as the last beacon data sent is continuously received and this same beacon data becomes a transmission candidate, the same beacon data is sent again after the TX Interval time elapses. By periodically sending beacon data, the location of the transceiver can be clarified. Also, by spacing the transmission times, the battery consumption from multiple data transmissions is saved, and an increase in the processing of the target Gateway can be reduced.

TX Interval is an item to configure for the mobile station in Indoor Location, and is the function of the Bluetooth System method.

The length of time that TX Interval functions is configured by using the KPG-D1/ D1N. The configuration range of **TX Interval** is 1 sec to 255 sec.

If the state occurs where the same beacon data continuously becomes a transmission candidate, the same beacon data is not sent until the elapse of the length of time configured in **TX Interval**.

If the time specified in **TX Interval** elapses at the timing of BLE Scan Time expiry, the same beacon data is sent again.

TX Interval is activated after an advertising (Adv) behavior and stops before the next advertising behavior.

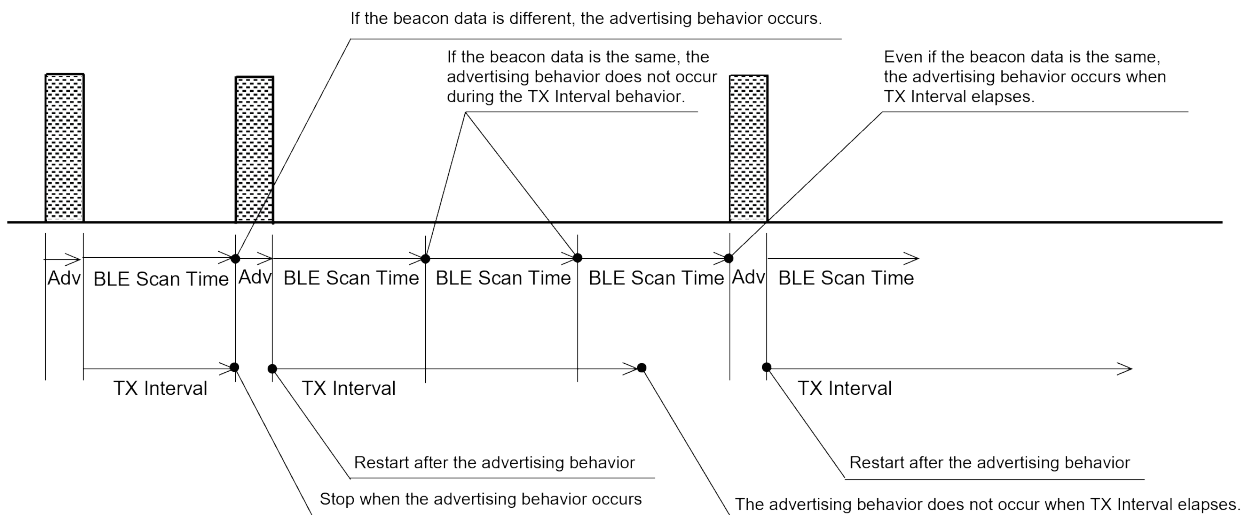


**Figure 10-5 Relationship of TX Interval and BLE Scan Time
(If the TX Interval Configuration Is Longer Than the BLE Scan Time Configuration)**

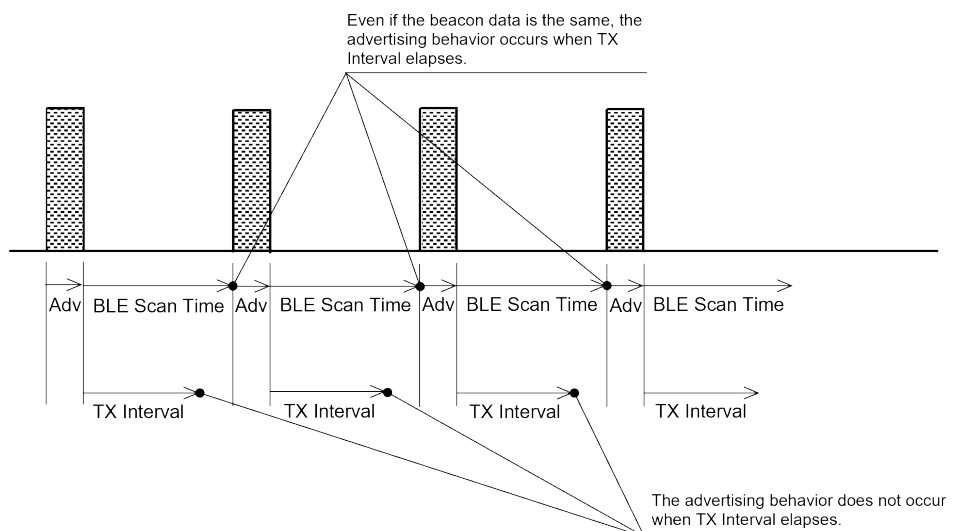


**Figure 10-6 Relationship of TX Interval and BLE Scan Time
(If the BLE Scan Time Configuration Is Longer Than the TX Interval Configuration)**

Configuration using KPG-D1/ D1N

- Configuring **TX Interval** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in NXDN Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in DMR Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in DMR Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Bluetooth System)
- Configuring **TX Interval** in DMR-based Trunking system ( [See](#) Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Bluetooth System)

10.6 TX Power

TX Power is the function to configure by using the KPG-D1/ D1N the Bluetooth transmission power of when beacon data is sent during the Bluetooth System behavior. **TX Power** is an item to configure for the mobile station in Indoor Location, and is the function of the Bluetooth System method.

TX Power configuration values: 4 dBm, 1 dBm, 0 dBm, -1 dBm, -10 dBm, -16 dBm, -20 dBm, -24 dBm

Configuration using KPG-D1/ D1N

Configuring **TX Power** ( [See](#) Transceiver Settings > Indoor Location > Bluetooth System)

10.7 GPS Delay Time

GPS Delay Time is the function to configure the length of time from when the mobile station stops receiving beacon data until GPS data transmission is permitted.

If the Indoor Location function is used, the transceiver receives the signal from the beacon transmitter placed at each location indoors to perform indoor positioning. However, a GPS signal may be received depending on the location to which the transceiver is moved. In this case, the location server determines that the transceiver is outside when the transceiver sends GPS data to the base station. Also, before and after the transceiver is moved, if the transceiver receives the signal from the beacon transmitter and sends the beacon data to the base station, the location display of the transceiver frequently changes.

By using this function, the location display of the transceiver frequently changing because the transceiver sends GPS data while a beacon cannot be received can be avoided.

GPS Delay Time is an item to configure for the mobile station in Indoor Location, and is the function enabled in both the RF System method and the Bluetooth System method.

GPS Delay Time prevents the mobile station from sending GPS data until a configured length of time elapses. The range of GPS Delay Time configured by using the KPG-D1/ D1N is 20 sec to 255 sec. After receipt of the last beacon signal, GPS data transmission is permitted when the configured length of time elapses.

Configuration using KPG-D1/ D1N

- Configuring **GPS Delay Time** in NXDN Conventional system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Conventional > Indoor Location > Common)
- Configuring **GPS Delay Time** in NXDN Site Roaming system ( [See](#) Transceiver Settings > Personal > Personal Features > NXDN Site Roaming/ NXDN Site Roaming with RAN > Indoor Location > Common)

- Configuring **GPS Delay Time** in NXDN Trunking system ( **See** Transceiver Settings > Personal > Personal Features > NXDN Trunking > Indoor Location > Common)
- Configuring **GPS Delay Time** in DMR Conventional system ( **See** Transceiver Settings > Personal > Personal Features > DMR Conventional > Indoor Location > Common)
- Configuring **GPS Delay Time** in DMR Site Roaming system ( **See** Transceiver Settings > Personal > Personal Features > DMR Site Roaming > Indoor Location > Common)
- Configuring **GPS Delay Time** in DMR-based Trunking system ( **See** Transceiver Settings > Personal > Personal Features > DMR-based Trunking > Indoor Location > Common)

10.8 BLE Beacon Display

BLE Beacon Display is the function to display on the LCD of the transceiver the beacon information received while the Indoor Location function functions. **BLE Beacon Display** is the function to configure for the mobile station in Indoor Location, and applies to the beacon data in the RF System method and the Bluetooth System method.

To use BLE Beacon Display, one of the key operations is performed on the transceiver.

- **BLE Beacon Display key**

Pressing the **BLE Beacon Display** key causes the transceiver to migrate to BLE Beacon Display Mode.

- **Menu key**

Pressing the **Menu** key places the transceiver in Menu Mode, and then the transceiver enters BLE Beacon Display Mode by executing "BLE Beacon Display".

Of the beacon data accumulated in the transceiver, the information of the beacon data that satisfies the following conditions is displayed:

- Data received within the last 20 seconds at the timing of the BLE Beacon Display update
- Data with the highest RSSI value

Even if BLE Scan is disabled, or even on a channel of a system which does not support Indoor Location, the transceiver can migrate to BLE Beacon Display Mode.

However, the value of each item is not displayed because beacon data is not received.

Operating the transceiver

1 Press the BLE Beacon Display key.

The transceiver enters BLE Beacon Display Mode.
The following operations are the same even if BLE Beacon Display Mode is executed by pressing the **Menu** key.



2 Press the Home ([Home]) key.

The transceiver exits BLE Beacon Display Mode and restores the previous channel display.


Transceiver behavior

Beacon information is displayed on the LCD display of the transceiver.

Table 10-3 Displayed Beacon Information

Display	Description
UUID	The list number of a UUID configured in Beacon List
R	The signal strength level (RSSI) value (dBm) of when the transceiver receives beacon data
M	The Measured Power value (dBm) in the beacon data
Major	The Major value in the beacon data
Minor	The Minor value in the beacon data

The following is an example of when the beacon information is displayed on the LCD of the transceiver:

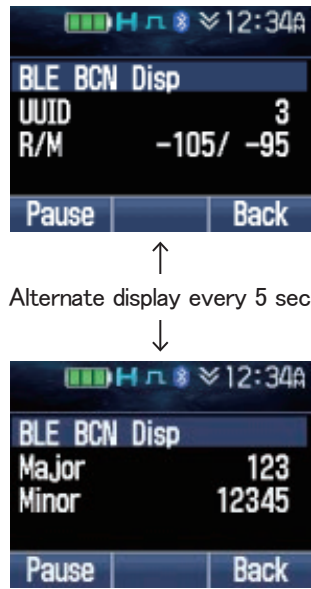

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

Bluetooth can be used to wirelessly connect a Bluetooth-compatible device and the transceiver.

As the main method of use, wirelessly connecting by Bluetooth a Bluetooth-compatible headset and the transceiver can execute a voice call using the mic and speaker of the headset.

Also, if a Bluetooth-compatible Automatic Injury Detection Sensor is connected to the transceiver, Emergency can be activated when the transceiver receives a damage report.

Note

- The transceiver complies with Bluetooth standard Version 3.0 and 4.0.
The following are the supporting transceivers and functions for each Bluetooth version:

Table 11-1 Supporting Transceivers and Functions for Bluetooth Versions

Bluetooth Version	Supporting Transceiver	Function
Version 4.0	Portable	Headset Profile, Serial Port Profile, Heart Rate Service, Automatic Injury Detection Service
Version 3.0	Mobile	Headset Profile, Serial Port Profile

- To wirelessly connect by Bluetooth a Bluetooth-compatible headset and the transceiver, the Bluetooth-compatible headset needs to support HSP (Headset Profile).

JVCKENWOOD Corporation has confirmed the behavior with some headsets, heart rate meters, and Automatic Injury Detection devices. Refer to the following URL for the specific devices.

http://manual2.jvckenwood.com/com/help_ref/nx5000_series/compatible_model_list/CNMJSYnnzoitpv.html

Configuration using KPG-D1/ D1N

Configuring **Built-in GPS Receiver/Bluetooth** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth)

11.1 Toggling Bluetooth On/ Off

To use various Bluetooth functions, **Built-in GPS Receiver/Bluetooth** needs to be enabled (On) by using KPG-D1/ D1N.

Also, Bluetooth can be toggled On and Off by operating the transceiver.

Pressing the **Bluetooth** key can toggle Bluetooth On and Off.

Or, pressing the **Menu** key causes the transceiver to enter Menu Mode, and then Bluetooth can be toggled On and Off by selecting "On" or "Off". (Refer to [Using Menu Mode.](#))

Operating the transceiver


● Enabling Bluetooth

Press the **Bluetooth** key when Bluetooth is disabled.

A Key Beep A (1 beep) sounds from the transceiver and the "  " icon blinks.




The “” icon lights when Bluetooth is enabled.



● Disabling Bluetooth

Press the **Bluetooth** key when Bluetooth is enabled.

A Key Beep B (2 beeps) sounds from the transceiver and Bluetooth is disabled. The “” icon disappears.



Note

- If Bluetooth in **GPS/Bluetooth Preset (Default)** is enabled, Bluetooth is enabled when the transceiver is turned ON. However, the Bluetooth enabled or disabled state is retained; therefore, the transceiver starts up in the same Bluetooth status as retained when the transceiver is turned ON next time.

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)
- Configuring **Bluetooth** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/ Bluetooth > GPS/Bluetooth Preset (Default))

11.2 Finding a Bluetooth-compatible Device (Bluetooth Find Device)

Bluetooth Find Device is the function to find a Bluetooth-compatible device.

For wirelessly connecting by Bluetooth a Bluetooth-compatible device and the transceiver, the Bluetooth-compatible device is found by using this function.

The transceiver can find a Bluetooth-compatible device by entering Bluetooth Find Device Mode.

Pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the transceiver enters Bluetooth Find Device Mode by executing "Find Device" after executing "Bluetooth Device". (Refer to [Using Menu Mode](#).)

Configuring the FPU


To search for a Bluetooth-compatible device which supports **Heart Rate Service** or **Automatic Injury Detection Service**, configure KPG-D1/ D1N as follows:

- **To search for a Bluetooth-compatible device which supports Heart Rate Service**
 - Enable Bluetooth Data in Model > Product Information > Feature Selection.
- **To search for a Bluetooth-compatible device which supports Automatic Injury Detection Service**
 - Enable Bluetooth Data in Model > Product Information > Feature Selection.
 - Enable Injury Detection in Transceiver Settings > Emergency > Emergency Information > Bluetooth.

Operating the transceiver

1 Press the **Menu** key to enter Menu Mode and then execute "Bluetooth Device".

Pressing the [▲] or [▼] key to select "Bluetooth Device" and then pressing the **Menu** ([□]) or [*] key causes the transceiver to enter Bluetooth Device Mode. (Refer to [Using Menu Mode](#).)




2 Press the [▲] key or [▼] key to select “Find Device”, and then press the Menu ([☐]) or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters Bluetooth Find Device Mode. The transceiver automatically initiates the search for a Bluetooth-compatible device. A Bluetooth Find Device Mode Tone (2 beeps) continuously sounds from the transceiver during the search.


Note

- If Bluetooth is disabled when “Bluetooth Device” is executed, Bluetooth is automatically enabled.
- The Bluetooth-compatible device first needs to be in pairing mode.



3 Find a Bluetooth-compatible Device.

A found Bluetooth-compatible device appears on the display. With the Bluetooth-compatible device found earliest listed as list number 1, a maximum of 16 devices are displayed. When about 30 sec or about 40 sec elapse after the search is started, or when 16 devices are found, the search ends. Even if the search ends, the transceiver continues in Bluetooth Find Device Mode.



Note

- The Bluetooth Find Device Mode Tone stops and the search ends if about 30 sec or about 40 sec elapse without the transceiver finding a Bluetooth-compatible device. In this case, “BT Not Found” appears on the display.
- When “BT Not Found” or a found Bluetooth-compatible device appears on the display, pressing the **Back** ([↩]) or [#] key stops the Bluetooth Find Device Mode Tone and ends the search. A Key Beep A (1 beep) sounds from the transceiver and the transceiver returns to Bluetooth Device Mode.
- A found Bluetooth-compatible device is registered in the transceiver and the transceiver can connect wirelessly. (Refer to **Finding, Registering and Connecting a Bluetooth-compatible Device (Bluetooth Find Device)**.)
- A found Bluetooth-compatible device is displayed in the format of either the Bluetooth device name, Bluetooth device address, or device class. Pressing the [▲] or [▼] key can switch the display. (Refer to **About the Displayed Contents of a Bluetooth-compatible Device**.)
- If the Bluetooth device name of a found Bluetooth-compatible device cannot be acquired, the Bluetooth device name is displayed as “- -”.
- **Mode Reset Timer** is extended during a search. **Mode Reset Timer** is initiated when the search ends.
- If the transceiver receives an individual call while in Bluetooth Find Device Mode, Bluetooth Find Device Mode ends.
- If the Bluetooth-compatible device to be connected wirelessly is not found, move the Bluetooth-compatible device closer to the transceiver and search again.

About the Displayed Contents of a Bluetooth-compatible Device

A found Bluetooth-compatible device is displayed in the format of either the Bluetooth device name, Bluetooth device address, or device class. Pressing the [▲] key or [▼] key can switch the display.

Bluetooth device name:

The name of the Bluetooth-compatible device. The name of the Bluetooth-compatible device appears as a maximum 14-character ASCII code on the display of the transceiver. Therefore, if the name of a found Bluetooth-compatible device is 15 characters or more, the first 14 characters are displayed. If non-ASCII code characters are used, these characters are blank.

Bluetooth device address:

The unique address of the Bluetooth-compatible device. The Bluetooth device address appears as 12 hexadecimal digits on the display of the transceiver.

Device class:

The type of the Bluetooth-compatible device. The device class is displayed by the following icons: If the device cannot be classified even in the following table, the device class is "Other Device". The device class of the transceiver is "Phone".

Table 11-2 Device Class

Device Class	Icons	
	Disconnected	Connected
Computer		
Phone		
Audio/Video		
LAN/Network		
Peripheral		
Imaging		
Wearable		
Toy		
Health		

Note

- If the device class is "Other Device", the icon is "  " or "  ".
- The device class icon of a Bluetooth-compatible device registered using the **Bluetooth Connect / Disconnect** key is "  " or "  ".

Configuring the Bluetooth Device Name of the Transceiver (Bluetooth Device Name)

Bluetooth Device Name is the Bluetooth device name of the transceiver to be notified to a Bluetooth-compatible device. A maximum of 14 characters of Bluetooth device name can be configured. By configuring the Bluetooth device name of the transceiver, the configured Bluetooth device name can be notified to the Bluetooth-compatible device. The Bluetooth-compatible device can display the notified Bluetooth device name. The type of Bluetooth device name can be configured in **Name Type**.

Table 11-3 Name Type

Configuration	Description
Text	An arbitrary text string can be configured as a Bluetooth device name. If the text is left blank, the combination of Model Name and Market Code of the Kenwood ESN is configured as the Bluetooth device name.
Unit ID	Using "%" in the text string can configure the Unit ID of the system configured in Preset System Number as a Bluetooth device name. If the text is left blank, the combination of Model Name and Market Code of the Kenwood ESN is configured as the Bluetooth device name. Note - If the number of configured "%" is less than the number of digits for the Unit ID (Own), the Unit ID is displayed from the lowest digits. - If the number of configured "%" is more than the number of digits configured for the Unit ID (Own), the extra "%" is replaced with a space. This method is also applied if Unit ID is not configured. - The following is the case if Fleet Dialing Plan is enabled in a DMR Tier III Trunking system or S-Trunking system for the system configured in Preset System Number: - A Unit ID replaced from "%" is displayed in the format of a total of 8 digits (3-digit of Number Prefix (NP) + a 2-digit of Fleet Individual Number (FIN) + a 3-digit of Individual Number (IN)).
Unit ID Name	The Unit ID Name (Own) string of the system configured in Preset System Number can be configured as a Bluetooth device name. If the Unit ID Name (Own) of the system configured in Preset System Number is not configured, a combination of Model Name and Market Code of the Kenwood ESN is configured as the Bluetooth device name.
ESN	Serial Number of Kenwood ESN can be configured as a Bluetooth device name.
FleetSync ID	Using "%" in a text string can configure the Fleet (Own) and ID (Own) of the system configured in Preset System Number as the Bluetooth device name. Note - If the number of configured "%" is less than 7, the IDs are displayed from the lowest digits. - If both Fleet (Own) and ID (Own) are not configured, "%" is replaced with a space.

Note

- While the transceiver is in Unprogramming Mode, the Bluetooth device name becomes the combination of Model Name and Market Code of the Kenwood ESN. If the combination of characters for Model Name and Market Code is 15 or more, the number of characters of Model Name are removed from the end to display the name within 14 characters. For example, if the configuration is such as the following, the Bluetooth device name becomes "1234567890ABCD".
Model Name: "123456789012"
Market Code: "ABCD"


Configuration using KPG-D1/ D1N

- Configuring **Bluetooth Device Name (Control Head 2)** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > Control Head 2 > Bluetooth Device Name)
- Configuring **Bluetooth Device Name (Portable)** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > Bluetooth Device Name)
- Configuring **Bluetooth Device Name (RF Deck/Control Head 1)** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > RF Deck/Control Head 1 > Bluetooth Device Name)

Checking the Bluetooth Device Name (Bluetooth Information)

In **Bluetooth Information**, the own Bluetooth device name configured for the transceiver can be confirmed on the display.

Pressing the **Menu** key to enter Menu Mode and executing "Bluetooth Information" sounds a Key Beep A (1 beep) from the transceiver and places the transceiver in Bluetooth Information Mode. If Bluetooth is disabled, Bluetooth becomes enabled automatically.



In Bluetooth Information Mode, the Bluetooth device name, the Bluetooth device address, and the device class configured in the transceiver are displayed.

Pressing the [▲] key can change the display in the following order:

Bluetooth device name → device class → Bluetooth device address → Bluetooth device name → ...

Pressing the [▼] key can change the display in the following order:

Bluetooth device name → Bluetooth device address → device class → Bluetooth device name → ...

Responding to the Search of a Bluetooth-compatible Device (Bluetooth Discoverable)


Bluetooth Discoverable is the function to respond to the search of a Bluetooth-compatible device.

A Bluetooth-compatible device searches to understand a Bluetooth device name and a Bluetooth device address of the transceiver before requesting a pairing to the transceiver. Whether or not the transceiver responds to the search of a Bluetooth-compatible device can be configured using KPG-D1/ D1N beforehand.

If **Bluetooth Discoverable** is enabled, the transceiver responds to the search of a Bluetooth-compatible device.

If **Bluetooth Discoverable** is disabled, the transceiver responds to the search of a Bluetooth-compatible device temporarily in Menu Mode.

Pressing the **Menu** key to enter Menu Mode and executing "Bluetooth Discoverable" sounds a Key Beep A (1 beep) from the transceiver and places the transceiver in Bluetooth Discoverable Mode.



The available time to respond is displayed and counting down of the time is started while the transceiver is in Bluetooth Discoverable Mode.

After responding to the search of a Bluetooth-compatible device, the transceiver notifies the Bluetooth-compatible device of the Bluetooth device name and the Bluetooth device address.

When a Bluetooth-compatible device requests a pairing to the transceiver, the transceiver will be in the state of confirming whether or not to pair with the Bluetooth-compatible device. Refer to "**Registering and Connecting a Bluetooth-compatible Device to the Transceiver (Pairing/ HSP Connection)**" for the pairing operation.

Note

- Bluetooth Discoverable Mode ends upon lapse of 60 sec after the transceiver enters the mode. Or, pressing the **Menu** ([]), **Home** ([]), or [*****] key sounds a Key Beep A (1 beep) from the transceiver and ends the mode.
- If the transceiver enters Bluetooth Discoverable Mode when Bluetooth is disabled, Bluetooth becomes enabled automatically.
- **Mode Reset Timer** is extended while the transceiver is in Bluetooth Discoverable Mode.

Configuration using KPG-D1/ D1N

Configuring **Bluetooth Discoverable** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth)

11.3 Registering and Connecting a Bluetooth-compatible Device to the Transceiver (Pairing/ HSP Connection)

Pairing is the function to register the device configuration of a Bluetooth-compatible device to the transceiver. For registering a device configuration of a Bluetooth-compatible device which supports the Headset Profile and Serial Port Profile, authentication is required, such as entering a PIN Code. If a Bluetooth-compatible device is registered in the transceiver, HSP Connection starts, and the transceiver and Bluetooth-compatible device are connected wirelessly. (Refer to **About Headset Profile (HSP Connection/ HSP Disconnection)**.)

Once pairing succeeded, additional pairing is not required.

Pairing can be started for a Bluetooth-compatible device from the transceiver by one of the following methods:

● Bluetooth Find Device Mode

In Bluetooth Find Device Mode, the transceiver can select a Bluetooth-compatible device and start pairing. (Refer to **Finding, Registering and Connecting a Bluetooth-compatible Device (Bluetooth Find Device)**.)

● Bluetooth Connect/ Disconnect key

Pressing the **Bluetooth Connect / Disconnect** key causes the transceiver to behave as follows. (Refer to **Registering and Connecting Using PF Keys (Define Bluetooth Device)**.)

Table 11-4 Bluetooth Connect/ Disconnect

Connection Status	Define Bluetooth Device Registration Status	Operation
Disconnected	Unregistered	Pairing is started for a Bluetooth-compatible device having an address configured in Define Bluetooth Device .
Disconnected	Already Registered	By HSP Connection, connection starts for a Bluetooth-compatible device having an address configured in Define Bluetooth Device .
Connected	Not Depend on the Registration Status	The connection to the connected Bluetooth-compatible device is reset.

Also, the transceiver can start pairing by receiving a pairing request from a Bluetooth-compatible device. (Refer to **Receive a pairing request from a Bluetooth-compatible device**.)

Note

- If pairing for a Bluetooth-compatible device is started from the transceiver, the transceiver confirms whether the Bluetooth-compatible device supports Headset Profile, Heart Rate Service, or Automatic Injury Detection Service. If the Bluetooth-compatible device does not support Headset Profile, Heart Rate Service, or Automatic Injury Detection Service, pairing ends.
- A maximum of 10 Bluetooth-compatible devices can be registered in the transceiver. If pairing is executed while 10 devices are already registered, the registration of the Bluetooth-compatible device registered earliest is reset, and the new Bluetooth-compatible device is registered.
- Pairing continues even if a Voice Call or Data Call is received during pairing.
- **Mode Reset Timer** is extended during pairing.

About Authentication

If pairing for a Bluetooth-compatible device which supports the Headset Profile or the Serial Port Profile, the transceiver executes authentication. The authentication of pairing differs as follows depending on whether the Bluetooth-compatible device supports Secure Simple Pairing:

● If Secure Simple Pairing is not supported

If authenticating a Bluetooth-compatible device found in Bluetooth Find Device Mode, the same PIN Code needs to be entered on both the transceiver and the Bluetooth-compatible device. A PIN Code is a number of 1 digit to 6 digits (from 0 to 999999).

If authenticating a Bluetooth-compatible device having an address configured in **Define Bluetooth Device** by pressing the **Bluetooth Connect/ Disconnect** key, the Fixed PIN preconfigured by using KPG-D1/ D1N is used.

● If Secure Simple Pairing is supported

The behavior when authenticating differs as follows depending on whether an input function and display function are available for the Bluetooth-compatible device:

Table 11-5 Behavior when Secure Simple Pairing is Supported

Input Functions	Display Functions	Operation
Disabled	Disabled	Authenticating a Bluetooth-compatible device is not required.
Enabled	Disabled	Pairing cannot occur because the transceiver cannot authenticate this Bluetooth-compatible device. In this case, pairing ends.
Enabled	Enabled	Whether the Passkey displayed on the transceiver and the Passkey displayed on the Bluetooth-compatible device are the same needs to be confirmed. A Passkey is a 6-digit number.

Finding, Registering and Connecting a Bluetooth-compatible Device (Bluetooth Find Device)

In Bluetooth Find Device Mode, the transceiver searches for a Bluetooth-compatible device, and the transceiver can start pairing for the found Bluetooth-compatible device.

Operating the transceiver


1

Search for a Bluetooth-compatible device in Bluetooth Find Device Mode.

Refer to "**Finding a Bluetooth-compatible Device (Bluetooth Find Device)**" for operation methods.

2

Press the [▲] key or [▼] key to select the Bluetooth-compatible device, and then press the Menu ([□]) key or [*] key.



A Key Beep A (1 beep) sounds from the transceiver and pairing starts.
An LED flashes blue during pairing.




If the Bluetooth-compatible device supports Heart Rate Service or Automatic Injury Detection Service, the connection process starts by Bluetooth Low Energy. Proceed to step 5.

If the selected Bluetooth-compatible device is already registered in the transceiver, the connection process starts by HSP Connection without pairing occurring. Proceed to step 5.

If the selected Bluetooth-compatible device is not registered in the transceiver, the transceiver checks whether the Bluetooth-compatible device supports Secure Simple Pairing. The operation procedure differs as follows according to the check results. (Refer to [About Authentication.](#))

- **If Secure Simple Pairing is not supported**

The following screen appears. Proceed to step 3.



- **If Secure Simple Pairing is supported**

The behavior differs as follows depending on whether an input function and display function are available for the Bluetooth-compatible device:


- **No input function/ no display function**
Pairing continues. The display does not change. Proceed to step 5.
- **Input function available/ no display function**
Pairing cannot occur because the transceiver cannot authenticate this Bluetooth-compatible device. In this case, pairing ends.
- **Input function available/ display function available**
The following screen appears. Proceed to step 4.



3 Enter the PIN Code.

Refer to “Entering or Deleting a Code” for entry methods.

Press the **Menu** ([]) key, or [*] key.
A Key Beep A (1 beep) sounds from the transceiver and the transceiver checks whether the PIN Codes match.
Proceed to step 5.

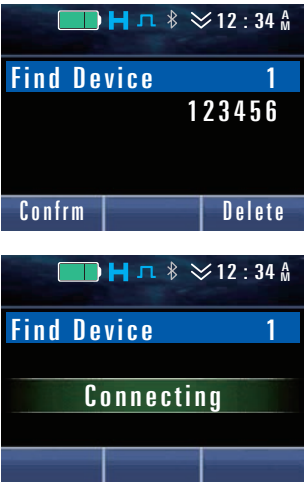

4 Check whether the Passkey displayed on the transceiver and the Passkey displayed on the Bluetooth-compatible device are the same.

- **If the Passkeys match**
Press the **Menu** ([]) key, or [*] key.
A Key Beep A (1 beep) sounds from the transceiver and pairing continues.
Proceed to step 5.



- **If the Passkeys do not match**
Pairing cannot occur with this Bluetooth-compatible device. Pressing the **Home** ([]) key ends pairing.

 Note

- If the Passkeys do not match, pairing ends even when the **Menu** ([]) key or [*] key is pressed.


5 Complete pairing.

When pairing completes, the Bluetooth-compatible device is registered in the transceiver, and the connection process starts by HSP Connection or Bluetooth Low Energy.

● If Heart Rate Service or Automatic Injury Detection Service is not supported

The connection process by HSP Connection starts.
If a connected Bluetooth-compatible device exists, the connection process starts after the connection is reset.
A Ring Tone sounds from the Bluetooth-compatible device during the connection process. In this case, start-up operations need to be done on the Bluetooth-compatible device. Refer to the instruction manual supplied with the Bluetooth-compatible device for details on the start-up operations.

The microphone and speaker of the Bluetooth-compatible device can be used when the connection process completes. In this case, the “” icon appears and “Connected” is displayed for 1 sec. The LED also turns Off.




Note

- The connection process continues even if a Voice Call or Data Call is received during the connection process.
- **Mode Reset Timer** is extended during the connection process.
- If the transceiver emits audio according to the configuration in **Bluetooth Speaker** and **Off-hook Speaker Revert**, a Bluetooth Connect Tone (2 beeps) is emitted. The Bluetooth Connect Tone (2 beeps) is not emitted if audio is emitted from the Bluetooth-compatible device or from both the transceiver and Bluetooth-compatible device.

● **If Heart Rate Service or Automatic Injury Detection Service is supported**

The connection process by Bluetooth Low Energy starts.
If the transceiver is already connected to a Bluetooth-compatible device which supports Heart Rate Service (1 device), the connection is automatically disconnected, and the connection of the selected Bluetooth-compatible device and Heart Rate Service starts.
If the transceiver is already connected to Bluetooth-compatible devices which support Automatic Injury Detection Service (2 devices), the connection to the Bluetooth-compatible device connected first is automatically disconnected, and the connection of the selected Bluetooth-compatible device and Automatic Injury Detection Service starts.

When the connection process completes, a Bluetooth Connect Tone (2 beeps) sounds, the "Bluetooth" icon blinks, and "Connected" appears for 1 sec. Also, the LED turns Off.



Note

- To terminate the connection process, press the **Home** ([Home]) key. A Key Beep A (1 beep) sounds, and "Canceling" appears on the display. When the process to end a connection completes, "Canceled" appears for 1 sec, and the blue LED turns off.
- While a connection process is being canceled, nothing appears in the key guide of the **Menu** ([Menu]) key. When a connection process is canceled, "Conn" appears in the key guide of the **Menu** ([Menu]) key.

Registering and Connecting Using PF Keys (Define Bluetooth Device)

Pairing can be started for a Bluetooth-compatible device having an address configured in **Define Bluetooth Device**.

Operating the transceiver


1 Press the Bluetooth Connect/ Disconnect key when a connected Bluetooth-compatible device does not exist.

A Key Beep A (1 beep) sounds from the transceiver and pairing starts. An LED flashes blue during pairing.



If the Bluetooth-compatible device having an address configured in **Define Bluetooth Device** is already registered in the transceiver, the connection process starts by HSP Connection without pairing occurring. Proceed to step 3.
If the Bluetooth-compatible device having an address configured in **Define Bluetooth Device** is not registered in the transceiver, the transceiver checks whether the Bluetooth-compatible device supports Secure Simple Pairing. The operation procedure differs as follows according to the check results. (Refer to **About Authentication**.)

- **If Secure Simple Pairing is not supported**
The transceiver checks whether the Fixed PIN matches. If the **Fixed PIN** matches, pairing continues. Proceed to step 3.
If the **Fixed PIN** does not match, pairing cannot occur because the transceiver cannot authenticate this Bluetooth-compatible device. In this case, pairing ends.
- **If Secure Simple Pairing is supported**
The behavior differs as follows depending on whether an input function and display function are available for the Bluetooth-compatible device having an address configured in **Define Bluetooth Device**:
 - **No input function/ no display function**
Pairing continues. The display does not change. Proceed to step 3.
 - **Input function available/ no display function**
Pairing cannot occur because the transceiver cannot authenticate this Bluetooth-compatible device. In this case, pairing ends.
 - **Input function available/ display function available**
The following screen appears. Proceed to step 2.




Note

- Pressing the **Bluetooth Connect/ Disconnect** key while Bluetooth is turned Off causes Bluetooth to automatically turn On, and then pairing starts.
- If the Bluetooth device address of the transceiver is configured in **Define Bluetooth Device**, pressing the **Bluetooth Connect/ Disconnect** key sounds a Key-entry Error Tone (1 beep) and the transceiver does not respond at all.

2

Check whether the Passkey displayed on the transceiver and the Passkey displayed on the Bluetooth-compatible device are the same.



- **If the Passkeys match**
Press the **Menu** ([]) key, or [*****] key.
A Key Beep A (1 beep) sounds from the transceiver and pairing continues.
Proceed to step 3.



- **If the Passkeys do not match**

Pairing cannot occur with this Bluetooth-compatible device. Pressing the **Home** ([]) key ends pairing.

 Note

- If the Passkeys do not match, pairing ends even when the **Menu** ([]) key or [*] key is pressed.

3 Complete pairing.

When pairing completes, the Bluetooth-compatible device is registered in the transceiver, and the connection process starts by HSP Connection.

A Ring Tone sounds from the Bluetooth-compatible device during the connection process. In this case, start-up operations need to be done on the Bluetooth-compatible device. Refer to the instruction manual supplied with the Bluetooth-compatible device for details on the start-up operations.

The mic and speaker of the Bluetooth-compatible device can be used when the connection process completes. In this case, a Bluetooth Connect Tone (2 beeps) sounds from the transceiver, the “” icon blinks, and “Connected” appears for 1 sec. Also, the LED turns Off.

 Note

- The connection process continues even if a Voice Call or Data Call is received during the connection process.
- **Mode Reset Timer** is extended during the connection process.



Configuration using KPG-D1/ D1N

- Configuring **Define Bluetooth Device** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > Define Bluetooth Device)
- Configuring **Fixed PIN** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > Define Bluetooth Device)

Receive a pairing request from a Bluetooth-compatible device

When the transceiver receives a pairing request from a Bluetooth-compatible device, the Bluetooth device name or Bluetooth device address appears on the transceiver and whether to connect can be selected.

If a pairing request from a Bluetooth-compatible device is received, the connection can be made by using either Headset Profile or Serial Port Profile.

Operating the transceiver

- If a pairing request from a Bluetooth-compatible device not supporting Secure Simple Pairing is received


1 Receive a pairing request from a Bluetooth-compatible device.

If the Bluetooth-compatible device is already registered in the transceiver, the connection process starts by HSP Connection or SPP Connection without pairing occurring. Proceed to step 3.

If the Bluetooth-compatible device is not registered in the transceiver, the PIN Code entry screen appears and the LED flashes blue.


If permitting pairing, enter the PIN Code. Proceed to step 2.

If rejecting pairing, press the **Home** ([]) key to end pairing. Also, pairing ends if 30 sec elapse without confirming the entered PIN Code.



2 Enter the PIN Code.


Refer to “[Entering or Deleting a Code](#)” for entry methods.



Press the Menu ([]) key, or [*] key.

A Key Beep A (1 beep) sounds from the transceiver and the transceiver checks whether the PIN Codes match.

If the PIN Code matches, the following is displayed:



3 Complete pairing.

When pairing completes, the Bluetooth-compatible device is registered in the transceiver, and the connection process starts by HSP Connection or SPP Connection. However, if a connected Bluetooth-compatible device exists, the connection process by HSP Connection or SPP Connection does not start.




When pairing completes, the Bluetooth-compatible device is registered in the transceiver, and the connection process starts by HSP Connection or SPP Connection. However, if a connected Bluetooth-compatible device exists, the connection process by HSP Connection or SPP Connection does not start.



● If a pairing request from a Bluetooth-compatible device supporting Secure Simple Pairing and having an input function and display function is received

1 Receive a pairing request from a Bluetooth-compatible device.

If the Bluetooth-compatible device is already registered in the transceiver, the connection process starts by HSP Connection or SPP Connection without pairing occurring. Proceed to step 3.
If the Bluetooth-compatible device is not registered in the transceiver, the Passkey confirmation screen appears and the LED flashes blue.
If permitting pairing, whether the Passkey displayed on the transceiver and the Passkey displayed on the Bluetooth-compatible device are the same needs to be confirmed. Proceed to step 2.




If rejecting pairing, press the **Home** ([]) key to end pairing. Also, pairing ends if 30 sec elapse with the Passkey displayed.

2

Check whether the Passkey displayed on the transceiver and the Passkey displayed on the Bluetooth-compatible device are the same.

- **If the Passkeys match**
Press the **Menu** ([]) key, or [*] key.
A Key Beep A (1 beep) sounds from the transceiver and pairing continues.
Proceed to step 3.



- **If the Passkeys do not match**
Pairing cannot occur with this Bluetooth-compatible device. Pressing the **Home** ([]) key ends pairing.

Note

- If the Passkeys do not match, pairing ends even when the **Menu** ([]) key or [*] key is pressed.

3

Complete pairing.

When pairing completes, the Bluetooth-compatible device is registered in the transceiver, and the connection process starts by HSP Connection or SPP Connection. However, if a connected Bluetooth-compatible device exists, the connection process by HSP Connection or SPP Connection does not start.



If a Bluetooth-compatible device is registered in the transceiver, "Connecting" does not appear.
For the Headset Profile connection, the microphone and speaker of the Bluetooth-compatible device can be used when the connection process completes. For the Serial Port Profile connection, the communication to KPG-D1/ D1N and using the PC Interface Protocol become available. In this case, a Bluetooth Connect Tone (2 beeps) sounds from the transceiver, the "  " icon blinks, and "Connected" appears for 1 sec. Also, the LED turns Off.



Note

- The connection process continues even if a Voice Call or Data Call is received during the connection process.
- **Mode Reset Timer** is extended during the connection process.
- If a pairing request is received from a Bluetooth-compatible device when **Key Lock** is enabled, **Key Lock** is temporarily disabled with the “” icon displayed. **Key Lock** is restored to the enabled state by one of the following operations:
 - Confirming the PIN Code
 - Completing Passkey confirmation
 - Aborting the current mode

Behavior of the Transceiver When Pairing Cannot Occur

If pairing cannot occur, the transceiver behaves as follows:

Table 11-6 Behavior of the Transceiver When Pairing Cannot Occur

Status	Transceiver Behavior
When nothing can be received from the Bluetooth-compatible device	Pairing ends in one of the following conditions. In this case, a Bluetooth No Response Tone (1 beep) sounds from the transceiver, the LED turns Off, and “No Response” appears on the display for 1 sec. • The transceiver starts pairing for the Bluetooth-compatible device, and the Bluetooth-compatible device does not respond even if about 10 sec elapse. • The transceiver moves outside the Bluetooth operation range while pairing.
When the Bluetooth-compatible device rejects pairing	If the transceiver starts pairing for the Bluetooth-compatible device and pairing is rejected, pairing ends. In this case, a Bluetooth Connect Denied Tone (2 beeps) sounds from the transceiver, the blue LED turns Off, and “Connect Denied” appears on the display for 1 sec.
When the Bluetooth-compatible device does not support Headset Profile	If pairing for a Bluetooth-compatible device is started from the transceiver, the transceiver checks whether the Bluetooth-compatible device supports the Headset Profile. If the Bluetooth-compatible device does not support the Headset Profile, pairing ends. In this case, a Bluetooth No Service Tone (3 beeps) sounds from the transceiver, the LED turns Off, and “BT No Service” appears on the display for 1 sec.
When the PIN Code is incorrect	If the PIN Code entered on the transceiver differs, or if the Fixed PIN and the PIN Code entered on the Bluetooth-compatible device differ, pairing ends. In this case, a Bluetooth Connect Invalid Tone (3 beeps) sounds from the transceiver, the LED turns Off, and “BT PIN Invalid” appears on the display for 1 sec.
When nothing operates	Pairing ends in one of the following conditions when the transceiver starts pairing for the Bluetooth-compatible device. In this case, a Bluetooth Connect Denied Tone (2 beeps) sounds from the transceiver, the LED turns Off, and “Connect Denied” appears on the display for 1 sec. • 30 sec elapse without pressing the Menu () key or [*] key after “Passkey” appears on the display. • 30 sec elapse without confirming the PIN Code after the PIN Code entry screen appears. • 30 sec elapse without the Bluetooth-compatible device completing confirmation of the Passkey. • 30 sec elapse without the Bluetooth-compatible device confirming of the PIN Code.
If Passkey Entry	If pairing occurs with a Bluetooth-compatible device which supports Secure Simple Pairing, which does not have a display function, and which has an input function, pairing ends. In this case, a Bluetooth No Service Tone (3 beeps) sounds from the transceiver, the LED turns Off, and “BT No Service” appears on the display for 1 sec.

11.4 Displaying a Bluetooth-compatible Device (Bluetooth My Devices)

Bluetooth My Devices is the function to display a Bluetooth-compatible device registered in the transceiver. If the transceiver enters Bluetooth My Devices Mode, a Bluetooth-compatible device registered in the transceiver appears on the display.

The following operations are enabled in Bluetooth My Devices Mode:

- The connection to the selected Bluetooth-compatible device can be made by using Headset Profile, Heart Rate Service, or Automatic Injury Detection Service.
- The connection to the Bluetooth-compatible device connected by Headset Profile, Heart Rate Service, or Automatic Injury Detection Service is reset.
- The registration of a Bluetooth-compatible device can be reset if the connection has not been made by using Headset Profile, Serial Port Profile, Heart Rate Service, or Automatic Injury Detection Service.

For Bluetooth version 4.0 or later, the following items of a registered Bluetooth-compatible device can be confirmed in Bluetooth My Devices Mode:

- If a device supports Heart Rate Service, the heart rate [bpm] notified from the Bluetooth-compatible device can be confirmed.
- If a device supports Automatic Injury Detection Service, whether the Bluetooth-compatible device has been damaged can be confirmed.
- The remaining battery power can be confirmed.
- The manufacturer name, Model Number, hardware version, and firmware version, etc. can be confirmed.


Pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the transceiver enters Bluetooth My Devices Mode by executing "Bluetooth My Devices" after executing "Bluetooth Device". (Refer to [Using Menu Mode](#).)

Operating the transceiver

● Placing the transceiver in Bluetooth My Devices Mode


1 Press the **Menu** key to enter Menu Mode and then execute "Bluetooth Device".

Press the [▲] key or [▼] key to select "Bluetooth Device", then press the **Menu** ([□]) key or [*] key to place the transceiver in Bluetooth Device Mode. (Refer to [Using Menu Mode](#).)




2 Press the [▲] key or [▼] key to select "My Devices", and then press the **Menu** ([□]) or [*] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters Bluetooth My Devices Mode.



If a Bluetooth-compatible device registered in the transceiver does not exist, a Key-entry Error Tone (1 beep) sounds from the transceiver and "BT No Device" appears on the display.



Note

- A Bluetooth-compatible device registered in the transceiver is displayed in the format of either the Bluetooth device name, Bluetooth device address, or device class. Pressing the [▲] key or [▼] key can switch the display. (Refer to [About the Displayed Contents of a Bluetooth-compatible Device.](#))
- If the Bluetooth device name of a Bluetooth-compatible device registered in the transceiver cannot be acquired, the Bluetooth device name is displayed as "--".
- If the transceiver receives an individual call while in Bluetooth My Devices Mode, Bluetooth My Devices Mode ends.


● **Connecting to a Bluetooth-compatible device, or resetting the connection**

1 In Bluetooth My Devices Mode, press the [▲] key or [▼] key to select a Bluetooth-compatible device.




2 Press the **Menu** ([□]) key, or [*] key.

- **If a disconnected Bluetooth-compatible device is selected**
A Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to connect appears.
- **If a connected Bluetooth-compatible device is selected**
A Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to reset the connection appears.



3 Press the **Menu** ([]) key, or [*****] key.

- **If a disconnected Bluetooth-compatible device is selected**
The connection process by HSP Connection or Bluetooth Low Energy starts. The LED flashes blue and “Connecting” appears on the display.
- **If a connected Bluetooth-compatible device is selected**
The connection to the Bluetooth-compatible device is reset. In this case, a Bluetooth Disconnect Tone (2 beeps) sounds from the transceiver, the “” icon blinks, and “Disconnected” appears on the display for 1 sec.



● **Deregistration of 1 Bluetooth-compatible device**

1 In Bluetooth My Devices Mode, press the [**▲**] key or [**▼**] key to select a disconnected Bluetooth-compatible device.



2 Press the **Back** ([]) key, or [**#**] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to deregister a Bluetooth-compatible device appears.



3 Press the **Menu** ([]) key, or [*****] key.


A Key Beep B (2 beeps) sounds from the transceiver and the selected Bluetooth-compatible device is deregistered, and then the list display is restored.



●Deregistering all Bluetooth-compatible devices

1 In Bluetooth My Devices Mode, press and hold the Back ([↶]) key or [#] key.


A Key Beep A (1 beep) sounds from the transceiver, and then the screen to confirm whether to deregister a Bluetooth-compatible device appears.



Pressing and holding the key causes the screen to confirm whether to deregister all Bluetooth-compatible devices to appear.


Note

- If all Bluetooth-compatible devices cannot be deregistered, the list display is restored.



2 Press the Menu ([□]) key, or [*] key.


A Key Beep B (2 beeps) sounds from the transceiver and all Bluetooth-compatible devices are deregistered, and then “BT No Device” appears on the display.



● Migrating to the Device Information screen of the transceiver

1 Select a Bluetooth-compatible device in Bluetooth My Devices Mode and press the [▶] key.

A Key Beep A (1 beep) sounds from the transceiver, and then the Device Information screen for the selected Bluetooth-compatible device appears.



2 Press the [▲] key, or [▼] key.

A Key Beep A (1 beep) or Rollover Tone sounds from the transceiver, and the display switches in the following order:

- **When the [▲] key is pressed**
Bluetooth device name → software version ^{*3} → firmware version ^{*3} → hardware version ^{*3} → Serial Number ^{*3} → Model Number ^{*3} → manufacturer name ^{*3} → remaining Battery power ^{*3} → Injury Detection Status ^{*2} → Heart Rate ^{*1} → device class → Bluetooth device address → Bluetooth device name → ...
- **When the [▼] key is pressed**
Bluetooth device name → Bluetooth device address → device class → Heart Rate ^{*1} → Injury Detection Status ^{*2} → remaining Battery power ^{*3} → manufacturer name ^{*3} → Model Number ^{*3} → Serial Number ^{*3} → hardware version ^{*3} → firmware version ^{*3} → software version ^{*3} → Bluetooth device name → ...

^{*1} Appears if the selected Bluetooth-compatible device supports Heart Rate Service.
^{*2} Appears if the selected Bluetooth-compatible device supports Automatic Injury Detection Service.
^{*3} Appears if the selected Bluetooth-compatible device supports Heart Rate Service or Automatic Injury Detection Service.

Note

- The display of the Device Information screen is available with Bluetooth version 4.0 or later.

11.5 About Headset Profile (HSP Connection/ HSP Disconnection)

HSP Connection is the function to connect a registered Bluetooth-compatible device to the transceiver by Headset Profile. If connected by Headset Profile, a voice call can be made using the mic and speaker of the Bluetooth-compatible device. For connecting by Headset Profile, a Bluetooth-compatible device needs to support Headset Profile. Also, **HSP Disconnection** is the function to reset a connection by Headset Profile.

Connecting by Headset Profile

A Bluetooth-compatible device that supports Headset Profile can be selected and the connection process can be initiated by one of the following methods:

● Bluetooth Find Device Mode

Entering Bluetooth Find Device Mode, the transceiver selects a Bluetooth-compatible device and starts pairing. If pairing is successful, the connection process is automatically initiated. In this case, if a connected Bluetooth-compatible device exists, connection to the found Bluetooth-compatible device is initiated after connection to the connected Bluetooth-compatible device is automatically reset. (Refer to [Finding, Registering and Connecting a Bluetooth-compatible Device \(Bluetooth Find Device\)](#).)

● Bluetooth My Devices Mode

Entering Bluetooth My Devices Mode, the transceiver selects a Bluetooth-compatible device registered in the transceiver and initiates the connection process. In this case, if a connected Bluetooth-compatible device exists, connection to the selected Bluetooth-compatible device is initiated after connection to the connected Bluetooth-compatible device is automatically reset. (Refer to [Displaying a Bluetooth-compatible Device \(Bluetooth My Devices\)](#).)

● Bluetooth Connect/ Disconnect key

When **Define Bluetooth Device** is registered in the transceiver with no connected Bluetooth-compatible devices, pressing the **Bluetooth Connect/ Disconnect** key starts connection to **Define Bluetooth Device**. (Refer to [Registering and Connecting Using PF Keys \(Define Bluetooth Device\)](#).)

Note

- For Bluetooth version 4.0, the device supporting **Bluetooth Low Energy** and the headset supporting Headset Profile cannot be connected to the transceiver together. Only the one connected to the transceiver first can be used.

The following is the behavior of the transceiver when the connection process of the transceiver and Bluetooth-compatible device completes:

- If the **PTT** switch of the transceiver (including the microphone of Mobile) is pressed, or if the External PTT (Voice) port or one of the External PTT (Direct Channel 1 Voice) port to External PTT (Direct Channel 5 Voice) port is configured low level, the Mic Line of the Bluetooth-compatible device is enabled.
- The PTT command using the Serial Port Profile functions regardless of whether Bluetooth Data is enabled or disabled.
- If the **PTT** switch of the Bluetooth-compatible device is pressed, the behavior is the same as the behavior of when With QT/DQT and With STE are allowed.
- The configuration in **External Microphone Sense** applies to the microphone sensitivity of the Bluetooth-compatible device.
- The speaker to emit audio is switched according to the configuration in **Bluetooth Speaker**. (Refer to [Switching the Speaker to Emit Audio \(Bluetooth Speaker\)](#).)
- The volume level of the received audio of a Bluetooth-compatible device is operated as follows:

For Portable, or Mobile for which "RF Deck" is configured in Bluetooth Interface Selection:

Based on the volume level 31 of the transceiver, the volume level of the received audio of a Bluetooth-compatible device is adjusted by the volume operation of the Bluetooth-compatible device. Even if the volume level is operated by the transceiver, the volume level of the received audio of the Bluetooth-compatible device does not change.

For Mobile for which "Control Head" is configured in Bluetooth Interface Selection (Featured Panel only):

The volume level of the received audio of a Bluetooth-compatible device can be adjusted by the volume operation of the Bluetooth-compatible device based on the volume level from 0 to 31 of the transceiver. If the volume level is operated by the transceiver, the volume level of the received audio of the Bluetooth-compatible device also changes.

- The configuration in **Tone Volume** applies to the volume level of a tone emitted from a Bluetooth-compatible device as follows. (Refer to [Configuring the Volume Level of Various Tones \(Tone Volume\)](#).)

Table 11-7 Tone Volume

Tone Volume	Description
Current	The tone volume is linked to the reception volume level adjusted in a Bluetooth-compatible device.
1 to 31	The tone sounds from a Bluetooth-compatible device with a fixed tone volume. Higher values result in greater volume.
Off	The tone does not sound from a Bluetooth-compatible device.
Selectable	The tone volume varies in conjunction with the Fixed Volume key. (Refer to Changing the Tone Volume Level with a Single Touch (Selectable Tone Level) .)

- The sound quality function behaves as follows. (Refer to [Configuring Audio Profile \(Audio Profile\)](#).)

Table 11-8 Sound Quality Function

Type	Function	Configuration
RX Audio Response	Audio Gain Control	Yes
	Audio Equalizer (High)	Yes
	Audio Equalizer (High Midrange)	Yes
	Audio Equalizer (Midrange)	Yes
	Audio Equalizer (Low Midrange)	Yes
	Audio Equalizer (Low)	Yes
	Speaker Type	Yes ^{*1}
TX Audio Response	Audio Gain Control	Yes
	Audio Equalizer (High)	Yes
	Audio Equalizer (High Midrange)	Yes
	Audio Equalizer (Midrange)	Yes
	Audio Equalizer (Low Midrange)	Yes
	Audio Equalizer (Low)	Yes
	Microphone Type	Yes ^{*1}
Active Noise Reduction	ANR Preset Mode	Yes
	Vocoder	Yes
	DSP	Yes
	Noise Attenuation Level	Yes
	Low Noise Level Adjustment	Yes
	Optimization based on Microphone Position	No ^{*2}
	Siren	Yes
	Vibration (Alert Device)	Yes
	Battery Save for Noise Reduction	Yes ^{*3}

^{*1} Behaves as the configuration of "None".

^{*2} Behaves as the configuration of "Off".

^{*3} For Portable, behaves as the configuration of "On", and for Mobile, behaves as the configuration of "Off".

Yes: Indicates that the configuration is enabled when connected to a Bluetooth-compatible device and that the sound quality function behaves as configured.

No: Indicates that the configuration is disabled when connected to a Bluetooth-compatible device.

When a Pairing Cannot Occur with the Bluetooth-compatible Device or the Bluetooth-compatible Device Does Not Behave (Bluetooth Headset Connection Type)

An appropriate Headset Profile connection sequence exists for each of the Bluetooth-compatible devices (headsets) to be connected with the transceiver by using Headset Profile. For the transceiver, an appropriate Headset Profile connection sequence needs to be configured in **Bluetooth Headset Connection Type** according to the Bluetooth-compatible device to be used.

By using KPG-D1/ D1N, **Bluetooth Headset Connection Type** can be configured.

The operations of the following Bluetooth-compatible devices are confirmed.

Table 11-9 Bluetooth Headset Connection Type

Configuration	Description
Headset 1	The Bluetooth-compatible devices in the following URL can be used normally: http://manual2.jyckenwood.com/com/help_ref/nx5000_series/compatible_model_list/CNMJSYnnzoitpv.html
Headset 2	

Also, the Headset Profile connection sequence can be changed by selecting “Headset 1” or “Headset 2” after placing the transceiver in Menu Mode by pressing the **Menu** key and executing “Bluetooth Headset Connection Type”. (Refer to **Using Menu Mode**.)

Note

- Bluetooth-compatible devices with different connection sequences may not be connected even if either “Headset 1” or “Headset 2” is configured in **Bluetooth Headset Connection Type**.

Configuration using KPG-D1/ D1N


- Configuring **Bluetooth Headset Connection Type (Control Head 2)** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > Control Head 2)
- Configuring **Bluetooth Headset Connection Type (Portable)** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth)
- Configuring **Bluetooth Headset Connection Type (RF Deck/Control Head 1)** ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth > RF Deck/Control Head 1)

Resetting the Connection by Headset Profile

Connection by Headset Profile can be reset by one of the following methods:

- Pressing the **Bluetooth Connect/ Disconnect** key when a connected Bluetooth-compatible device exists
- Placing the transceiver in Bluetooth My Devices Mode, selecting a connected Bluetooth-compatible device, and pressing the **Menu** ([) or [*****] key (Refer to [Displaying a Bluetooth-compatible Device \(Bluetooth My Devices\)](#).)
- Moving outside the Bluetooth operation range
- Receiving a disconnection request from a connected Bluetooth-compatible device

If connection by Headset Profile is reset by any of these methods, a Bluetooth Disconnect Tone (2 beeps) sounds from the transceiver, the “” icon blinks, and “Disconnected” appears on the display for 1 sec.



Also, connection by Headset Profile can be reset even by the following methods:

- Turning the transceiver OFF
- Disabling Bluetooth (Refer to [Toggling Bluetooth On/ Off](#).)

Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Headset Profile)

If connection to a Bluetooth-compatible device fails by Headset Profile, the transceiver behaves as follows:

Table 11-10 Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails

Status	Transceiver Behavior
When the Bluetooth-compatible device does not support Headset Profile	If connection to a Bluetooth-compatible device is started using Bluetooth My Devices Mode or the Bluetooth Connect/ Disconnect key, the transceiver checks whether the Bluetooth-compatible device supports Headset Profile. If the Bluetooth-compatible device does not support Headset Profile, the connection process ends. In this case, a Bluetooth No Service Tone (3 beeps) sounds from the transceiver, the LED turns Off, and “BT No Service” appears on the display for 1 sec.
When nothing can be received from the Bluetooth-compatible device	The connection process ends in one of the following conditions. In this case, a Bluetooth No Response Tone (1 beep) sounds from the transceiver, the LED turns Off, and “No Response” appears on the display for 1 sec. • The transceiver starts connection to the Bluetooth-compatible device, and the Bluetooth-compatible device does not respond even if about 10 sec elapse. • The transceiver moves outside the Bluetooth operation range during the connection process.
When the Bluetooth-compatible device rejects the connection request.	The connection process ends in one of the following conditions. In this case, a Bluetooth Connect Denied Tone (2 beeps) sounds from the transceiver, the LED turns Off, and “Connect Denied” appears on the display for 1 sec. • The connection request is rejected by the Bluetooth-compatible device. • 120 sec elapse without the Bluetooth-compatible device operating to start connection after a Ring Tone sounds from the Bluetooth-compatible device.

11.6 About Serial Port Profile (SPP Connection/ SPP Disconnection)

SPP Connection is the function to connect a registered Bluetooth-compatible device with the transceiver by Serial Port Profile.

Connecting by Serial Port Profile enables the communication to KPG-D1/ D1N without using a programming cable and the use of the PC Interface Protocol. Serial Port Profile is the effective function to be used in a small-scale system. Also, **SPP Disconnection** is the function to reset a connection by Serial Port Profile.

Note

- When the transceiver is configured as a Bluetooth-compatible device on the PC in which KPG-D1/ D1N is used, the Serial Port Profile function (Bluetooth SPP) of KPG-D1/ D1N cannot be used. Use the Serial Port Profile function after removing the corresponding transceiver from the configuration of Bluetooth-compatible device on the PC.
- To use Serial Port Profile in KPG-D1/ D1N, a Bluetooth-compatible device using Windows standard drivers is required. Other than the above, Windows standard drivers are not required.
- For Bluetooth version 4.0, the device supporting Bluetooth Low Energy and the device supporting Serial Port Profile cannot be connected to the transceiver at the same time. Only the one connected to the transceiver first can be used.

Connecting by Serial Port Profile

After the pairing completes, the connection process by Serial Port Profile starts when the transceiver receives a connection request from a Bluetooth-compatible device. (Refer to [Receive a pairing request from a Bluetooth-compatible device.](#))



After the connection process between the transceiver and the Bluetooth-compatible Device completes, the communication to KPG-D1/ D1N and the use of the PC Interface Protocol are available.



The transceiver migrates to each mode when the communication to KPG-D1/ D1N starts. If the PC Interface Protocol is used, the behavior of each PC command is executed.

Note

- Whether or not to use Serial Port Profile can be configured using KPG-D1/ D1N. (Refer to [Connecting the Transceiver to a PC by Bluetooth.](#))
- The connection by Serial Port Profile cannot be requested from the transceiver to the Bluetooth-compatible device.
- If the Bluetooth-compatible device connected by Serial Port Profile exists, the transceiver does not respond even if the transceiver receives a connection request by Serial Port Profile.
- Serial Port Profile functions also in Unprogramming Mode. The following are behaviors of Bluetooth in Unprogramming Mode:

- For Mobile, the configuration of **Bluetooth Interface Selection** is retained when the transceiver migrates to FPU Programming Mode by using SPP Connection. Therefore, when the writing of configuration data fails and the transceiver starts up in Unprogramming Mode, Bluetooth of an RF Deck (mobile transceiver), KCH-20R (Featured Panel), or KCH-21R (Handheld Control Head) is enabled according to the stored configuration of Bluetooth Interface Selection. When Bluetooth is enabled, **COM port 2** cannot be used. The stored configuration of **Bluetooth Interface Selection** is initialized when the transceiver starts in user mode.
- For Portable, if the writing of FPU data by using SPP Connection fails, the transceiver enters Unprogramming Mode when the transceiver is turned ON next time. At this time, Bluetooth of an RF Deck or Featured Panel is enabled. If Bluetooth is enabled, **COM port 2** cannot be used.
- If a connection request by Headset Profile is received, the connection is established once; however, the connection is immediately disconnected. The transceiver also rejects a pairing request automatically even if the request is received.
- **Bluetooth Device Name** becomes the combination of Model Name and Market Code of the Kenwood ESN.

Configuration using KPG-D1/ D1N

- Configuring **Bluetooth Data** to be enabled or disabled ( **See** Model > Product Information > Feature Selection)
- Configuring **Bluetooth SPP** ( **See** Setup > COM port)

Resetting the Connection by Serial Port Profile

Connection by Serial Port Profile can be reset by one of the following methods:

- Finishing the communication with KPG-D1/ D1N (A disconnection request is sent to the connected Bluetooth-compatible device.)
- Disabling Bluetooth (Refer to [Toggling Bluetooth On/ Off.](#))
- Moving outside the Bluetooth operation range
- Receiving a disconnection request from a connected Bluetooth-compatible device

Note

- When the transceiver is turned OFF during the connection, a disconnection request is not sent from the transceiver to the Bluetooth-compatible device. Therefore, the Bluetooth-compatible device behaves the same as when the transceiver moves out of range of Bluetooth.

Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Serial Port Profile)

The connection process ends in one of the following conditions.

- The transceiver starts connection to the Bluetooth-compatible device, and the Bluetooth-compatible device does not respond even if about 10 sec elapse.
- The transceiver moves outside the Bluetooth operation range during the connection process.

In this case, if "Connecting" appears on the display, a Bluetooth No Response Tone (1 beep) sounds from the transceiver, the LED turns Off, and "No Response" appears on the display for 1 sec. If "Connecting" does not appear on the display, the display does not change, and no tone sounds.

11.7 Switching the Speaker to Emit Audio (Bluetooth Speaker)

Bluetooth Speaker is the function to switch the speaker to emit audio between the speaker of the Bluetooth-compatible device connected to the transceiver by Headset Profile and the internal speaker of the transceiver.

Pressing the **Bluetooth Speaker** key can switch among Off, Only, Both (Bluetooth+Radio) (Mobile only) of **Bluetooth Speaker**.

Or, pressing the **Menu** key to enter Menu Mode, and selecting "Off", "Only" or "Both (Bluetooth+Radio)" (Mobile only) after executing "Bluetooth Speaker" can switch the speaker to emit audio. (Refer to [Using Menu Mode](#).)

Table 11-11 Bluetooth Speaker

Configuration	Description
Off	Audio is emitted from the internal speaker of the transceiver.
Only	Audio is emitted from the speaker of a Bluetooth-compatible device.
Both (Bluetooth+Radio) (Mobile only)	Audio is emitted from both the speaker of a Bluetooth-compatible device and the internal speaker of the transceiver.

Note

- **Bluetooth Speaker** behaves as the configuration "Only" by default. If "Bluetooth Speaker" is not assigned to a **PF** key, and if "Bluetooth Speaker" is not configured in Menu Mode, the configuration of **Bluetooth Speaker** cannot be changed.
- The configuration status of **Bluetooth Speaker** is retained even if the transceiver is turned OFF.
- When a Bluetooth-compatible device connected by Headset Profile does not exist, pressing the **Bluetooth Speaker** key sounds a Key-entry Error Tone (1 beep) from the transceiver and the transceiver does not respond at all.
- The relationship between the **External Speaker** function and **Bluetooth Speaker** is as follows:

Table 11-12 Relationship Between the External Speaker Function and Bluetooth Speaker

Connection Status		Configuration Status		Audio Output Pattern		
External Speaker	Bluetooth-compatible Device	External Speaker	Bluetooth Speaker	Internal Speaker	External Speaker	Bluetooth-compatible Device
Disconnected	Disconnected	-	-	Output	-	-
Connected	Disconnected	Off	-	Output	No output	-
		On	-	No output	Output	-
		Internal + External (Mobile only)	-	Output	Output	-
Disconnected	Connected	-	Off	Output	-	No output
		-	Only	No output	-	Output
		-	Both (Bluetooth+Radio) (Mobile only)	Output	-	Output
Connected	Connected	Off	Off	Output	No output	No output
		On	Off	No output	Output	No output
		Internal + External (Mobile only)	Off	Output	Output	No output
		On	Only	No output	No output	Output
		Off	Only	No output	No output	Output

Connection Status		Configuration Status		Audio Output Pattern		
External Speaker	Bluetooth-compatible Device	External Speaker	Bluetooth Speaker	Internal Speaker	External Speaker	Bluetooth-compatible Device
Connected	Connected	Internal + External (Mobile only)	Only	No output	No output	Output
		Off	Both (Bluetooth+Radio) (Mobile only)	Output	No output	Output
		On	Both (Bluetooth+Radio) (Mobile only)	No output	Output	Output
		Internal + External (Mobile only)	Both (Bluetooth+Radio) (Mobile only)	Output	Output	Output

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

Determining the Speaker to Emit by Linking with the Microphone Hook (Off-hook Speaker Revert)

Supported Models: Mobile

Off-hook Speaker Revert is the function to determine whether to use the speaker of the transceiver or the speaker of the Bluetooth-compatible device connected by Headset Profile, by linking with a microphone on- or off-hook state. If **Off-hook Speaker Revert** is enabled, the speaker to emit is determined by the configuration of **Bluetooth Speaker** regardless of the microphone on-hook or off-hook state.

If **Off-hook Speaker Revert** is disabled, the speaker to emit is determined as follows by the microphone hook state and the configuration of Bluetooth Speaker.

Table 11-13 Off-hook Speaker Revert

Bluetooth Speaker	The Microphone Hook Status	Speaker to Emit Audio	When the Microphone Hook Status is changed	
			The Microphone Hook Status	Speaker to Emit Audio
Off ^{*1}	Off	Transceiver	Off → On	Transceiver
Only ^{*1}		Transceiver		Bluetooth-compatible device
Both (Bluetooth+Radio) ^{*1}		Transceiver + Bluetooth-compatible device		Transceiver + Bluetooth-compatible device
Off	On	Transceiver	On → Off	Transceiver
Only		Bluetooth-compatible device		Transceiver
Both (Bluetooth+Radio)		Transceiver + Bluetooth-compatible device		Transceiver + Bluetooth-compatible device

^{*1} The microphone goes to the off-hook state after changing the configuration of **Bluetooth Speaker** by pressing the **Bluetooth Speaker** key when the microphone is in the on-hook state.

Note

- This function can be used only when a Bluetooth-compatible device connected by Headset Profile exists.
- If **Off-hook Speaker Revert** is disabled, changing the microphone on- or off-hook state while the audio data is being played back in Playback Mode pauses the playing.

Configuration using KPG-D1/ D1N

Configuring **Off-hook Speaker Revert** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth)

11.8 About Bluetooth Low Energy (Heart Rate Service/ Automatic Injury Detection Service/ Battery Service/ Device Information Service)

Supported Models: Portable

Heart Rate Service, Automatic Injury Detection Service, Battery Service, and Device Information Service in **Bluetooth Low Energy** can be used when the transceiver is connected to a Bluetooth-compatible device.

Bluetooth Low Energy is supported by the compatible device with Bluetooth version 4.0 or later in all systems.

Note

- **Bluetooth Low Energy** includes the Heart Rate Notice function, Heart Rate Status function, and Injury Detection function.
- For Bluetooth version 4.0, the device supporting **Bluetooth Low Energy** and the headset supporting Headset Profile cannot be connected to the transceiver together. Only the one connected to the transceiver first can be used.

● Heart Rate Service

The function notifies the transceiver of the heart rate [bpm] from a Bluetooth-compatible device (heart rate meter, etc.) which supports Heart Rate Service. The transceiver can send the heart rate as a Status and activate Emergency according to the notified heart rate [bpm]. Also, when the transceiver receives the Status request message from the Base ID, the transceiver can send back the heart rate or send the heart rate together with GPS data. (Refer to [Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver \(Heart Rate Service\)](#).)

● Automatic Injury Detection Service

The function notifies the transceiver of the damage from the Bluetooth-compatible device if a Bluetooth-compatible device which supports Automatic Injury Detection Service has been damaged. Up to 2 Bluetooth-compatible devices can simultaneously be connected to the transceiver for Automatic Injury Detection Service. (Refer to [Notifying of Damage on a Bluetooth-compatible Device to the Transceiver \(Automatic Injury Detection Service\)](#).)

● Battery Service

If the transceiver is connected to a Bluetooth-compatible device which supports Heart Rate Service or Automatic Injury Detection Service, the transceiver can display the remaining battery power [%] of the Bluetooth-compatible device on the display.
(Refer to [Confirming the Remaining Battery Power of a Bluetooth-compatible Device \(Battery Service\)](#).)

● Device Information Service

If the transceiver is connected to a Bluetooth-compatible device which supports Heart Rate Service or Automatic Injury Detection Service, the transceiver can display the manufacturer name, Model Number, etc. of the Bluetooth-compatible device on the display. (Refer to [Confirming the Manufacturer Name, Model Number, Etc. of a Bluetooth-compatible Device \(Device Information Service\)](#).)

Configuring the FPU

To use **Heart Rate Service** or **Automatic Injury Detection Service**, configure as follows in KPG-D1/ D1N:

- 1
- Enable **Built-in GPS Receiver/Bluetooth** in **GPS/Bluetooth of Transceiver Settings > Optional Features > Optional Features 2**.

GPS/Bluetooth

☒ Built-in GPS Receiver/Bluetooth

GPS/Bluetooth Preset (Default)

☒ GPS

☐ Bluetooth

Figure 11-1 Heart Rate Notice Configuration 1

- 2
- Enable **Bluetooth Discoverable** in **GPS/Bluetooth > Bluetooth**, and then configure **Heart Rate Notice**.

Bluetooth

☒ Bluetooth Discoverable

Bluetooth Device Name

Name TypeText

Text

Preset System Number

Define Bluetooth Device

Address00 . 00 . 00 . 00 . 00 . 00

Fixed PIN0000

Bluetooth Headset Connection TypeHeadset 1

Heart Rate Notice

Upper Threshold [bpm]25

Lower Threshold [bpm]Off

MethodStatus

Delay Time [s]10

Figure 11-2 Heart Rate Notice Configuration 2

- **Upper Threshold [bpm]**

Configures the heart rate value which activates **Delay Time**. If the transceiver receives a heart rate value which is larger than the value configured in **Upper Threshold**, the transceiver activates **Delay Time**.

Range: Off, 25 bpm to 200 bpm (in steps of 1)

Default: Off

- **Lower Threshold [bpm]**

Configures the heart rate value which activates **Delay Time**. If the transceiver receives a heart rate value which is smaller than the value configured in **Lower Threshold**, the transceiver activates **Delay Time**.

Range: Off, 25 bpm to 200 bpm (in steps of 1)

Default: Off

- **Method**

Configures the behavior for the transceiver to transmit to the Base ID after **Delay Time** elapses.

Range: Status, Emergency

Default: Status

- **Delay Time [s]**

Configures the duration until the transceiver transmits to the Base ID when the heart rate goes higher than **Upper Threshold** or goes lower than **Lower Threshold**.

Range: 0 sec to 70 sec (in steps of 1)

Default: 10 sec

 Note

- A number and "O" can be entered in **Upper Threshold** and **Lower Threshold**. If the entry is "0", "O" or blank, the configuration is disabled.
- If "Off" is configured in **Upper Threshold** and **Lower Threshold**, the **Delay Time** configuration is disabled.
- The **Heart Rate Notice** configuration is disabled in the following cases:
 - If **Bluetooth Data** in **Product Information** is disabled
 - If **Built-in GPS Receiver/Bluetooth** is disabled
- The **Heart Rate Notice** configuration is disabled if all of the following conditions are satisfied:
 - If NXDN is disabled, or NXDN Conventional and NXDN Trunking are disabled
 - If DMR is disabled, or DMR Conventional and DMR-based Trunking are disabled
- For Mobile, the **Heart Rate Notice** configuration is not displayed.

3 Configure Bluetooth in NXDN and DMR.

- **If connecting to a Bluetooth-compatible device on an NXDN Channel**
Configure **Bluetooth** in Status of Transceiver Settings > NXDN > NXDN Information.
- **If connecting to a Bluetooth-compatible device on a DMR Channel**
Configure **Bluetooth** in Status of Transceiver Settings > DMR > DMR Information.

The screenshot shows the 'Status' configuration window. The 'Bluetooth' section is highlighted with a red border. It contains the following settings:

- Heart Rate Status:** Checked (indicated by a blue checkmark).
- Reserved Statuses:** Two input fields with values 25 and 200, each with up and down arrow buttons.
- Status Hold:** A dropdown menu currently set to 'Selected'.

Figure 11-3 Heart Rate Notice Configuration 3

- **Heart Rate Status**
Whether the heart rate received by a Bluetooth-compatible device is sent to a Base ID as a Status (status number) is configured.
Range: Check, Uncheck
Default: Uncheck
- **Reserved Statuses**
The Status range specified as the heart rate is configured.
Range: 25 to 200 (in steps of 1) [Start ≤ End]
Default: Start = 25, End = 200
- **Status Hold**
Whether only a Status selected in Status Mode is retained or the sent Status is also retained can be configured.
Range: Selected, Selected + Transmit
Default: Selected

Note

- For Mobile, the **Bluetooth** configuration is not displayed.
- The **Bluetooth** configuration is disabled in the following cases:
 - If **Bluetooth Data** in **Product Information** is disabled
 - If **Built-in GPS Receiver/Bluetooth** is disabled in step 1
- A value on the right must be larger than a value on the left in **Reserved Statuses**.
- If **Heart Rate Status** is enabled, the **Status Hold** configuration is disabled.

Connecting by Bluetooth Low Energy

A Bluetooth-compatible device which supports Bluetooth Low Energy can be selected and the connection process can be initiated by one of the following methods:

● Bluetooth Find Device Mode

Entering Bluetooth Find Device Mode, the transceiver selects a Bluetooth-compatible device and starts the connection process.

In this case, if a Bluetooth-compatible device connected by Heart Rate Service exists, the connected Bluetooth-compatible device is reset, and the new Bluetooth-compatible device is connected.

Also, if 2 Bluetooth-compatible devices are connected by Automatic Injury Detection Service, one of the connected Bluetooth-compatible devices is reset, and the new Bluetooth-compatible device is connected. (Refer to [Finding, Registering and Connecting a Bluetooth-compatible Device \(Bluetooth Find Device\)](#).)

● Bluetooth My Devices Mode

Entering Bluetooth My Devices Mode, the transceiver selects a Bluetooth-compatible device registered in the transceiver and initiates the connection process.

In this case, if a Bluetooth-compatible device connected by Heart Rate Service exists, the connected Bluetooth-compatible device is reset, and the new Bluetooth-compatible device is connected.

Also, if 2 Bluetooth-compatible devices are connected by Automatic Injury Detection Service, one of the connected Bluetooth-compatible devices is reset, and the new Bluetooth-compatible device is connected. (Refer to [Displaying a Bluetooth-compatible Device \(Bluetooth My Devices\)](#).)

Note

- If the Bluetooth Low Energy connection process is done with the transceiver and a Bluetooth-compatible device not connected, GPS positioning is temporarily interrupted because the IC for Built-in GPS Receiver/Bluetooth is restarted.
- Refer to [“Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver \(Heart Rate Service\)”](#), [“Notifying of Damage on a Bluetooth-compatible Device to the Transceiver \(Automatic Injury Detection Service\)”](#) for the connection process as needed.

Reconnecting by Bluetooth Low Energy

If Bluetooth is turned on, or if the connection is reset when the transceiver moves outside the **Bluetooth Low Energy** operation range, the transceiver tries to reconnect to a Bluetooth-compatible device for **Heart Rate Service** (one unit) or Bluetooth-compatible devices for **Automatic Injury Detection** (two units) around the transceiver.

When connecting to a Bluetooth-compatible device for **Heart Rate Service** (one unit) or Bluetooth-compatible devices for **Automatic Injury Detection** (two units), the transceiver first tries the device having the smallest list number in **Bluetooth My Devices Mode**.

Note

- If the connection to a Bluetooth-compatible device is reset when the transceiver moves outside the **Bluetooth Low Energy** operation range, a Bluetooth Find Device Mode Tone (2 beeps) continuously sounds until one of the following operations is done while the transceiver is searching the vicinity:
 - Reconnecting to the Bluetooth-compatible device for which the connection was reset
 - Deleting from **Bluetooth My Devices Mode** the registration information of the Bluetooth-compatible device for which the connection was reset

Resetting the Connection by Bluetooth Low Energy

Connection to a Bluetooth-compatible device can be reset by one of the following methods:

- Entering Bluetooth My Devices Mode to select the connected Bluetooth-compatible device and pressing the **Menu** ([]) or [*****] key (Refer to [Displaying a Bluetooth-compatible Device \(Bluetooth My Devices\)](#).)
- Disabling Bluetooth (Refer to [Toggling Bluetooth On/ Off](#).)
- Moving outside the Bluetooth operation range
- Enabling BLE Scan

Note

- When the transceiver is turned OFF during the connection, a disconnection request is not sent from the transceiver to the Bluetooth-compatible device. Therefore, the Bluetooth-compatible device behaves the same as when the transceiver moves out of range of Bluetooth.

Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Bluetooth Low Energy)

If connection to a Bluetooth-compatible device fails by Bluetooth Low Energy, the transceiver behaves as follows:

Table 11-14 Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails

Status	Transceiver Behavior
When nothing can be received from the Bluetooth-compatible device	If the Bluetooth-compatible device does not respond even if about 10 sec elapse after the transceiver starts the connection process to the Bluetooth-compatible device, the connection process ends. In this case, a Bluetooth No Response Tone sounds from the transceiver, the LED turns Off, and "No Response" appears on the display for 1 sec.
When the Bluetooth-compatible device rejects the connection request	The connection process to the Bluetooth-compatible device ends. In this case, a Bluetooth Connect Denied Tone sounds from the transceiver, the LED turns Off, and "Connect Denied" appears on the display for 1 sec.

11.9 Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver (Heart Rate Service)

Supported Models: Portable

Heart Rate Service is the function to notify the transceiver of the heart rate [bpm] from a Bluetooth-compatible device (heart rate meter, etc.) which supports Heart Rate Service. The transceiver can send the heart rate as a Status and activate Emergency according to the notified heart rate [bpm]. Also, when the transceiver receives the Status request message from the Base ID, the transceiver can send back the heart rate or send the heart rate together with GPS data.

Heart Rate Service is available with Bluetooth version 4.0 or later.

Note

- **Heart Rate Service** is the function for the police or firefighting services. Use this function as support for determining whether an emergency or failure has occurred.

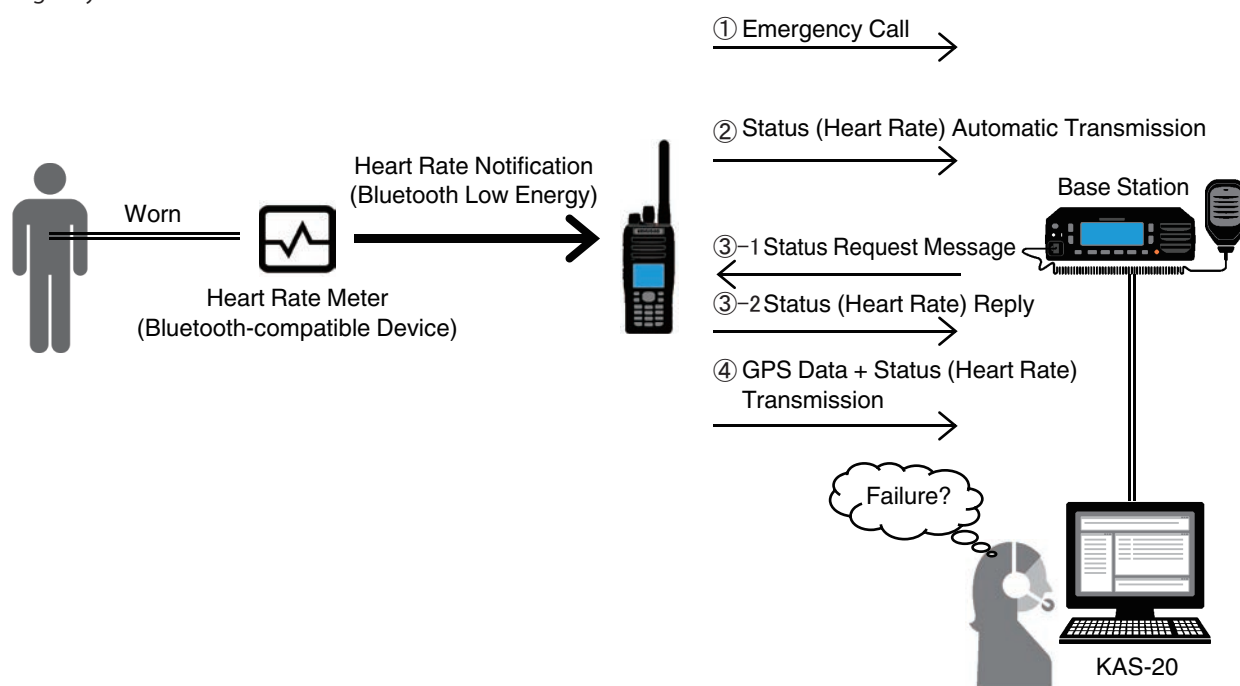


Figure 11-4 Heart Rate Service

Automatic Status Transmission

The automatic transmission of Status (heart rate) functions on an NXDN Channel or DMR Channel if “Status” is configured in **Method**.

The transceiver activates **Delay Time** if the heart rate notified from a Bluetooth-compatible device goes higher than Upper Threshold, or goes lower than Lower Threshold. The transceiver sends a Status to the Base ID if the status where the heart rate goes higher than Upper Threshold or goes lower than Lower Threshold continues while **Delay Time** is activated.

Also, the Status to be sent back depends on the configuration in **Reserved Statuses**.

● For NXDN Conventional, NXDN Trunking, DMR Conventional

If the heart rate is within the range of **Reserved Statuses** when **Delay Time** expires, the status number which is the same as the heart rate is sent. If the heart rate is larger than **Reserved Statuses**, the largest number in **Reserved Statuses** is sent. If the heart rate is smaller than **Reserved Statuses**, the smallest number in **Reserved Statuses** is sent.

● For DMR-based Trunking

If a value calculated 1/2 of the heart rate (cut off after the decimal point) is within the range of **Reserved Statuses** when **Delay Time** expires, the status number which is the same as the heart rate is sent. If a value calculated 1/2 of the heart rate (cut off after the decimal point) is larger than **Reserved Statuses**, the largest number in **Reserved Statuses** is sent.

If the heart rate is smaller than **Reserved Statuses**, the smallest number in **Reserved Statuses** is sent.

Note

- The transceiver does not activate **Delay Time** even if the heart rate goes higher than Upper Threshold or goes lower than Lower Threshold in the following cases. Also, if the following cases occur while **Delay Time** is activated, the transceiver does not send a Status even when **Delay Time** expires:
 - When the heart rate is notified from a Bluetooth-compatible device, if the heart rate has already been higher than Upper Threshold
 - When the heart rate is notified from a Bluetooth-compatible device, if the heart rate has already been lower than Lower Threshold
 - When the Channel to send a Status is an Analog Channel, P25 Channel or Error Channel
 - When the Channel to send a Status is configured as Receive only (Transmit Frequency = None) (A Key-entry Error Tone sounds from the transceiver.)
 - When “None” is configured in Base ID
 - When Heart Rate Status is disabled
 - When Lone Worker is enabled and “Transmit / Receive Inhibit” is configured in Lone Worker Type
 - While the transceiver is in Emergency Mode
 - While the transceiver is in Transceiver Password Mode
 - While the transceiver is in the Radio Inhibit (Kill) or Stun state
 - While data transmission is suspended
- If the transceiver is in the following statuses upon expiry of Delay Time, a Status transmission is suspended. Also, when the following statuses are reset on the transceiver, the suspended Status is sent.
 - During voice communications or data transmission
 - While the speaker is muted
 - While the transceiver is executing the Trunking control channel Hunt
 - While executing Zeroize

● For NXDN Conventional, NXDN Trunking, DMR Conventional

Example 1: For the following configuration:

Upper Threshold = 150 bpm

Lower Threshold = 50 bpm

Delay Time = 10 sec

Reserved Statuses = 25 to 200

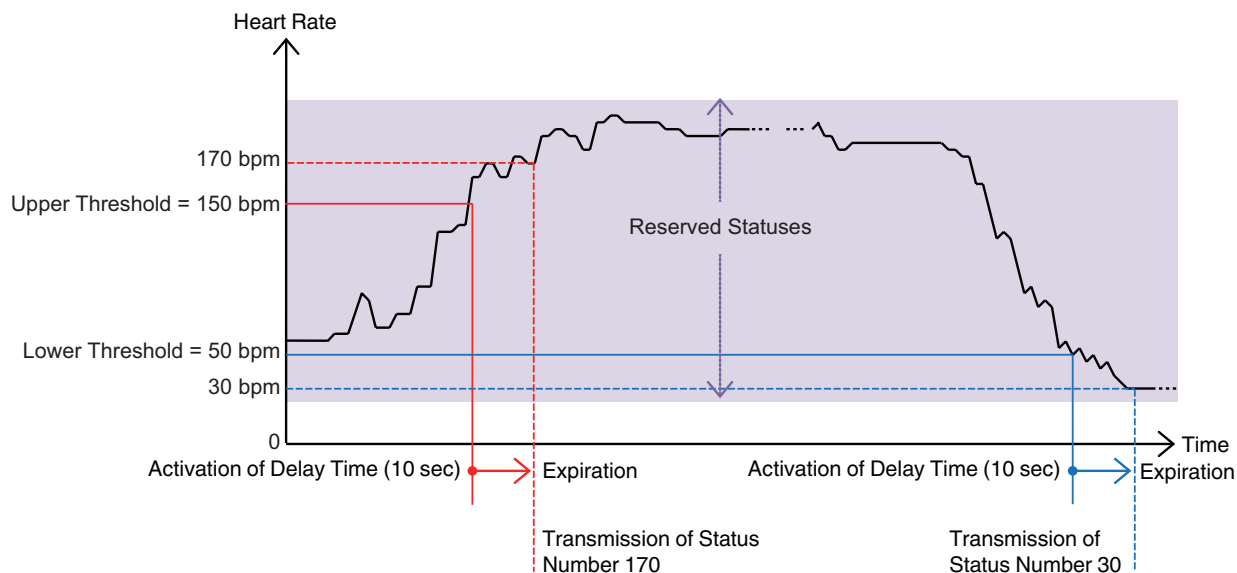


Figure 11-5 Automatic Status Transmission 1

Example 2: For the following configuration:

Upper Threshold = 70 bpm

Lower Threshold = 120 bpm

Delay Time = 10 sec

Reserved Statuses = 60 to 120

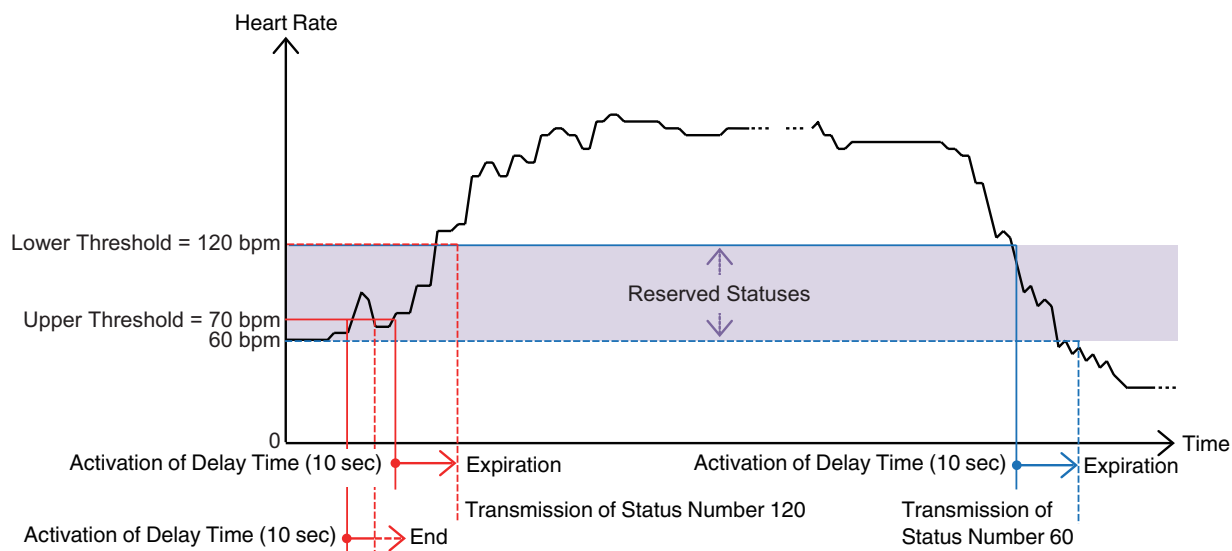


Figure 11-6 Automatic Status Transmission 2

● For DMR-based Trunking

Example 1: For the following configuration:

Upper Threshold = 150 bpm
 Lower Threshold = 50 bpm
 Delay Time = 10 sec
 Reserved Statuses = 15 to 99

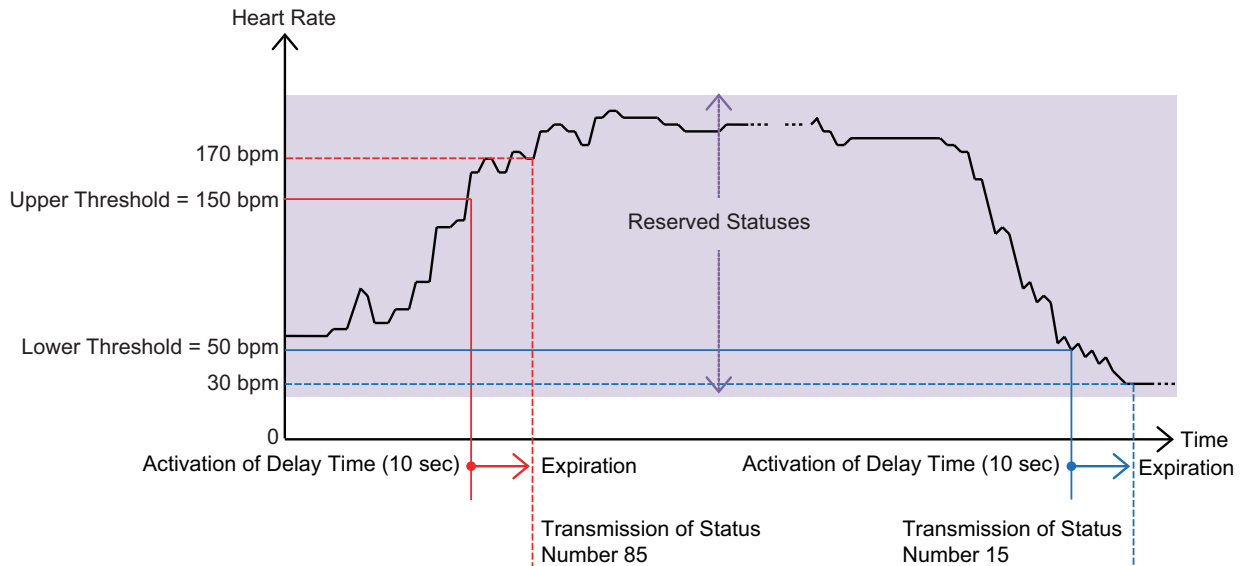


Figure 11-7 Automatic Status Transmission 3

Example 2: For the following configuration:

Upper Threshold = 70 bpm
 Lower Threshold = 120 bpm
 Delay Time = 10 sec
 Reserved Statuses = 30 to 60

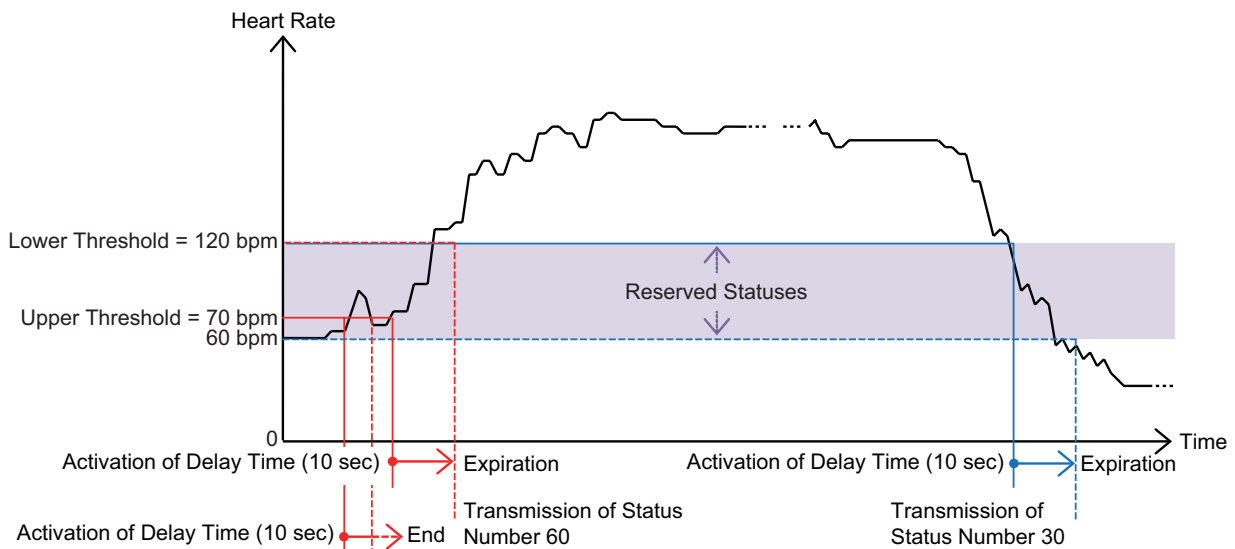


Figure 11-8 Automatic Status Transmission 4

Activation of Emergency

The activation of Emergency occurs in all types of protocols if “Emergency” is configured in **Method**.

The transceiver activates **Delay Time** if the heart rate notified from a Bluetooth-compatible device goes higher than Upper Threshold, or goes lower than Lower Threshold. The transceiver activates Emergency if the status where the heart rate goes higher than Upper Threshold or goes lower than Lower Threshold continues while **Delay Time** is activated.

Note

- The transceiver does not activate **Delay Time** even if the heart rate goes higher than Upper Threshold or goes lower than Lower Threshold in the following cases. Also, if the following cases occur while **Delay Time** is activated, the transceiver does not send Emergency even when **Delay Time** expires:
 - When the heart rate is notified from a Bluetooth-compatible device, if the heart rate has already been higher than Upper Threshold
 - When the heart rate is notified from a Bluetooth-compatible device, if the heart rate has already been lower than Lower Threshold
 - While the transceiver is in Emergency Mode for a cause other than the key operation
 - While the transceiver is in Transceiver Password Mode
 - While the transceiver is in the Radio Inhibit (Kill) or Stun state

Example: For the following configuration:

Upper Threshold = 150 bpm

Lower Threshold = 50 bpm

Delay Time = 10 sec

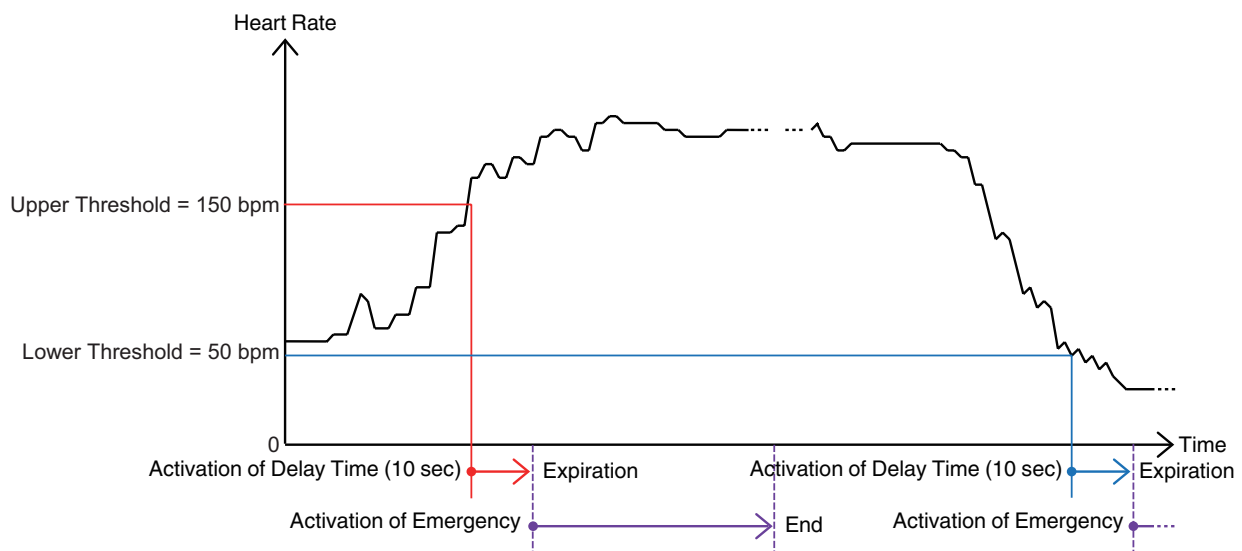


Figure 11-9 Activation of Emergency

Status Request Message Response

The response of the Status request message occurs on an NXDN Channel or DMR Channel.

If **Heart Rate Status** is enabled, the transceiver sends back the heart rate (status number) received from a Bluetooth-compatible device upon receipt of a Status request message.

Also, the Status to be sent back depends on the configuration in **Reserved Statuses**. If the heart rate is within the range of **Reserved Statuses** upon receipt of a Status request message, the status number which is the same as the heart rate is sent. If the heart rate is larger than **Reserved Statuses**, the largest number in **Reserved Statuses** is sent. If the heart rate is smaller than **Reserved Statuses**, the smallest number in **Reserved Statuses** is sent. If no heart rate has been notified from a Bluetooth-compatible device, the default value of Status is sent.

● For NXDN Conventional, NXDN Trunking, DMR Conventional

If the heart rate is within the range of **Reserved Statuses** upon receipt of a Status request message, the status number which is the same as the heart rate is sent. If the heart rate is larger than **Reserved Statuses**, the largest number in **Reserved Statuses** is sent. If the heart rate is smaller than **Reserved Statuses**, the smallest number in **Reserved Statuses** is sent.

● For DMR-based Trunking

If a value calculated 1/2 of the heart rate (cut off after the decimal point) is within the range of **Reserved Statuses** upon receipt of a Status request message, the status number for the value which is the same as the heart rate is sent. If a value calculated 1/2 of the heart rate (cut off after the decimal point) is larger than **Reserved Statuses**, the largest number in **Reserved Statuses** is sent. If a value calculated 1/2 of the heart rate (cut off after the decimal point) is smaller than **Reserved Statuses**, the smallest number in **Reserved Statuses** is sent.

If no heart rate has been notified from a Bluetooth-compatible device, the default value of Status is sent.

● For NXDN Conventional, NXDN Trunking, DMR Conventional

Example: If Reserved Statuses are from 50 to 120:

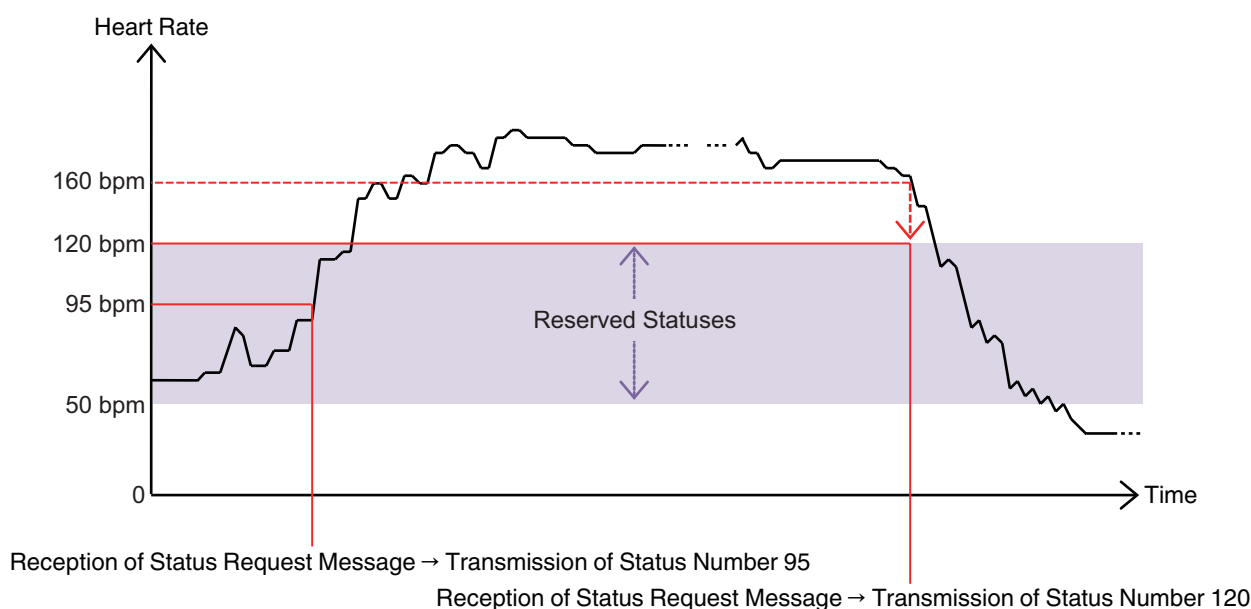


Figure 11-10 Status Request Message Response 1

● For DMR-based Trunking

Example: If Reserved Statuses are from 25 to 60:

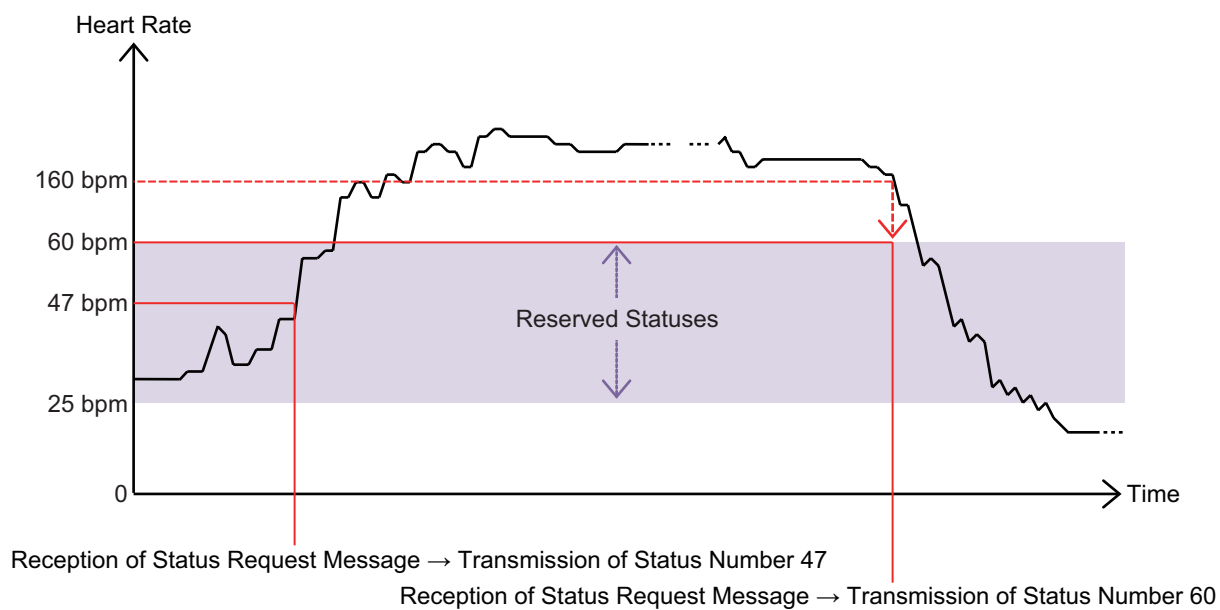


Figure 11-11 Status Request Message Response 2

Note

- The heart rate notified from a Bluetooth-compatible device is cleared when Heart Rate Service is disconnected.
- While the transceiver is in Emergency Mode or the Stun state, a Status corresponding to the heart rate is not sent even if the transceiver receives a Status request message. A Status indicating Emergency or Stun is sent.

GPS Data Transmission

The transmission of GPS data functions on an NXDN Channel.

If **Heart Rate Status** is enabled, the GPS data sent from the transceiver includes the heart rate (status number) notified from a Bluetooth-compatible device.

Also, the Status to be included in the GPS data depends on the configuration in **Reserved Statuses**. If the heart rate is within the range of **Reserved Statuses** when sending the GPS data, the status number which is the same as the heart rate is sent. If the heart rate is larger than **Reserved Statuses**, the largest number in **Reserved Statuses** is sent. If the heart rate is smaller than **Reserved Statuses**, the smallest number in **Reserved Statuses** is sent. If no heart rate has been notified from a Bluetooth-compatible device, the default value of Status is included in the GPS data.

Example: If Reserved Statuses are from 50 to 120:

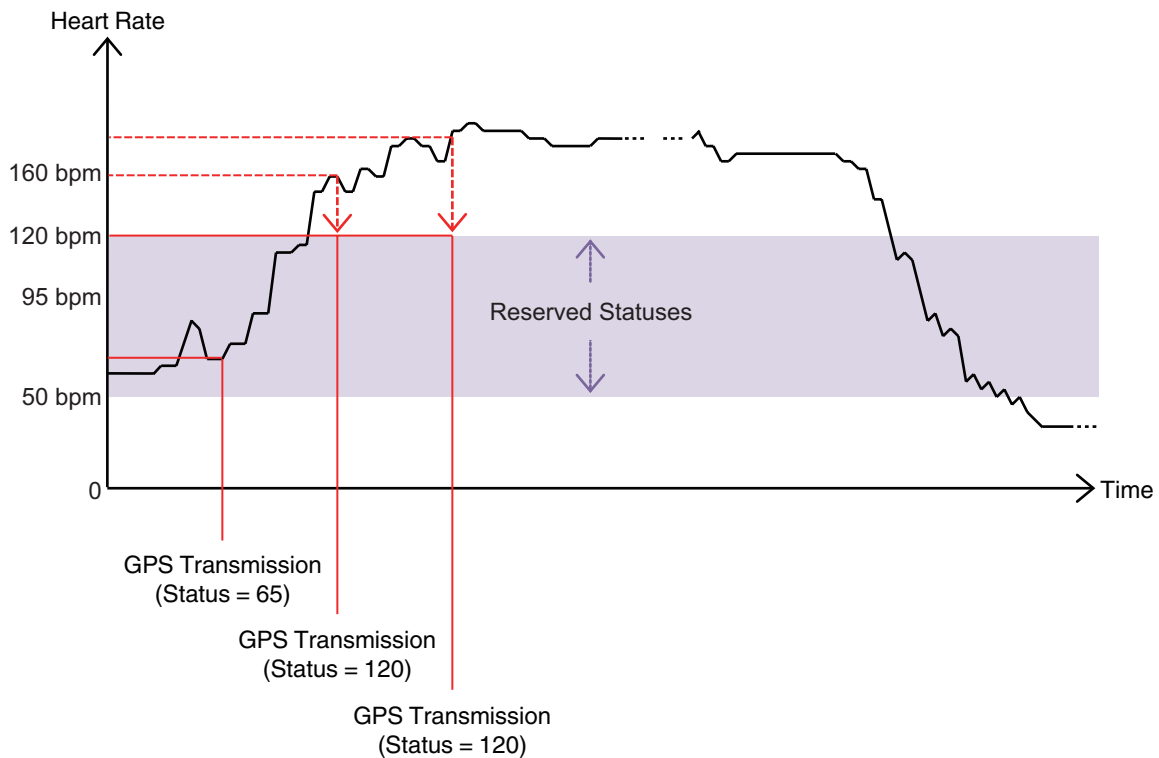


Figure 11-12 GPS Data Transmission

Note

- The heart rate notified from a Bluetooth-compatible device is cleared when Heart Rate Service is disconnected.
- While the transceiver is in Emergency Mode, a Status corresponding to the heart rate is not included in the GPS data. A Status indicating Emergency is included.

Confirming the Heart Rate by Using the Transceiver (Bluetooth My Devices Mode)

The heart rate notified from a Bluetooth-compatible device can be confirmed in the Device Information screen of **Bluetooth My Devices Mode**.

Operating the transceiver

1 Select a Bluetooth-compatible device in Bluetooth My Devices Mode and press the [▶] key.


The Device Information screen for the selected Bluetooth-compatible Device appears.

Refer to “**Displaying a Bluetooth-compatible Device (Bluetooth My Devices)**” for operation methods.

2 Press the [▲] key or [▼] key and select “Heart Rate”.


- **If a Bluetooth-compatible device is connected**

The heart rate notified from a Bluetooth-compatible device appears.



- **If a Bluetooth-compatible device is not connected**

“--bpm” appears for the heart rate.



Configuration using KPG-D1/ D1N

- Configuring **Heart Rate Status** (See Transceiver Settings > NXDN > NXDN Information > Status > Bluetooth)
- Configuring **Heart Rate Status** (See Transceiver Settings > DMR > DMR Information > Status > Bluetooth)

11.10 Notifying of Damage on a Bluetooth-compatible Device to the Transceiver (Automatic Injury Detection Service)

Supported Models: Portable

Automatic Injury Detection Service is the function to notify the transceiver of the damage if a Bluetooth-compatible device which supports Automatic Injury Detection Service has been damaged. Up to 2 Bluetooth-compatible devices can simultaneously be connected to the transceiver for **Automatic Injury Detection Service**.

If **Automatic Injury Detection Service** is enabled, the transceiver activates Emergency when the transceiver receives a damage report from a Bluetooth-compatible device.

Automatic Injury Detection Service is available with Bluetooth version 4.0 or later.

Note

- **Automatic Injury Detection Service** is the function for the police. If a police officer is shot while wearing a bulletproof vest, Emergency is automatically activated and an emergency situation is reported to a console.

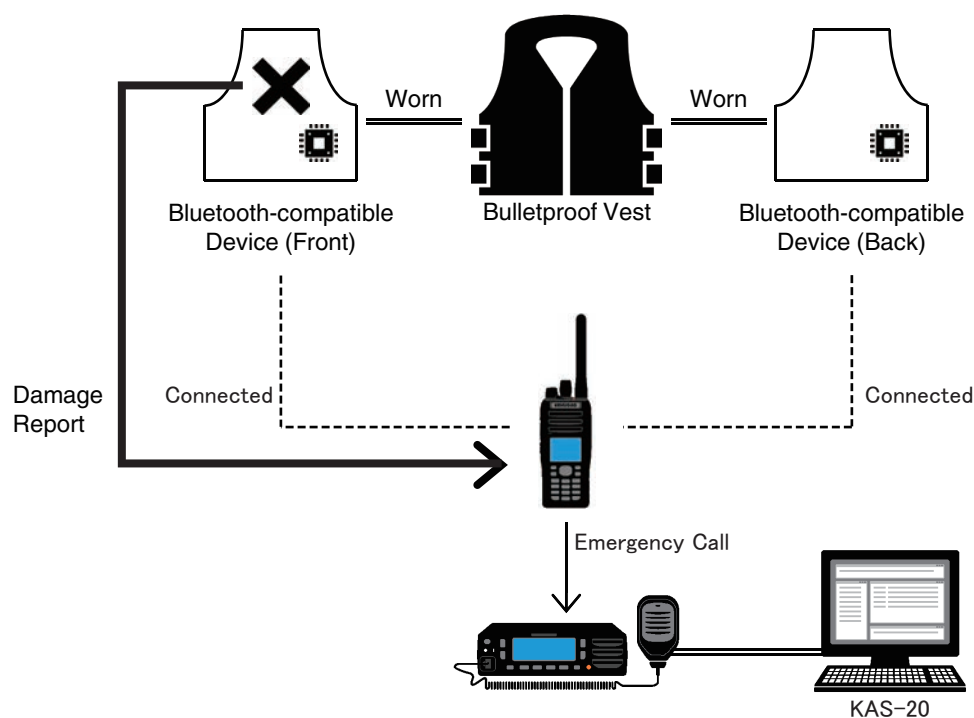


Figure 11-13 Automatic Injury Detection Service

Confirming Damage to a Bluetooth-compatible Device by Using the Transceiver (Bluetooth My Devices Mode)

Whether a Bluetooth-compatible device has been damaged can be confirmed in the Device Information screen of **Bluetooth My Devices Mode**.

Operating the transceiver

1 Select a Bluetooth-compatible device in Bluetooth My Devices Mode and press the [▶] key.

The Device Information screen for the selected Bluetooth-compatible Device appears.
Refer to “**Displaying a Bluetooth-compatible Device (Bluetooth My Devices)**” for operation methods.



2 Press the [▲] key or [▼] key and select “Injury Detection Status”.

- **If a Bluetooth-compatible device is connected**
Whether a Bluetooth-compatible device has been damaged can be confirmed.
If not damaged = Undamaged
If damaged = Damaged



- The display example is for the case when a Bluetooth-compatible device is not damaged.

- **If a Bluetooth-compatible device is not connected**
“--” appears for each item.



Configuration using KPG-D1/ D1N

Configuring **Injury Detection** to be enabled or disabled (**See** Transceiver Settings > Emergency > Emergency Information > Bluetooth > Injury Detection)

11.11 Confirming the Remaining Battery Power of a Bluetooth-compatible Device (Battery Service)

Supported Models: Portable

Battery Service is the function to notify the transceiver of the remaining battery power [%] of a Bluetooth-compatible device which supports Heart Rate Service or Automatic Injury Detection Service. The transceiver displays the notified remaining battery power [%] on the display.

The remaining battery power can be confirmed when the transceiver is in the following statuses:

- When connection to a Bluetooth-compatible device completes (displays for 1 sec) (Refer to [Connecting to a Bluetooth-compatible device, or resetting the connection.](#))
- When connection to a Bluetooth-compatible device completes and the Device Information screen of Bluetooth My Devices Mode appears

Operating the transceiver

The following is the confirmation procedure in the Device Information screen:


1 Select a Bluetooth-compatible device in Bluetooth My Devices Mode and press the [▶] key.

The Device Information screen for the selected Bluetooth-compatible Device appears.


Refer to “[Displaying a Bluetooth-compatible Device \(Bluetooth My Devices\)](#)” for operation methods.

2 Press the [▲] key or [▼] key and select “Charge”.

- **If a Bluetooth-compatible device is connected**
The remaining battery power is indicated in the range of 0 % to 100 %.



- **If a Bluetooth-compatible device is not connected**
The remaining battery power is indicated as “- - %”.



11.12 Confirming the Manufacturer Name, Model Number, Etc. of a Bluetooth-compatible Device (Device Information Service)

Supported Models: Portable

Device Information Service is the function to notify the transceiver of the manufacturer name or Model Number of a Bluetooth-compatible device which supports Heart Rate Service or Automatic Injury Detection Service. The transceiver displays the notified manufacturer name or Model Number on the display.

The following of a Bluetooth-compatible device can be confirmed with **Device Information Service**.

- Manufacturer Name = Manufacturer
- Model Number = Model
- Serial Number = Serial
- Hardware Version = Hardware Ver.
- Firmware Version = Firmware Ver.
- Software Version = Software Ver.

Operating the transceiver



1 Select a Bluetooth-compatible device in Bluetooth My Devices Mode and press the [▶] key.

The Device Information screen for the selected Bluetooth-compatible Device appears.

Refer to “[Displaying a Bluetooth-compatible Device \(Bluetooth My Devices\)](#)” for operation methods.

2 Press the [▲] key or [▼] key and select the item to confirm.

- **If a Bluetooth-compatible device is connected**
The content of the selected item appears with the maximum of 14 characters.
- **If a Bluetooth-compatible device is not connected**
“--” appears for the content of the selected item.



Note

- The display example is for the case when a manufacturer name is selected.

11.13 Resetting the GPS/ Bluetooth Device (GPS/Bluetooth Reset)

GPS/Bluetooth Reset is the function to execute the hardware reset of the GPS/Bluetooth device.

By using this function, the GPS/Bluetooth device can be restored to the normal state without turning OFF the transceiver.

If the device does not function normally when the Bluetooth function is used, "BT Failure" appears on the display for 1 sec and the transceiver enters the state where the Bluetooth function cannot be used.



If GPS/Bluetooth Reset is executed in such case, the normal status of the GPS/Bluetooth device is restored and the Bluetooth function can be used.

Pressing the **Menu** key to enter Menu Mode, and then executing "GPS/Bluetooth Reset" places the transceiver in GPS/Bluetooth Reset Mode. (Refer to [Using Menu Mode](#).)


Operating the transceiver

● Placing the transceiver in GPS/Bluetooth Reset Mode

1

Press the **Menu** key to enter Menu Mode and then execute "GPS/Bluetooth Reset".


A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters GPS/Bluetooth Reset Mode. (Refer to [Using Menu Mode](#).)



2

Press the [**▲**] key or [**▼**] key to select "Start", and then press the **Menu** ([**□**]) or [*****] key.

A Key Beep A (1 beep) sounds from the transceiver and the hardware reset of the GPS/Bluetooth device is executed. When the hardware reset completes, the standby display is restored.



The screen above is an example of the display when executing the hardware reset of the GPS/Bluetooth device during connection of a Bluetooth-compatible device by Headset Profile or while GPS positioning.

Note

- If the hardware reset of the GPS/Bluetooth device is executed while GPS positioning, the GPS positioning is disabled.
- If the hardware reset of the GPS/Bluetooth device is executed while connecting to a Bluetooth-compatible device by Headset Profile, the connection is reset.

11.14 Configuring the Connection Destination of a Bluetooth-compatible Device (Bluetooth Interface Selection)

Bluetooth Interface Selection is the function to select whether to use the Bluetooth device equipped in the transceiver or the Bluetooth device equipped in KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head) when using KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head).

The transceiver, KCH-20R (Featured Panel), and KCH-21R (Handheld Control Head) have the Bluetooth device which enables the Bluetooth function. When using KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head), whether to use the Bluetooth device equipped in the transceiver or the Bluetooth device equipped in KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head) needs to be configured.

If "RF Deck" is configured in **Bluetooth Interface Selection**, a Bluetooth-compatible device is connected to the transceiver.

If "Control Head" is configured in **Bluetooth Interface Selection**, a Bluetooth-compatible device is connected to KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head).

Configuration using KPG-D1/ D1N

Configuring **Bluetooth Interface Selection** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth)

The transceiver is equipped with function ports that can be programmed using KPG-D1/ D1N.

12.1 Universal Connector

Supported Models: Portable

For Portable, the transceiver is equipped with a function port that can be programmed for use with the 14-pin universal connector located on the side of the transceiver. The Vibrator unit and GPS receiver unit can be connected to the transceiver via the universal connector.

Assigning Functions to the Universal Connector

Pin 11 of the universal connector can be used with the following functions according to the user's purpose of use.

Table 12-1 Available Functions to be Assigned to Pin 11

Function	Description
AUX	When the AUX function is enabled by pressing the AUX key, or by pressing the Menu key to enter Menu Mode and then selecting "AUX", the 5 V power source is supplied to pin 11 of the universal connector. The transceiver stops supplying 5 V when the AUX function is disabled. A maximum of 200 mA current can be supplied to pin 11.
Vibrator	If activation conditions of the vibrator are satisfied while the Vibrator function is enabled, the 5 V power source is supplied to pin 11 at 500-ms intervals for 10 sec. The vibrator unit (KCT-48VU) connected to the universal connector notifies a user by vibrating.
Always 5 V (high)	This configuration is applied when using external devices that always require a power source, such as a speaker microphone and a headset. The transceiver behavior varies as below depending on the configuration in Output Control by SSW . If the Output Control by SSW is configured to be enabled: The 5 V power source is supplied to pin 11 if pin 1 (SSW) of the universal connector is low level. If the Output Control by SSW is configured to be disabled: The 5 V power source is always supplied to pin 11 regardless of the status of pin 1 (SSW) of the universal connector.
HRS Adapter	The 5 V power source is always supplied to pin 11 of the universal connector. This configuration is applied when the KCT-51 is used. HRS Adapter can be used to easily connect audio accessories or similar to the KCT-51. This configuration is also applied when an external device that always requires a power source is used.

Note

- Refer to "Using Menu Mode" for operations in Menu Mode.
- If the **Vibrator** key is not configured while "Vibrator" is configured in **Universal Connector Pin Number 11**, the Vibrator function is automatically enabled when the transceiver is turned ON.
- When the **PTT** switch on the external microphone or transceiver is pressed while an external microphone is connected to the universal connector, the audio input from the external microphone is sent.0

Configuration using KPG-D1/ D1N

- Configuring **Universal Connector Pin Number 11** ( See Transceiver Settings > Extended Function > Universal Connector)
- Configuring **Output Control by SSW** to be enabled or disabled ( See Transceiver Settings > Extended Function > Always 5V (high))

Using the Vibrator

Vibrator is the function to vibrate the transceiver when the transceiver receives an individual call with Optional Signaling, an NXDN Status Message or a Short Message. With this function, a user can recognize that the transceiver is receiving a call even in noisy environments or an environment requiring silence.

The vibrator functions under the following conditions:

Table 12-2 Conditions for the Vibrator to Function

System	Conditions
P25 Conventional	• If a Selective Call matches • If the Optional Signaling matches
P25 Trunking	• If the transceiver receives an Individual Call or Group Call • If the transceiver receives a Paging Call • If the transceiver receives a Telephone Call • If the Optional Signaling matches
NXDN Conventional	• If the Optional Signaling matches • If the transceiver receives a Status Message (other than status 226) • If the transceiver receives a Short Message • If the transceiver receives a Paging Call
DMR Conventional	• If the transceiver receives an Individual Call or Group Call (except an Unaddressed Call) • If the transceiver receives a Status Message (except an Emergency Termination Status) • If the transceiver receives a Short Message • If the transceiver receives a Paging Call • If the transceiver receives a Telephone Call (a Telephone Call using an Individual Call or Group Call in the KAIROS system (SIP Call))
NXDN Trunking	• If the transceiver receives an Individual Call or Group Call • If the transceiver receives a Status Message (other than status 226) • If the transceiver receives a Short Message • If the transceiver receives a Paging Call • If the transceiver receives a Telephone Call • If the Optional Signaling matches
DMR-based Trunking	• If the transceiver receives an Individual Call or Group Call • If the transceiver receives a Status Message (except an Emergency Termination Status) • If the transceiver receives a Short Message • If the transceiver receives a Telephone Call
Analog Conventional/ LTR Trunking	• If the Optional Signaling matches • If the transceiver receives a Status Message (except the status number 88, 90, 91, and 92) • If the transceiver receives a Short Message • If the transceiver receives a Paging Call • If the transceiver receives a Call Alert

The vibrator vibrates for 500 ms and stops for 500 ms, and repeats this cycle 10 times.

However, in the following cases, even if the conditions for the vibrator to function are satisfied, the vibrator does not function.

During this state, the “” icon blinks.

- When the transceiver receives another signal to match the Optional Signaling while the vibrator is activated after the Optional Signaling matches
- During the amount of time configured in **Auto Reset Timer** after pressing the **PTT** switch, if the transceiver is on a channel where anything other than “None” is configured for Optional Signaling
- When the transceiver receives the same call while the amount of time configured in **Auto Reset Timer** is counting down

Pressing the **Vibrator** key toggles the Vibrator between enabled and disabled.

Vibrator can also be enabled or disabled by selecting “Vibrator” after entering Menu Mode by pressing the **Menu** key. (Refer to [Using Menu Mode](#).)

Operating the transceiver

1 Press the **Vibrator** key.

The “” icon appears and then the Vibrator function is enabled. The vibrator vibrates for a second.



2 Press the **Vibrator** key again.

The “” icon disappears and then the Vibrator function is disabled.

Note

- If the **Vibrator** key is not configured while “Vibrator” is configured in **Universal Connector Pin Number 11**, the Vibrator function is automatically enabled when the transceiver is turned ON. (Refer to [Assigning Functions to the Universal Connector](#).)
- The status of the Vibrator function is retained even if the transceiver is turned OFF.
- The function assigned to a key that is pressed while the vibrator is vibrating does not function. However, the following functions function:
 - **Emergency** key
 - **Backlight** key
 - **Key Lock** key
 - **Function** key
 - **Zeroize** key
- While the “” icon blinks, the vibrator does not function even if the functioning conditions for the vibrator are satisfied.

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

without Alert Tone

without Alert Tone is the function to configure the transceiver not to emit an Alert Tone when the conditions for the vibrator to function are satisfied and the vibrator functions. (Refer to [Conditions for the Vibrator to Function](#).)

If an Alert Tone sounds from the transceiver in quiet environments, it may bother other people. In this case, the transceiver can be configured to mute Alert Tones and a user can recognize the reception of a call or message only from the vibration of the vibrator.

After disabling this function, the vibrator vibrates and Alert Tones sound from the transceiver if the conditions for the vibrator to function are satisfied. However, a user may not recognize a call or message is being received only from the vibration of the vibrator. In this case, an Alert Tone notifies a user that a call or message is being received.

Configuration using KPG-D1/ D1N

Configuring **without Alert Tone** to be enabled or disabled ( [See](#) Transceiver Settings > Extended Function > Vibrator)

12.2 D-sub 25-pin Connector

Supported Models: Mobile

For Mobile, the transceiver is equipped with function ports (AUX Input/ AUX Output) that can be programmed for use with the D-sub 25-pin connector located on the rear panel of the transceiver.

Available Functions for AUX Input Ports

This section describes each function that can be assigned to AUX Input ports.

Depending on a function assigned to an AUX Input port, the function immediately functions if the AUX Input port is active when the transceiver is turned ON. In addition, depending on the function assigned to an AUX Input port, the function does not function when the transceiver is in the Radio Inhibit state. Refer to the following table for how the function functions depending on the transceiver status.

Table 12-3 Behavior of Each Function Depending on the Transceiver Status

Function	Transceiver Status		
	When the transceiver is turned ON	While the transceiver is in the Stun state	While the transceiver is in the Radio Inhibit state
External PTT (Voice)	No	No	No
External PTT (Data)	No	No	No
Data PTT	No	No	No
External PTT (PA)	No	No	No
External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice)	No	No	No
DTC	Yes	*1	*1
Speaker Mute	Yes	Yes	*1
Mic Mute	Yes	Yes	*1
External Monitor	Yes	Yes	*1
External Hook	Yes	Yes	*1
External Speaker	Yes	Yes	*1
Emergency	Yes	No	No
AUX Input Status Message 1 to AUX Input Status Message 3	No	No	No
Scan	Yes	*1	*1
Home Channel	Yes	*1	*1
Call 1 to Call 6	No	No	No
Light Sense	Yes	Yes	*1
Zeroize	Yes	No	No
Scrambler/Encryption	Yes	*1	*1
Mobile Relay Station	Yes	*1	*1

*1 The function functions when the Stun or Radio Inhibit state is reset.
Yes: functions, No: does not function

Configuration using KPG-D1/ D1N

Assigning functions to the AUX Input port ( See Transceiver Settings > Extended Function > AUX)

External PTT (Voice)

External PTT (Voice) is the transmission request port for voice channels. This port can be used for a transmission request from a headset or external microphone.

The transceiver starts transmitting if the External PTT (Voice) port goes low level. The transceiver ends transmitting if the External PTT (Voice) port goes high level. If the transceiver is on a data channel, the transceiver migrates to the lowest numbered voice channel in the current zone and transmits.

Also, functions that are used for transmitting by using the External PTT (Voice) port can be configured using KPG-D1/ D1N. (Refer to **Functions When Sending by Using the External PTT and Data PTT.**)

Note

- The External PTT (Voice) port and the External PTT (Direct Channel 1 Voice) port to External PTT (Direct Channel 5 Voice) port can be used at the same time. However, the Data PTT, External PTT (Voice) and External PTT (Data) ports cannot be used at the same time.

External PTT (Data)

External PTT (Data) is the transmission request port for data communications.

The following are the 2 methods of use of **External PTT (Data)**:

● Using with the DTC port

In an LTR Trunking system, the port becomes the transmission request port in ARQ Mode.

The transceiver transmits by activating the External PTT (Data) port after activating the DTC port.

● Using with Channel Select A to Channel Select D

This port functions as the transmit request port for external devices used for data communications. However, the transceiver transmits on the currently selected channel without migrating to the Data Zone-channel in the same manner as the Data PTT port.

The transceiver behaves as follows depending on the channel which has the External PTT (Data) port active:

Table 12-4 External PTT (Data)

Current Channel	Transceiver Behavior
Conventional Zone-Channel (Analog)	The transceiver transmits.
Conventional Zone-Channel (NXDN/ P25/ DMR)	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not transmit.
LTR Trunking Zone-Channel	The transceiver transmits.
P25 Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not transmit.
NXDN Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not transmit.
DMR-based Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not transmit.

Also, functions that are used for transmitting by using the External PTT (Data) port can be configured using KPG-D1/ D1N. (Refer to **Functions When Sending by Using the External PTT and Data PTT.**)

Note

- The Data PTT, External PTT (Voice) and External PTT (Data) ports cannot be used at the same time.

Data PTT

Data PTT is the transmission request port for data communications.

The transceiver migrates to a Data Zone-Channel/ System-Personality to start the transmission when the Data PTT port goes low level. The transceiver ends transmitting if the Data PTT port goes high level. The transceiver remains on the data channel for the amount of time configured in **Dwell Time** after the Data PTT port goes high level. The transceiver returns to the voice channel after the amount of time configured in **Dwell Time** elapses.

The relationship between the channel when the Data PTT port is activated and the Data Zone-Channel/ System-Personality is as follows:

Table 12-5 Data PTT

Current Channel	Transceiver Behavior
Conventional Zone-Channel (Analog)	The transceiver migrates to an analog channel configured for the Data Zone-Channel/ System-Personality (Analog) in the Conventional Zone to start transmitting. If no Data Zone-Channel/ System-Personality (Analog) is configured, the transceiver migrates to the data channel (Channel Type = Analog only) configured for the highest channel number in the zone to start transmitting.
Conventional Zone-Channel (NXDN/ P25/ DMR)	The transceiver migrates to an analog channel configured for the Data Zone-Channel/ System-Personality (Analog) in the Conventional Zone to start transmitting. If no Data Zone-Channel/ System-Personality (Analog) is configured, a Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not start transmitting.
LTR Trunking Zone-Channel	The transceiver migrates to an analog channel configured for Data Zone-Channel/System-Personality in the LTR Trunking Zone to start transmitting. If no Data Zone-Channel/ System-Personality is configured, the transceiver migrates to the data channel with the highest channel number in the zone to start transmitting.
P25 Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not transmit.
NXDN Trunking Zone-Channel	The transceiver migrates to an analog channel configured for Data Zone-Channel/System-Personality (Analog) in the NXDN Trunking Zone to start transmitting. If no Data Zone-Channel/ System-Personality (Analog) is configured, a Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not start transmitting.
DMR-based Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not transmit.

Also, functions that are used for transmitting by using the Data PTT port can be configured using KPG-D1/ D1N.

(Refer to **Functions When Sending by Using the External PTT and Data PTT.**)

Note

- The Data PTT, External PTT (Voice) and External PTT (Data) ports cannot be used at the same time.

External PTT (PA)

External PTT (PA) is the port for the audio output of Public Address. If the External PTT (PA) port goes low level, the transceiver enters Public Address Mode and the audio inputted from the microphone line (MI/ MI2) configured for Modulation Line is outputted from the external speaker. If the External PTT (PA) port goes high level, the transceiver terminates the audio output and exits Public Address Mode.

External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice)

External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) are the ports used for requesting voice transmission of Direct Channel. If External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) goes low level, the transceiver displays "Remote Control" and starts transmitting after the channel is changed to the Direct Channel.

If the Direct Channel is the 5-tone Channel, the transceiver behaves according to the configuration in Encode Format or Decode Format after the channel is changed to the Direct Channel.

If the digital Encode Format or Decode Format is enabled for the Direct Channel, the transceiver behaves according to the configuration in the digital Decode Format when Talkback is received after the transceiver transmits on the Direct Channel.

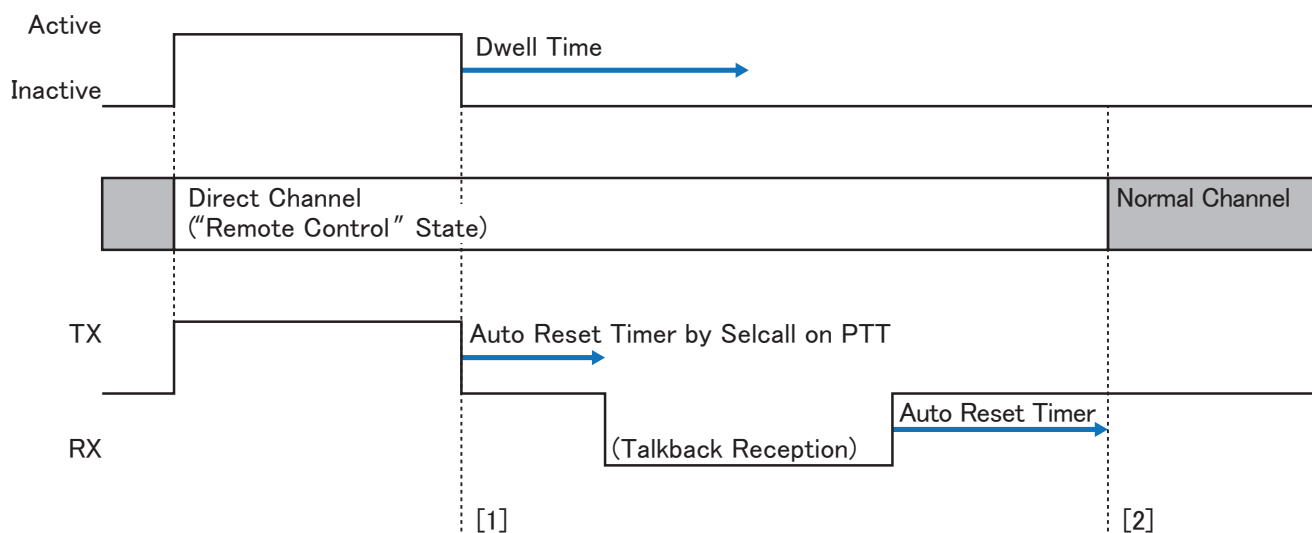


Figure 12-1 External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) (n = 1 to 5) Behavior

If External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) goes high level, the transceiver ends the transmission, and the Dwell Time is activated. The **Optional Signaling** matches by the transmission and reception of the transceiver. ...[1]

If the matching state of the **Optional Signaling** is reset and the **Dwell Time** expires, the "Remote Control" display is reset. ...[2]

Also, the transceiver behavior varies as follows depending on the configuration in Return on the FPU:

- **If Return is enabled**

The transceiver returns to the previous channel of before the change to the Direct Channel.

- **If Return is disabled**

The transceiver continues to retain the Direct Channel.

If the **Clear** key is pressed while "Remote Control" is displayed by External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice), the matching of the **Optional Signaling** can be reset.

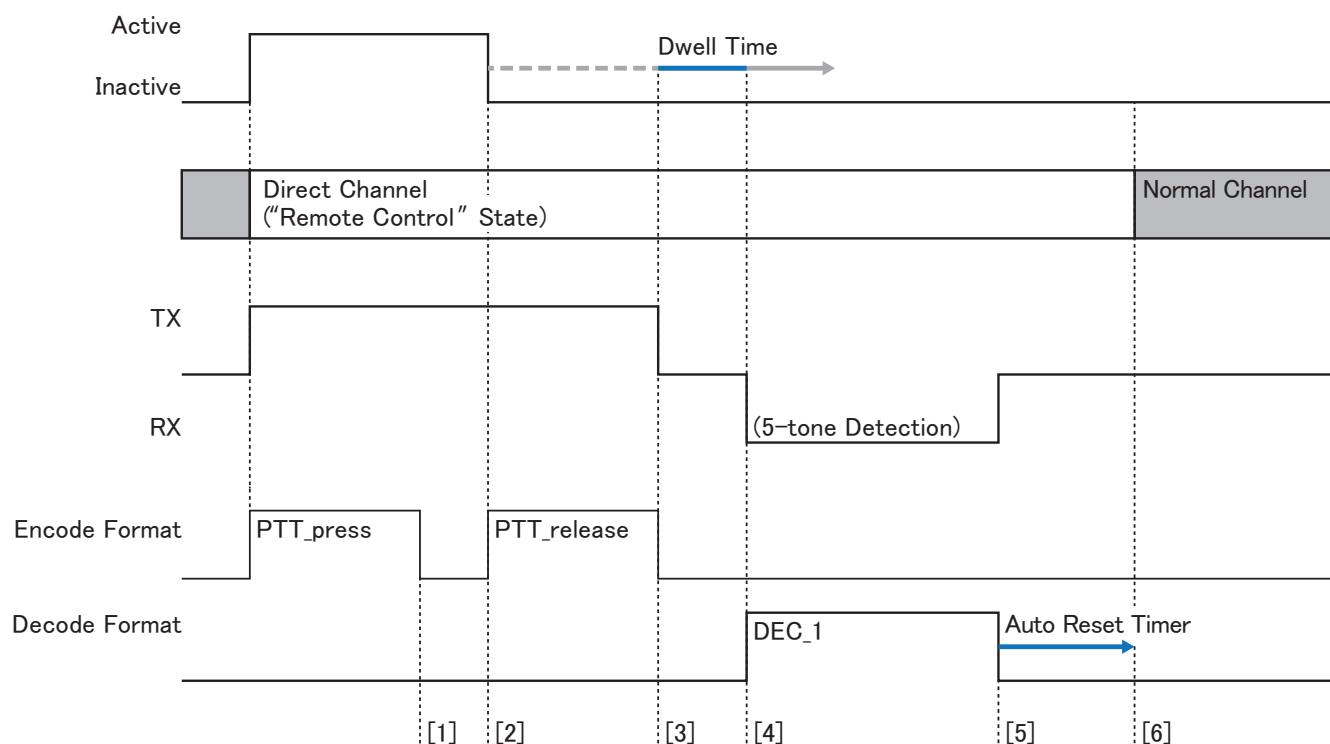


Figure 12-2 Behavior with Encode Format/ Decode Format (Example: 5-tone)

Encode Format for which Pressing **PTT** is configured ends. ...[1]

If External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) become inactive (= High), Encode Format for which Releasing **PTT** is configured is executed. ...[2]

When Encode Format for which Releasing **PTT** is configured ends, **Dwell Time** is executed, because External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) become inactive. ...[3]

Decode Format is executed by the detection of 5-tone. In this case, **Dwell Time** stops. ...[4]

If "AUTR" is configured in Decode Format, **Auto Reset Timer** is activated (if "AUTR" does not function, the behavior [6] occurs). ...[5]

If the **Auto Reset Timer** expires and the **Dwell Time** expires, the "Remote Control" display is reset. ...[6]

Also, the transceiver behavior varies as follows depending on the configuration in Return on the FPU:

- **If Return is enabled**

The transceiver returns to the previous channel of before the change to the Direct Channel.

- **If Return is disabled**

The transceiver continues to retain the Direct Channel.

For the channel with digital Encode Format or Decode Format enabled, if Talkback is received after External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice), Decode Format is executed.

In this case, the transceiver behaves in the same manner as [4] and later.

Also, the expiry of the **Auto Reset Timer**, which is one of the conditions to reset the "Remote Control" display in [6], indicates that 2 Auto Reset Timers, one for Encode Format/ Decode Format and the other for **Optional Signaling**, have expired.

Note

- If External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) becomes active (= Low) and the transceiver returns from the Direct Channel to the channel which was used before the change (if Return is enabled), voice guidance by Voice Announcement is not executed.
- Even if the transceiver cannot transmit on Direct Channel 1 to Direct Channel 5 which was changed by making External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) active (= Low), Direct Channel 1 to Direct Channel 5 is retained while External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) is active (= Low).
- If External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) becomes active (= Low) during the scan, the transceiver pauses the scan and migrates to Direct Channel 1 to Direct Channel 5 and starts voice transmission. After voice transmission ends, the scan is resumed as follows according to the configuration in Return:
 - If Return is enabled, after voice transmission ends and the Dwell Time (Extended Function) elapses, the transceiver returns to the channel which was used before migrating to Direct Channel 1 to Direct Channel 5. After that, upon elapse of the Key Delay Time, the scan is resumed.
 - If Return is disabled, the scan is resumed after voice transmission ends and the Dwell Time (Scan Information) elapses.

Channel Select A to Channel Select D

Channel Select A to **Channel Select D** are the Channel Select ports for using a Remote Channel List.

The Zone-channel of the transceiver can be changed using the external device that is connected to the transceiver. (Refer to [Migrating to a Zone-channel by Using a Connected External Device \(Remote Zone-Channel\)](#).)

DTC

DTC is the port that migrates the transceiver to the Data Zone-Channel/ System-Personality used for data communications.

Normally, establishing a link is required for each data communication when making data communications in an LTR Trunking system. However, if the system is busy, and a repeater has no available channels, the possibility of failing to send data becomes higher. ARQ Mode can be used to avoid these problems and unfaillingly complete data communications with a single link.

If ARQ Mode is used, the transceiver does not send the EOT until the transceiver finishes data communications after the transceiver establishes a link to the repeater. The transceiver retains the linked state using the Hung Up Time configured for the repeater and then sends or receives the acknowledgment during the Hung Up Time. With this function, the transceiver is not required to link to a repeater every time to send data, and Air Time can effectively be utilized.

The relationship between the channel where the DTC port is active and the Data Zone-channel is as follows:

Table 12-6 DTC

Current Channel	Data Zone-Channel
Conventional Zone-Channel (Analog)	The transceiver migrates to an analog channel configured for the Data Zone-Channel/ System-Personality (Analog) in the Conventional Zone. If no Data Zone-Channel/ System-Personality (Analog) is configured, the transceiver migrates to the data channel (Channel Type = Analog only) with the highest channel number in the zone.
Conventional Zone-Channel (NXDN/ P25/ DMR)	The transceiver migrates to an analog channel configured for the Data Zone-Channel/ System-Personality (Analog) in the Conventional Zone. If no Data Zone-Channel/ System-Personality (Analog) is configured, a Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not respond at all.
LTR Trunking Zone- Channel	The transceiver migrates to an analog channel configured for Data Zone-Channel/ System-Personality in the LTR Trunking Zone to start transmitting. If no Data Zone-Channel/ System-Personality is configured, the transceiver migrates to the data channel with the highest channel number in the zone.
P25 Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not respond at all.
NXDN Trunking Zone-Channel	The transceiver migrates to an analog channel configured for the Data Zone-Channel/ System-Personality (Analog) in the NXDN Trunking Zone. If no Data Zone-Channel/ System-Personality (Analog) is configured, a Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not respond at all.
DMR-based Trunking Zone-Channel	A Key-entry Error Tone (1 beep) sounds from the transceiver and the transceiver does not respond at all.

Note

- The data channel is not targeted for Revert Channel.
- When the DTC port goes low level while scanning, the transceiver migrates to a Data Zone-channel in a Revert Zone.
- If "Data PTT" is assigned to another port, "DTC" cannot be assigned.
- If "External PTT (Data)" is not assigned to another port, "DTC" cannot be assigned.

Speaker Mute

Speaker Mute is the port that is used to mute the speaker audio output line.

The transceiver mutes the speaker when the Speaker Mute port goes low level. Only the received audio is muted, and the control audio, such as a beep tone, is not muted. The transceiver unmutes the speaker when the Speaker Mute port goes high level.

Mic Mute

Mic Mute is the port that is used to mute the microphone modulation line.

The Mic Line (Front Mic and MI2) is muted when the Mic Mute port goes low level. The Mic Line (Front Mic and MI2) is unmuted when the Mic Mute port goes high level.

External Monitor

External Monitor is the port that is used to activate the Monitor function.

The Monitor function is enabled when the External Monitor port goes low level. The Monitor function is disabled when the External Monitor port goes high level.

Note

- If the External Monitor port is active while the Monitor function is enabled by pressing the **Monitor** key, the Monitor function for the External Monitor port is enabled.
- The enabled state of the Monitor function is not retained in the transceiver.

External Hook

External Hook is the port that is used to switch the state of the microphone hook in the same way as Local Mic Hook.

The microphone goes to the On-hook state when the External Hook port goes low level. The microphone goes to the Off-hook state when the External Hook port goes high level.

Off-hook Decode, Off-hook Horn Alert, Off-hook Scan, Off-hook Connect, On-hook Disconnect, and Optional Signaling are reset in the same manner as Local Mic Hook.

If both the Local Mic Hook and the External Hook port are used, the microphone hook behaves according to the configuration in **Hook Control**.

External Speaker

External Speaker is the port that is used to activate the **External Speaker** function.

If the External Speaker port goes low level, **External Speaker** is enabled regardless of the configuration of **External Speaker**, or the configuration status of **External Speaker** by the **External Speaker** key.

If the External Speaker port goes high level, the configuration of **External Speaker**, or the configuration status of **External Speaker** by the **External Speaker** key is restored.

For the High Power model (NX-5600H/ NX-5700H/ NX-5800H), KES-5 or KES-5A connected to ES1(6 Pin)/ ES2(2 Pin) of Molex 9-Pin functions as an external speaker.

Note

- While the External Speaker port goes low level, the configuration of **External Speaker** cannot be switched by the **External Speaker** and in Menu Mode.

Emergency

Emergency is the port that is used to activate the Emergency function.

The transceiver enters Emergency Mode when the Emergency port goes low level.

The transceiver behaves according to the configuration using KPG-D1/ D1N in Emergency Mode. **Emergency Delay Time** needs to be configured for this port and used to avoid erroneously placing the transceiver in Emergency Mode.

AUX Input Status Message 1 to AUX Input Status Message 3

AUX Input Status Message 1 to AUX Input Status Message 3 are the trigger ports that are used to send a FleetSync, NXDN, or DMR Status Message.

The transceiver sends a Status Message configured for each port to an ID configured for Target ID (FleetSync), Base ID (NXDN), or Base ID (DMR) when the port goes high level to low level or goes low level to high level.

Two statuses (High → Low, and Low → High) can be configured for each port of AUX Input Status Message 1 to AUX Input Status Message 3 by using KPG-D1/ D1N. These ports are normally used as the sensor ports for telemetry purposes.

Note

- The transceiver does not send a Status Message immediately after the transceiver is turned ON since the transceiver does not recognize that the AUX Input port to which "AUX Input Status Message" is assigned has changed.
- If the logic of the port is not changed, the transceiver does not send a Status Message when the analog channel is changed to an NXDN or DMR channel. However, the transceiver sends a Status Message if conditions to send the Status Message are satisfied.

Zeroize

Zeroize is the port that is used to delete the following types of Encryption Keys:

- Encryption Key configured for the Secure Cryptographic Module (SCM)
- Built-in DES
- Enhanced Encryption (DMR)
- P25 Enhanced Encryption

If the port remains active for the amount of time configured in **Zeroize Delay Time**, the transceiver determines that the port is active. When the port is activated, the Encryption Key configured for the SCM is deleted.

If "Zeroize" is assigned to the AUX Input port, the logic of the port can be configured Active High or Active Low. The transceiver behaves as follows according to the logic of the port:

Table 12-7 Zeroize

The Logic of the Port	Transceiver Behavior
Active Low	This logic is used to delete an Encryption Key by user operation, such as using the Foot Switch. All Encryption Keys stored in the SCM are deleted if the port is continuously detected as active for the amount of time configured in Zeroize Delay Time .
Active High	This logic is used to automatically delete an Encryption Key when the transceiver is turned ON to avoid any leakage of encrypted information, such as when the transceiver is stolen. If the port is active when the transceiver is turned ON, all Encryption Keys stored in the SCM are automatically deleted regardless of the configuration in Zeroize Delay Time .

Scan

Scan is the port that is used to activate the scan function.

When the Scan port goes low level, the scan is started. When the Scan port goes high level, the scan is stopped.

Light Sense

Light Sense is the port that is used to control the backlight of the LCD and the operation of the **LCD Brightness** key.

When the Light Sense port goes low level, **LCD Brightness** is configured as follows:

KCH-19 (Basic Panel)/ KCH-20R (Featured Panel):

“Level 1” is configured in LCD Brightness.

KCH-21R (Handheld Control Head):

“Off” is configured in LCD Brightness.

The brightness of the backlight cannot be switched by operating the **LCD Brightness** key, and by Menu Mode. Also, the configuration in **Auto Dimmer** cannot be changed.

If the Light Sense port goes high level, the backlight lights at the level configured in **LCD Brightness**. The brightness of the backlight can be switched by operating the **LCD Brightness** key, and by Menu Mode. Also, the configuration in **Auto Dimmer** can be changed.

Scrambler/Encryption

Scrambler/Encryption is the port that is used to operate the Scrambler/Encryption function.

When the Scrambler/Encryption port goes low level, Scrambler/Encryption is enabled. When the Scrambler/Encryption port goes high level, Scrambler/Encryption is disabled.

Call 1 to Call 6

Call 1 to **Call 6** are the ports that start the various following communications:

- Execution of the Encode Format configured in the 5-tone System Parameter
- Transmission of a DTMF code configured in the DTMF Autodial List
- Transmission of a 2-tone code configured in the 2-tone List
- Transmission of a Status Message configured in the FleetSync Status List
- Transmission of a Status Message configured in the NXDN Status List
- Transmission of an Individual Call to the Unit ID configured in the NXDN Individual ID List
- Transmission of a Status Message configured in the DMR Status List
- Transmission of an Individual Call to the Unit ID configured in the DMR Individual ID List

The various transmissions start when the port becomes active.

“Call 1” to “Call 6” are assigned to the AUX Input ports by using KPG-D1/ D1N, and then the DTMF code, 2-tone code, Status Message, and NXDN Unit ID corresponding to each port can be configured.

Configuration using KPG-D1/ D1N

- Allocating functions to the **AUX Input** port ( **See** Transceiver Settings > Extended Function > AUX)
- Configuring **Emergency Delay Time** ( **See** Transceiver Settings > Extended Function > AUX > AUX Input)
- Configuring **Zeroize Delay Time** ( **See** Transceiver Settings > Extended Function > AUX > AUX Input)
- Configuring various data corresponding to **Call 1** to **Call 6** ( **See** Transceiver Settings > Key Assignment > Call)

Available Functions for AUX Output Ports

The following functions can be assigned to AUX Output ports:

Table 12-8 Available Functions for AUX Output Ports

Function Name	Description
None	No function is assigned.
LOK	For a Conventional Channel (Analog/ NXDN/ DMR/ P25): The output port is active while the transceiver is transmitting. Otherwise, the output port is inactive. For an LTR Trunking system: The output port is activated when the transceiver is linked with a repeater while transmitting. Otherwise, the output port is inactive. For a P25 Trunking system and DMR-based Trunking system: The output port is active while the transceiver is transmitting on a traffic channel. Otherwise, the output port is inactive. This function applies to all audio and data communications on the traffic channel. For an NXDN Trunking system: The output port is active while the transceiver is transmitting on a traffic channel. Otherwise, the output port is inactive. The output signal of LOK can be configured using KPG-D1/ D1N. There are 2 types of LOK Logic Signals: "Continuous" and "Pulse". The port is always at low level while the LOK port is active if "Continuous" is selected. The LOK port is active for the first 30 ms, and then the LOK port returns to open level if "Pulse" is selected.
COR	For a Conventional Channel (Analog/ NXDN/ DMR/ P25) or an LTR Trunking system: The output port is active while the transceiver is receiving a carrier. Otherwise, the output port is inactive. However, the output port does not behave for the DMR Conventional Channel (CH Type = Mixed). For a P25 Trunking system: The output port is active while the transceiver is receiving a carrier. Otherwise, the output port is inactive. All carriers as well as P25 signals are targeted. For an NXDN Trunking system: The output port is active while the transceiver is receiving a carrier. Otherwise, the output port is inactive. For a DMR-based Trunking system: The output port is active while the transceiver is receiving a carrier. Otherwise, the output port is inactive. All carriers as well as DMR signals are targeted.
COR or Channel Busy	The COR or Channel Busy output port is active while the conditions to activate COR or the conditions to activate Channel Busy are satisfied. While conditions to activate COR and Channel Busy are not satisfied, the COR or Channel Busy output port is inactive.

Function Name	Description
TOR	For a Conventional Channel (Analog/ NXDN/ P25): The output port is active while the received QT tone or DQT code (Analog), RAN code (NXDN), or NAC (P25) matches the QT tone or DQT code (Analog), RAN code (NXDN), or NAC (P25) preconfigured for the transceiver. If QT/DQT Decode is not configured, the output port is active while the transceiver is receiving a carrier. If RAN Decode is not configured, the output port is active while the transceiver is receiving a RAN code. Otherwise, the output port is inactive. For a Conventional Channel (DMR): The output port is active while the transceiver is unmuting the speaker. Otherwise, the output port is inactive. For an LTR Trunking system: The output port is active while a Group ID is received. Otherwise, the output port is inactive. For a P25 Trunking system, NXDN Trunking system, and DMR-based Trunking system: The output port is active while the transceiver is unmuting the speaker on a traffic channel. Otherwise, the output port is inactive.
TOR or Channel Busy	The TOR or Channel Busy output port is active while the conditions to activate TOR or the conditions to activate Channel Busy are satisfied. If conditions to activate the TOR and Channel Busy are not satisfied, the TOR or Channel Busy output port is inactive.
Channel Busy	The output port is active while the transceiver does not accept a remote control request from an external device. The output port is active while the transceiver is in the following states: • The output port is active regardless of the configuration in Data Override (AUX Input) while the transceiver is in the following states: • While the transceiver is transmitting (including while a link is established in an LTR Trunking system) • While the Public Address function is used • While System Search is being executed (LTR Trunking) • While the transceiver is in Emergency Mode • While the transceiver is in Transceiver Password Mode • While the transceiver is in the Stun state • While the transceiver is in the Radio Inhibit state • While the transceiver is on a P25 or NXDN channel • While the transceiver is on a DMR channel • If Data Override (AUX Input) is disabled, the output port is active while the transceiver is in the following states: • While Auto Telephone Search is being executed (LTR Trunking) • While the transceiver is in Function Mode • While an ID is displayed by transmitting and receiving a FleetSync Selcall/ Paging Call, by transmitting and receiving an MDC-1200 Selcall/ Call Alert, by receiving an NXDN Individual Call/ Group Call, by receiving a DMR Individual Call/ Group Call, or by receiving a P25 Individual Call/ Group Call • While an ID is displayed by transmitting via Caller ID Stack List selection in Stack Mode • While the Public Address function is used • While the transceiver temporarily migrates to a channel by pressing one of the Direct Channel 1 to Direct Channel 5 keys, Home Channel, or Channel Recall key

Function Name	Description
System Busy	The output port is active when a repeater has no available channels in an LTR Trunking system. Otherwise, this port is inactive.
AUX A	The port output is changed with the state of the AUX A key. An external device connected to the AUX A port can be controlled.
AUX B	The port output is changed with the state of the AUX B key. An external device connected to the AUX B port can be controlled.
AUX C	The port output is changed with the state of the AUX C key. An external device connected to the AUX C port can be controlled.
PTT Output	The output port is active while the PTT switch is being pressed. Otherwise, this port is inactive.
TXS	The output port is active while the transceiver is transmitting. Otherwise, this port is inactive.
AUX Output ID 1 to AUX Output ID 3	The port output changes by linking with the state of the AUX Output ID 1 port to the AUX Output ID 3 port. External devices connected to each port of AUX Output ID 1 to AUX Output ID 3 can be controlled. AUX Output ID 1 to AUX Output ID 3 can be changed to high level or low level by operating the AUX Output ID 1 to AUX Output ID 3 keys. If "Off" is configured in State Hold Timer (Active Low): Each time one of the AUX Output ID 1 to AUX Output ID 3 keys is pressed, the AUX Output ID 1 to AUX Output ID 3 ports are toggled from high level to low level or from low level to high level. If anything other than "Off" is configured in State Hold Timer (Active Low): Pressing the AUX Output ID 1 to AUX Output ID 3 keys toggles the AUX Output ID 1 to AUX Output ID 3 ports to low level.
AUX Output Status Message 1 to AUX Output Status Message 3	The status of these ports are changed when the transceiver receives a FleetSync, NXDN, or DMR Status Message. The transceiver alternates the status of the AUX Output port (High to Low or Low to High) when the received Status Message matches the Status number preconfigured for the port. Two statuses (High → Low, and Low → High) can be configured for each port of AUX Output Status Message 1 to AUX Output Status Message 3 by using KPG-D1/ D1N. These ports are usually used to remotely control the transceiver by connecting an external device to the AUX Output port. Also, the port status can be retained even if the transceiver is turned OFF.  Note This function is disabled when the transceiver receives a response status to a PC command (AUX Status Request Transmission). For an NXDN system and DMR system, this function is also disabled when the transceiver receives the Radio Check from Remote Control Mode.
Encryption	If the Encryption function (AES, DES, or bit scramble) is configured for a received signal, the output port is active while receiving the signal. Otherwise, this port is inactive.
Selected RF Deck	In a Multi RF Deck system, the output port is active for the Selected RF Deck. The port is inactive for the Unselected RF Deck.

Function Name	Description
Digital Mode	For a Conventional Channel (Analog/ NXDN/ DMR/ P25): The output port is active if a channel with “NXDN”, “DMR”, or “P25” configured in Channel Type is selected. The output port is inactive if a channel with “Analog” configured in Channel Type is selected. For an NXDN Trunking/ P25 Trunking/ DMR-based Trunking/ LTR Trunking system: The output port is active if a channel in an NXDN Trunking system, P25 Trunking system, or DMR-based Trunking system is selected. The output port is inactive if a channel in an LTR Trunking system is selected. If “Mixed” is configured in Channel Type: The transceiver behaves as follows according to the configuration in Transmit Mode (Analog or Digital): Analog: • The output port is inactive when Signaling Reset Timer (or Auto Reset Timer) is not activated. • The output port is active if the transceiver receives a digital signal, Signaling Reset Timer or Auto Reset Timer is activated, and the transceiver transmits a digital signal. • The output port is inactive if the time configured in Signaling Reset Timer (or Auto Reset Timer) elapses, and the transceiver transmits an analog signal. Digital: • The output port is active when Signaling Reset Timer (or Auto Reset Timer) is not activated. • The output port is inactive if the transceiver receives an analog signal, Signaling Reset Timer or Auto Reset Timer is activated, and the transceiver transmits an analog signal. • The output port is active if the time configured in Signaling Reset Timer (or Auto Reset Timer) elapses, and the transceiver transmits a digital signal.
Out of Range	The output port is active if Out of Range Indicator is enabled in the transceiver and the transceiver is in the Out of Range state in an NXDN Conventional system, NXDN Trunking system, NXDN Site Roaming system, DMR Conventional system, DMR-based Trunking system, DMR Site Roaming system, and P25 Trunking system. Otherwise, the output port is inactive.

Configuration using KPG-D1/ D1N

- Assigning functions to the AUX Output port ( [See](#) Transceiver Settings > Extended Function > AUX)
- Configuring **LOK Logic Signal** ( [See](#) Transceiver Settings > Extended Function > AUX > AUX Output)
- Configuring **Data Override** ( [See](#) Extended Function > AUX > AUX Input)

Dwell Time

Dwell Time is the delay time to return to the voice channel when the state of the DTC port or Data PTT port on the AUX Input port changes from active to inactive. Also, when the External PTT (Direct Channel 1 Voice) port to External PTT (Direct Channel 5 Voice) port change from active to inactive, this delay time is the time until the transceiver returns to the channel which was used before the change to Direct Channel.

This function is used such as when an external device waits to receive an acknowledgment from the receiving transceiver, or to receive Talkback from the other party which communicated by using the External PTT (Direct Channel 1 Voice) port to External PTT (Direct Channel 5 Voice) port.

Configuration using KPG-D1/ D1N

Configuring **Dwell Time** ( See Transceiver Settings > Extended Function > AUX > AUX Input)

Avoiding Noise and Chattering on the AUX Input Port (Debounce Time)

Debounce Time is the amount of time to avoid the influence of noise and chattering that occurs on the AUX Input port.

If noise or chattering does not occur while the amount of time configured in **Debounce Time** elapses, the AUX Input Port where Debounce is enabled is activated. Using this function prevents the state of the AUX Input port from being erroneously changed by noise and chattering.

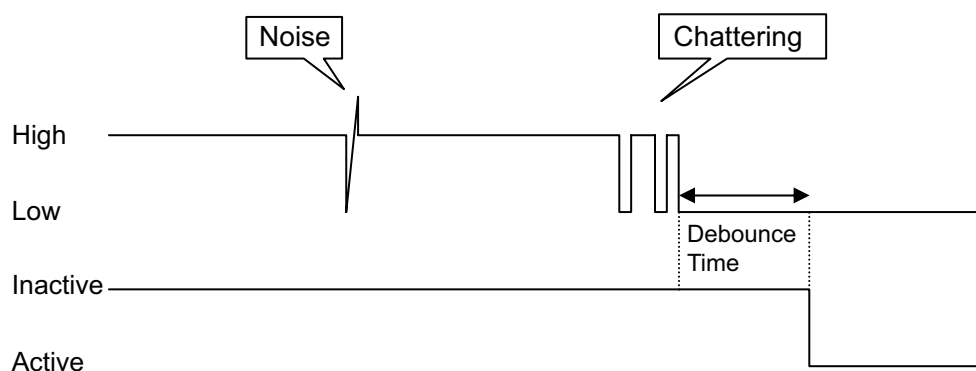


Figure 12-3 Debounce Time

Configuration using KPG-D1/ D1N

Configuring **Debounce Time** ( See Extended Function > AUX > AUX Input)

State Hold Timer (Active Low)

State Hold Timer (Active Low) is the length of time that the AUX Output Status Message ports remain at the low level after these ports go low level.

The AUX Output Status Message ports go high level when the amount of time configured in **State Hold Timer (Active Low)** elapses.

If "Off" is configured in **State Hold Timer (Active Low)**, the timer is not activated. In this case, the AUX Output Status Message ports remain at low level from when the AUX Output Status Message ports go low level until the transceiver receives a Status Message which changes the AUX Output Status Message ports to high level.

Configuration using KPG-D1/ D1N

Configuring **State Hold Timer (Active Low)** ( **See** Transceiver Settings > Extended Function > AUX > AUX Output > AUX Output Status Message)

Status Memory (AUX Output Status Message)

Status Memory (AUX Output Status Message) can be used to retain the output status of AUX Output Status Message 1 to AUX Output Status Message 3.

If this function is enabled, the output status of each of AUX Output Status Message 1 to AUX Output Status Message 3 is retained. When the transceiver is turned ON, the transceiver restores the last status prior to the transceiver being turned OFF (high level or low level).

If this function is disabled, the output status of each of AUX Output Status Message 1 to AUX Output Status Message 3 is not retained and the port always goes high level when the transceiver is turned ON.

Configuration using KPG-D1/ D1N

Configuring **Status Memory (AUX Output Status Message)** ( **See** Transceiver Settings > Extended Function > AUX > AUX Output > AUX Output Status Message)

Functions When Sending by Using the External PTT and Data PTT

The following functions that are used for sending by using the External PTT (Voice), External PTT (Data), External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice), and Data PTT can be configured using KPG-D1/ D1N.

In this section, External PTT (Voice), External PTT (Data), External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice), and Data PTT are described as External PTT and Data PTT.

Table 12-9 External PTT, Data PTT

Configuration	Operation
Modulation Line	Which modulation line is enabled can be configured for the External PTT (Voice) ports, External PTT (Data) ports, External PTT (Direct Channel 1 Voice) to External PTT (Direct Channel 5 Voice) ports, and Data PTT ports. The following modulation lines are available: • Mic Line Whether the audio line of the microphone that is connected to the microphone connector of the transceiver or the audio line of KCT-72 is enabled when transmitting by using the Mic PTT, External PTT, and Data PTT ports can be configured. • MI2 Line Whether to enable the audio modulation line of the D-sub 25-pin connector of the transceiver when transmitting by using the Mic PTT, External PTT, and Data PTT ports can be configured. If the transceiver transmits by using the External PTT (Voice) port, the transceiver is often configured to be modulated only by the MI2 Line. Normally, an external microphone such as KCT-73 is connected to the MI2 Line. • DI Line Whether to enable the data modulation line of the D-sub 25-pin connector of the transceiver when transmitting by using the Mic PTT, External PTT, and Data PTT ports can be configured. If the transceiver transmits by using the External PTT (Data) or Data PTT port, the transceiver is normally configured to be modulated only by the DI Line. However, the DI Line is enabled only when transmitting on an analog channel.
With QT/ DQT	Whether to multiplex the QT tone or DQT code configured for an analog channel when transmitting by using the Mic PTT, External PTT, and Data PTT ports can be configured. Normally, QT tone or DQT code is configured to be multiplexed. This function functions only on an analog channel.
With STE	Whether to send the STE (Squelch Tail Eliminator) after sending the QT tone or DQT code configured for an analog channel when transmitting by using the Mic PTT, External PTT, and Data PTT ports can be configured. Normally, the transceiver is configured to send the STE. Sending the Squelch Tail Eliminator eliminates the noise that occurs in the receiving transceiver when transmission ends. This function functions only on an analog channel.

Configuration	Operation
Control Head Mic Input	By using KRK-15B and KRK-14H, the Control Head (KCH-19/ KCH-20R) and RF Deck (transceiver) can be separated. In this case, if KCT-72 is connected to KRK-14H or KCH-20R, the audio input paths of the 8 Pin Modular Jack and of KCT-72 (connection cable) can be set. In Control Head Mic Input, whether the audio line path of the 8 Pin Modular Jack or of KCT-72 is used can be configured when transmitting by using the Mic PTT, External PTT, and Data PTT ports can be configured. (Refer to Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input).)  Note The transceiver can determine whether or not the Control Head and RF Deck are separated. For this reason, even if "KCT-72" is configured in Control Head Mic Input, the audio input from the microphone which is connected to the 8 Pin Modular Jack becomes enabled regardless of the configuration in Control Head Mic Input, if the Control Head and the RF Deck are not separated.
Auto Microphone 7 Select	Auto Microphone 7 Select is the function to automatically switch the Microphone Type configuration to "Microphone 7" when the External PTT (Voice) port and the External PTT (Direct Channel 1 Voice) port to External PTT (Direct Channel 5 Voice) port become active. This function is used when microphones such as KCT-73MIC and KMC-35 are simultaneously operated. If Auto Microphone 7 Select is enabled, the Microphone Type configuration is automatically switched to "Microphone 7" when the External PTT (Voice) port and the External PTT (Direct Channel 1 Voice) port to External PTT (Direct Channel 5 Voice) port become active. If the External PTT (Voice) port becomes inactive, the Microphone Type configuration before the switch is restored.

Configuration using KPG-D1/ D1N

Configuring functions used when sending by using External PTT and Data PTT

( **See** Transceiver Settings > Extended Function > Modulation Line)

Migrating to a Zone-channel by Using a Connected External Device (Remote Zone-Channel)

Remote Zone-Channel is the function to migrate to one of a maximum of 15 zones and channels by using the Channel Select A to Channel Select D ports.

The transceiver migrates to a zone and channel configured in the Remote Zone-Channel List if one of the Channel Select A to Channel Select D ports goes low level.

Table 12-10 Remote Zone-Channel List Number Corresponding to Each Channel Select Port

Remote Zone-Channel	AUX Input port			
	Channel Select D	Channel Select C	Channel Select B	Channel Select A
No.1	High	High	High	Low
No.2	High	High	Low	High
No.3	High	High	Low	Low
No.4	High	Low	High	High
No.5	High	Low	High	Low
No.6	High	Low	Low	High
No.7	High	Low	Low	Low
No.8	Low	High	High	High
No.9	Low	High	High	Low
No.10	Low	High	Low	High
No.11	Low	High	Low	Low
No.12	Low	Low	High	High
No.13	Low	Low	High	Low
No.14	Low	Low	Low	High
No.15	Low	Low	Low	Low
Not Configured *1	High	High	High	High

*1 If Remote Zone-Channel is not configured, the transceiver cannot migrate to a zone or channel.

Note

- A zone and channel for which no channel data is configured cannot be configured in the Remote Zone-Channel List.

Configuration using KPG-D1/ D1N

- Assigning functions to the AUX Input port ( [See](#) Transceiver Settings > Extended Function > AUX)
- Configuring **Remote Zone-Channel** ( [See](#) Transceiver Settings > Extended Function > Remote Zone-Channel)

Optimizing Various Signal Levels

The DI Level, DEO Level, and AFO Level can be configured using KPG-D1/ D1N.

DI Level

DI Level is the input signal level of the DI port available on the D-sub 25-pin connector of the transceiver. The input signal level can be optimized according to the devices that are connected to the transceiver.

DEO Level

DEO Level is the output signal level of the DEO port available on the D-sub 25-pin connector of the transceiver. The output signal level can be optimized according to the devices that are connected to the transceiver.

AFO Level

AFO Level is the output signal level of the AFO port available on the D-sub 25-pin connector of the transceiver. The output signal level can be optimized according to the devices that are connected to the transceiver.

Configuration using KPG-D1/ D1N

- Configuring **DI Level** ( **See** Transceiver Settings > Extended Function > Mobile Function)
- Configuring **DEO Level** ( **See** Transceiver Settings > Extended Function > Mobile Function)
- Configuring **AFO Level** ( **See** Transceiver Settings > Extended Function > Mobile Function)

12.3

Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input)

Supported Models: Mobile

Control Head Mic Input is the function to select whether to input audio from the microphone connected to 8 Pin Modular Jack of Control Head or from the MIC Input side of the connection cable (KCT-72).

By using KRK-15B and KRK-14H, the Control Head and RF Deck (transceiver) can be separated. If Control Head and RF Deck are used separately, a microphone can be connected to 8 Pin Modular Jack of Control Head, or a microphone can be connected to KRK-14H via KCT-72. At this time, configuring whether to input audio from the microphone connected to 8 Pin Modular Jack or from the Mic Input of KCT-72 is required.

As in the case of the following diagram, select whether to input audio from KMC-27 (Microphone) connected to 8 Pin Modular Jack or from KCT-73MIC (External Mic) connected via KCT-72.

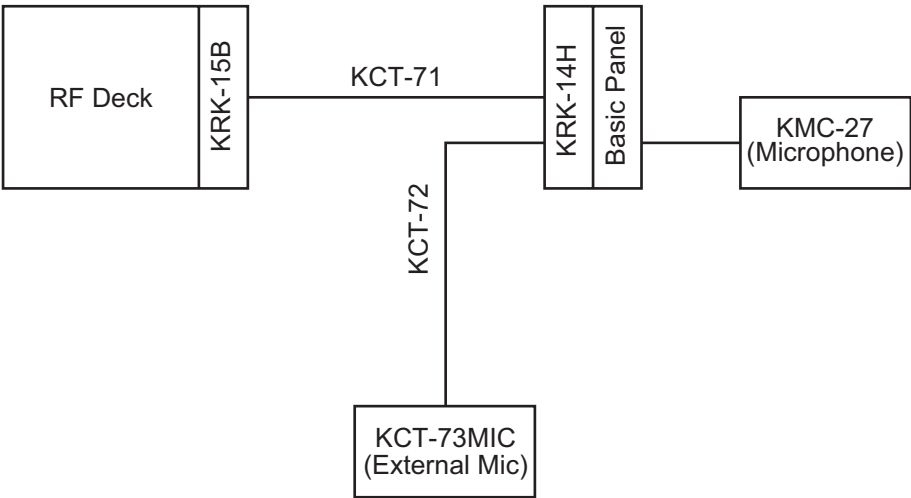


Figure 12-4 Control Head Mic Input

Table 12-11 Control Head Mic Input

Configuration	Description
Modular Jack	Inputs audio from the microphone connected to the Modular Jack.
KCT-72	Inputs audio from the Mic Input of KCT-72.

Note

- This function can be used only if KCH-19 (Basic Panel) or KCH-20R (Featured Panel) is used.
- For NX-5700S/ NX-5800S, the configuration in **Control Head Mic Input** is fixed to “Modular Jack” because the structure in Figure 11-4 is not supported.

Configuration using KPG-D1/ D1N

Configuring **Control Head Mic Input** (See Transceiver Settings > Extended Function > Mobile > Modulation Line)

Supported Models: Mobile

When the transceiver is installed in a vehicle, functions linked to the vehicle, such as Ignition Sense or Horn Alert, can be used.

13.1 Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port (Ignition Sense)

Ignition Sense is the function to automatically turn the transceiver ON or OFF according to the status of the Ignition Sense port of a vehicle. While the vehicle engine is running, high level is entered for the Ignition Sense port, and when the vehicle engine is not running, low level is entered for the Ignition Sense port.

Ignition Sense can be enabled or disabled using KPG-D1/ D1N.

Note

- To use the Ignition Sense function, the optional KCT-46 Ignition Sense cable and the Ignition Line of the vehicle needs to be connected.

Configuration using KPG-D1/ D1N

Configuring **Ignition Sense** to be enabled or disabled ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Ignition Function)

Usage of the Ignition Sense Port

The method of turning the transceiver ON or OFF using the Ignition Sense port varies depending on the configuration in **Ignition Sense Type**.

● Turning the transceiver ON or OFF according to the state of the Ignition Sense port

The transceiver can be turned ON or OFF according to the state of the Ignition Sense port if "Ignition Only" is configured in **Ignition Sense Type**.

The transceiver is automatically turned ON when the Ignition Sense port goes high level and is automatically turned OFF when the port goes low level. The transceiver cannot be turned ON or OFF by pressing the **Power** switch.

● Turning the transceiver ON or OFF using both the Ignition Sense port and Power switch

If "Ignition and Switch" is configured in **Ignition Sense Type**, the transceiver can be turned ON or OFF using both the **Power** switch and the Ignition Sense port.

The transceiver can be turned OFF by pressing the **Power** switch even if the vehicle engine is running (the state of the Ignition Sense port is High). However, the state of the **Power** switch is not retained.

Also, the transceiver is turned ON when the state of the Ignition Sense port switches from low level to high level.

Configuration using KPG-D1/ D1N

Configuring **Ignition Sense Type** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Ignition Function)

The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)

Timed Power-off is the amount of time from when the vehicle engine stops running (the state of the Ignition Sense port is at low level) until the transceiver is automatically turned OFF.

If the amount of time configured in **Timed Power-off** elapses after the vehicle engine stops running, the transceiver is automatically turned OFF. This function is used for continuing communications even if the vehicle engine is not running.

A Timed Power-off Pre-alert Tone sounds from the transceiver in the following manners if anything other than "Off" is configured in **Warning Tone**:

- 1 min before the transceiver is turned OFF: The transceiver beeps twice. (Timed Power-off Pre-alert Tone A)
- 10 sec before the transceiver is turned OFF: The transceiver beeps 4 times. (Timed Power-off Pre-alert Tone B)
- 2 sec before the transceiver is turned OFF: The transceiver beeps continuously. (Timed Power-off Pre-alert Tone C)

Note

- **Timed Power-off** is reset if the Ignition Sense port goes high level.
- If "Ignition and Switch" is configured in **Ignition Sense Type**, **Timed Power-off** is not activated when the transceiver is turned ON by pressing and holding the **Power** switch.
- If "Ignition and Switch" is configured in **Ignition Sense Type**, the **Timed Power-off** timer is reset when the **Power** switch is pressed while **Timed Power-off** is functioning. Pressing and holding the **Power** switch turns the transceiver OFF. Also, the **Timed Power-off** timer is reset if the Ignition Sense port is switched from low level to high level while **Timed Power-off** is functioning.

Configuration using KPG-D1/ D1N

Configuring **Timed Power-off** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Ignition Function)

13.2 Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert)

Horn Alert is the function to activate the Horn Alert port for a certain amount of time when the transceiver receives a call.

This function turns headlights On of the vehicle connected to the Horn Alert port and makes the horn sound. Therefore, a user can recognize that the transceiver has received a call with lighting of headlights of the vehicle and the horn even if the user is away from the transceiver.

Pressing the **Horn Alert** key enables or disables Horn Alert.

Horn Alert can also be enabled or disabled by selecting "Horn Alert" after entering Menu Mode by pressing the **Menu** key. (Refer to [Using Menu Mode.](#))

Note

- An optional KAP-2 is required to activate the Horn Alert.

Operating the transceiver


● Enabling the Horn Alert

Press the **Horn Alert** key while Horn Alert is disabled.
Horn Alert is enabled, and then the “” icon appears.



● Disabling the Horn Alert

Press the **Horn Alert** key while Horn Alert is enabled.
Horn Alert is disabled, and then the “” icon disappears.

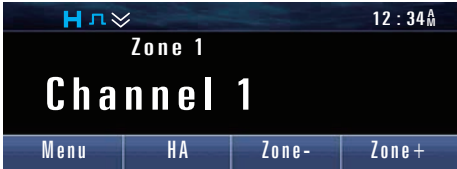

 Note

- The Horn Alert port functions according to the configuration in **Horn Alert Logic Signal**. (Refer to [Horn Alert Logic Signal](#).)
- While the state of the Ignition Sense port is at high level, the Horn Alert port is not activate even if the transceiver receives a call. (Refer to [Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port \(Ignition Sense\)](#).)

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

Conditions to Activate the Horn Alert

The conditions to activate the Horn Alert vary on a Conventional Channel (Analog/ NXDN/ P25/ DMR), in an LTR Trunking system, in a P25 Trunking system, in an NXDN Trunking system, or in a DMR-based Trunking system.

Conventional Channel (Analog/ NXDN/ P25/ DMR)

On a Conventional Channel (Analog/ NXDN/ P25/ DMR), one of the following conditions needs to be satisfied to activate the Horn Alert:

Table 13-1 Conditions to Activate the Horn Alert (Conventional Channel (Analog/ NXDN/ P25/ DMR))

Type	Conditions
Analog Conventional	• If the transceiver receives an Option Signaling while Horn Alert is enabled • If the transceiver receives a Paging Call while Horn Alert is enabled • If the transceiver receives a Call Alert while Horn Alert is enabled • If the transceiver receives Status No.89 of FleetSync regardless of whether Horn Alert is enabled or disabled (except when the transceiver receives the Status No.89 of the response to a PC command for AUX Status Request Transmission)
NXDN Conventional	• If the transceiver receives an Option Signaling while Horn Alert is enabled • If the transceiver receives a Paging Call while Horn Alert is enabled • If the transceiver receives Horn Alert Status regardless of whether Horn Alert is enabled or disabled (except when the transceiver receives the Horn Alert Status of the response to a PC command for AUX Status Request Transmission)
P25 Conventional	• If the transceiver receives an Individual Call while Horn Alert is enabled • If the transceiver receives an Option Signaling while Horn Alert is enabled
DMR Conventional	• If the transceiver receives an Individual Call or a Group Call while Horn Alert is enabled (except an Unaddressed Call) • If the transceiver receives a Paging Call while Horn Alert is enabled • If the transceiver receives Horn Alert Status regardless of whether Horn Alert is enabled or disabled (except when the transceiver receives the Horn Alert Status of the response to a PC command for Status Request Transmission and AUX Status Request Transmission) • If the transceiver receives a Telephone Call (a Telephone Call using an Individual Call or Group Call in the KAIROS system (SIP Call))

LTR Trunking System

In an LTR Trunking system, Horn Alert can be enabled or disabled in each Group ID by using KPG-D1/ D1N.

● If Horn Alert is configured for the Horn Alert key or Menu Mode

One of the following conditions needs to be satisfied to activate Horn Alert:

- When Horn Alert is enabled by pressing the **Horn Alert** key or by selecting "Horn Alert" from Menu Mode
- When "Start Up" is configured in **Horn Alert Mode**

If one of the above conditions is satisfied, Horn Alert is activated under the following conditions:

- When the received Group ID matches if "None" is configured in **Optional Signaling** of the Group ID which the transceiver waits for and Horn Alert is enabled
- When the received Group ID and Optional Signaling match if "DTMF" or "FleetSync" is configured in **Optional Signaling** of the Group ID which the transceiver waits for and Horn Alert is enabled However, "FleetSync" needs to be configured in Optional Signaling for a Paging Call.
- When the Fix ID for which Horn Alert is enabled matches the received Group ID

Regardless of the above conditions, the configuration of Optional Signaling, and all other configurations related to Horn Alert, the Horn Alert port is activated according to the configuration in Horn Alert Logic Signal when the transceiver receives Status No.89 of Fleet Sync (except when the transceiver receives the Status No.89 of the response to a PC command for AUX Status Request Transmission).

● If Horn Alert is not configured for both the Horn Alert key and Menu Mode

Horn Alert is activated in the following conditions:

- When the received Group ID matches if "None" is configured in Optional Signaling of the Group ID which the transceiver waits for and Horn Alert is enabled
- When the received Group ID and Optional Signaling match if "DTMF" or "FleetSync" is configured in Optional Signaling of the Group ID which the transceiver waits for and Horn Alert is enabled However, "FleetSync" needs to be configured in Optional Signaling for a Paging Call.
- When the Fix ID for which Horn Alert is enabled matches the received Group ID

Regardless of the above conditions, the configuration of Optional Signaling, and all other configurations related to Horn Alert, the Horn Alert port is activated according to the configuration in Horn Alert Logic Signal when the transceiver receives Status No.89 of Fleet Sync (except when the transceiver receives the Status No.89 of the response to a PC command for AUX Status Request Transmission).

P25 Trunking System

In a P25 Trunking system, one of the following conditions needs to be satisfied to activate Horn Alert:

- If the transceiver receives an Individual Call while Horn Alert is enabled
- If the transceiver receives a Paging Call while Horn Alert is enabled
- When the Optional Signaling of the Group ID which the transceiver waits for and the Optional Signaling of the received Group ID match while Horn Alert is enabled

NXDN Trunking System

In an NXDN Trunking system, one of the following conditions needs to be satisfied to activate Horn Alert:

- If the transceiver receives an Individual Call or a Group Call while Horn Alert is enabled
- If the transceiver receives a Paging Call while Horn Alert is enabled
- If the transceiver receives Horn Alert Status regardless of whether Horn Alert is enabled or disabled (except when the transceiver receives the Horn Alert Status of the response to a PC command for AUX Status Request Transmission)
- If the transceiver receives a Telephone Call while Horn Alert is enabled
- When the Optional Signaling of the Group ID which the transceiver waits for and the Optional Signaling of the received Group ID match while Horn Alert is enabled

DMR-based Trunking System

In a DMR-based Trunking system, one of the following conditions needs to be satisfied to activate Horn Alert:

- If the transceiver receives an Individual Call or a Group Call while Horn Alert is enabled
- If the transceiver receives Horn Alert Status regardless of whether Horn Alert is enabled or disabled (except when the transceiver receives the Horn Alert Status of the response to a PC command for AUX Status Request Transmission)
- If the transceiver receives a Telephone Call while Horn Alert is enabled

Configuration using KPG-D1/ D1N



- Configuring **Horn Alert Status** ( [See](#) Transceiver Settings > NXDN > NXDN Information > Status > Option)
- Configuring **Horn Alert Status** ( [See](#) Transceiver Settings > DMR > DMR Information > Status > Option)

Horn Alert Logic Signal

Horn Alert Logic Signal is the function to activate the Horn Alert port depending on the configuration when Horn Alert functions.

The manner in which the Horn Alert port is activated when the Horn Alert functions can be configured using KPG-D1/ D1N.

Table 13-2 Horn Alert Logic Signal

Configuration	Description
Until Reset	The Horn Alert port remains active until the matching status of Optional Signaling is reset.
1 sec to 30 sec	The Horn Alert port remains active for configured amount of time.
Pulse	The Horn Alert port is activated 3 times at 500 ms intervals.  Figure 13-1 Pulse Only when a Fix ID is received, the Horn Alert port becomes active for 1 sec, subsequently becomes inactive for 500 ms, and then becomes active for 1 sec again.  Figure 13-2 Pulse (Fix ID)

Note

- The Horn Alert port is not deactivated even if the amount of time configured in **Horn Alert Logic Signal** is longer than the amount of time configured in **Auto Reset Timer**. The Horn Alert port is deactivated when the amount of time configured in Horn Alert Logic Signal elapses.
- Operating one of the following while Horn Alert is functioning deactivates Horn Alert:
 - When the **Horn Alert** key is pressed (the Horn Alert is disabled)
 - When the state of the microphone hook is changed
 - When a key is pressed

Configuration using KPG-D1/ D1N

Configuring **Horn Alert Logic Signal** ( See Transceiver Settings > Optional Features > Optional Features 1 > Horn Alert)

Activating Horn Alert According to the Microphone Hook (Off-hook Horn Alert)

Off-hook Horn Alert is the function to activate the Horn Alert according to the microphone hook status when Horn Alert functions.

Refer to “[Conditions to Activate the Horn Alert](#)” for conditions to activate Horn Alert.

Table 13-3 Off-hook Horn Alert

Configuration	Description
Enabled	Horn Alert is activated regardless of the microphone on- or off-hook state.
Disabled	Horn Alert is activated only if the microphone is on-hook.

Note

- On-hook indicates the state that the microphone is hooked. Off-hook indicates the state that the microphone is not hooked.

Configuration using KPG-D1/ D1N

Configuring **Off-hook Horn Alert** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Horn Alert)

Horn Alert Status When the Transceiver Is Turned ON (Horn Alert Mode)

Horn Alert Mode is the function to enable or disable Horn Alert depending on the configuration when the transceiver is turned ON.

The Horn Alert state when the transceiver is turned ON can be configured using KPG-D1/ D1N.

Table 13-4 Horn Alert Mode

Configuration	Description
Current	When the transceiver is turned ON, the transceiver always starts up with Horn Alert disabled.
Status Memory	If Horn Alert is enabled or disabled by pressing the Horn Alert key or selecting Horn Alert from Menu Mode, the status of Horn Alert, either enabled or disabled, can be retained in the transceiver. When the transceiver is turned ON, the transceiver starts up in the same Horn Alert state as was retained in the transceiver (enabled or disabled).
Startup	When the transceiver is turned ON, the transceiver always starts up with Horn Alert enabled.

Configuration using KPG-D1/ D1N

Configuring **Horn Alert Mode** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Horn Alert)

14 TRANSCIVER DATA PROTECTION WITH PASSWORD

The transceiver has password functions for protecting the transceiver operation and the security of the configuration data.

14.1 Password for Transceiver Operation (Transceiver Password)

Transceiver Password protects the transceiver from unauthorized usage.

Placing the transceiver in Transceiver Password Mode prevents the transceiver from being used. The transceiver exits Transceiver Password Mode and becomes available if a password is entered and the password is correct.

Pressing the **Transceiver Password** key places the transceiver in Transceiver Password Mode.

Or, pressing the **Menu** key places the transceiver in Menu Mode, and then selecting “Transceiver Password” places the transceiver in Transceiver Password Mode. (Refer to [Using Menu Mode](#).)

A password can be configured for the transceiver using KPG-D1/ D1N. The password can be configured using any numbers between 0 and 999999 inclusive.

Note


- If **Transceiver Password** is configured but no Transceiver Password is configured for the **Transceiver Password** and **Menu** keys, the transceiver enters Transceiver Password Mode when the transceiver is turned ON.

Operating the transceiver

● Placing the transceiver in Transceiver Password Mode

Press the **Transceiver Password** key.


The transceiver enters Transceiver Password Mode.



● Exiting the Transceiver Password Mode

1 Enter a password in Transceiver Password Mode.

Refer to “[Entering or Deleting a Code](#)” for entry methods.



2 Press the **Menu** ([]) key or [*] key after entering the password.

If the password matches, a Password Authorization Tone (2 beeps) sounds from the transceiver and the transceiver enters User Mode.

Configuration using KPG-D1/ D1N

- Configuring **Transceiver Password** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Password)
- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

14.2 Password When Reading Configuration Data in a PC (Read Authorization Password)

Read Authorization Password is the function to protect the configuration data, such as the operating frequencies, from being read by unauthorized persons if the transceiver should ever be stolen.

To read data using KPG-D1/ D1N from the transceiver with **Read Authorization Password** configured, **Read Authorization Password** needs to be entered on a PC. The configuration data in the transceiver cannot be read unless the correct Password is entered.

Read Authorization Password can be configured for the transceiver using KPG-D1/ D1N. **Read Authorization Password** can be arbitrarily configured using a maximum of 16 alphanumeric characters.

Note

- If the password authentication fails consecutively for the number of times configured in **Password Entry Limit**, the transceiver enters Transceiver Lockout Mode, and then "LOCKOUT" appears on the display. In Transceiver Lockout Mode, the transceiver cannot be operated. Writing configuration data to the transceiver by using KPG-D1/ D1N, the transceiver exits Transceiver Lockout Mode.
Also, a failure in **Overwrite Password** authentication counts as a failure in the password authentication. The number of failures in the password authentication is cleared by one of the following conditions:
 - When the transceiver is turned OFF and then turned ON again
 - When the correct password is entered
 - When configuration data is written to the transceiver by using KPG-D1/ D1N

Configuration using KPG-D1/ D1N

- Configuring **Read Authorization Password** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Data Password > Read Authorization Password)
- Configuring **Password Entry Limit** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Data Password)

14.3 Password for Writing Configuration Data (Overwrite Password)

Overwrite Password is the function to protect the configuration data from being overwritten by unauthorized persons if the transceiver should ever be stolen.

To write data using KPG-D1/ D1N to the transceiver with **Overwrite Password** configured, the password needs to be entered on a PC.

Overwrite Password can be configured for the transceiver using KPG-D1/ D1N. **Overwrite Password** can be arbitrarily configured using a maximum of 16 alphanumeric characters.

Note

- Copying data from another transceiver cannot occur by using the Clone function if **Overwrite Password** is configured for the transceiver.
- If the password authentication fails consecutively for the number of times configured in **Password Entry Limit**, the transceiver enters Transceiver Lockout Mode, and then "LOCKOUT" appears on the display. In Transceiver Lockout Mode, the transceiver cannot be operated. Writing configuration data to the transceiver by using KPG-D1/ D1N, the transceiver exits Transceiver Lockout Mode.
Also, a failure in **Read Authorization Password** authentication counts as a failure in the password authentication. The number of failures in the password authentication is cleared by one of the following conditions:
 - When the transceiver is turned OFF and then turned ON again
 - When the correct password is entered
 - When configuration data is written to the transceiver by using KPG-D1/ D1N

Configuration using KPG-D1/ D1N

- Configuring **Overwrite Password** ( See Transceiver Settings > Optional Features > Optional Features 1 > Data Password > Overwrite Password)
- Configuring **Password Entry Limit** ( See Transceiver Settings > Optional Features > Optional Features 1 > Data Password)

14.4 Restricting the Functions of KPG-D1/ D1N (Read FPU Data Inhibition)

The following are the specifications if the **Read FPU Data Inhibition** configuration is enabled:

- The following functions cannot be used:
 - The reading of FPU data
 - Clone Mode ^{*1}
 - Front Panel Programming Mode ^{*1}
 - Read Authorization Password ^{*2}
 - Overwrite Password ^{*3}
 - ^{*1} The use of the mode is restricted by the FPU.
 - ^{*2} Read Authorization Password cannot be configured if **Read FPU Data Inhibition** is configured.
 - ^{*3} Overwrite Password cannot be configured if **Read FPU Data Inhibition** is configured.
- The log can be read from the transceiver if **Read Log Data** is executed, but FPU data is not included.
- If the version of the firmware to be updated is earlier than 5.00.00 when the firmware is written, the FPU data is deleted after the firmware is updated. If the version of the firmware to be updated is 5.00.00 or later, the FPU data is not deleted even if the firmware is updated.

Note

- For a Multi RF Deck, the configuration of **Read FPU Data Inhibition** is based on the Master Operation Data.

Configuration using KPG-D1/ D1N

Configuring **Read FPU Data Inhibition** to be enabled or disabled ( See Transceiver Settings > Optional Features > Optional Features 1 > Password > FPU Data File

15 ADJUSTING THE TIME ON THE TRANSCEIVER

The transceiver is equipped with an internal clock IC. Using the internal clock IC, the current time can be displayed on the display.

15.1 Displaying the Current Time

Pressing the **Clock** key displays the current time on the display.


The current time also appears when “Clock” is selected after entering Menu Mode by pressing the **Menu** key. (Refer to [Using Menu Mode](#).)

Operating the transceiver


1 Press the **Clock** key.

The current time appears.

- 12H Display



- 24H Display



2 Press the **Home** ([]) key to exit the mode.

If Menu Mode is entered by using the **Menu** key, pressing and holding the **Home** ([]) key restores Menu Mode.

Note

- If Clock Display is enabled, the current time appears on the display when the transceiver is turned ON.
- The transceiver is equipped with a separate battery for the clock IC. If the second rechargeable battery runs out, the clock will not be displayed properly. Recharge the battery and then configure the clock again. In this case, “- : - : -” appears.

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)
- Configuring **Clock Display** ( [See](#) Transceiver Settings > Optional Features > Optional Features 1 > Display)

15.2 Adjusting the Time

Pressing the **Clock Adjustment** key causes the transceiver to enter Clock Adjustment Mode and then date and time can be adjusted.

Also, pressing the **Menu** key causes the transceiver to enter Menu Mode, and then the transceiver enters Clock Adjustment Mode by selecting "Clock Adjustment" and the date and time can be adjusted. (Refer to [Using Menu Mode](#).)

Note


- When the data configured by using KPG-D1/ D1N is written to the transceiver, the date and time of the internal clock of the transceiver can be adjusted by sending the date and time configured on the PC to the transceiver. ([See](#) Program > Write Data to the Transceiver > Time Adjustment)

Operating the transceiver


The following is the operation example when "Year/Month/Day" is configured in **Date Format** and "12H" is configured in **Time Format**:

1 Press the **Clock Adjustment** key.


A Key Beep A (1 beep) sounds from the transceiver, and then the transceiver enters Clock Adjustment Mode.
The following operations are the same even if the transceiver enters Clock Adjustment Mode by pressing the **Menu** key.




2 Configure the year by pressing the [▲] key or [▼] key, and then press the [▶] key.




3 Configure the month by pressing the [▲] key or [▼] key, and then press the [▶] key.




4 Configure the date by pressing the [▲] key or [▼] key, and then press the [▶] key.



5 Configure the hour by pressing the [▲] key or [▼] key, and then press the [▶] key.




6 Configure the minute by pressing the [▲] key or [▼] key, and then press the [▶] key.



7 Configure the display format for the time by pressing the [▲] key or [▼] key, and then press the Menu ([□]) key or [*] key.



A Key Beep C (3 beeps) sounds from the transceiver, and then the date and time is determined.



Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( See Transceiver Settings > Key Assignment)

The transceiver has the following modes: the mode for adjusting the transceiver, the mode for copying the configuration data to another transceiver, the mode to change the configuration of the transceiver, and the mode for updating the firmware and confirming the version number of the firmware.

- Panel Test Mode
- Panel Tuning Mode
- Clone Mode
- Front Panel Programming Mode
- Firmware Programming Mode
- Transceiver Information Mode

The transceiver can enter each mode by pressing keys on the transceiver. Whether to permit the use of these modes can be configured using KPG-D1/ D1N.

Using KPG-D1/ D1N, the transceiver also has PC Test Mode for testing transmit and receive capabilities of the transceiver and PC Tuning Mode for adjusting the transceiver.

16.1 Testing the Transmit and Receive Capabilities of the Transceiver (Panel Test Mode)


Panel Test Mode can be used to test transmit and receive capabilities of the transceiver using the operation panel of the transceiver.

Operating the transceiver

Turn the transceiver ON while pressing and holding the **Back** ([↶]) key.
A Power-on Tone A (1 beep) sounds from the transceiver, and then the market code of the transceiver appears for 2 sec.
For Portable, the battery type also appears.



The transceiver enters Panel Test Mode after a lapse of 2 sec.



Note

- Refer to the service manual for instructions on how to operate the transceiver in Panel Test Mode, and on how to test transmit and receive capabilities.
- To end Panel Test Mode, the transceiver must be turned OFF.
- Panel Test Mode does not function in a Multi RF Deck/ Multi Control Head structure for Mobile.

Configuration using KPG-D1/ D1N

Configuring whether to permit the use of Panel Test Mode ( See Transceiver Settings > Optional Features > Optional Features 1 > Mode)

16.2

Adjusting the Transmit and Receive Capabilities of the Transceiver (Panel Tuning Mode)

Panel Tuning Mode can be used to adjust transmit and receive capabilities of the transceiver by using the operation panel of the transceiver.

Note

- Panel Tuning Mode does not function in a Multi RF Deck/ Multi Control Head structure for Mobile.

Operating the transceiver


1

Turn the transceiver ON while pressing and holding the Back ([↩]) key.

A Power-on Tone A (1 beep) sounds from the transceiver, and then the market code of the transceiver appears for 2 sec. For Portable, the battery type also appears.



The transceiver enters Panel Test Mode after a lapse of 2 sec.



2

Press the Menu ([☐]) key.

The transceiver enters Panel Tuning Mode.



Note

- Refer to the service manual for instructions on how to operate the transceiver in Panel Tuning Mode, and on how to adjust transmit and receive capabilities.
- To end Panel Tuning Mode, the transceiver must be turned OFF.

Configuration using KPG-D1/ D1N

Configuring whether to permit the use of Panel Tuning Mode (See Transceiver Settings > Optional Features > Optional Features 1 > Mode)


16.3 Copying the Configuration Data to Another Transceiver (Clone Mode)

Clone Mode can be used to copy the data configured for the transceiver to another transceiver.

Operating the transceiver

1 Turn the transceiver ON while pressing and holding the **Function** ([]) key.

The transceiver enters Clone Mode.



2 Copy the data.

A Key Beep A (1 beep) sounds from the transceiver and copying the data ends.

Note

- Refer to the service manual for instructions on how to operate the transceiver in Clone Mode, and for details on the Clone function.
- To end Clone Mode, the transceiver must be turned OFF.
- The following data cannot be copied in Clone Mode:
 - Tuning Data
 - Embedded Message with Password
 - KENWOOD ESN Data
 - P25 ESN Data
 - NXDN ESN Data
- If the data is copied to a transceiver having a different firmware version number, this may result in an error or a failure of the transceiver to function correctly. In such a case, the cloned transceiver operation must be verified prior to using this transceiver on a regular basis.
- Clone Mode does not function in a Multi RF Deck system for Mobile.

Configuration using KPG-D1/ D1N

Configuring whether to permit the use of Clone Mode ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Mode)

16.4

Changing the Configuration of the Transceiver (Front Panel Programming Mode)

This mode can be used to change data, such as the frequency on a Conventional Channel, and to add a Conventional Channel in the transceiver only.

Even if no KPG-D1/ D1N and PC is available, required data can be configured by using only the transceiver.

Pressing the **Front Panel Programming** key places the transceiver in Front Panel Programming Mode. Or, pressing the **Menu** key places the transceiver in Menu Mode, and the transceiver can be placed in Front Panel Programming Mode by selecting “Panel Program”. (Refer to [Using Menu Mode.](#))

Note


- To use this mode, a Radio Feature License (KWD-5001FP) is required.

Operating the transceiver


1

Press the **Front Panel Programming** key.


- **If Clone/Front Panel Programming Password is not configured**
The transceiver enters Front Panel Programming Mode.



- **If Clone/Front Panel Programming Password is configured**
The password entry display appears.




Press the **Menu** ([]) or [*] key after entering a password.
Refer to “[Entering or Deleting a Code](#)” for entry methods.
If the correct password is entered, the transceiver enters Front Panel Programming Mode.



2

Press the **Menu** ([]) key, or [*] key.

The zone selection display appears.



Note

- Refer to the service manual for instructions on how to operate the transceiver in Front Panel Programming Mode.
- To exit Front Panel Programming Mode, press the **Home** ([]) key, and then press the **Menu** ([]) or [*****] key on the confirmation screen. The transceiver exits Front Panel Programming Mode and then restarts in User Mode.
- For NX-5600H, DMR Conventional Channel and P25 Conventional Channel cannot be added or changed.
- For NX-5200LG/ NX-5300LG/ NX-5700H/ NX-5800H, DMR Conventional Channel cannot be added or changed.
- For NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S, only an analog channel and only a digital Conventional Channel that is permitted in **Feature Selection** can be added or changed.

Configuration using KPG-D1/ D1N

- Configuring whether to permit the use of Front Panel Programming Mode ( **See** Model > Product Information > Feature Selection)
- Configuring Clone/Front Panel Programming Password ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Password)


16.5 Overwriting the Firmware (Firmware Programming Mode)

Firmware Programming Mode can be used to write the firmware to the transceiver.

Operating the transceiver**1**

Turn the transceiver ON while pressing and holding the **AUX** key.

The transceiver enters Firmware Programming Mode.

**2**

Write the firmware to the transceiver.

Note

- For NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S, the firmware of NX-5200/ NX-5200LG/ NX-5300/ NX-5300LG/ NX-5400/ NX-5600H/ NX-5700/ NX-5700H/ NX-5800/ NX-5800H/ NX-5900 cannot be written.
Also, the firmware of NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S cannot be written to NX-5200/ NX-5200LG/ NX-5300/ NX-5300LG/ NX-5400/ NX-5600H/ NX-5700/ NX-5700H/ NX-5800/ NX-5800H/ NX-5900.
- Refer to the service manual for instructions on how to operate the transceiver in Firmware Programming Mode, and on how to write the firmware to the transceiver.
- To end Firmware Programming Mode, the transceiver must be turned OFF.
- If no firmware is written to the transceiver, the transceiver enters Firmware Programming Mode when the transceiver is turned ON.

Configuration using KPG-D1/ D1N

Configuring whether to permit the use of Firmware Programming Mode ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Mode)


16.6 Checking the Firmware Version (Transceiver Information Mode)

Transceiver Information Mode is the function to display the version of the firmware written in the transceiver and the firmware version and hardware version of the SCM.

Operating the transceiver


- 1
- Turn the transceiver ON while pressing and holding the Side 3 key (Portable/ KCH-21R (Handheld Control Head)) or the [+] key (Mobile).

The transceiver enters Transceiver Information Mode. The version number of the transceiver written to the transceiver appears.



- 2
- Toggle the display by pressing the [▲] key or [▼] key.

The display toggles as follows:

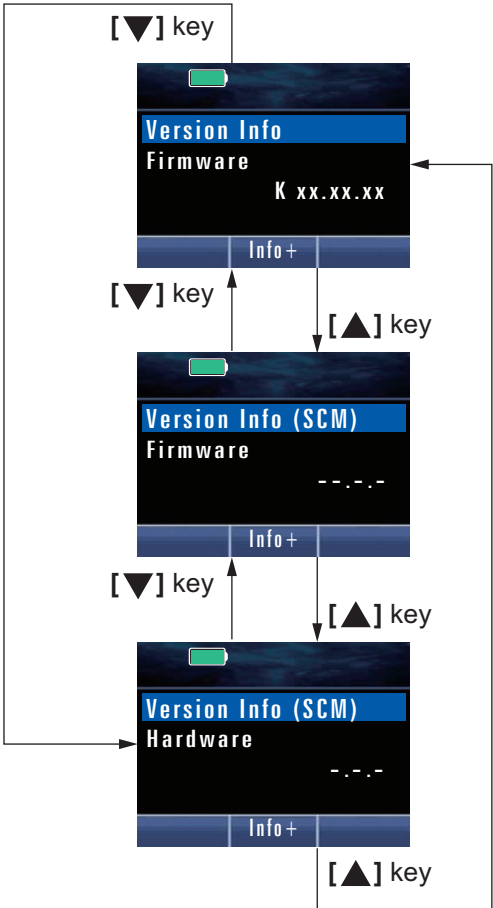

Note

- To end Transceiver Information Mode, the transceiver must be turned OFF.

Configuration using KPG-D1/ D1N

Configuring whether to permit the use of Transceiver Information Mode ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Mode)

16.7 Testing or Adjusting the Transmit and Receive Capabilities of the Transceiver (PC Test Mode/ PC Tuning Mode)

PC Test Mode can be used to test transmit and receive capabilities of the transceiver by using KPG-D1/ D1N. PC Tuning Mode can be used to adjust transmit and receive capabilities of the transceiver by using KPG-D1/ D1N. To test or adjust the transceiver in each mode, the transceiver and a PC with KPG-D1/ D1N installed need to be connected by using the programming cable. (Refer to [Connecting the Transceiver to a PC.](#)) After connecting the transceiver and the PC, clicking the “Test Mode” button on the Program menu in the main window of KPG-D1/ D1N opens the **Test Mode** dialog box. By selecting an item from the tuning item list in the **Test Mode** dialog box and double-clicking it, the tuning dialog box of the selected item opens.

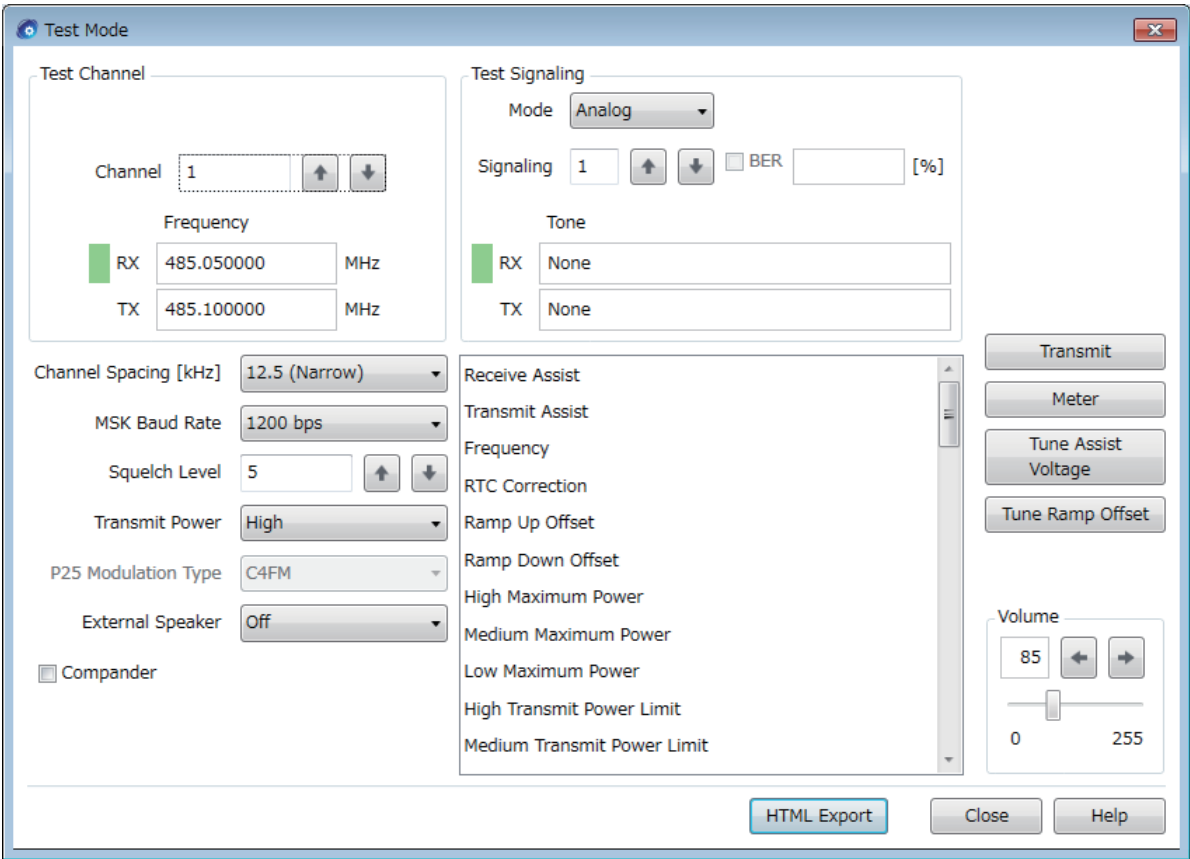


Figure 16-1 Test Mode Dialog Box

Note

- Refer to the service manual for operating the transceiver in PC Test Mode and PC Tuning Mode, and instructions on how to adjust transmit and receive capabilities.

Supported Models: Mobile (except NX-5700S/ NX-5800S)

By connecting 1 or 2 Control Heads to multiple mobile transceivers (RF Decks), 1 Multi RF Deck system can be structured.



Figure 17-1 Multi RF Deck/Multi Control Head

“RF Deck” indicates NX-5600H/ NX-5700/ NX-5700H/ NX-5800/ NX-5800H/ NX-5900, and “Control Head” indicates Basic Panel (KCH-19), Featured Panel (KCH-20R), and Handheld Control Head (KCH-21R).

This chapter describes the basic operations when structuring Multi RF Deck/ Multi Control Head and the behavior of each function.

17.1 Description

In Multi RF Deck/ Multi Control Head, the following functions can be achieved:

- Transceivers can be operated with a combination of different frequencies such as VHF/ UHF/ 700-800 MHz.
- Transceivers can be operated with a combination of different protocols (NXDN, P25, etc.).
- The transceiver can be operated with a combination of different system types, such as Conventional and Trunking.
- Even if a failure occurs, such as the deterioration of the sensitivity of the main transceiver, or the lessening of the transmit power, the other transceivers can be operated continuously as substitute transceivers.
- Multiple transceivers can receive audio simultaneously and each transceiver can emit the audio individually by connecting an external speaker.
- If a Dual Control Head is used, an operator at a remote location can operate the transceiver individually.
- By using Remote Kit for Head (KRK-14H), Remote Kit for RF Deck (KRK-15B), and Remote Control Cable (KCT-71), a system can be structured with a maximum of 2 Control Heads and a maximum of 3 RF Decks.
- In a Multi RF Deck system, a Control Head can operate each RF Deck.
- If KCH-20R or KCH-21R is used, the channel information of multiple connected RF Decks can be displayed on the transceiver display.

17.2 Structures of Multi RF Deck/ Multi Control Head

For Multi RF Deck/Multi Control Head, the following 5 types of structures except Single RF Deck/Single Control Head are available:

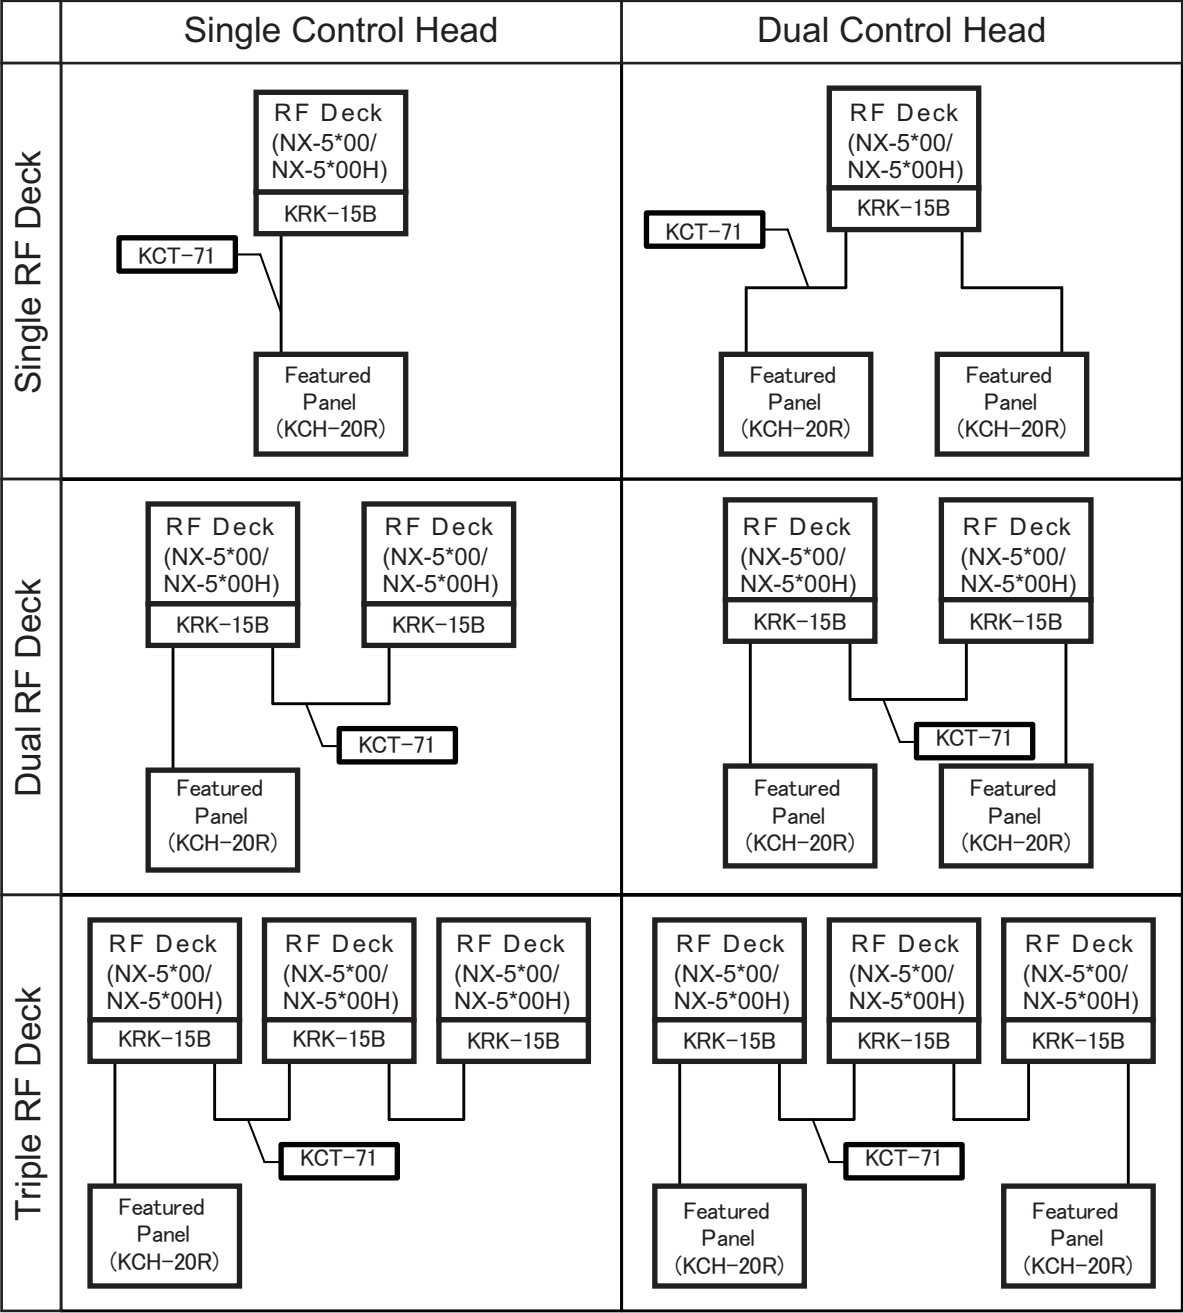


Figure 17-2 Structures of Multi RF Deck/ Multi Control Head

17.3 Building a Multi RF Deck System

By connecting 1 or 2 Control Heads to multiple RF Decks, a Multi RF Deck/ Multi Control Head system can be built. Refer to “[STRUCTURING A MULTI RF DECK/ MULTI CONTROL HEAD](#)” for instructions on how to build a Multi RF Deck/ Multi Control Head system.

17.4 Configuring the Initial Configuration

This section describes the initial configuration for Multi RF Deck/ Multi Control Head. The initial configuration is configured in the following order:

1. Update the firmware.
2. Activate a Radio Feature License (KWD-5004MR).
3. Configure FPU data and write the FPU data to each RF Deck.
4. Configure the DIP switch.

Updating the Firmware

To activate Multi RF Deck/ Multi Control Head, the firmware of firmware version 1.62.00 or later needs to be written. The firmware versions of all RF Decks and Control Heads need to be the same.

In the initial configuration, the firmware is written to each RF Deck. Because KRK-14H and KCH-20R to be connected to KCH-19 are equipped with microcomputers, also write the firmware to KRK-14H and KCH-20R. Write the firmware with RF Decks and Control Heads connected. In this way, the firmware for RF Decks and the firmware for Control Heads can be written simultaneously.

Also, when writing the firmware, note that the configuration of the DIP switch needs to be considered. The DIP switch is equipped on KRK-14H, KRK-15B, and KCH-20R. When writing the firmware in Single RF Deck/Single Control Head, the SW1 to SW4 DIP switches need to be all turned on. SW1 to SW4 are all turned on prior to factory shipment. (Refer to [Configuring the DIP Switch](#).)

The following is the procedure to write the firmware if 3 RF Decks are used:

1 Make the system in a Single RF Deck/ Single Control Head structure.

Combination of Remote Kits varies depending on the type of Control Head.

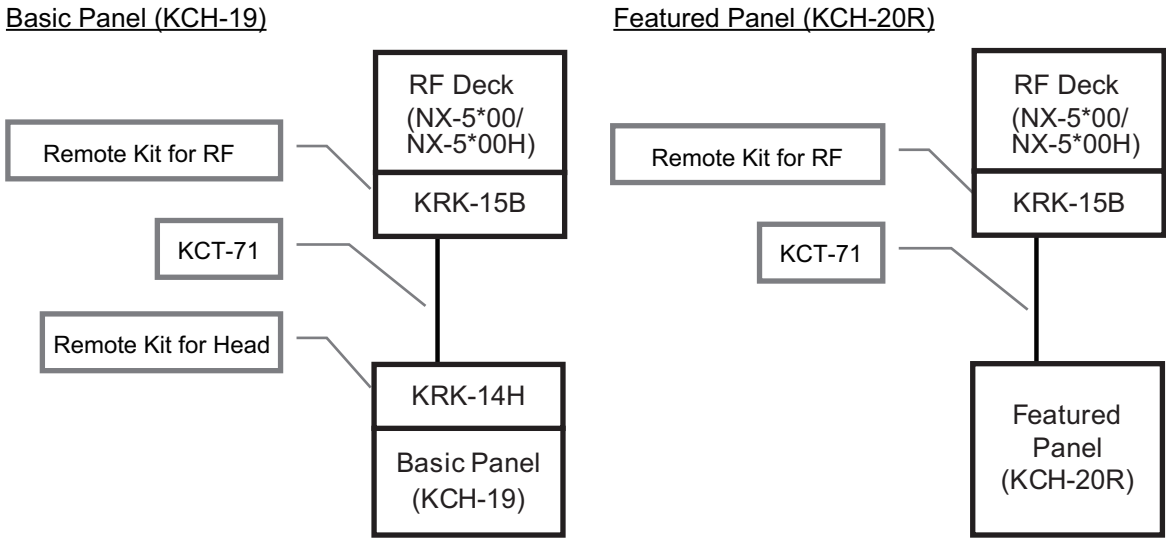


Figure 17-3 Single RF Deck/ Single Control Head

2 Write the firmware of version 1.60.00 or later to each RF Deck with the Control Heads and RF Decks connected.

The firmware is written to the Control Heads and RF Decks.

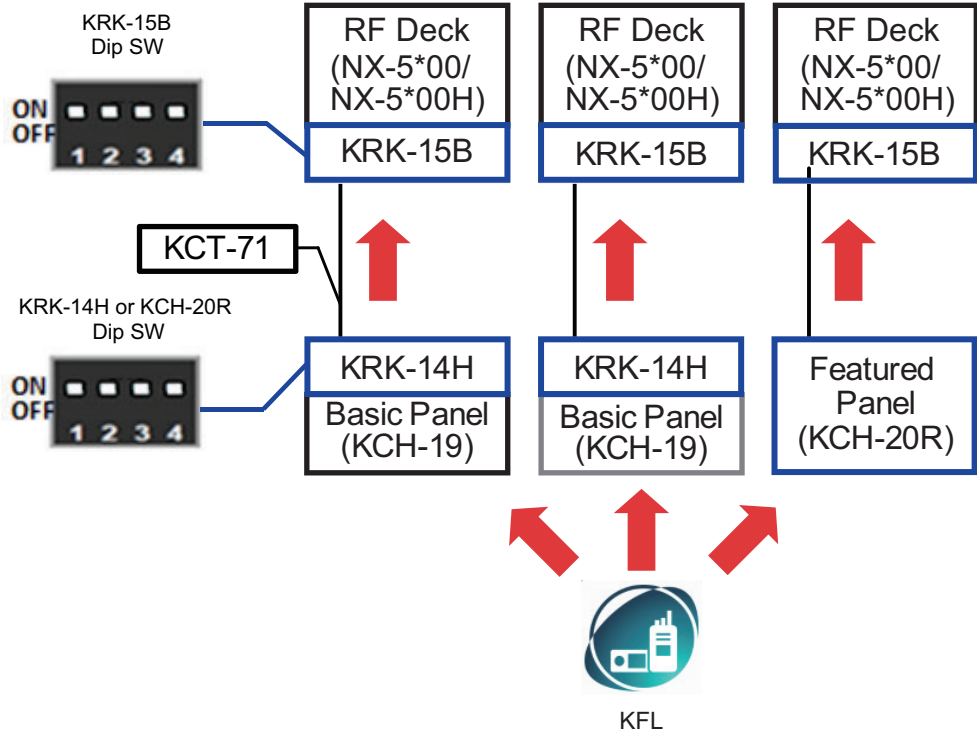


Figure 17-4 Writing the Firmware

 Note

- The firmware is written to KRK-14H and KCH-20R at the factory. If the firmware of the Control Head and the firmware of the RF Deck do not match, "FIRM MISMATCH" appears.
- Because the firmware needs to be written to each panel to make a system in a Dual Control Head structure, update the firmware by using both Control Heads.
- Once the initial configuration is done, if a system is made in a Multi RF Deck/ Multi Control Head structure, the firmware can be written to multiple RF Decks simultaneously.
- KCT-71 has parts of the following 3 lengths:
 - KCT-71M2: 17 feet (5.2 m)
 - KCT-71M3: 25 feet (7.6 m)
 - KCT-71M4: 1.6 feet (0.5 m)

Activating a Radio Feature License (KWD-5004MR)

To use the Multi RF Deck/ Multi Control Head function, a Radio Feature License (KWD-5004MR) for a Multi RF Deck needs to be activated for the transceiver by using KPT-300LMC. In the same manner as the writing of the firmware, activate the Radio Feature License for each RF Deck. The following is the operation procedure to use 3 RF Decks:

1 Make the system in a Single RF Deck/ Single Control Head structure.

2 Activate the Radio Feature License (KWD-5004MR) for each RF Deck with the Control Heads and RF Decks connected.

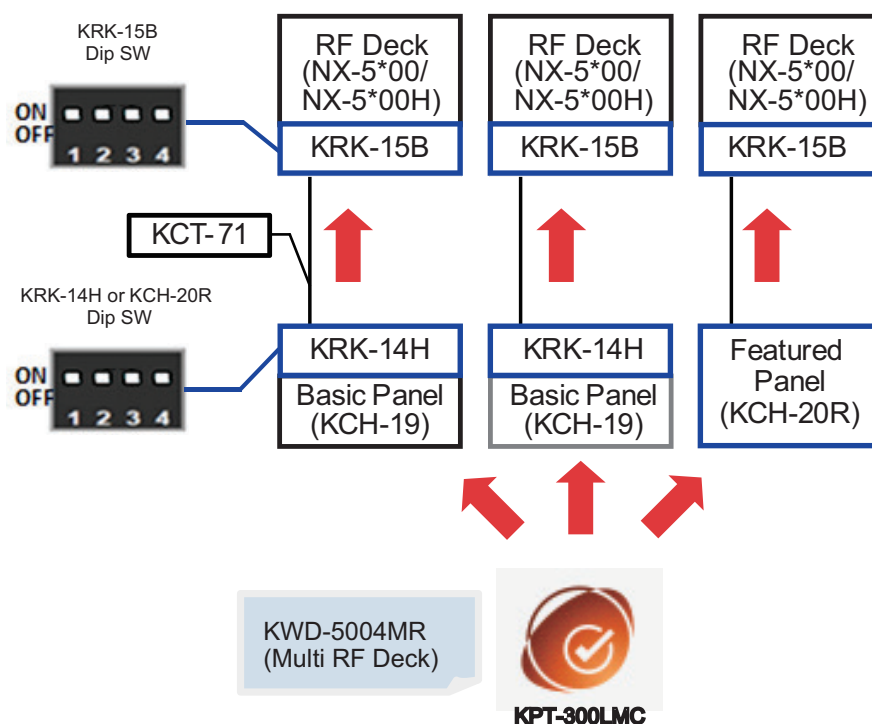


Figure 17-5 Activation of the Radio Feature License (KWD-5004MR)

- KWD-5004MR (Multi RF Deck) is activated before the factory shipment. No charge is incurred for activation.

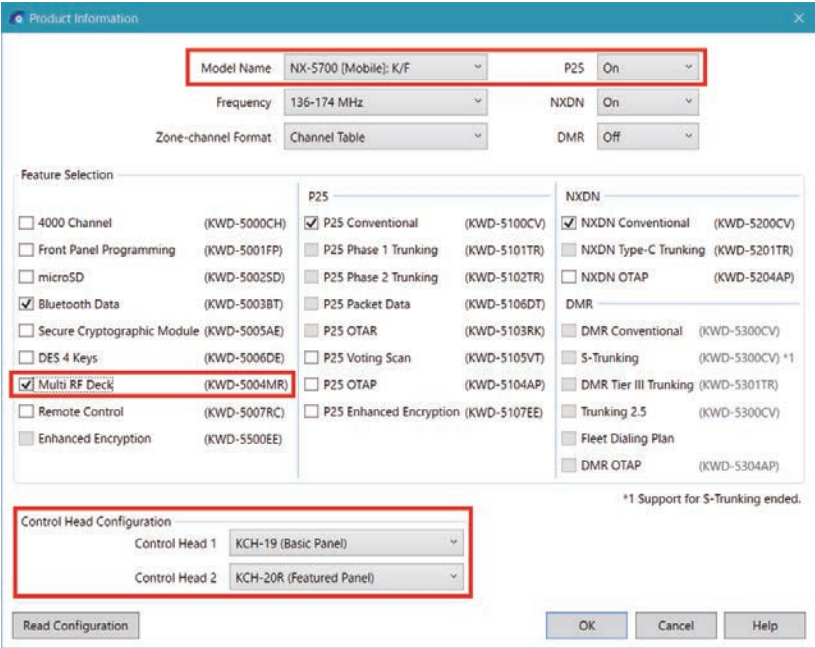


Figure 17-7 KPG-D1 > Model > Product Information

3 Configure the channel information, [Key Assignment](#), and other functions.

4 Store the created FPU data for VHF/ L-VHF.

5 With the same procedure described in step 2 to step 4, create FPU data for UHF and for 700 MHz/ 800 MHz, and store each FPU data.

6 Click the “Multi RF Deck Setup” button.

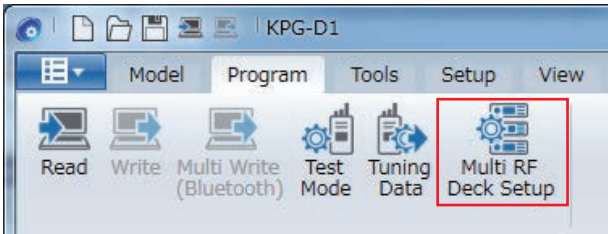


Figure 17-8 KPG-D1 > Program > Multi RF Deck Setup

7 In RF Deck Data A, RF Deck Data B, and RF Deck Data C of Multi RF Deck Setup, open all FPU data for RF Decks created beforehand by clicking the “Select File” button.

Master Operation Data is a configuration item in common in all RF Decks. The common data is reflected in the other RF Decks based on the common data of 1 RF Deck. Therefore, the inconsistency of the common data among RF Decks does not occur.

The configuration items included in the common data can be confirmed in the help texts of KPG-D1/ D1N. Select “RF Deck Data A” in Master Operation Data.

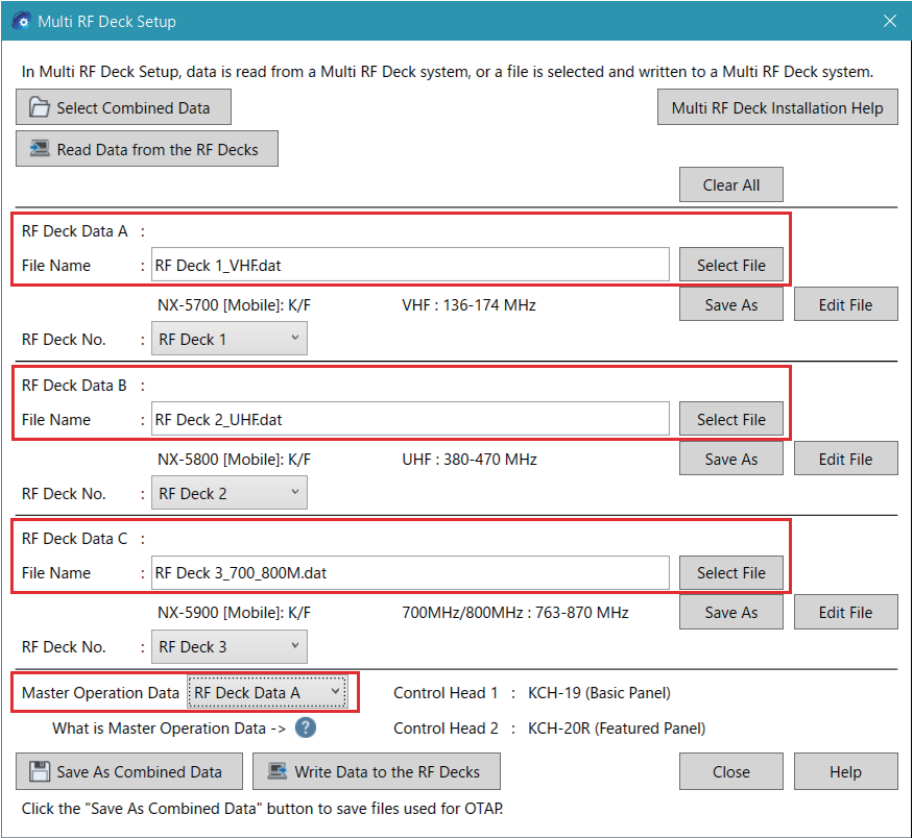


Figure 17-9 Multi RF Deck Setup

8 Open FPU data and select the common data.

The “Write Data to the RF Decks” button is activated.

9 Click the “Write Data to the RF Decks” button.

RF Deck Selection appears.

Select “RF Deck Data A”, the data for VHF/ L-VHF, from FPU Data Selection of RF Deck 1.

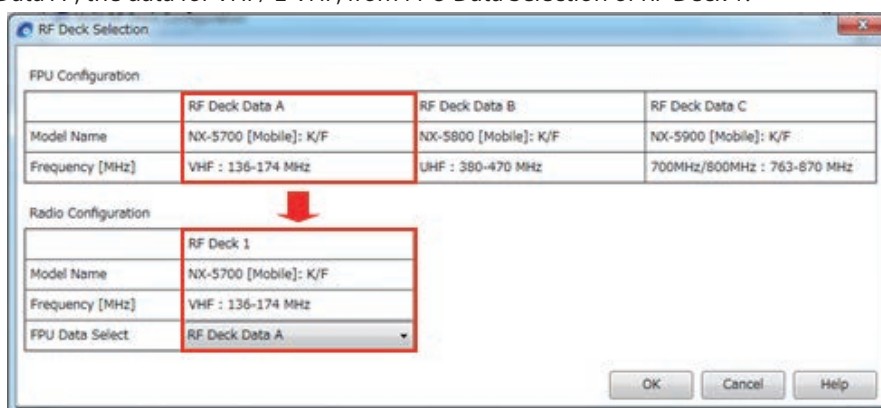


Figure 17-10 RF Deck Selection

10 Click the “OK” button in RF Deck Selection.

Write Data to the Transceiver appears and writing can be executed.

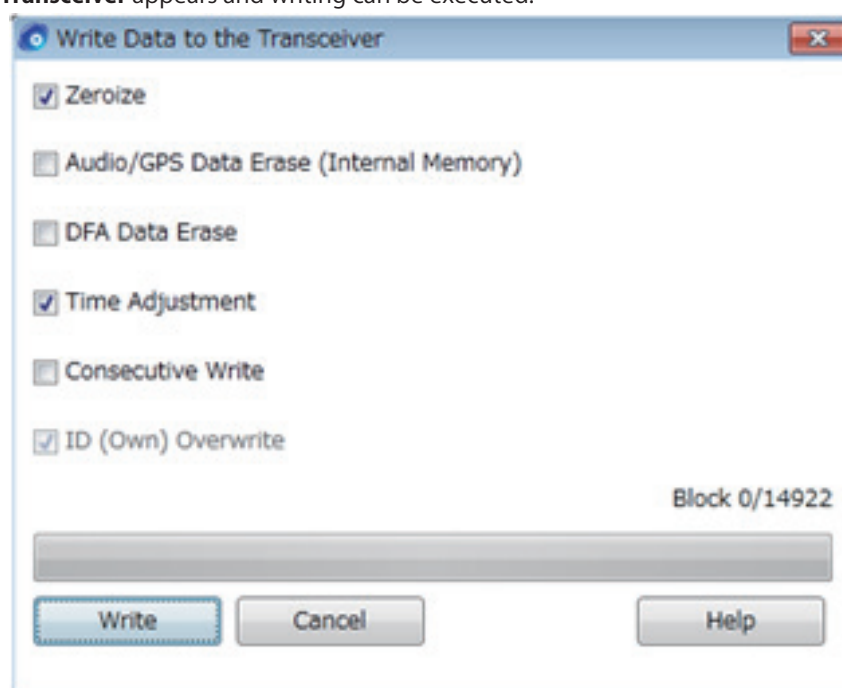


Figure 17-11 Write Data to the Transceiver

11 With the same procedure as step 8 to step 10, write FPU data for UHF to RF Deck 2 and for 700 MHz/ 800 MHz to RF Deck 3.

12 Connect all RF Decks and Control Heads, and configure the Dip switch.

The Dip switch needs to be configured to place the transceiver in the Triple RF Deck/ Dual Control Head state.

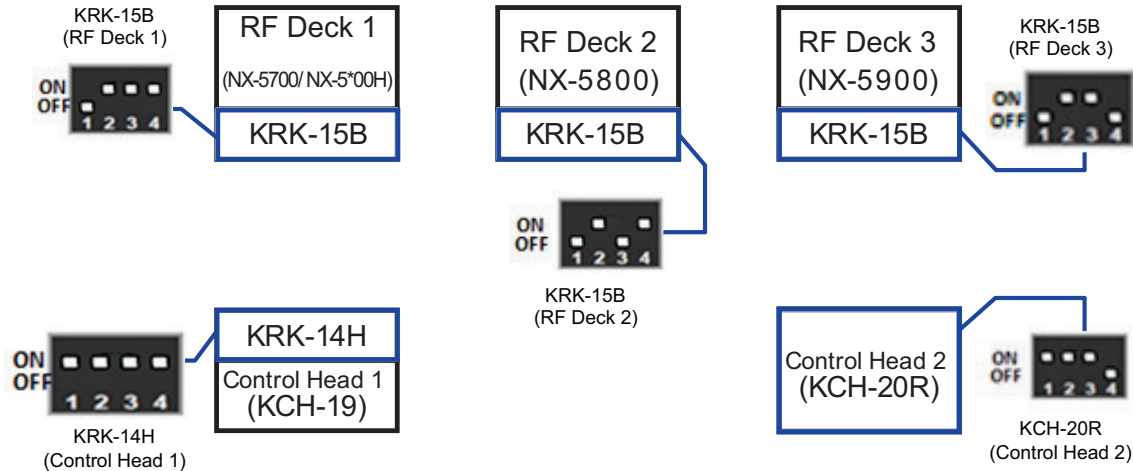


Figure 17-12 DIP Switch Configuration

13 Connect all RF Decks and Control Heads by using KCT-71.

The Control Head to be connected to RF Deck 1 is Control Head 1.
The Control Head to be connected to RF Deck 3 is Control Head 2.
No Control Head is connected to RF Deck 2.

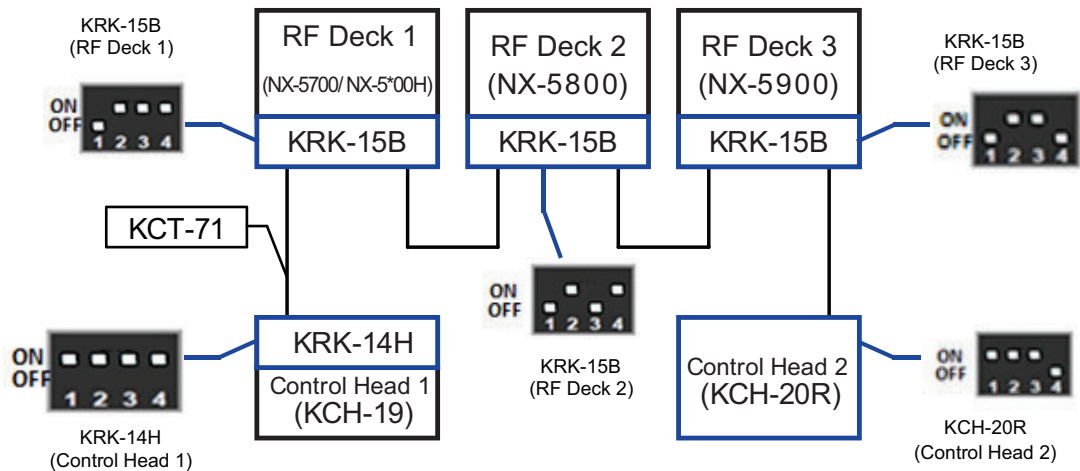


Figure 17-13 Connection of RF Decks and Control Heads

14 If “FPU MISMATCH” appears on the transceiver after connection, write each RF Deck Data to all transceivers.

- Select “RF Deck Data A”, the data for VHF/ L-VHF, from FPU Data Selection of RF Deck 1.
- Select “RF Deck Data B”, the data for UHF, from FPU Data Selection of RF Deck 2.
- Select “RF Deck Data C”, the data for 700 MHz/ 800 MHz, from FPU Data Selection of RF Deck 3.

After selection, the FPU data can be written simultaneously.

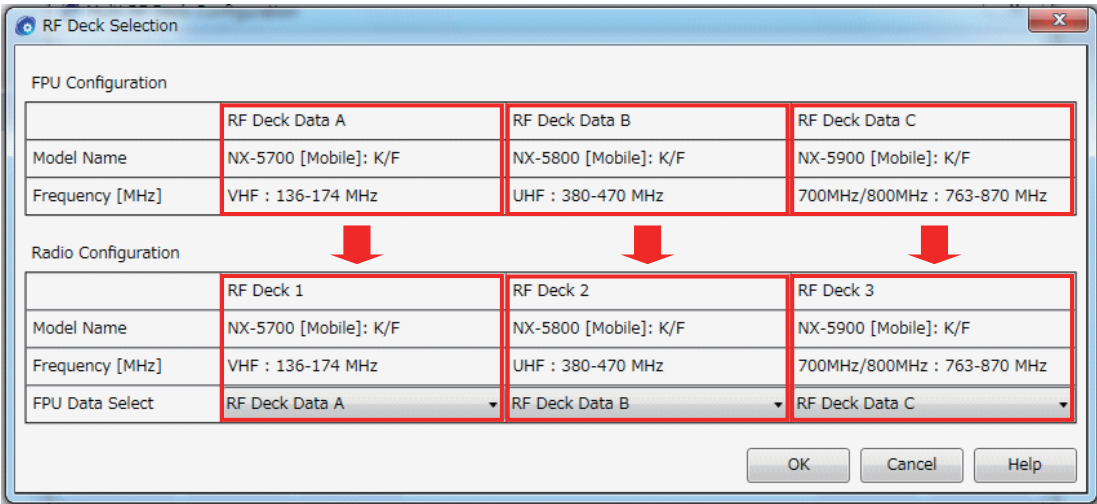


Figure 17-14 RF Deck Selection

Configuring the DIP Switch

The configuration of the DIP switch is important for making a system in a Multi RF Deck/ Multi Control Head structure behave properly. KRK-14H (Remote Kit for Head), KRK-15B (Remote Kit for RF Deck), and KCH-20R (Featured Panel) are equipped with the DIP switch. The DIP switch is the switch for managing the order of RF Decks and Control Heads connected in the system and for determining the terminal of CAN (Controller Area Network) communication. The purpose of each switch is as follows:

Table 17-1 DIP Switch

DIP Switch		KCH-20R/ KRK-14H (Control Head Side)	KRK-15B (RF Deck Side)
	SW1	Not used	For the terminal of CAN communication
	SW2	Not used	Not used
	SW3	Not used	For the numbering of RF Decks
	SW4	For the numbering of Control Heads	

The numbering of RF Decks and Control Heads by using the DIP switch is important to structuring Multi RF Deck/ Multi Control Head. If the RF Decks and Control Heads are not numbered correctly, the system may not start up properly. Number the RF Decks and Control Heads based on the following conditions, and correctly configure the DIP switch.

- The Control Head to be connected to RF Deck 1 is Control Head 1.
- The Control Head to be connected to RF Deck 3 is Control Head 2.
- No Control Head is connected to RF Deck 2.

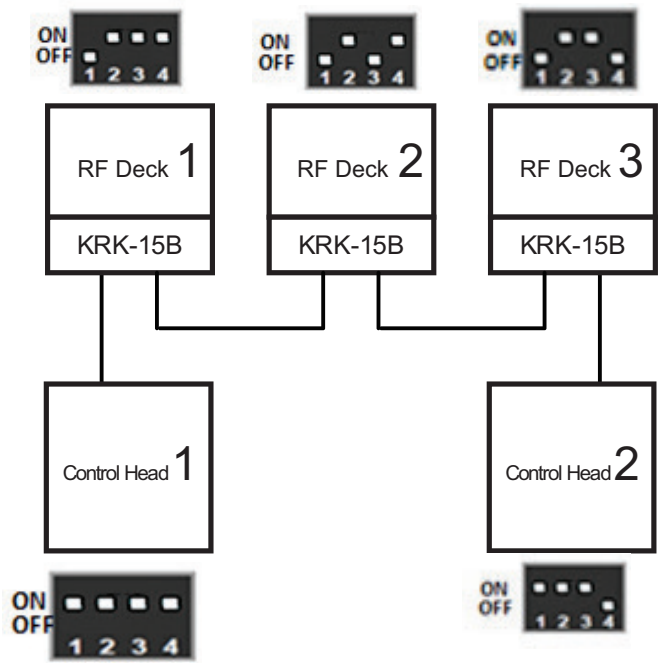


Figure 17-15 DIP Switch Configuration

Data communication of Control Heads and RF Decks occurs by using CAN. According to the High Speed CAN standards, a 120 ohm termination is required for CAN. The following figure is a block diagram of CAN communication between a Control Head and an RF Deck:

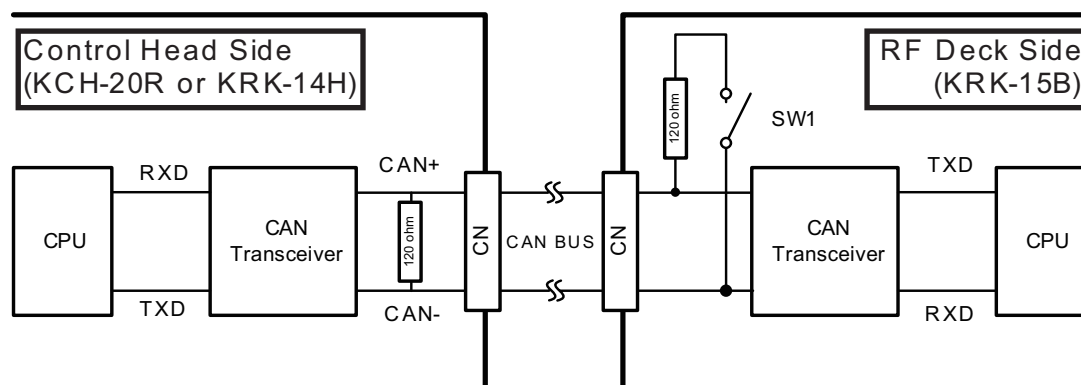


Figure 17-16 Block Diagram of CAN Communication

Because the Control Head is always the terminal, the terminal does not need to be considered if a Dual Control Head structure. If an RF Deck is the terminal, configure On the configuration of SW1 of the RF Deck. As the information to determine that an RF Deck is the terminal, if only one of the connectors to which KCT-71 implemented on KRK-15B is connected is used, the RF Deck to which the KRK-15B is connected is the terminal.

For Dual RF Deck/ Single Control Head, KRK-15B to be connected to RF Deck 2 is the terminal. For Triple RF Deck/ Single Control Head, KRK-15B to be connected to RF Deck 3 is the terminal.

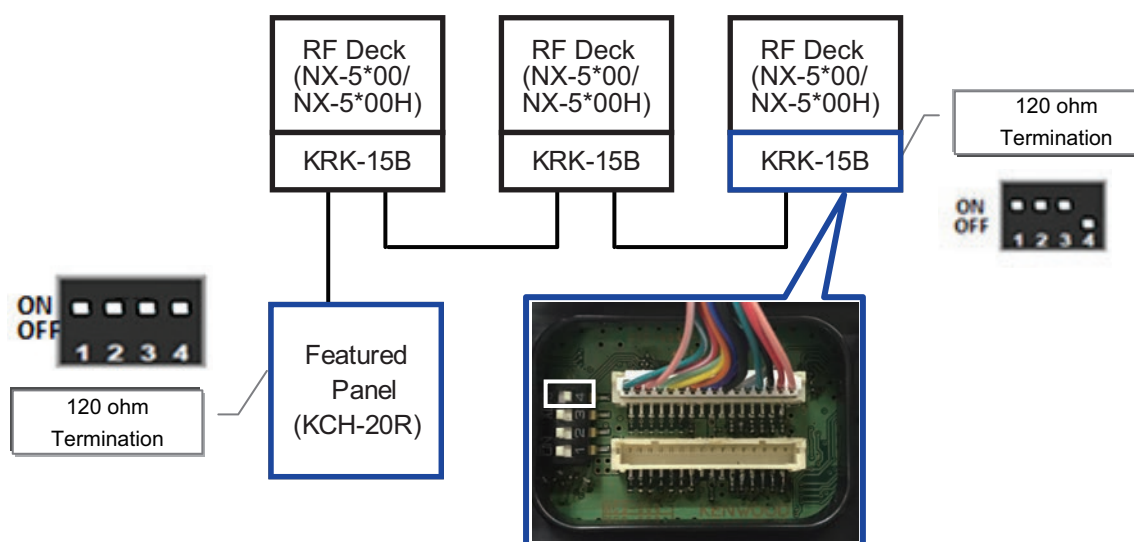


Figure 17-17 Triple RF Deck/ Single Control Head

Note

- For a Single Control Head structure, the DIP switch configuration of the Control Head needs to be the Control Head 1 configuration. If the DIP switch configuration is the Control Head 2 configuration, the system may not start up properly. For a Single Control Head structure, only Control Head 1 exists as a Head.
- For a Multi RF Deck system, the DIP switch with the RF Deck 1 configuration is always required in the system. For example, for a Dual RF Deck structure, the configurations of the DIP switches consist of the RF Deck 2 configuration and the RF Deck 3 configuration, the system may not behave properly.
- If CAN is not terminated, the LCD may not display and key operations may be disabled because the waveform of the data flowing through the CAN bus line is collapsed. To make CAN communication properly, CAN must be terminated in a 120 ohm resistor in the RF Deck configured as the terminal.

The switch status configured in each hardware structure

The following is the switch status configured in each hardware structure:

Case 1: Single RF Deck/ Single Control Head

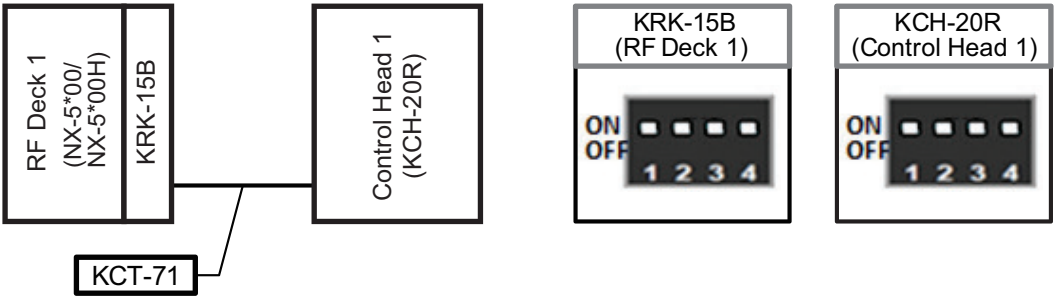


Figure 17-18 Case 1: Single RF Deck/ Single Control Head

Case 2: Single RF Deck/ Dual Control Head

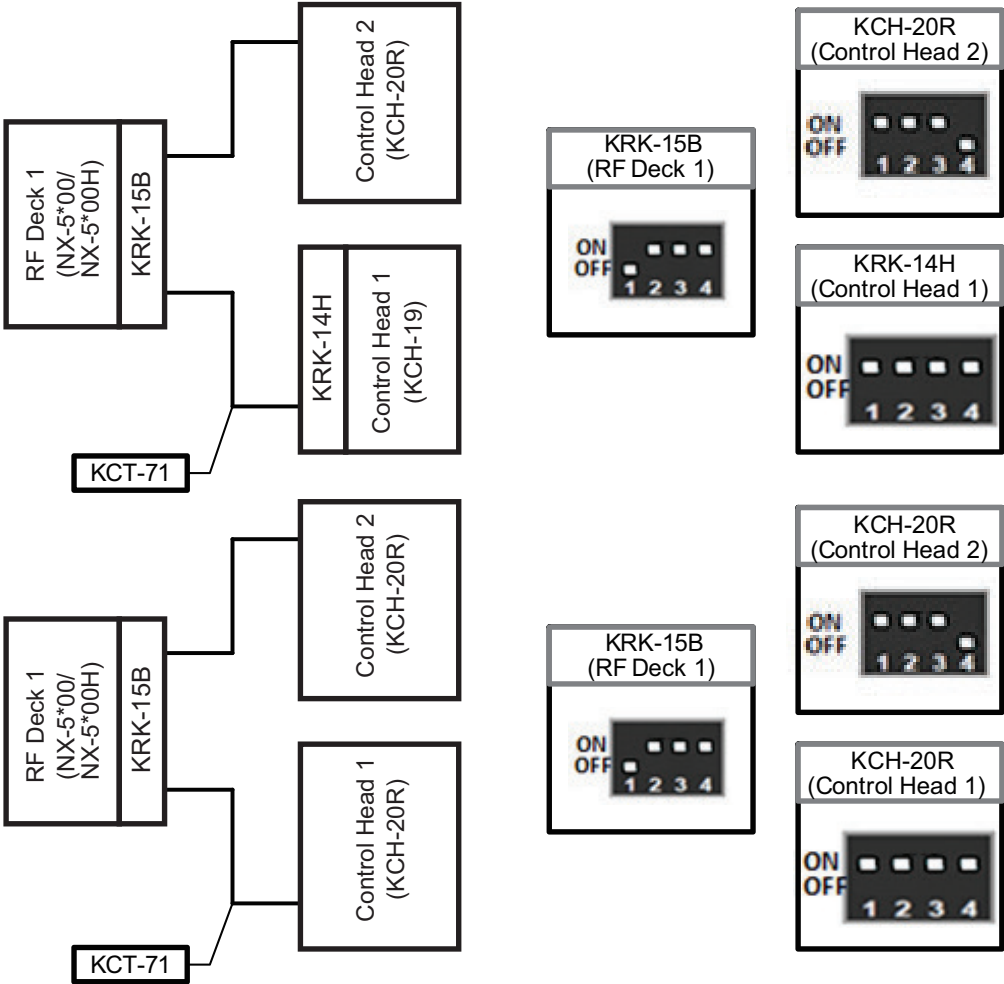


Figure 17-19 Case 2: Single RF Deck/ Dual Control Head

Case 3: Dual RF Deck/ Single Control Head

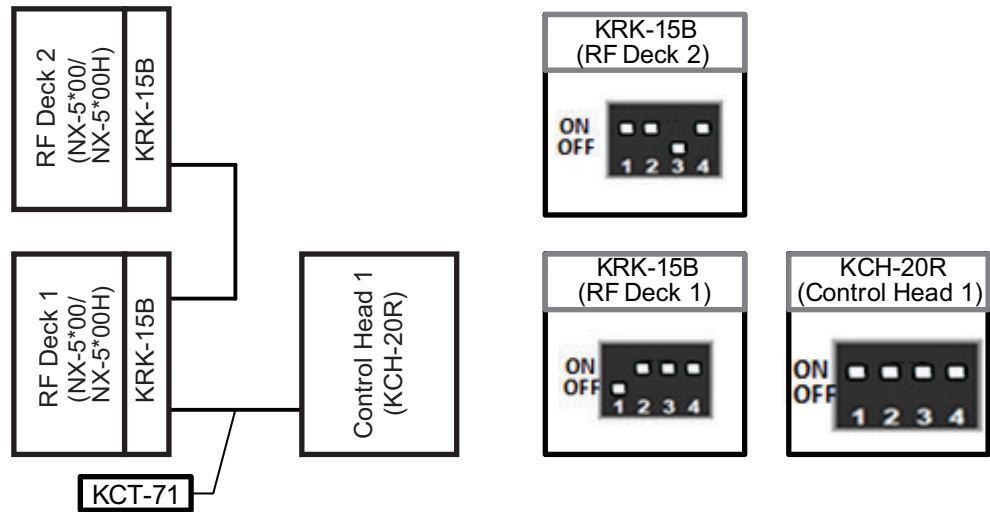


Figure 17-20 Case 3: Dual RF Deck/ Single Control Head

Case 4: Dual RF Deck/ Dual Control Head

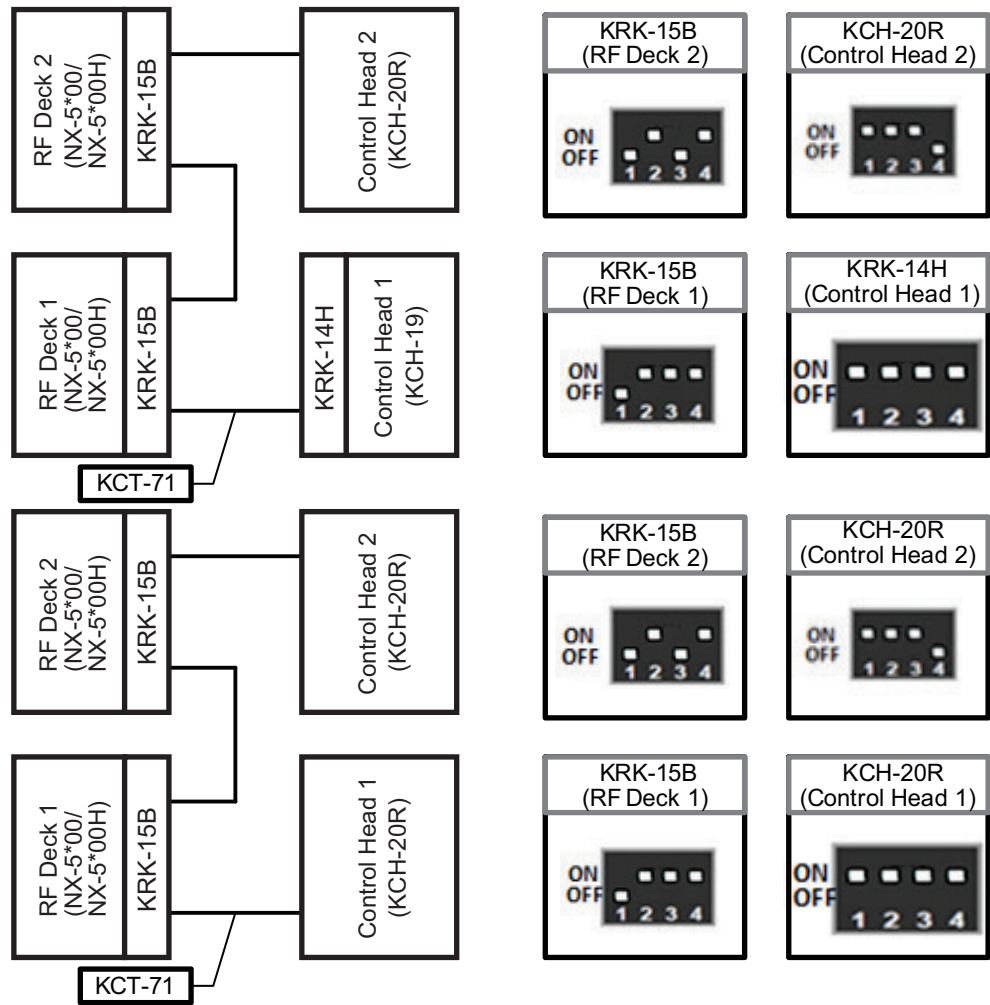


Figure 17-21 Case 4: Dual RF Deck/ Dual Control Head

Case 5: Triple RF Deck/ Single Control Head

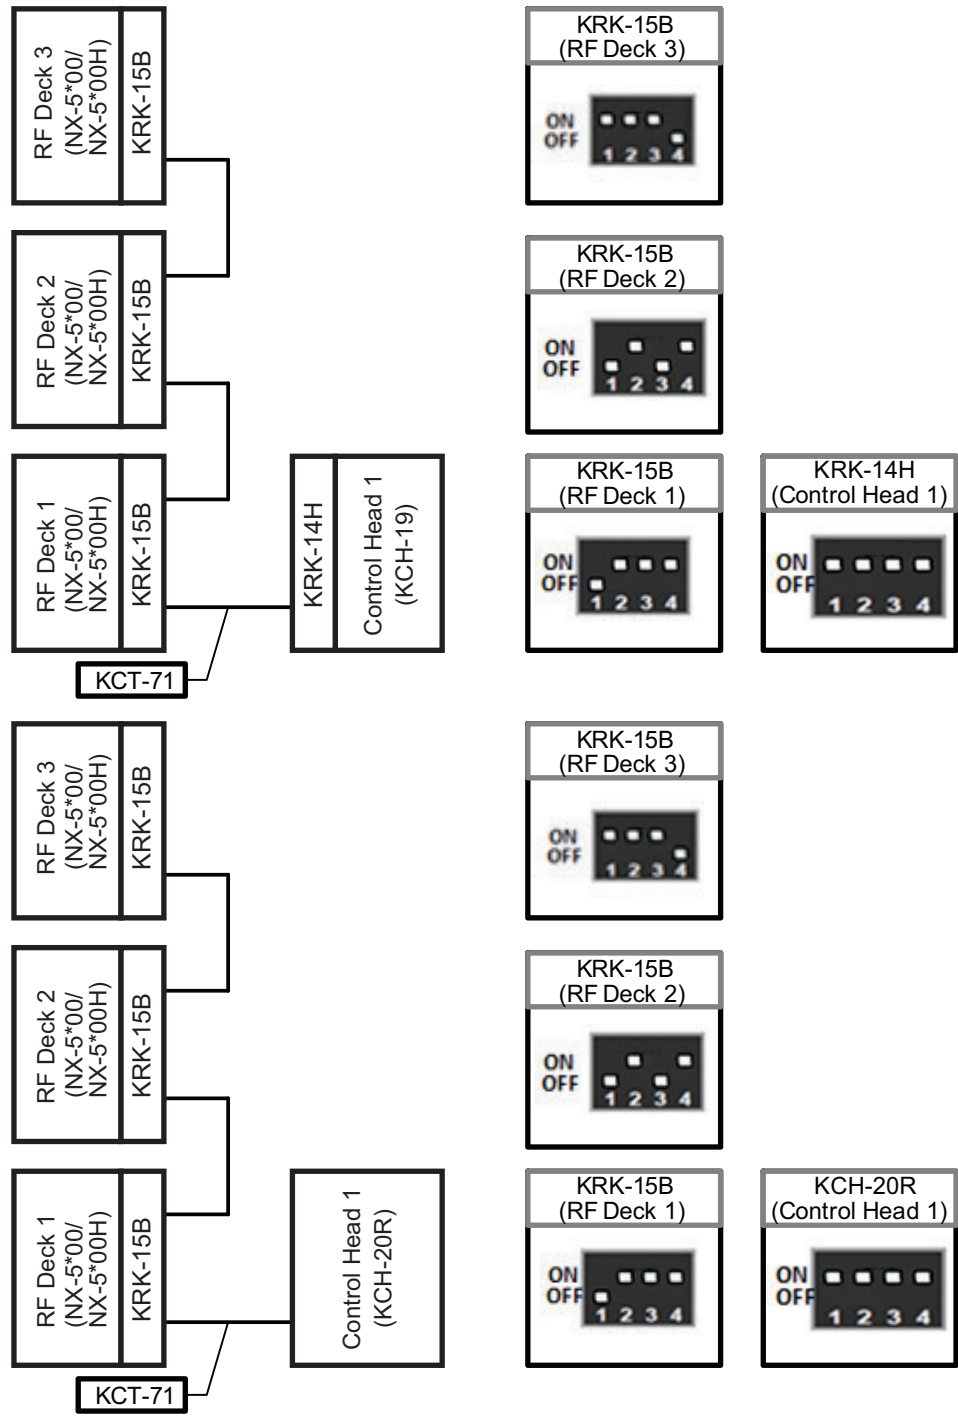


Figure 17-22 Case 5: Triple RF Deck/ Single Control Head

Case 6: Triple RF Deck/ Dual Control Head

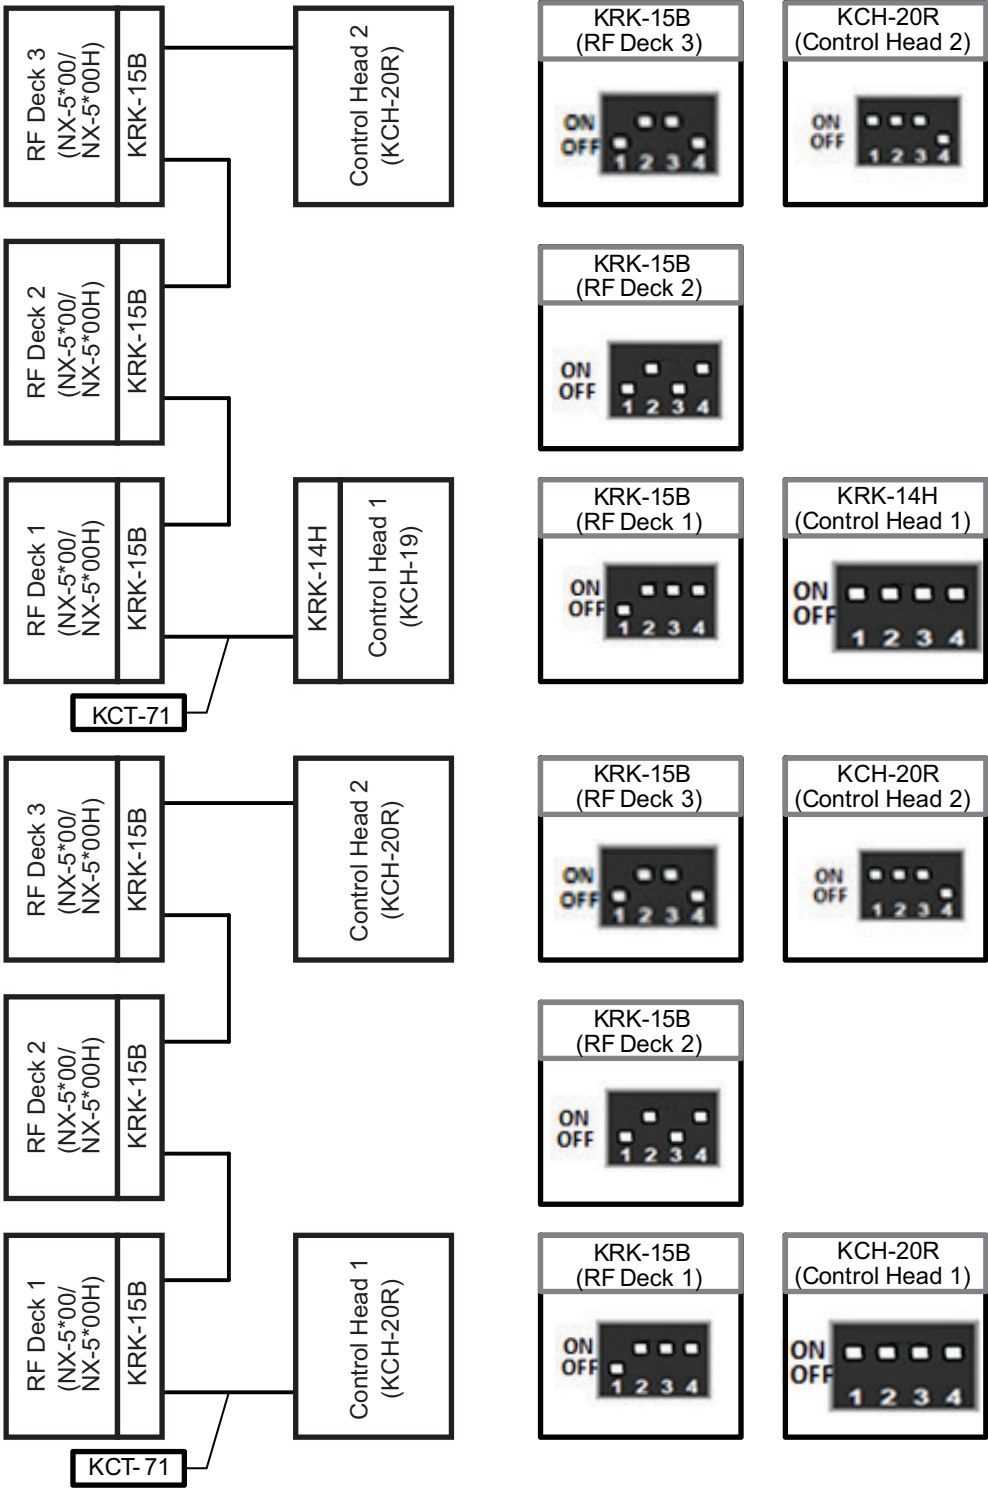


Figure 17-23 Case 6: Triple RF Deck/ Dual Control Head

17.5 Basic Operations

For the NX-5000 series (Mobile), each RF Deck can behave independently. However, as an exception, some functions behave as a Multi RF Deck/Multi Control Head structure.

In the following description of basic operations, the terms “Selected RF Deck” and “Unselected RF Deck” are used. “Selected RF Deck” indicates an RF Deck that can be operated from a Control Head in a Multi RF Deck system. Only one “Selected RF Deck” exists in a Multi RF Deck system.

Also, “Unselected RF Deck” indicates an RF Deck that cannot be operated from a Control Head.

In a Dual RF Deck structure, one “Selected RF Deck” and one “Unselected RF Deck” exist. In a Triple RF Deck structure, one “Selected RF Deck” and two “Unselected RF Deck” exist.

Operating a Control Head

In a Multi RF Deck system, a Control Head can operate the Selected RF Deck.

If the Control Head is KCH-19, the channel name of the Selected RF Deck can be displayed on the Control Head display.

If the Control Head is KCH-20R or KCH-21R, all channel names of the Multi RF Deck can be displayed on the Control Head display at the same time.

In the following figure of display examples, the orange icons indicate that RF Deck 1 is the Selected RF Deck.



Figure 17-24 Display Example on the Display

Dual Control Head

If connecting 2 Control Heads (Dual Control Head) to an RF Deck, each Control Head can operate the RF Deck. In a Multi RF Deck system, the Selected RF Deck can be operated from 2 Control Heads. For Dual Control Head, KCH-19, KCH-20R, and KCH-21R can exist together.

Note

- For Dual Control Head, basically all Control Heads display the same contents (display mirroring). However, as an exception, display mirroring may be disabled.
- For Dual Control Head, the LEDs of all Control Heads function together. The LED lights green when receiving and lights red when transmitting.
- The functions can be configured for each key for each Control Head; therefore, the display of Key Guide may differ from the key assignment.

RF Deck Select

In a Multi RF Deck system, the Selected RF Deck can be manually switched from a Control Head. The configurations of RF Decks can be changed by any of the following key operations:

1. By assigning “RF Deck 1”, “RF Deck 2”, and “RF Deck 3” to the **PF** keys, the Selected RF Deck can be switched directly.
2. By assigning “RF Deck Select” to the **PF** key, the Selected RF Deck can be switched sequentially as follows:

● **In a Triple RF Deck structure**

Pressing the **RF Deck Select** key switches the Selected RF Deck as follows:

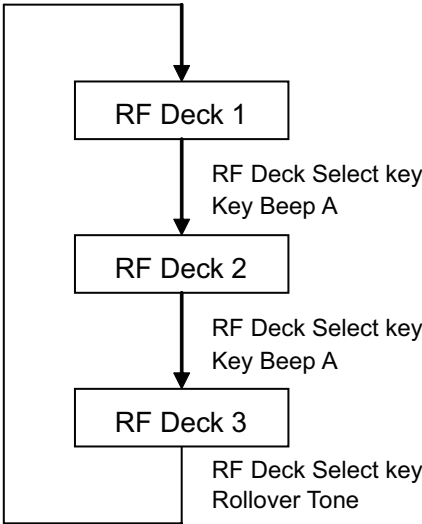


Figure 17-25 RF Deck Select (Triple RF Deck)

● **In a Dual RF Deck structure**

Pressing the **RF Deck Select** key switches the Selected RF Deck as follows:

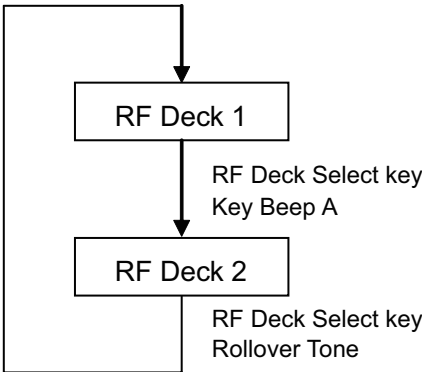


Figure 17-26 RF Deck Select (Dual RF Deck)

Note

- RF Deck 1 always becomes the Selected RF Deck after the FPU data is written.

Multi RF Deck View

For KCH-20R or KCH-21R, if **Multi RF Deck View** is enabled, the channel names of all RF Decks in a Multi RF Deck system can be displayed simultaneously on the display.

Also, if **Multi RF Deck View** is disabled, only the channel of the Selected RF Deck is displayed.

The configuration in Multi RF Deck View can be changed by any of the following key operations:

- Pressing the **Multi RF Deck View** key can toggle **Multi RF Deck View** between On and Off.
- Entering Menu Mode by pressing the **Menu** key, and then executing "Multi RF Deck View" can toggle **Multi RF Deck View** between On and Off.

The following is the display for Triple RF Deck:

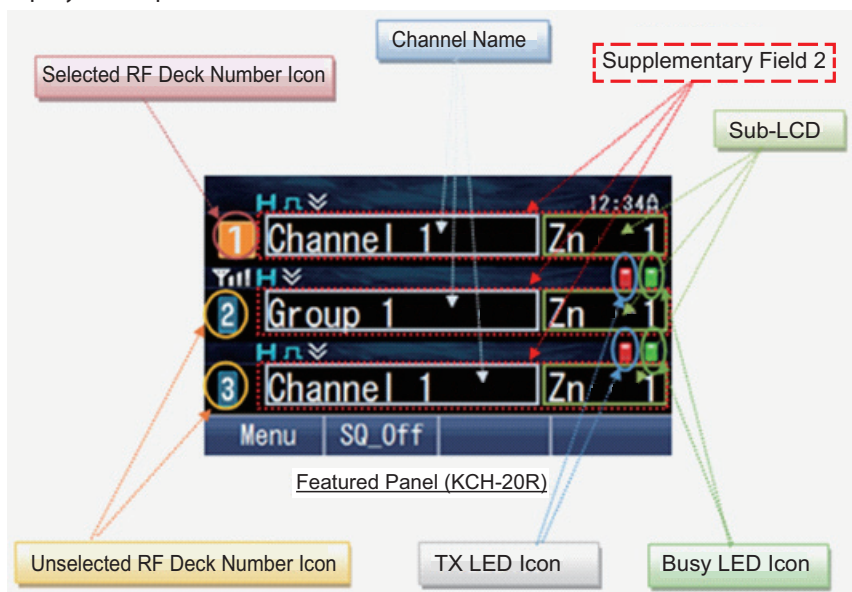


Figure 17-27 Multi Deck View (Triple RF Deck)

The following is the display for Dual RF Deck:

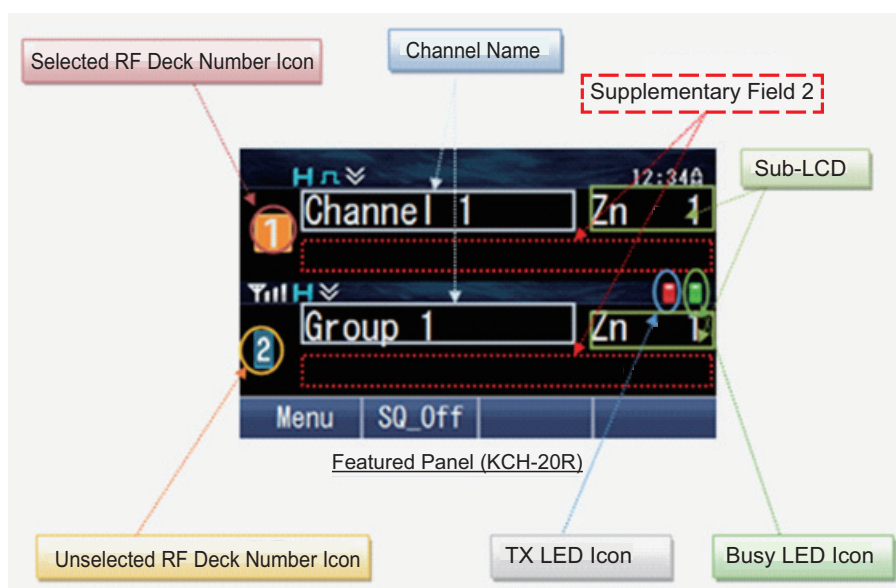


Figure 17-28 Multi Deck View (Dual RF Deck)

Receiving

If operating in a Multi RF Deck system, all RF Decks can receive simultaneously. The received audio of the Selected RF Deck is emitted from the speaker of a Control Head. Similarly, if operating in a Dual Control Head structure, the received audio of the Selected RF Deck is emitted from the speakers of both Control Heads. Additionally, if an external speaker is used, the received audio of Unselected RF Decks can be emitted. To emit the received audio from the external speaker (KES-3/ KES-5/ KES-5A) and the speakers of the Control Heads at the same time, "Internal + External" needs to be configured in **External Speaker**.

The conditions of the received audio to be emitted when connecting the external speaker to each RF Deck in a Dual RF Deck/ Dual Control Head structure are as follows:

Case 1: Received by the Selected RF Deck

The audio received by the Selected RF Deck is emitted from Control Head 1, Control Head 2, and the external speaker connected to the Selected RF Deck. Also, the LED lights green.

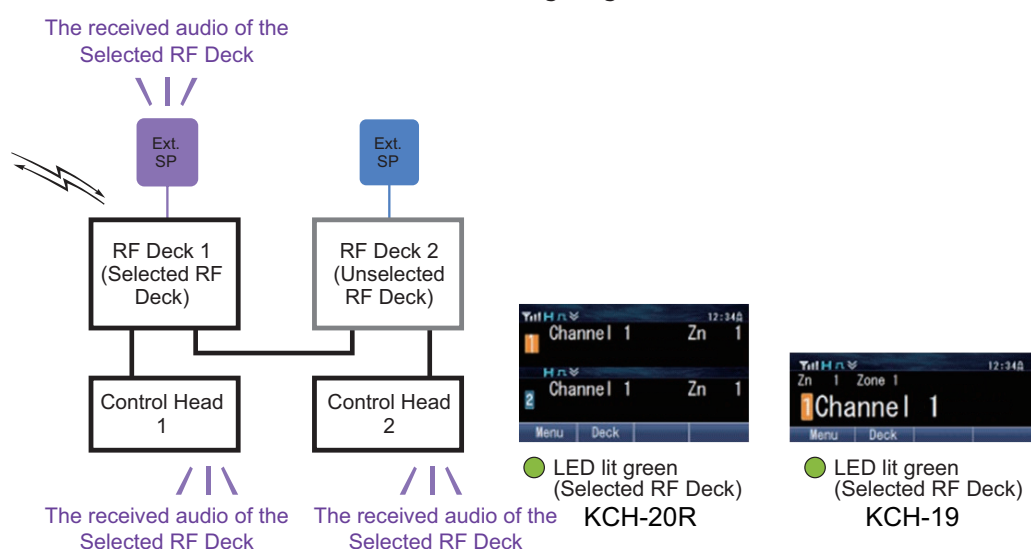


Figure 17-29 Case 1: Received by the Selected RF Deck

Case 2: Received by the Unselected RF Deck

The audio received by the Unselected RF Deck is emitted from the external speaker connected to the Unselected RF Deck. Also, if KCH-20R is used, the "BusyLED" icon appears alongside of the receiving Unselected RF Deck on the display.

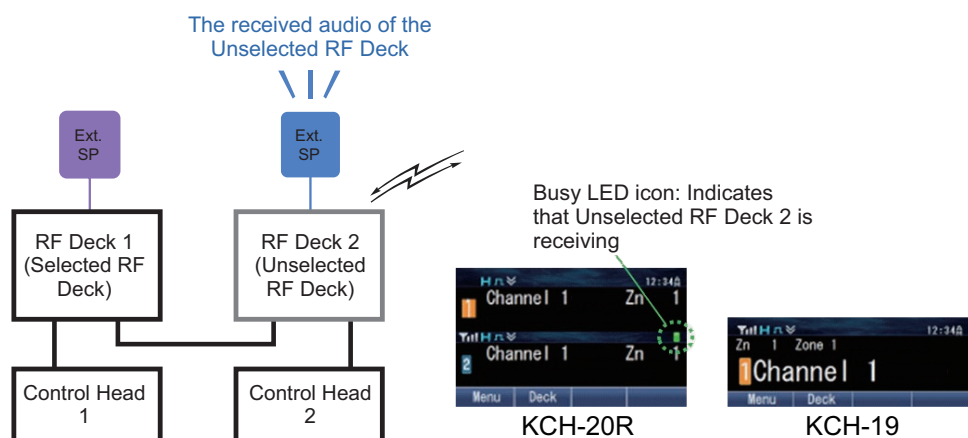


Figure 17-30 Case 2: Received by the Unselected RF Deck

Case 3: Received by the Selected RF Deck + received by the Unselected RF Deck (simultaneous reception)

The audio received by the Selected RF Deck is emitted from Control Head 1, Control Head 2, and the external speaker connected to the Selected RF Deck. Simultaneously, the audio received by the Unselected RF Deck is emitted only from the external speaker connected to the Unselected RF Deck. Also, the LED of the Selected RF Deck lights green, and the "BusyLED" icon appears alongside of the receiving Unselected RF Deck on the display of KCH-20R.

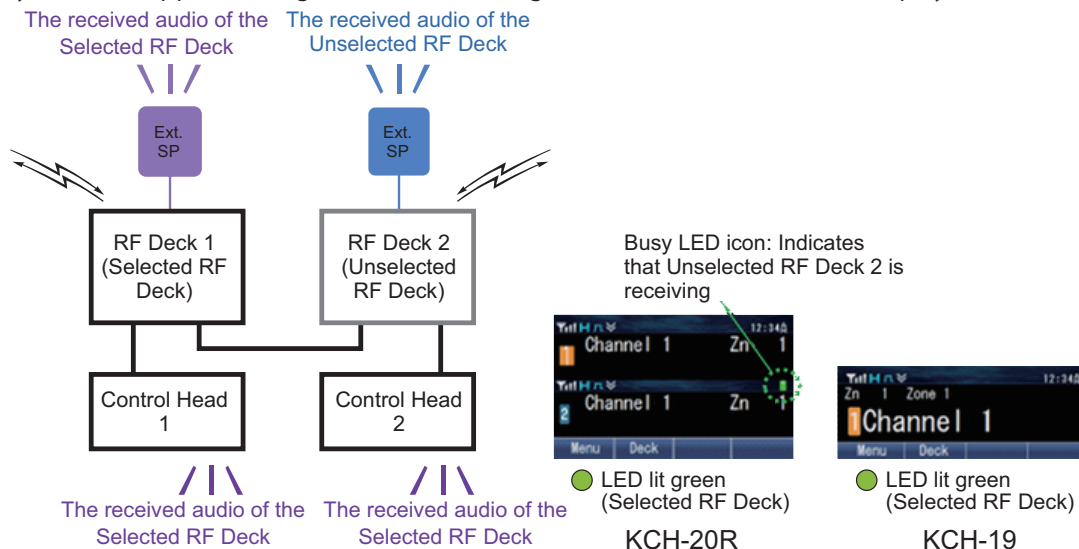


Figure 17-31 Case 3: Received by the Selected RF Deck + received by the Unselected RF Deck (simultaneous reception)

Transmitting

If operating in a Multi RF Deck system, only the Selected RF Deck transmits when the PTT is operated on a Control Head. Similarly, if operating in a Dual Control Head structure, the PTT operations of both Control Heads are enabled. Also, if the External PTT connected to a D-sub connector is operated, the connected RF Deck transmits individually.

The following are the transmission statuses assumed if the External PTT is connected to the D-sub connector of each RF Deck in a Triple RF Deck/ Dual Control Head structure:

Case 1: Transmitting by the Mic PTT of a Control Head

If transmission operation is done by the Mic PTT of Control Head 1 or Control Head 2, only the Selected RF Deck transmits. Also, the LED lights red.

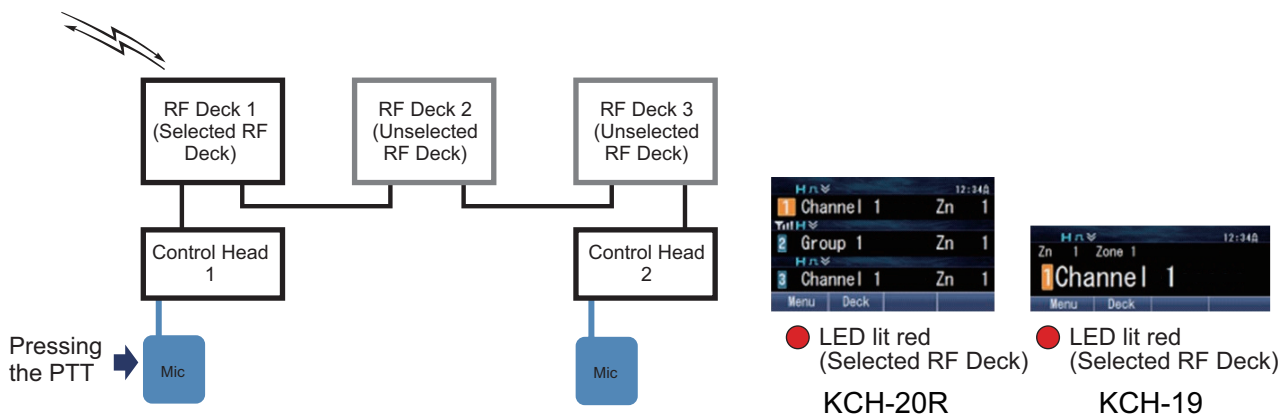


Figure 17-32 Case 1: Transmitting by the Mic PTT of a Control Head

Case 2: Transmitting by the External PTT connected to a D-sub connector

If the External PTT is connected to all RF Decks, each RF Deck transmits individually.

If the External PTT connected to the D-sub connector of the Selected RF Deck is operated, the behavior is the same as that of Case 1.

If the External PTT connected to the D-sub connector of an Unselected RF Deck is operated, the Unselected RF Deck transmits, and the "TX LED" icon appears alongside of the transmitting Unselected RF Deck on the display of KCH-20R.

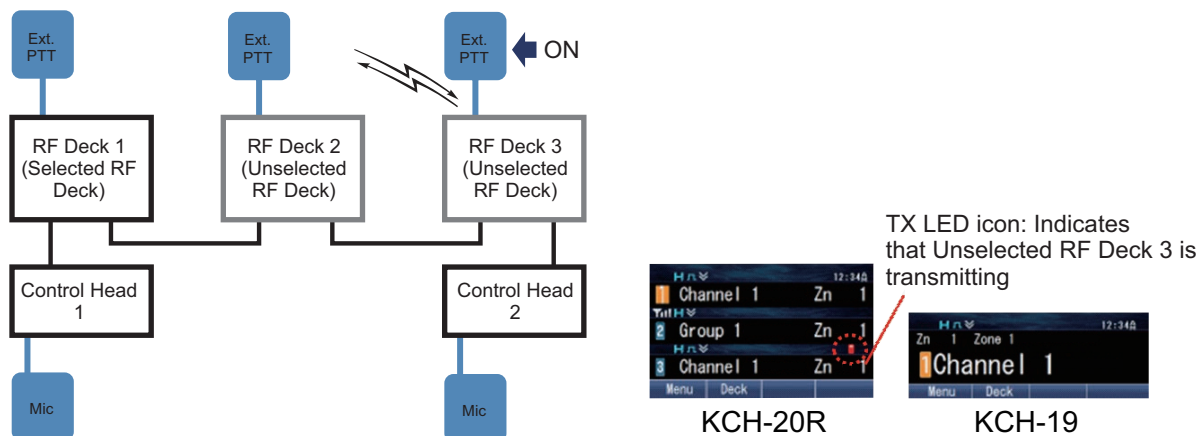


Figure 17-33 Case 2: Transmitting by the External PTT connected to a D-sub connector

17.6 Modulation Line

In a Multi RF Deck/ Multi Control Head structure, audio input by the Mic PTT, by the Ext PTT, and by Bluetooth are available for the Modulation Line. (Refer to [EXTERNAL PORTS](#).)

The following figure is the configuration screen of Modulation Line of KPG-D1/ D1N:

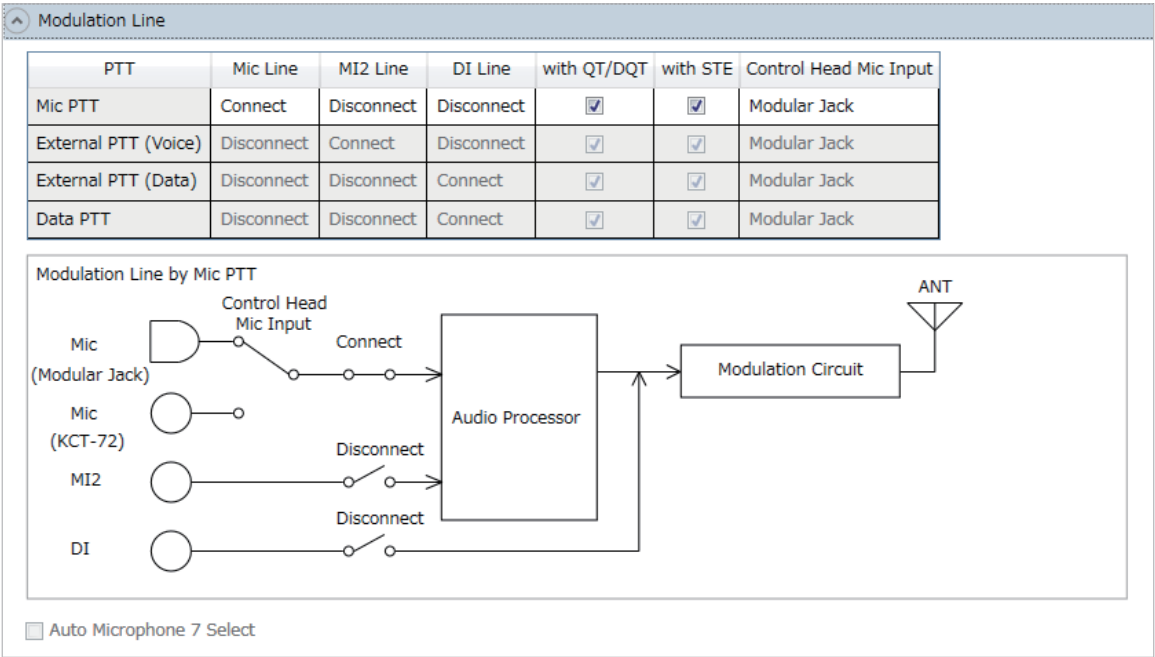


Figure 17-34 Modulation Line

Either “Modular Jack” or “KCT-72” is selected for the Mic Line of a Control Head. By using KCT-72, the connection of the External Mic (KCT-73MIC) becomes available. The Mic Input from the Modular Jack and the Mic Input from KCT-72 cannot be used at the same time.

A Control Head is equipped with a Bluetooth module. Refer to “[BLUETOOTH COMMUNICATION](#)” for the details of Bluetooth.

The following describes the Modulation Line (Mic Line) enabled when the Mic PTT, the External PTT, or the PTT of a Bluetooth headset is operated.

Configuration using KPG-D1/ D1N

Configuring **Modulation Line** (See Transceiver Settings > Extended Function > Mobile)

Case 1: Without Bluetooth

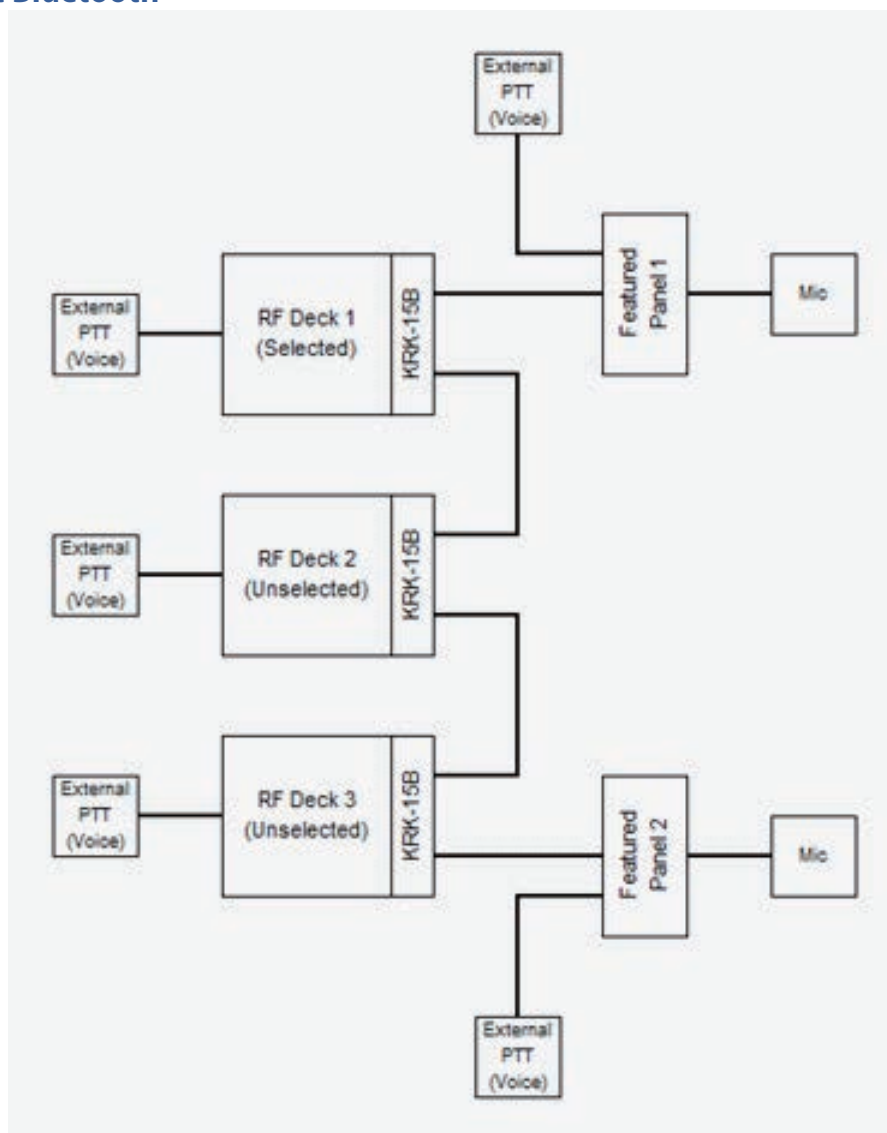


Figure 17-35 Case 1: Without Bluetooth

The Modulation Line configuration of the Mic PTT of KPG-D1/ D1N and the Mic Lines enabled when the **PTT** (microphone) switch of Control Head 1 or Control Head 2 is pressed are as follows:

Table 17-2 Mic Line (Mic PTT) (Without Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - [PTT]	None
		Control Head 2 - [PTT]	None
Connect	Disconnect	Control Head 1 - [PTT]	Control Head 1 - Mic Line
		Control Head 2 - [PTT]	Control Head 2 - Mic Line
Disconnect	Connect	Control Head 1 - [PTT]	Selected RF Deck - MI2 Line
		Control Head 2 - [PTT]	Selected RF Deck - MI2 Line
Connect	Connect	Control Head 1 - [PTT]	Control Head 1 - Mic Line Selected RF Deck - MI2 Line
		Control Head 2 - [PTT]	Control Head 2 - Mic Line Selected RF Deck - MI2 Line

The Modulation Line configuration of the External PTT (Voice) of KPG-D1/ D1N and the Mic Lines enabled when each External PTT (Voice) port (AUX Input) is operated are as follows:

Table 17-3 Mic Line (External PTT (Voice)) (Without Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	None
		Control Head 2 - The External PTT (Voice) port goes low level.	None
		Selected RF Deck - The External PTT (Voice) port goes low level.	None
		Unselected RF Deck - The External PTT (Voice) port goes low level.	None
Connect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line
		Control Head 2 - The External PTT (Voice) port goes low level.	Control Head 2 - Mic Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	None
Disconnect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Control Head 2 - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	Unselected RF Deck - MI2 Line
Connect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line Selected RF Deck - MI2 Line
		Control Head 2 - The External PTT (Voice) port goes low level.	Control Head 2 - Mic Line Selected RF Deck - MI2 Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line Selected RF Deck - MI2 Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	Unselected RF Deck - MI2 Line

Case 2: Selected RF Deck with Bluetooth

If a Bluetooth headset is connected to the Selected RF Deck, pressing the **PTT** switch of the Bluetooth headset enables the Mic Line of the Bluetooth headset regardless of the Modulation Line configuration.

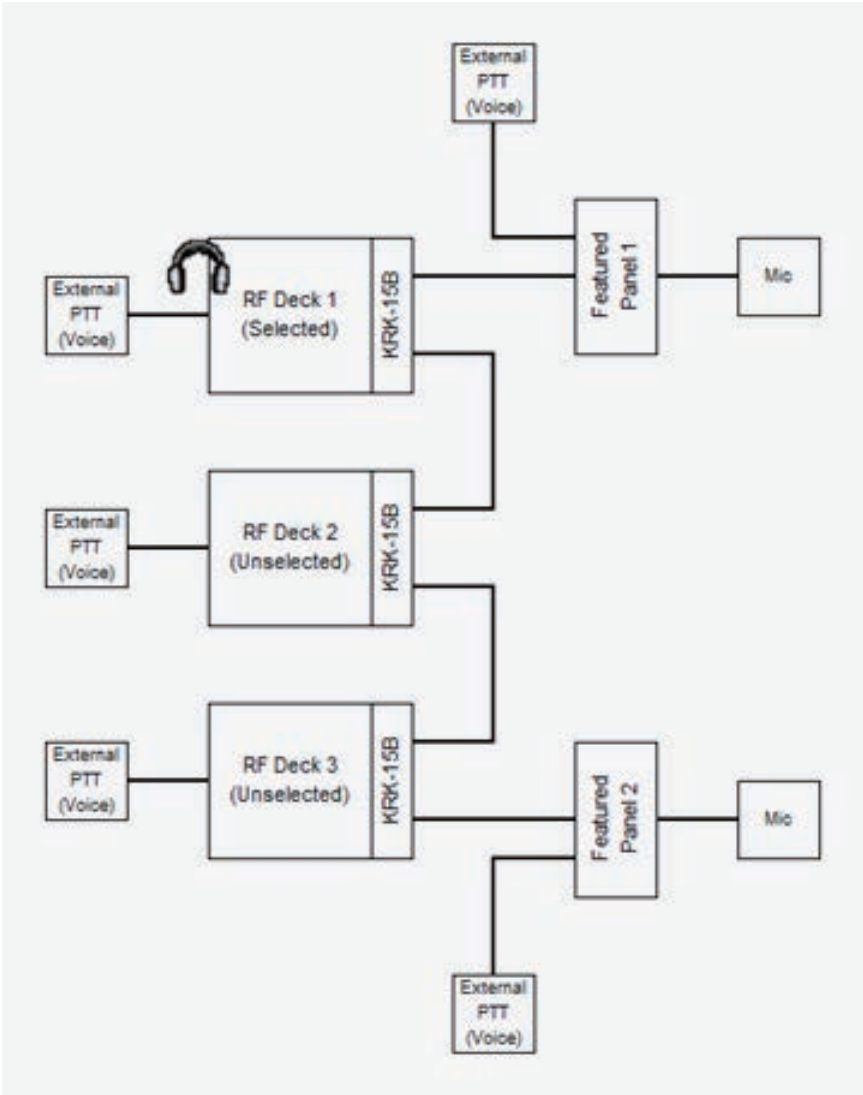


Figure 17-36 Case 2: Selected RF Deck with Bluetooth

The Modulation Line configuration of the Mic PTT of KPG-D1/ D1N and the Mic Lines enabled when the **PTT** (microphone) switch of Control Head 1 or Control Head 2 is pressed are as follows:

Table 17-4 Mic Line (Mic PTT) (Selected RF Deck with Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	The Mic Line of the Bluetooth-compatible device
Connect	Disconnect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	The Mic Line of the Bluetooth-compatible device
Disconnect	Connect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	The Mic Line of the Bluetooth-compatible device
Connect	Connect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	The Mic Line of the Bluetooth-compatible device

The Modulation Line configuration of the External PTT (Voice) of KPG-D1/ D1N and the Mic Lines enabled when each External PTT (Voice) port (AUX Input) is operated are as follows:

Table 17-5 Mic Line (External PTT (Voice)) (Selected RF Deck with Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Selected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Unselected RF Deck - The External PTT (Voice) port goes low level.	None
Connect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Selected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Unselected RF Deck - The External PTT (Voice) port goes low level.	None
Disconnect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Selected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Unselected RF Deck - The External PTT (Voice) port goes low level.	Unselected RF Deck - MI2 Line
Connect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Selected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Unselected RF Deck - The External PTT (Voice) port goes low level.	Unselected RF Deck - MI2 Line

Case 3: Unselected RF Deck with Bluetooth

If a Bluetooth headset is connected to an Unselected RF Deck, pressing the **PTT** switch of the Bluetooth headset enables the Mic Line of the Bluetooth headset regardless of the Modulation Line configuration.

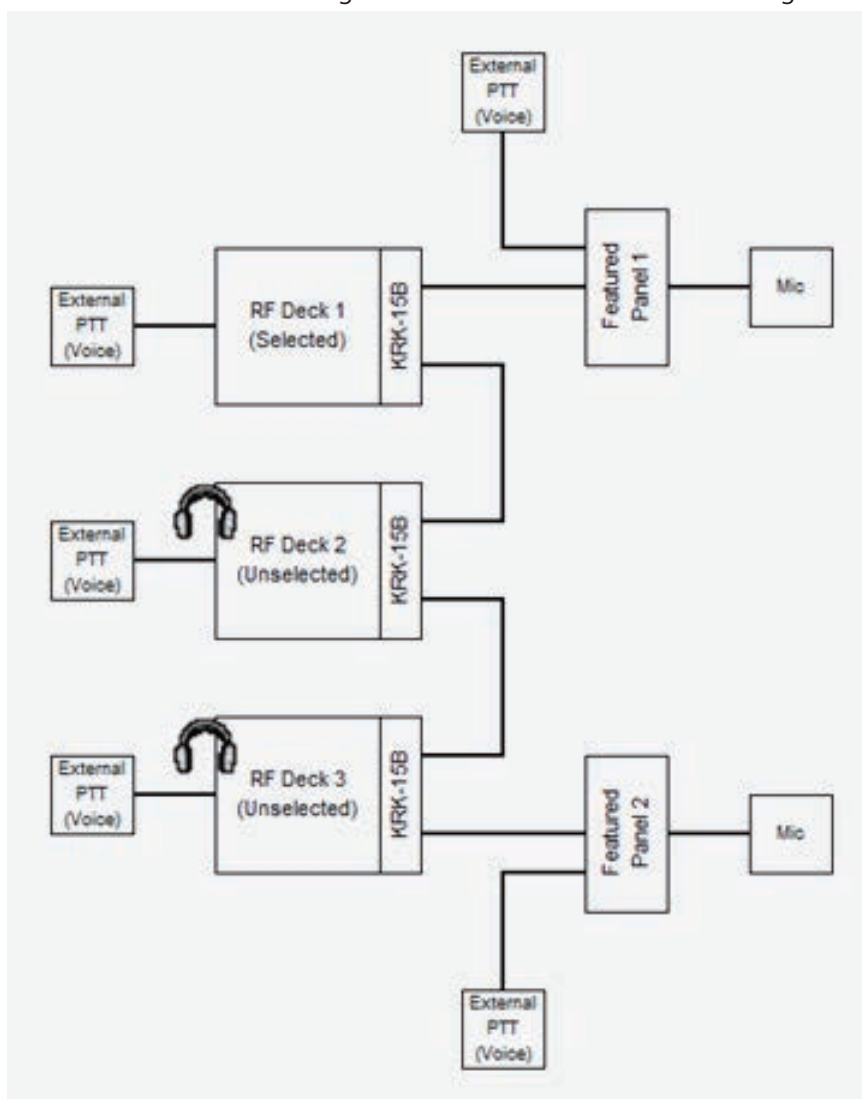


Figure 17-37 Case 3: Unselected RF Deck with Bluetooth

The Modulation Line configuration of the Mic PTT of KPG-D1/ D1N and the Mic Lines enabled when the **PTT** (microphone) switch of Control Head 1 or Control Head 2 is pressed are as follows:

Table 17-6 Mic Line (Mic PTT) (Unselected RF Deck with Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - [PTT]	None
		Control Head 2 - [PTT]	None
Connect	Disconnect	Control Head 1 - [PTT]	Control Head 1 - Mic Line
		Control Head 2 - [PTT]	Control Head 2 - Mic Line
Disconnect	Connect	Control Head 1 - [PTT]	Selected RF Deck - MI2 Line
		Control Head 2 - [PTT]	Selected RF Deck - MI2 Line
Connect	Connect	Control Head 1 - [PTT]	Control Head 1 - Mic Line Selected RF Deck - MI2 Line
		Control Head 2 - [PTT]	Control Head 2 - Mic Line Selected RF Deck - MI2 Line

The Modulation Line configuration of the External PTT (Voice) of KPG-D1/ D1N and the Mic Lines enabled when each External PTT (Voice) port (AUX Input) is operated are as follows:

Table 17-7 Mic Line (External PTT (Voice)) (Unselected RF Deck with Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	None
		Control Head 2 - The External PTT (Voice) port goes low level.	None
		Selected RF Deck - The External PTT (Voice) port goes low level.	None
		Unselected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
Connect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line
		Control Head 2 - The External PTT (Voice) port goes low level.	Control Head 2 - Mic Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
Disconnect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Control Head 2 - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
Connect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line Selected RF Deck - MI2 Line
		Control Head 2 - The External PTT (Voice) port goes low level.	Control Head 2 - Mic Line Selected RF Deck - MI2 Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Control Head 1 - Mic Line Selected RF Deck - MI2 Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device

Case 4: Featured Panel with Bluetooth

If a Bluetooth headset is connected to Featured Panel 1, pressing the **PTT** switch of the Bluetooth headset enables the Mic Line of the Bluetooth headset regardless of the Modulation Line configuration.

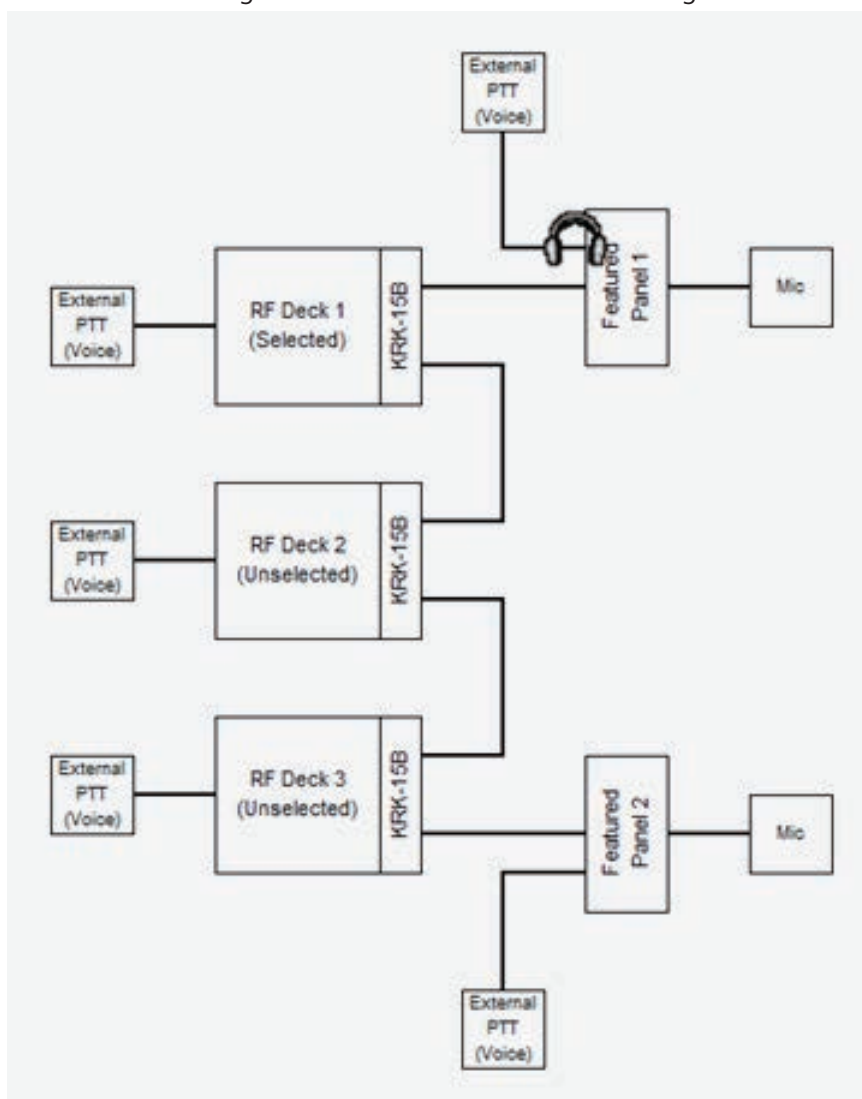


Figure 17-38 Case 4: Featured Panel with Bluetooth

The Modulation Line configuration of the Mic PTT of KPG-D1/ D1N and the Mic Lines enabled when the **PTT** (microphone) switch of Control Head 1 or Control Head 2 is pressed are as follows:

Table 17-8 Mic Line (Mic PTT) (Featured Panel with Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	None
Connect	Disconnect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	Control Head 2 - Mic Line
Disconnect	Connect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	Selected RF Deck - MI2 Line
Connect	Connect	Control Head 1 - [PTT]	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - [PTT]	Control Head 2 - Mic Line Selected RF Deck - MI2 Line

The Modulation Line configuration of the External PTT (Voice) of KPG-D1/ D1N and the Mic Lines enabled when each External PTT (Voice) port (AUX Input) is operated are as follows:

Table 17-9 Mic Line (External PTT (Voice)) (Featured Panel with Bluetooth)

Modulation Line Setting		Operation	Mic Input
Mic Line	MI2 Line		
Disconnect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	None
		Selected RF Deck - The External PTT (Voice) port goes low level.	None
		Unselected RF Deck - The External PTT (Voice) port goes low level.	None
Connect	Disconnect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	Control Head 2 - Mic Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Unselected RF Deck - The External PTT (Voice) port goes low level.	None
Disconnect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	Selected RF Deck - MI2 Line
		Unselected RF Deck - The External PTT (Voice) port goes low level.	Unselected RF Deck - MI2 Line
Connect	Connect	Control Head 1 - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Control Head 2 - The External PTT (Voice) port goes low level.	Control Head 2 - Mic Line Selected RF Deck - MI2 Line
		Selected RF Deck - The External PTT (Voice) port goes low level.	The Mic Line of the Bluetooth-compatible device
		Unselected RF Deck - The External PTT (Voice) port goes low level.	Unselected RF Deck - MI2 Line

17.7 Audio Function

This section describes the audio function available in a Multi RF Deck/ Multi Control Head structure.

Specifying a Control Head for Controlling the Volume (Master Volume Control)

Master Volume Control is the function to specify a Control Head for controlling the volume of an RF Deck. If the volume level of the Control Head specified in **Master Volume Control** is changed, the volume levels of all RF Decks are changed to the same volume level of the Control Head together.

If the volume level of a Control Head not configured in **Master Volume Control** is changed, only the volume level of the operated Control Head is changed, and the volume levels of RF Decks are not changed.

The configuration in **Master Volume Control** can be changed by any of the following key operations:

1. The configuration in **Master Volume Control** is toggled every time the **Master Volume Control** key is pressed.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Master Volume Control" can toggle the configuration in **Master Volume Control**.

The behavior if "Control Head 1" is configured in Master Volume Control

If the volume level of Control Head 1 is changed to 20, the volume levels of Control Head 1, RF Deck 1, and RF Deck 2 are changed to 20. If the volume level of Control Head 2 not configured in **Master Volume Control** is changed, only the volume level of Control Head 2 is changed.

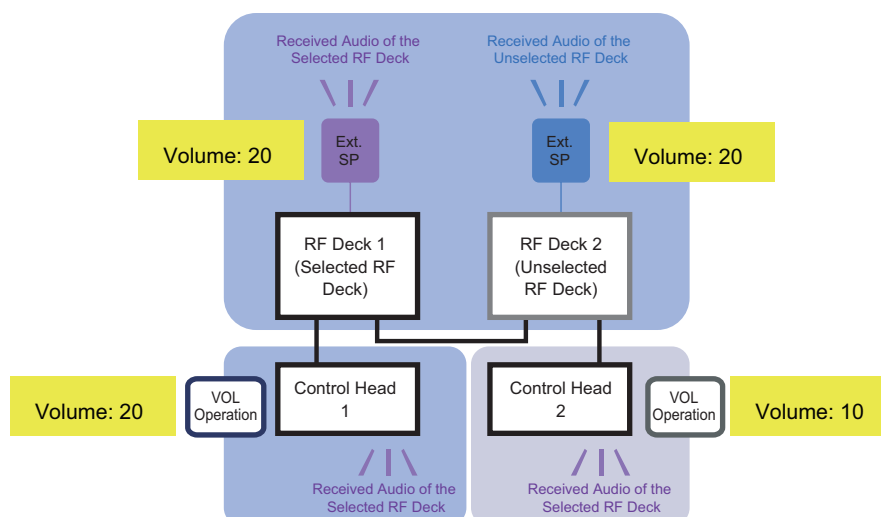


Figure 17-39 Master Volume Control = Control Head 1

Note

- If a PC command for changing the volume is received from a D-sub 25-pin connector by using KAS-10, etc., only the volume of the RF Deck to which the D-sub 25-pin connector is connected is changed. Both the Selected RF Deck and the Unselected RF Deck behave the same way.
- If the volume level of each RF Deck is different, when the volume of the Control Head configured in Master Volume Control is changed, the volume of the Control Head applies to the volume levels of all RF Decks.
- The volume of an RF Deck is controlled by the D/A Converter equipped in the RF Deck. Also, the volume of a Control Head is controlled by the CODEC IC equipped in KCH-20R/ KRK-14H. In this way, the volume level of a Control Head not configured in Master Volume Control can be changed individually.

Configuration using KPG-D1/ D1N

Configuring **Master Volume Control** (See Transceiver Settings > Optional Features > Optional Features 1 > Others)

Switching the Output Status of the External Speaker (Unselected RF Deck Speaker)

Unselected RF Deck Speaker is the function to switch the output status of the external speaker connected to the Unselected RF Deck between Mute and Unmute. This function is used such as to listen to only the received audio of the Selected RF Deck if the Selected RF Deck and Unselected RF Deck receive simultaneously.

One of the following key operations can switch the Unmute/ Mute status of the external speaker connected to the Unselected RF Deck:

1. Pressing the **Unselected RF Deck Speaker** key switches the Unmute/ Mute status in **Unselected RF Deck Speaker**.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Unselected RF Deck Speaker" can switch the Unmute/ Mute status of the external speaker connected to the Unselected RF Deck.

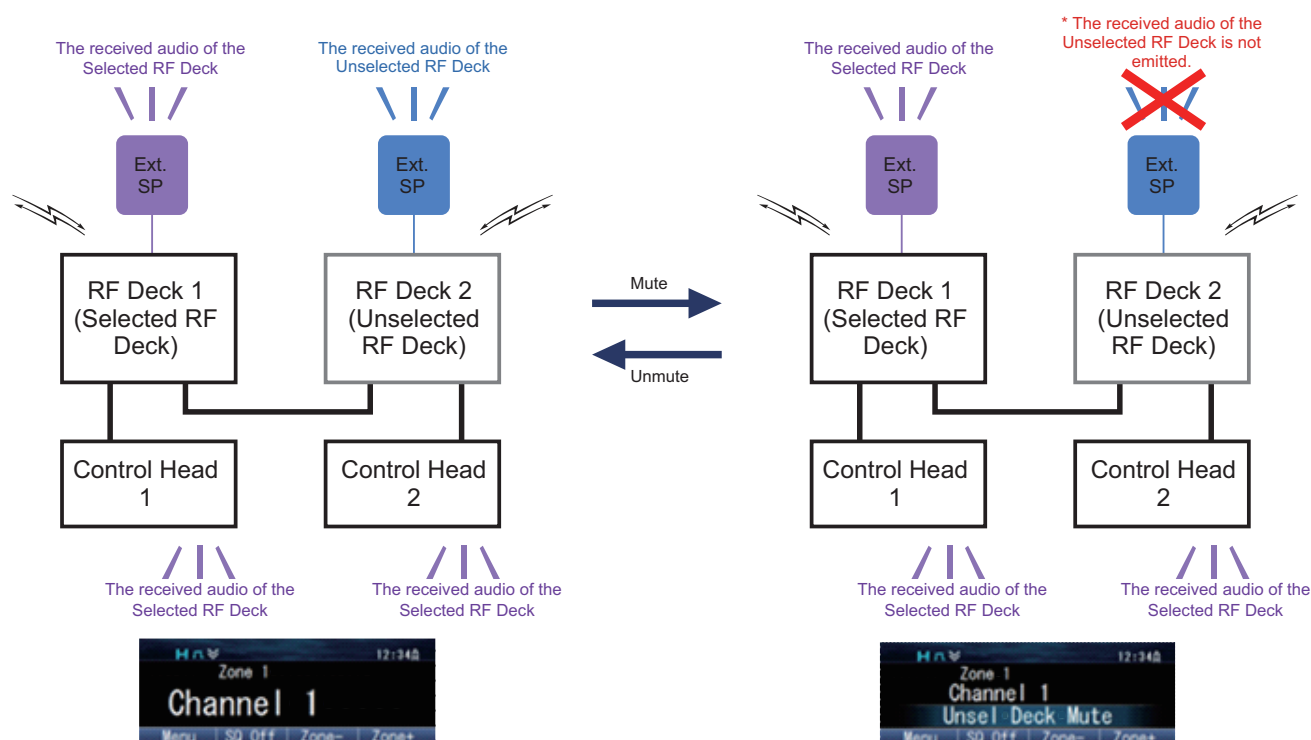


Figure 17-40 Unselected RF Deck Speaker

Configuration using KPG-D1/ D1N

Configuring **Unselected RF Deck Speaker** (See Transceiver Settings > Optional Features > Optional Features 1 > Others)

Adjusting the Output Level of the External Speaker (Unselected Speaker Offset)

Unselected Speaker Offset is the function to lower the output level of the external speaker connected to the Unselected RF Deck. This function is used to improve the audio of the Selected RF Deck.

Entering Menu Mode by pressing the **Menu** key, and then executing “Unselected Speaker Offset” can switch the offset value (0 dB, -3 dB, -9 dB) of the audio output level of the external speaker connected to the Unselected RF Deck.

- 0 dB is the same output level as the output level of the Selected RF Deck.
- -3 dB is output level 3 dB lower than the output level of the Selected RF Deck.
- -9 dB is output level 9 dB lower than the output level of the Selected RF Deck.

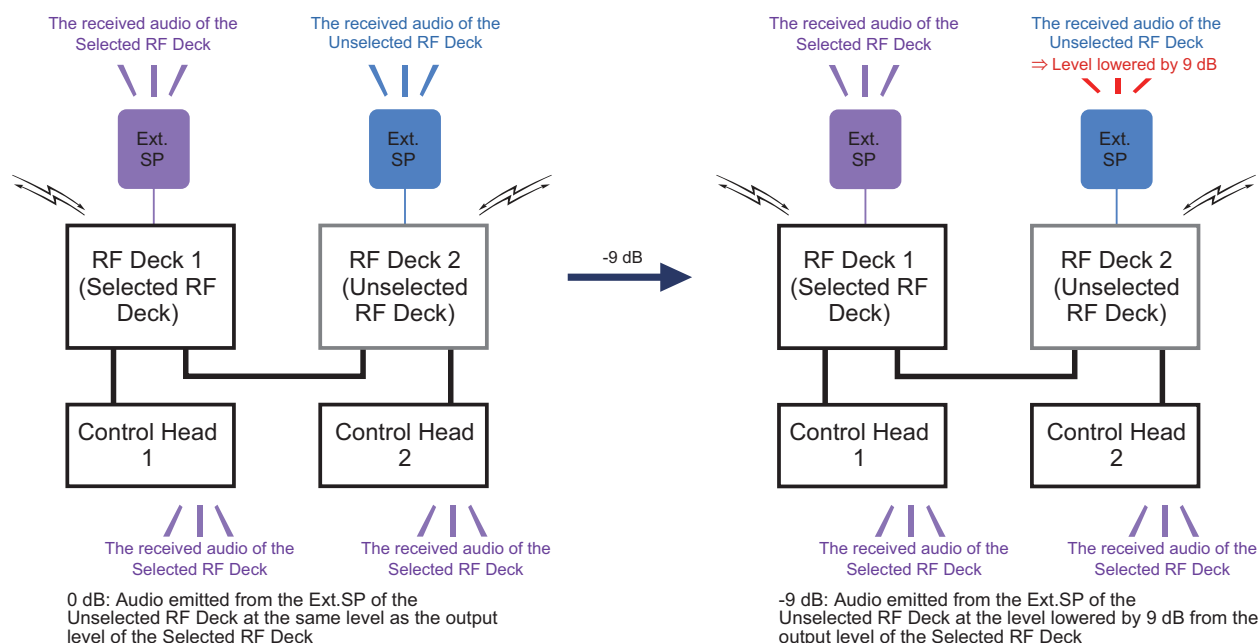


Figure 17-41 Unselected RF Deck Speaker Offset

Note

- If a PC command for changing the volume is received from a D-sub 25-pin connector, the volume of the RF Deck to which the D-sub 25-pin connector is connected is changed regardless of whether the RF Deck is the Selected RF Deck or not, but the offset configuration continues to be applied.
- If a device is connected to the Unselected RF Deck by using a Bluetooth connection, the volume offset of the device with the Bluetooth connection is not applied.

Configuration using KPG-D1/ D1N

Configuring **Unselected Speaker Offset** (See Transceiver Settings > Optional Features > Optional Features 1 > Others)

Communicating Directly Between Control Heads (Intercom)

Intercom is the function to directly communicate (simplex communication) between Control Head 1 and Control Head 2 with a wired connection. The function is for Dual Control Head. This function is used as means of contact between 2 Control Heads when the Control Heads are at remote locations.

Pressing the **PTT** switch of a Control Head when **Intercom** is on emits the audio from the speaker of the other Control Head.

Intercom can be toggled between on and off by any of the following key operations:

1. Pressing the **Intercom** key toggles Intercom between on and off.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Intercom" can toggle **Intercom** between on and off.

Note

- The audio input to a Control Head is returned on KRK-15B via KCT-71, and is emitted from the other Control Head. Therefore, only the Mic Line is available as the Modulation Line when **Intercom** is used, and the audio is not input from MI2 of the D-sub 25-pin connector.
- If audio is received when **Intercom** is on, the received audio is emitted from Control Head 1 and Control Head 2. The received audio is also emitted from the external speaker connected to each RF Deck.
- **Intercom** turns off if a Zone-channel is changed, the Selected RF Deck is switched, or scanning is toggled between on and off when **Intercom** is on.
- If audio is received while communicating by using **Intercom**, the **Intercom** behavior is prioritized, and the received audio is not emitted from the speakers of Control Head 1 and Control Head 2. Also, the received audio is not emitted from the external speaker connected to the Selected RF Deck.
- If audio is received while communicating by using **Intercom**, the receipt of audio can be confirmed with the lighting of the LED.
- When **Intercom** is on, various commands such as Radio Inhibit/Uninhibit, Radio Check, Remote Monitor (Radio Monitor), and Stun are accepted as usual.
- KCH-20R is not equipped with any speakers. Therefore, if KCH-20R is used, KES-5 or KES-5A needs to be connected via KCT-72.
- In a DMR-based Trunking system, **Intercom** is disabled at the reception of a call if the transceiver receives a call using a traffic channel, such as an Individual Call, Group Call, Broadcast Call, or Telephone Call. However, **Intercom** is not disabled if a Data Call is received.

Procedure of the Intercom behavior

1

Pressing the **Intercom** key on Control Head 1 or Control Head 2.

Intercom turns on and the transceiver enters Intercom Mode. At this time, voice communication is not initiated. When in Intercom Mode, the “” icon lights on the display and “Intercom” appears.

2

Press the **PTT** switch when in Intercom Mode.

The transceiver enters the functioning Intercom status and initiates voice communication between Control Head 1 and Control Head 2. The audio of the Control Head of the **PTT** switch that is pressed first is prioritized and sounds from the other Control Head. “Intercom” blinks only on the display of the receiving party while Intercom is functioning.

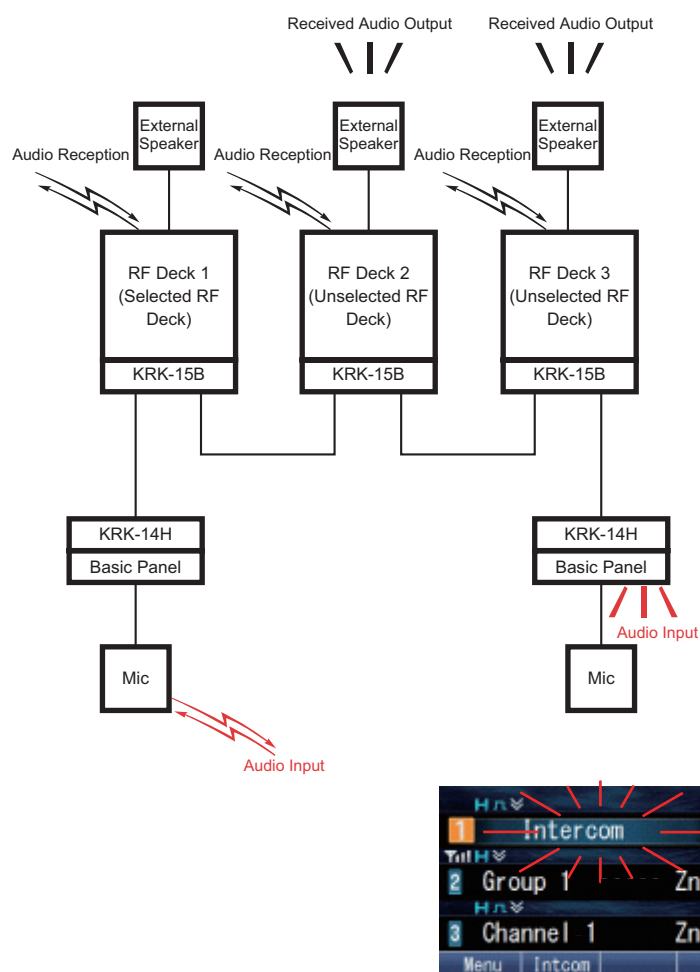


Figure 17-42 Intercom

Monitoring the Communications of Control Heads (Transmit Audio Monitor)

Transmit Audio Monitor is the function to monitor the audio of the transmitting Control Head by the speaker of the other Control Head when transmitting on the connected Control Head 1 and Control Head 2. The function is for Dual Control Head. The conversation can be heard even if the 2 Control Heads are at remote locations. Also, by using the Talk Interrupt function, one Control Head can send notifications such as a request for stopping transmission to the other transmitting Control Head by voice, and the Talk Interrupt function can be used for transmission during an emergency. Also, the voice communication can be monitored by the external speaker connected to the Selected RF Deck.

The transceiver behaves as follows according to the configuration in **Transmit Audio Monitor** (Disable, w/o Talk Interrupt, w Talk Interrupt):

- **Disable**

This configuration value is the default configuration value, and basically the behavior is the same as the behavior of normal transmission. The audio of the transmitting Control Head cannot be monitored by the other Control Head when transmitting.

- w/o Talk Interrupt

The audio of the transmitting Control Head can be monitored by the other Control Head when transmitting. The displays of both Control Head 1 and Control Head 2 are in the normal state while transmitting.

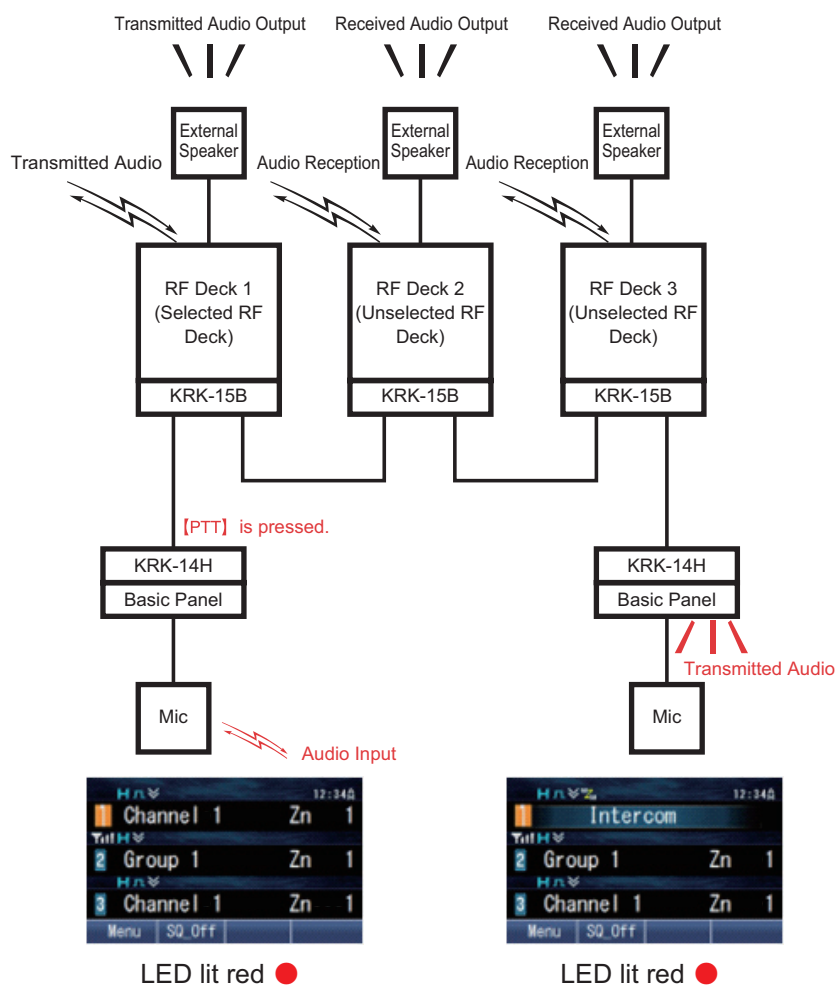


Figure 17-43 w/o Talk Interrupt

● w talk Interrupt

The audio of the transmitting Control Head can be monitored by the other Control Head when transmitting. Also, "Intercom" appears on the display of the other Control Head, and the "Z" icon lights. While transmitting by the **PTT** switch or External PTT (Voice) port (AUX Input) of one Control Head, if the **PTT** switch of the other Control Head is pressed or if the External PTT (Voice) port goes to low level, Talk Interrupt functions. If Talk Interrupt functions, the audio input from the other Control Head is emitted from the speaker of the transmitting Control Head.

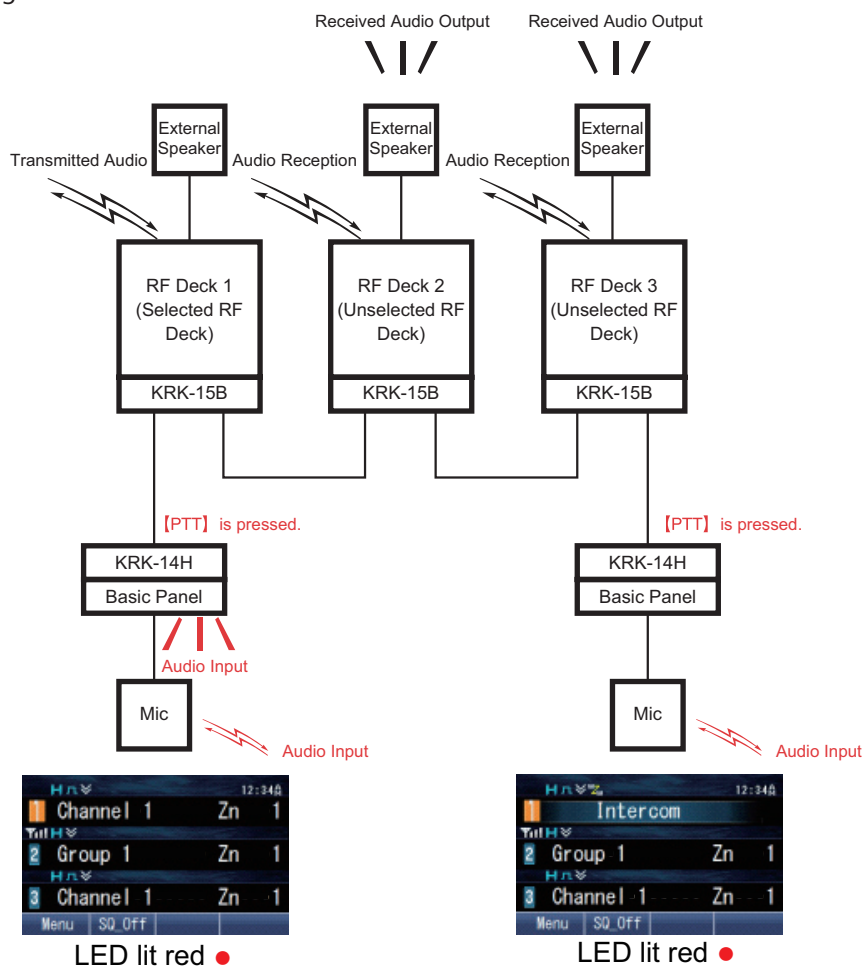


Figure 17-44 w talk Interrupt

Note

- The audio input to a Control Head is returned on KRK-15B via KCT-71, and is emitted from the other Control Head. Therefore, when **Transmit Audio Monitor** is used, only the Mic Line is available as the Modulation Line, and the audio is not input from MI2 of the D-sub 25-pin connector.
- Because the Talk Interrupt behavior is the same as the **Intercom** behavior, even if Control Head 1 completes transmission, the audio of Control Head 2 continues to be emitted from Control Head 1.
- If "w Talk Interrupt" is configured in **Transmit Audio Monitor**, because the Talk Interrupt behavior is equivalent to the **Intercom** behavior, the audio is not emitted from the external speaker connected to the Selected RF Deck.
- If the External PTT (Voice) is entered from the Selected RF Deck when "w/o Talk Interrupt" or "w Talk Interrupt" is configured in **Transmit Audio Monitor**, transmission is started. In this case, the audio input behaves according to the configuration of the Modulation Line.

Configuration using KPG-D1/ D1N

Configuring **Transmit Audio Monitor** (See Transceiver Settings > Optional Features > Optional Features 1 > Others)

Muting the Speaker of a Control Head (Speaker 1-2 Mute)

Speaker 1-2 Mute is the function to forcibly mute the output of the speaker of the other Control Head by key operations on the connected Control Head 1 and Control Head 2. The function is for Dual Control Head. This function limits Control Heads that can emit the received audio of the Selected RF Deck and enhances the private communications of the other Control Head.

Speaker 1 indicates the speaker of Control Head 1. Speaker 2 indicates the speaker of Control Head 2.

Speaker 1-2 Mute can be toggled between on and off by any of the following key operations:

1. Pressing the **Speaker 1-2 Mute** key toggles **Speaker 1-2 Mute** between on and off.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Speaker 1-2 Mute" can toggle **Speaker 1-2 Mute** between on and off.

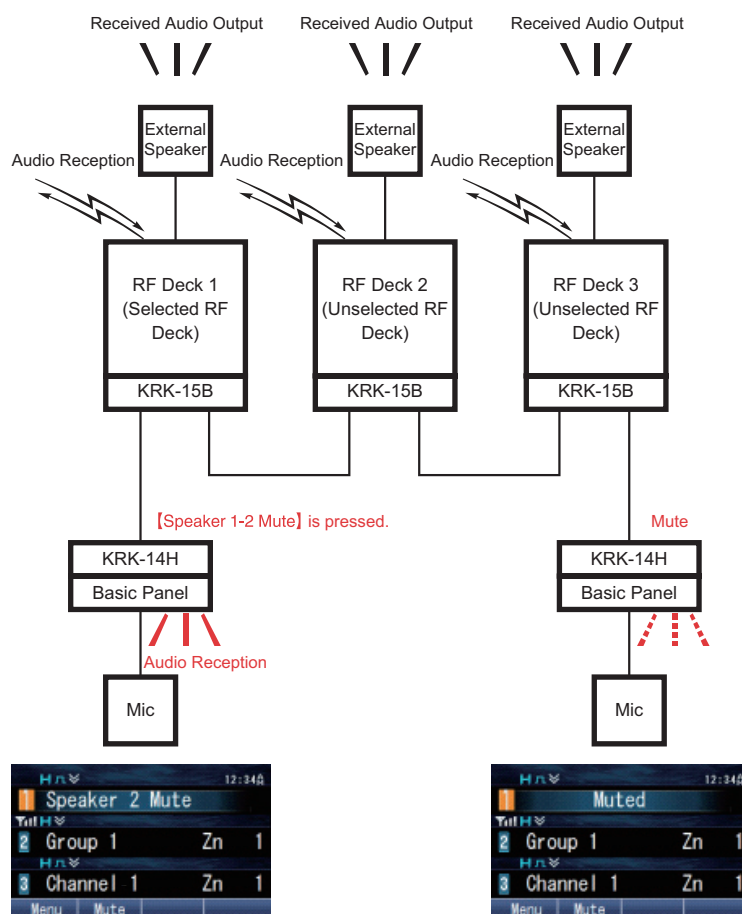


Figure 17-45 Speaker 1-2 Mute

Note

- If **Transmit Audio Monitor** is enabled, audio is not emitted from the monitoring Control Head when **Speaker 1-2 Mute** is toggled on.
- Even if a Control Head is muted, transmitting by the other Control Head or receiving by an RF Deck can be confirmed with the lighting of the Transmit/ Busy LED.
- When **Speaker 1-2 Mute** is on, by operating a key other than the **PTT** switch or Hook on the Control Head with the function toggled on, or by operating any key (including **Volume Control**) on the other Control Head, Speaker 1-2 Mute is toggled off.

Using the Transceiver as a Megaphone (Public Address)

Public Address (PA) enables the transceiver to be used in place of a megaphone. This function is used for a bus announcement, etc.

This section describes behaviors unique to a Multi RF Deck/ Multi Control Head structure.

Public Address can be toggled between enabled and disabled by any of the following key operations:

1. Pressing the **Public Address** key toggles **Public Address** between enabled and disabled.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Public Address" can toggle **Public Address** between enabled and disabled.

Public Address functions by using the external speaker (KES-3/ KES-5/ KES-5A) connected to RF Deck 1. Therefore, the behavior of RF Deck 1 is restricted as follows:

- While **Public Address** is enabled and the **PTT** switch is pressed, RF Deck 1 does not perform the reception behavior. The other RF Decks perform the reception behavior regardless of the status of the **PTT** switch.
- The operation to toggle **Public Address** between enabled and disabled is available only if the Selected RF Deck is RF Deck 1. When the Selected RF Deck is RF Deck 2 or RF Deck 3, the operation to toggle **Public Address** between enabled and disabled is unavailable.

If the External PTT (PA) is entered from the AUX Input port of RF Deck 2 or RF Deck 3, the audio is emitted from the external speaker of the RF Deck from which the External PTT (PA) is entered.

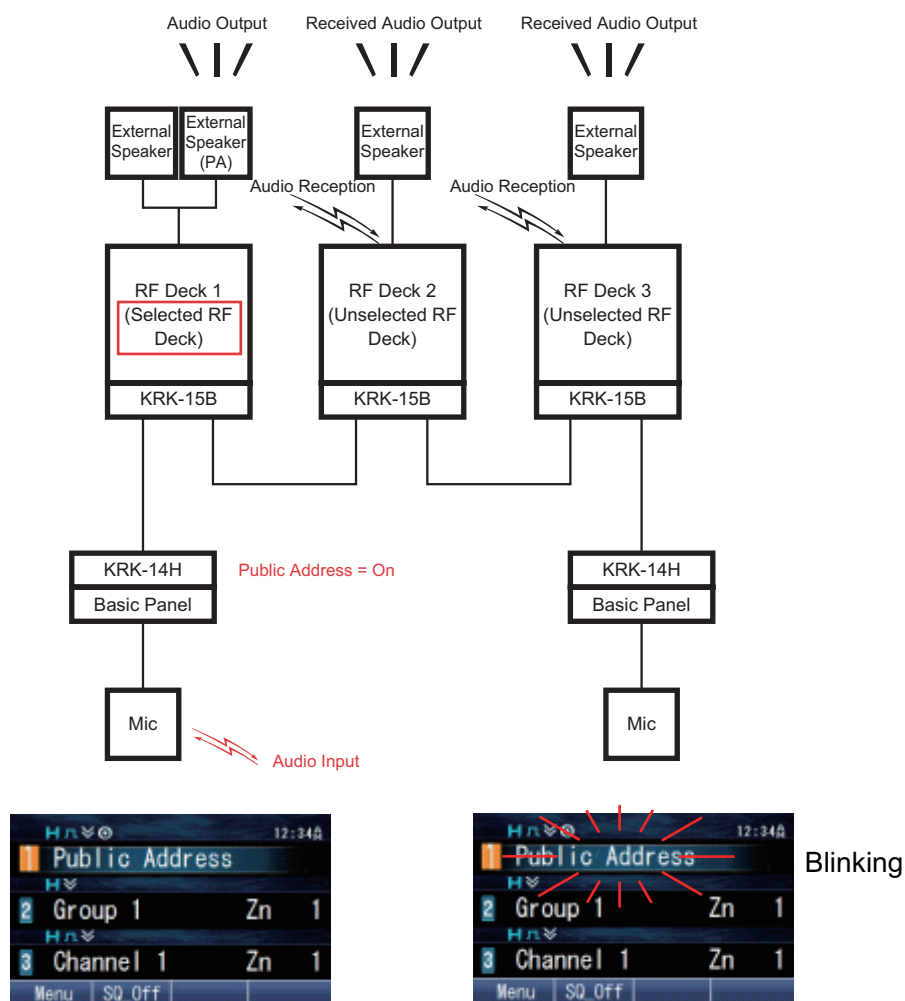


Figure 17-46 Public Address

 Note

- When **Public Address** is enabled, the **PTT** switch can be operated on both Control Heads, but the **PTT** switch pressed earlier becomes enabled. At this time, while the **PTT** switch of one Control Head is being pressed, nothing behaves even if the **PTT** switch of the other Control Head is pressed.
- The volume of an external speaker while **Public Address** is functioning varies in conjunction with the volume of the Control Head configured in **Master Volume Control**.
- When an external speaker (KES-3/ KES-5/ KES-5A) is not connected to RF Deck 1, the audio of **Public Address** is emitted from Control Heads. If the external speaker is disconnected from RF Deck 1 while **Public Address** is enabled, the output is switched to the output of the Control Heads.

Configuring the Output Method of the Received Audio and Beep (Multi RF Deck Audio Output Type)

Multi RF Deck Audio Output Type is the function that switches the output method of the received audio and beep in a Multi RF Deck/ Multi Control Head structure to “Single Audio Output” or “Multi Audio Output”.

The transceiver behaves as follows according to the configuration in **Multi RF Deck Audio Output Type**:

Table 17-10 Multi RF Deck Audio Output Type

Configuration	Description
Single Audio Output	The transceiver emits the received audio and beep of each RF Deck from the speaker of the Control Head, from the external speaker connected to RF Deck 1, or from both according to the configuration in External Speaker. The received audio and beep does not sound from each RF Deck at the same time. Only the received audio and beep of a single RF Deck sounds according to the output priority level. Because the audio of each RF Deck can be heard without preparing multiple external speakers, this configuration is used for the operation of Multi RF Deck/ Multi Control Head within a limited space.  Note • Output priority level is in the order: RF Deck 1, RF Deck 2, RF Deck 3 (highest to lowest).
Multi Audio Output	The received audio and beep of the Selected RF Deck sounds from the speaker of the Control Head according to the configuration in External Speaker. Also, because the received audio and beep of each RF Deck sounds from the external speaker connected to each RF Deck, the received audio and beep of multiple RF Decks can be heard at the same time. Because the received audio and beep of each RF Deck can be heard at the same time from the external speaker connected to the Control Head and each RF Deck, this configuration is used to monitor without missing the received audio and beep of all RF Decks.

Example of received audio output

The transceiver emits the received audio as follows according to the combination of configurations in **Multi RF Deck Audio Output Type** and **External Speaker**:

■ If "Off" is configured in **External Speaker**:

- When **Single Audio Output** is configured

The audio received by RF Deck 1 (Selected RF Deck) sounds from the speaker of the Control Head.

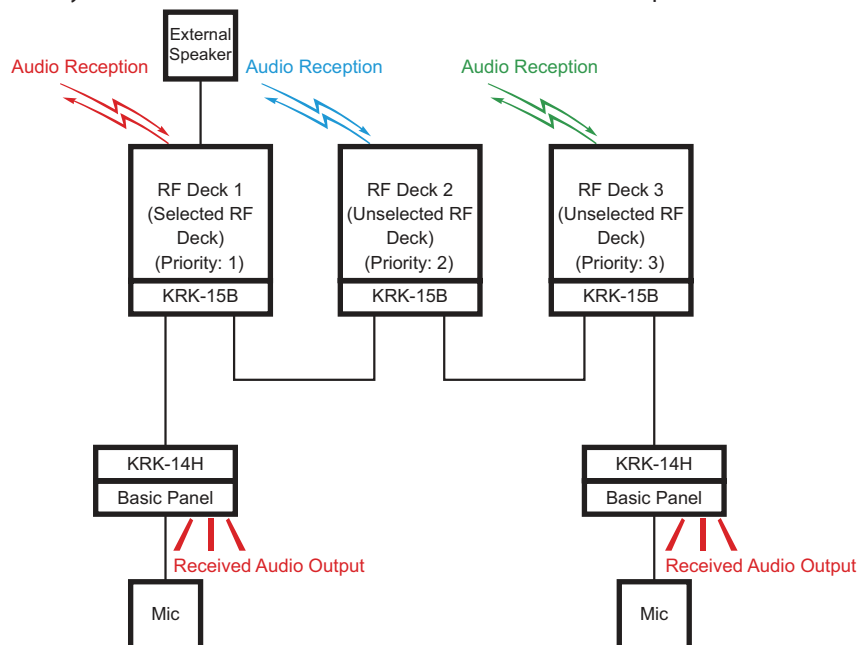


Figure 17-47 Single Audio Output (External Speaker = Off)

- When **Multi Audio Output** is configured

The audio received by RF Deck 1 (Selected RF Deck) sounds from the speaker of the Control Head.

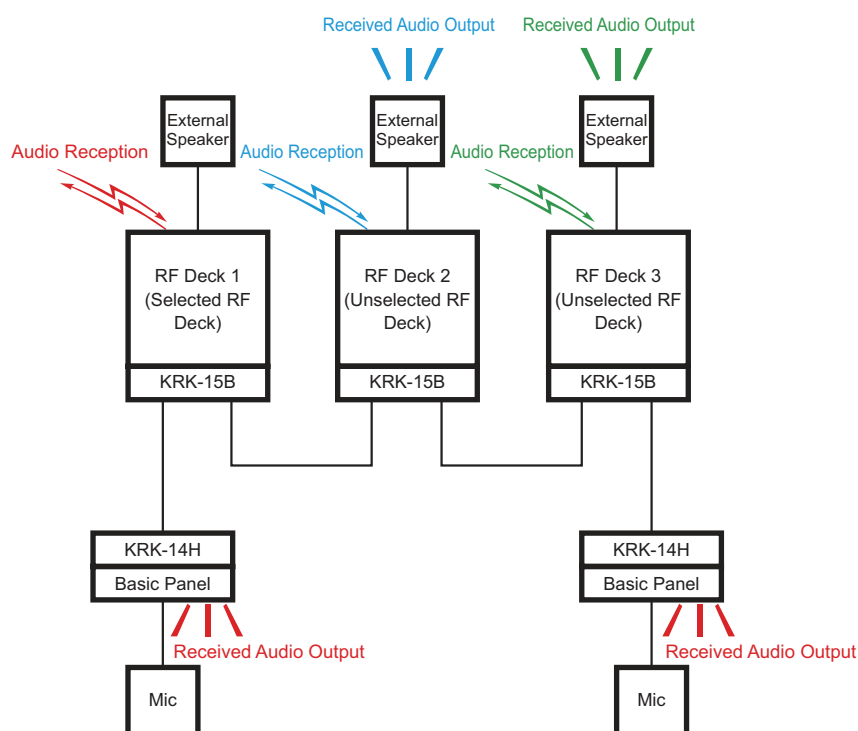


Figure 17-48 Multi Audio Output (External Speaker = Off)

■ If “On” is configured in External Speaker:

- When Single Audio Output is configured

The audio received by RF Deck 1 sounds from the external speaker connected to RF Deck 1.

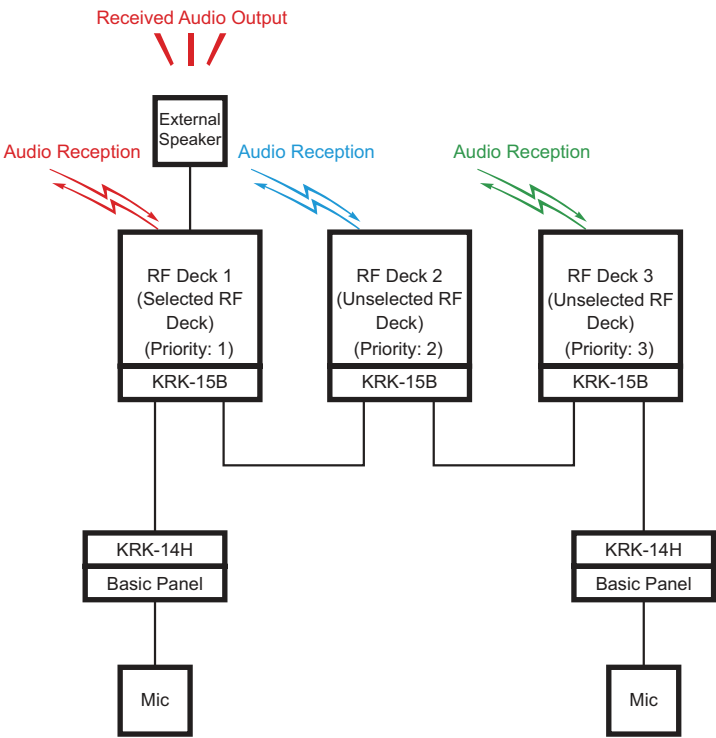


Figure 17-49 Single Audio Output (External Speaker = On)

- When Multi Audio Output is configured

The audio received by each RF Deck individually sounds from the external speaker connected to each RF Deck.

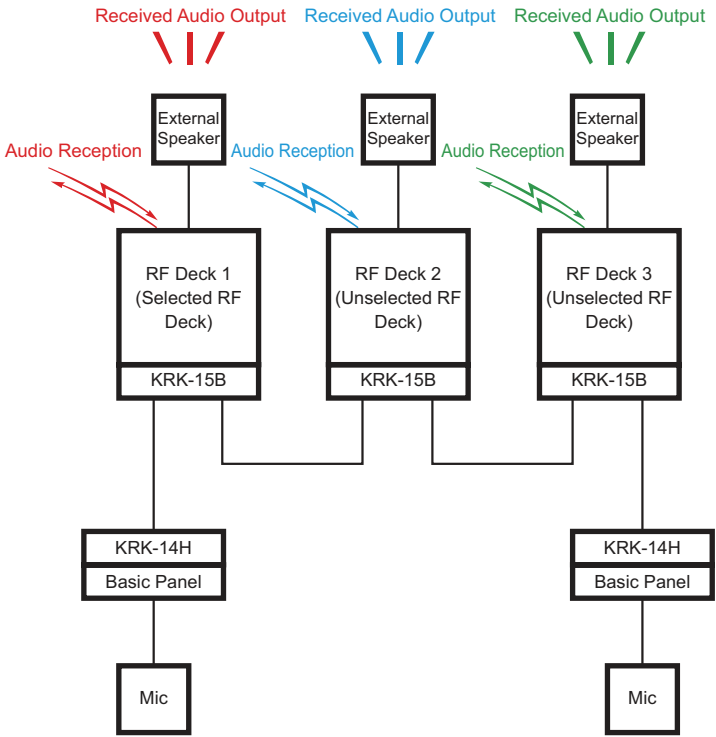


Figure 17-50 Multi Audio Output (External Speaker = On)

■ If “Internal + External” is configured in External Speaker:

• When Single Audio Output is configured

The audio received by RF Deck 1 sounds from both the speaker of the Control Head and the external speaker connected to RF Deck 1.

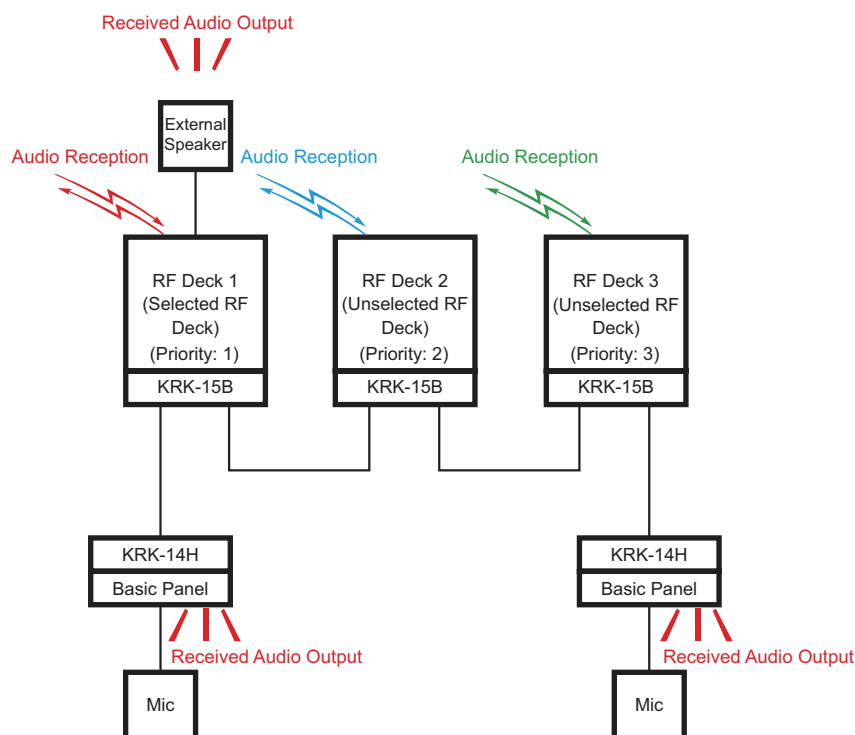


Figure 17-51 Single Audio Output (External Speaker = Internal + External)

• When Multi Audio Output is configured

The audio received by the Selected RF Deck sounds from the speaker of the Control Head. Simultaneously, the audio received by each RF Deck individually sounds from the external speaker connected to each RF Deck.

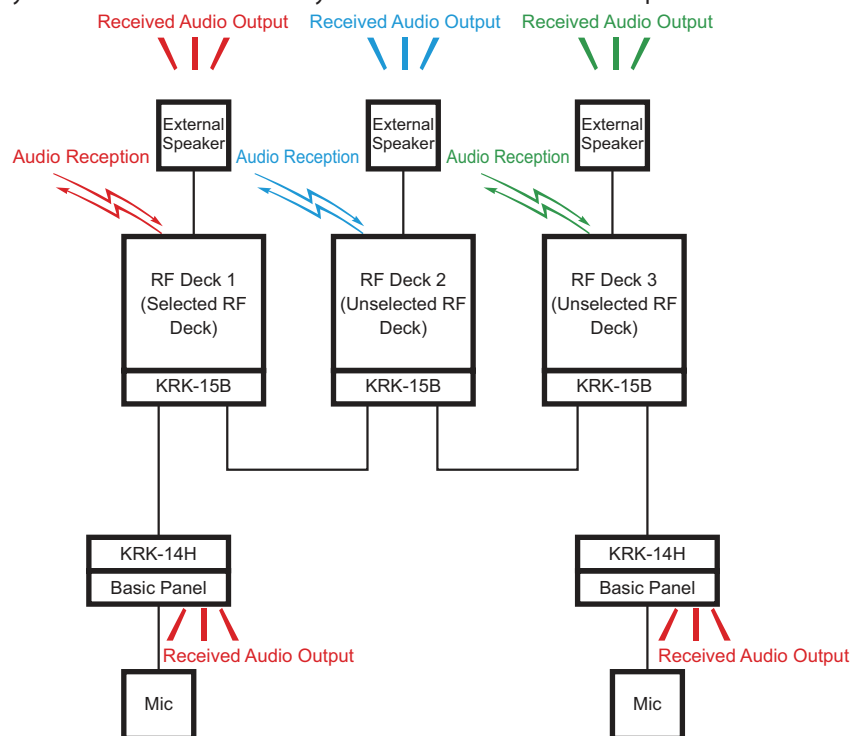


Figure 17-52 Multi Audio Output (External Speaker = Internal + External)

Example of received audio output by the priority level when Single Audio Output is configured

If "Single Audio Output" is configured in Multi RF Deck Audio Output Type, the transceiver emits the received audio as follows according to the output priority level. This is the example of the behavior if "Internal + External" is configured in External Speaker.

Note

- Output priority level is in the order: RF Deck 1, RF Deck 2, RF Deck 3 (highest to lowest).

1. When audio is received by RF Deck 3, the audio sounds from both the speaker of the Control Head and the external speaker connected to RF Deck 1.

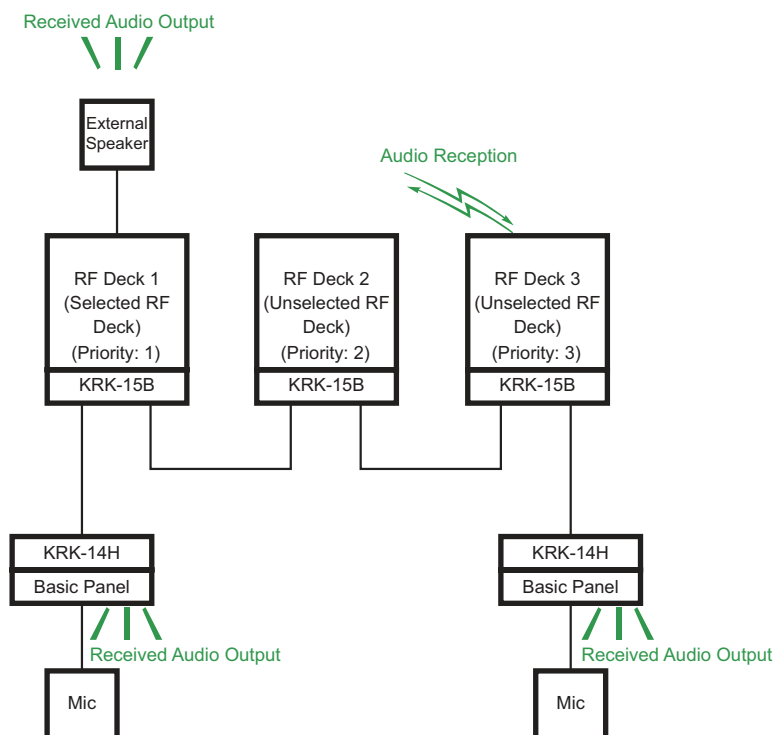


Figure 17-53 Single Audio Output 1

2. When audio is received by RF Deck 1 in the state of step 1), the audio that sounds from the speaker of the Control Head and from the external speaker connected to RF Deck 1 switches to the audio received by RF Deck 1.

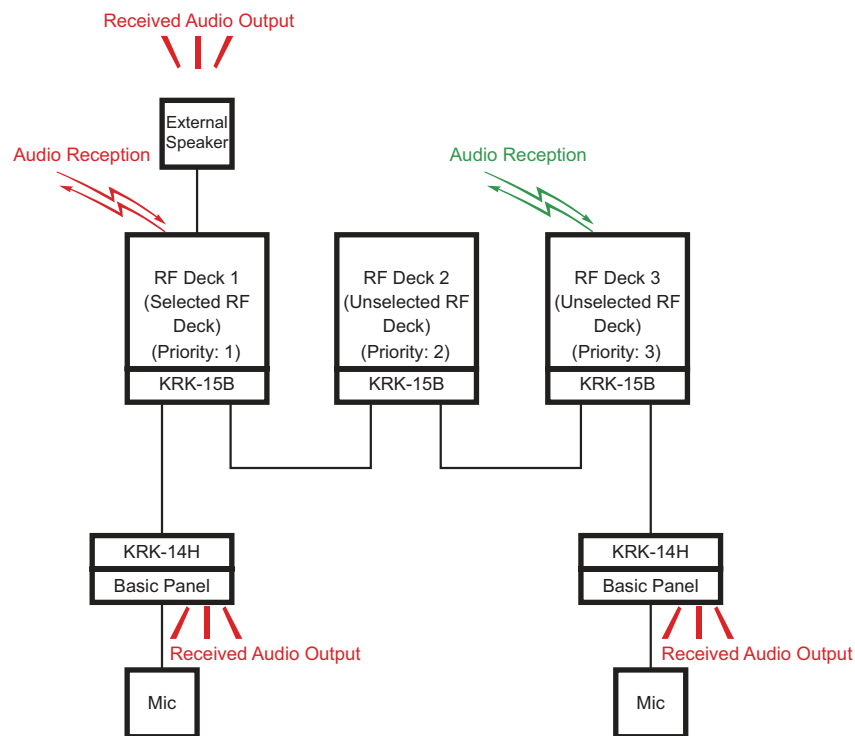


Figure 17-54 Single Audio Output 2

3. Even if audio is received again by RF Deck 2 after the state of step 2), the audio received by RF Deck 2 and RF Deck 3 do not sound while the audio received by RF Deck 1 having higher priority sounds.

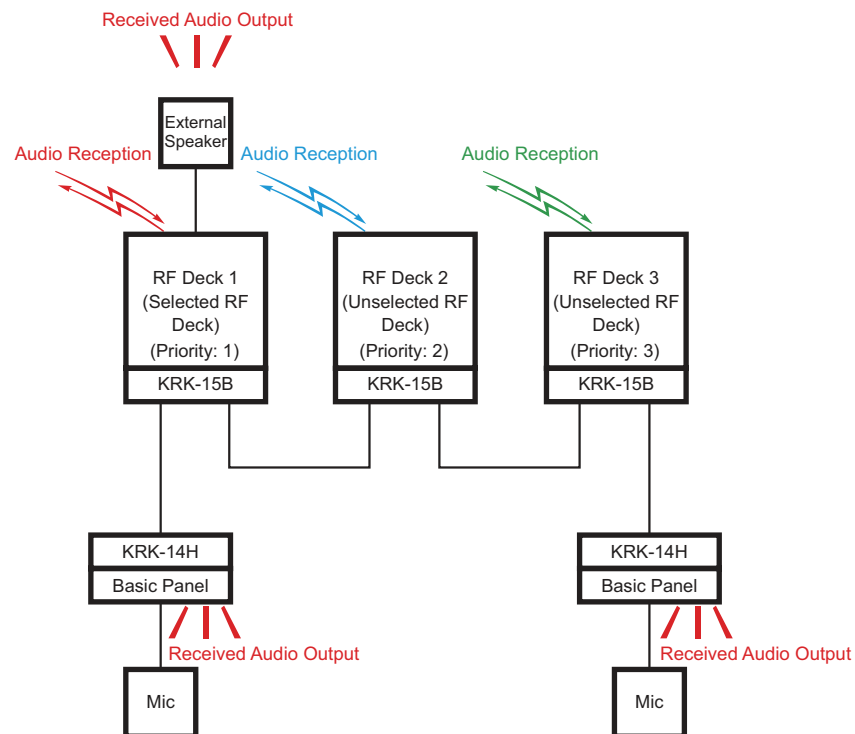


Figure 17-55 Single Audio Output 3

4. When audio reception of RF Deck 1 finishes, the audio received by RF Deck 2 sounds from the speaker of the Control Head and the external speaker connected to RF Deck 1.

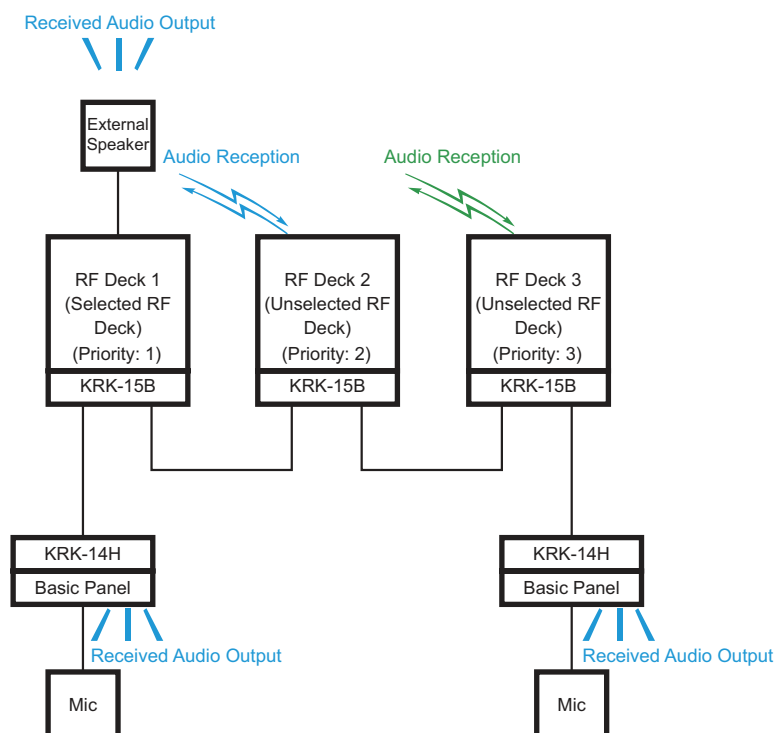


Figure 17-56 Single Audio Output 4

Note

- In user mode and modes other than Mobile Relay Station Mode, **Multi RF Deck Audio Output Type** functions as the configuration of "Multi Audio Output".
- If "Single Audio Output" is configured in **Multi RF Deck Audio Output Type**, the beginning of the received audio and beep may be missing because the audio line is switched.
- If "Single Audio Output" is configured in **Multi RF Deck Audio Output Type**, the function restrictions are as follows:
 - The VOX function is unavailable.
 - "RF Deck" is fixed as the configuration of **SD Card Selection**. (Refer to [microSD](#).)
 - "Control Head" is fixed as the configuration of **Bluetooth Interface Selection** when KCH-20R is used. The Bluetooth function is unavailable when KCH-19 is used. (Refer to [Configuring the Connection Destination of a Bluetooth-compatible Device \(Bluetooth Interface Selection\)](#).)
 - Unselected Speaker Offset** is unavailable.
- When Single Audio Output is configured, External PTT (PA) can be executed by Deck 1 and cannot be executed by Deck 2 and Deck 3. (Refer to [Using the Transceiver as a Megaphone \(Public Address\)](#).)
- When Single Audio Output is configured, the behavior to switch the audio output by the automatic detection of the external speaker (such as KES-3) is not supported.

Configuration using KPG-D1/ D1N

Configuring **Multi RF Deck Audio Output Type** ([See](#) Transceiver Settings > Optional Features > Optional Features 1 > Others)

17.8 Inhibiting Transceiver Behaviors by Remote Control (Inhibit/ Stun)

Inhibit/ Stun is the function to inhibit transceiver behaviors by remote control. This function is used to prevent the unauthorized use by a third party when the transceiver is stolen or lost.

This section describes behaviors unique to a Multi RF Deck/ Multi Control Head structure.

In a Multi RF Deck/ Multi Control Head structure, the system is operated by multiple protocols. The following are the Inhibit/ Stun behaviors under each condition:

Multi RF Deck (P25/ MDC-1200)

In Multi RF Deck operation, if any RF Deck receives an Inhibit request message, regardless of whether the RF Deck is the Selected RF Deck or not, all RF Decks enter the Inhibit state. If any RF Deck receives an Uninhibit request message, all RF Decks exit the Inhibit state.

Multi RF Deck (NXDN/ DMR/ FleetSync/ DTMF)

In Multi RF Deck operation, if any RF Deck receives a Stun/ Kill request message, regardless of whether the RF Deck is the Selected RF Deck or not, all RF Decks enter the Stun/ Kill state. If any of the RF Decks receives a Revive request message, all RF Decks exit the Stun state.

Multi RF Deck (mix of P25 and NXDN)

In Multi RF Deck operation, if any RF Deck operated in P25 receives an Inhibit request message, regardless of whether the RF Deck is the Selected RF Deck or not, all RF Decks, including RF Decks operated in NXDN, enter the Inhibit state. If any RF Deck operated in P25 receives an Uninhibit request message, all RF Decks exit the Inhibit state.

The opposite is the same, if any RF Deck operated in NXDN receives a Stun/ Kill request message, all RF Decks, including RF Decks operated in P25, enter the Stun/ Kill state. The recovery conditions are also the same. If any RF Deck operated in NXDN receives an Uninhibit request message, all RF Decks exit the Inhibit state.

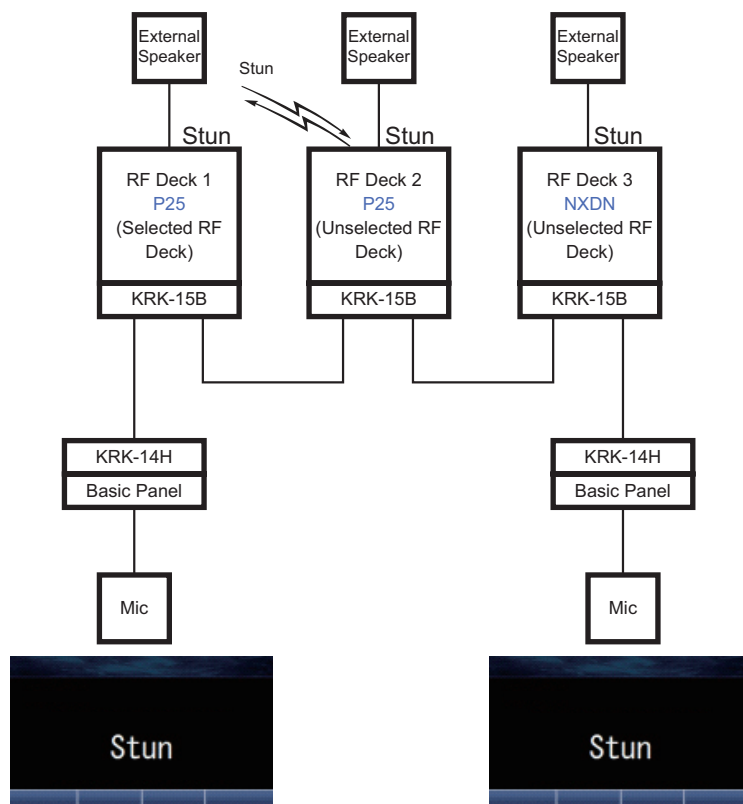


Figure 17-57 Inhibit/ Stun

Note

- In Multi RF Deck operation, when RF Decks are in the Inhibit/ Stun state, if one of the RF Decks is replaced with an RF Deck that is not in the Inhibit/ Stun state, the RF Deck that is not in the Inhibit/ Stun state enters the Inhibit/ Stun state. However, if an RF Deck is removed from the Multi RF Deck operation, the Inhibit/ Stun state of the RF Deck is reset.

17.9 Communication Ports

In a Multi RF Deck/ Multi Control Head structure, COM 1 and COM 2 can be configured for each RF Deck, and the communication ports of each RF Deck behave individually according to the configuration for the RF Deck with a serial cable connection, regardless of whether the RF Deck is the Selected RF Deck or not. (Refer to [Available Functions for COM Port.](#))

The following figure shows an example of when COM ports are configured for RF Decks:

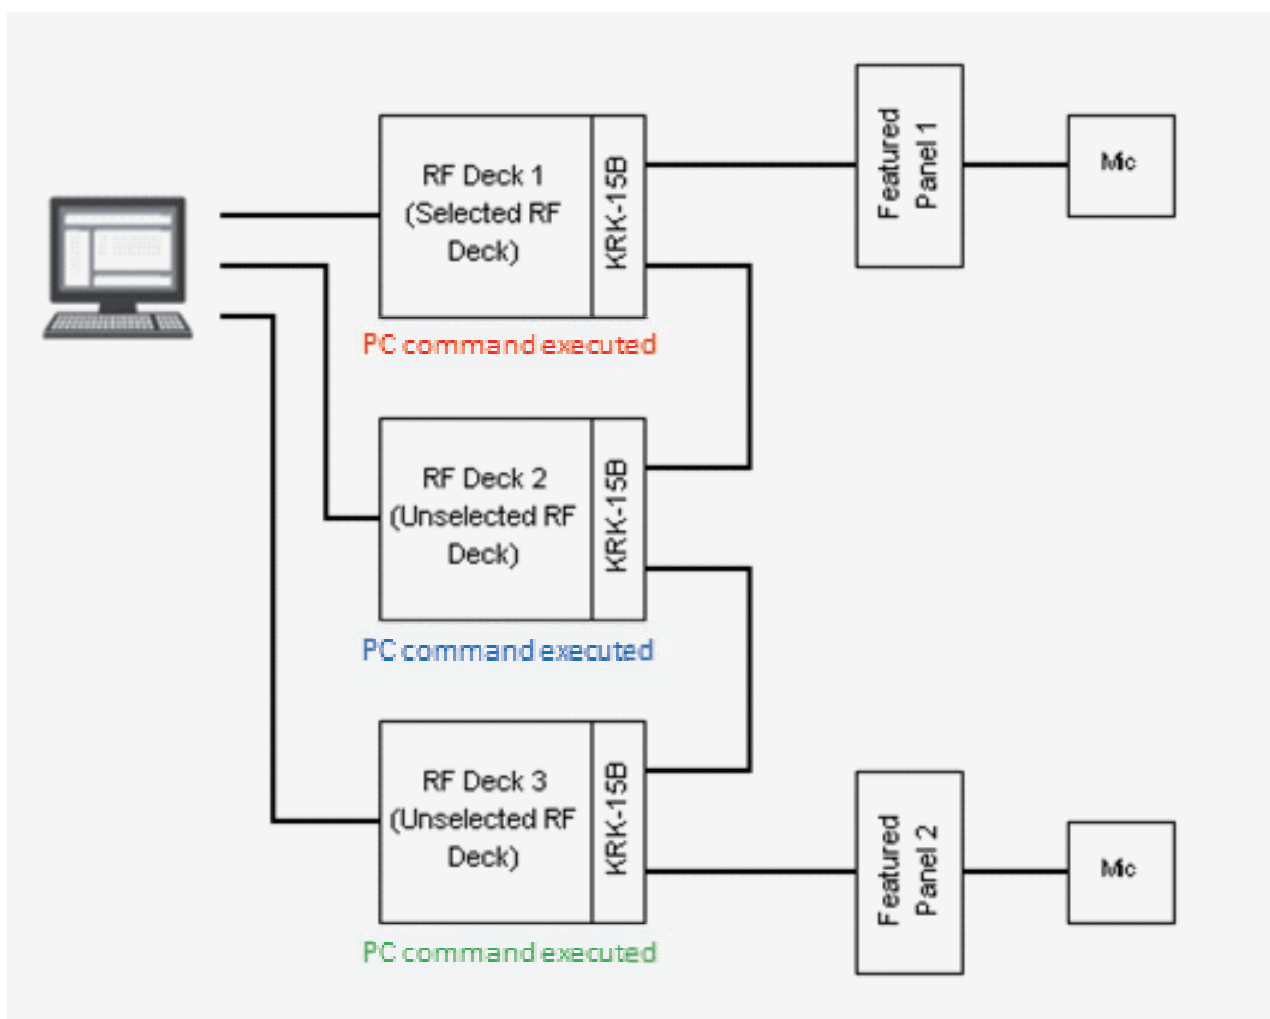


Figure 17-58 COM port

Note

- "GPS" can be configured in Function of **COM port 1** and **COM port 2** of RF Deck 1.

PC Interface Protocol

In a Multi RF Deck/ Multi Control Head structure, the remote control by applications such as KAS-10 is available by using a serial interface port of the transceiver.

If a PC command is executed from COM 1 or COM 2 of a D-sub 25-pin connector of an RF Deck, the communication ports of each RF Deck behave individually according to the configuration for the connected RF Deck, regardless of whether the RF Deck is the Selected RF Deck or Unselected RF Deck.

If a PC command is executed from COM 0 in a Multi RF Deck system, the communication port (COM 0) of the Selected RF Deck behaves. If a PC command is executed from COM 0, a response command is returned to the Control Head that executed the PC command.

Note

- In a Multi RF Deck system, if a PC command is executed from COM 1 or COM 2 of the Unselected RF Deck, some of the commands are restricted.

17.10 External Ports (AUX Input/ Output)

In a Multi RF Deck/ Multi Control Head structure, external devices such as Mobile Data Terminal (MDT) can be connected by using the AUX Input/ Output port of the transceiver. (Refer to [EXTERNAL PORTS](#).)

The functions configured for a D-sub 25-pin connector behave only for the RF Deck connected to the D-sub 25-pin connector, regardless of whether the RF Deck is the Selected RF Deck or Unselected RF Deck. The functions configured for the 12-pin connector of a Control Head behave individually for the Selected RF Deck according to the configurations of the communication ports of each RF Deck.

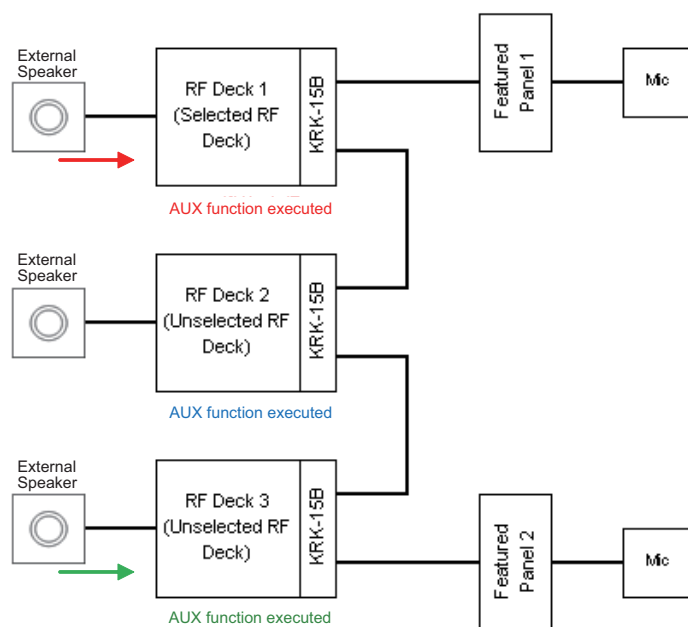


Figure 17-59 Example of When the AUX Input Is Configured for RF Decks

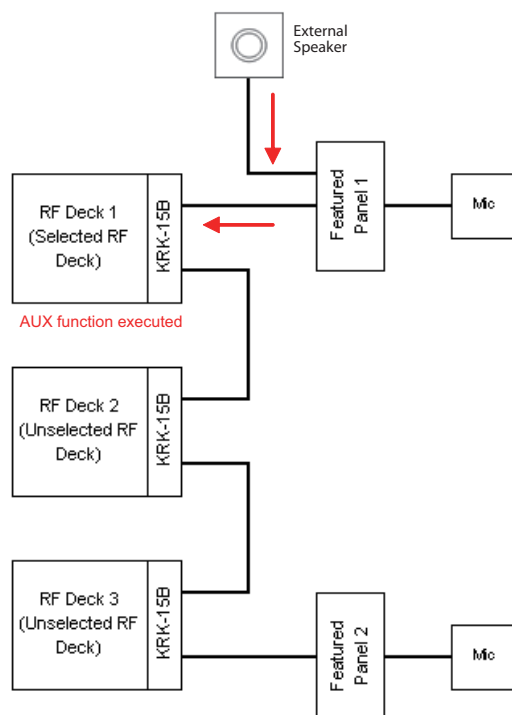


Figure 17-60 Example of When the AUX Input Is Configured for Control Heads

Restrictions When Configuring AUX Input/ Output

● AUX Input configuration

- In a Dual Control Head structure, if a function is configured for one of the Control Heads, the same function cannot be configured for the other Control Head.
- In a Multi RF Deck system, the same function can be configured for the D-sub connector of each RF Deck.
- The functions configured for Control Heads cannot be configured for RF Decks.
- The functions configured for RF Decks cannot be configured for Control Heads.
- The following functions can be configured only for one RF Deck or Control Head of all RF Decks and Control Heads:
 - Emergency
 - Mobile Relay Station
 - Light Sense

● AUX Output configuration

- In a Multi RF Deck system, no function can be configured for AUX Output of a Control Head.
- In a Dual Control Head structure, if a function is configured for one of the Control Heads, the same function cannot be configured for the other Control Head.
- In a Multi RF Deck system, the same function can be configured for the D-sub connector of each RF Deck.
- The functions configured for Control Heads cannot be configured for RF Decks.
- The functions configured for RF Decks cannot be configured for Control Heads.

Note

- In a Multi RF Deck system, if configuring the same AUX Input functions for the D-sub 25-pin connector of each RF Deck, connect an external device to each RF Deck individually.

17.11 Ignition Sense

In a Multi RF Deck/ Multi Control Head structure, turning the transceiver ON or OFF can be controlled by the ignition switch of a vehicle. (Refer to [FUNCTIONS LINKED TO A VEHICLE.](#))

RF Decks and Control Heads are equipped with an Ignition terminal.

Behaviors of Each Ignition Terminal

● Control Head Side

Connect a Control Head to the IGN terminal of a vehicle via KCT-72 (pin number: Pin 1) connected to the Control Head.

The ignition switch is enabled only on one of the Control Heads, therefore, the ignition switch can be easily connected compared to if the ignition switch is connected to an RF Deck.

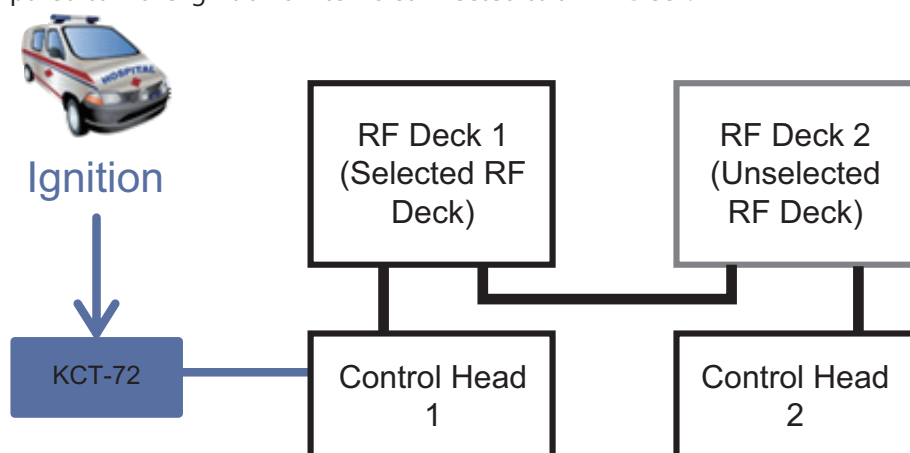


Figure 17-61 Example of When the Ignition of a Control Head Is Used

● RF Deck Side

Ignition can be used by inputting IGN signals from a vehicle to the Ignition terminals of all of the connected RF Decks.

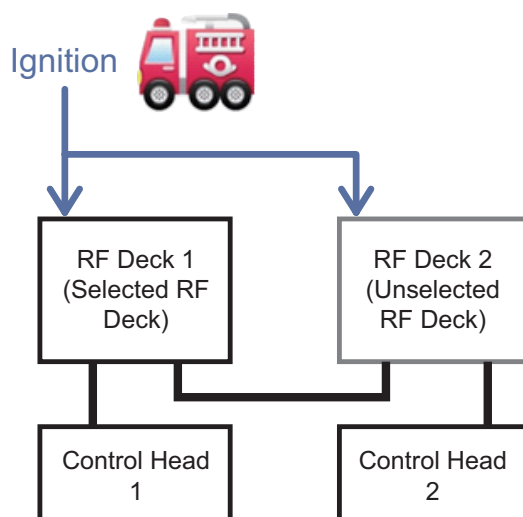


Figure 17-62 Example of When the Ignition of RF Decks Is Used

Note

- For RF Deck Side, even if the Ignition status of only one of the RF Decks in a Multi RF Deck system is changed, the other RF Decks cannot detect the change.

17.12 Microphone-hook

Hook Control exists as a function to control the microphone hook status for Mobile.

Hook Control is the function to specify the conditions to place the transceiver in the on-hook state if both the Local Mic Hook and the External Hook are used. By using this function, whether the on-hook state of the transceiver when both the Local Mic Hook and the External Hook are used is determined by AND or by OR can be changed.

Also, in a Multi RF Deck/ Multi Control Head structure, whether the on-hook state of the transceiver of when the following Local Mic Hook and External Hook are used together is determined by AND or by OR can be changed:

- the Local Mic Hook of Control Head 1 or Control Head 2 for the Selected RF Deck
- the External Hook of Control Head 1 or Control Head 2, or the External Hook of an RF Deck

The transceiver behaves as follows according to the configuration in **Hook Control** (AND, OR):

● AND

The transceiver behaves as the on-hook state if both the Local Mic Hook and External Hook are in the on-hook state.

Also, the transceiver behaves as the off-hook state if either the Local Mic Hook or External Hook is in the off-hook state.

● OR

The transceiver behaves as the on-hook state if either the Local Mic Hook or External Hook is in the on-hook state. Also, the transceiver behaves as the off-hook state if both the Local Mic Hook and External Hook are in the off-hook state.

The Unselected RF Deck judges the hook state of the connected RF Deck only by the input from the External Hook of the RF Deck, and performs the hook behavior.

Hook Control is applied to the following configurations:

- Off-hook Scan
- Off-hook Voting
- Off-hook Site Roaming
- Off-hook Decode
- Off-hook Connect
- Off-hook Speaker Revert


Configuration using KPG-D1/ D1N

Configuring **Hook Control** ( See Transceiver Settings > Optional Features > Optional Features 1 > Microphone-hook)

17.13 GPS


In a Multi RF Deck/ Multi Control Head structure, the built-in GPS receiver unit or an external GPS receiver unit can be used.

In a Multi RF Deck system, a GPS antenna is connected to RF Deck 1. The acquired GPS data is transferred from RF Deck 1 to another RF Deck. Whether to enable or disable Built-in GPS Receiver can be toggled after entering GPS Mode by pressing the **GPS** key or **Menu** key, regardless of whether RF Deck 1 is the Selected RF Deck.

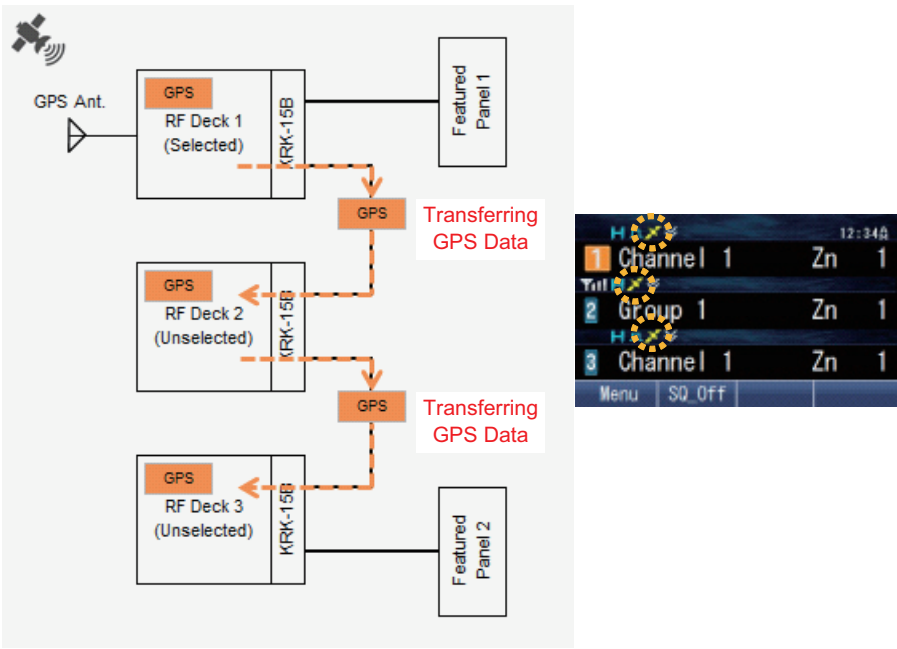

17.14 Scan

Regarding the scan behavior when Multi RF Deck is operated, each RF Deck can individually perform the scan behavior. While scanning stops, the audio received by the Selected RF Deck sounds from the Control Head, and the audio received by the Unselected RF Deck sounds only from an external speaker connected to each Unselected RF Deck. **Revert Channel** and **Priority Channel** can be configured for each RF Deck.

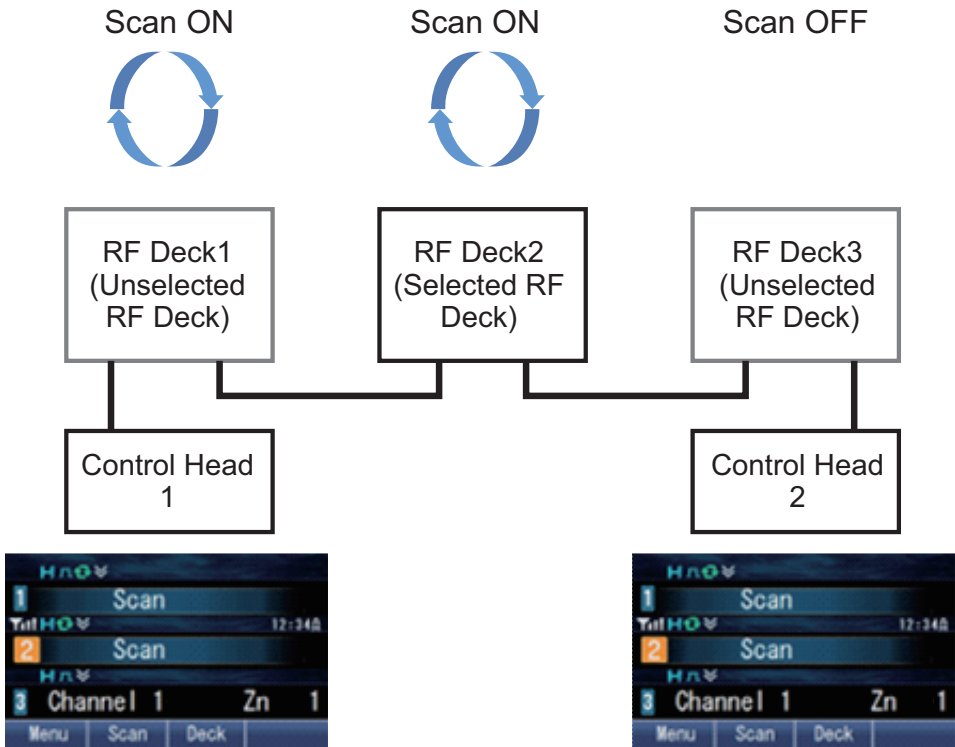

17.15 Communications in an Emergency (Emergency)

Emergency is the function to notify the base station or people around of the emergency situation by sending radio signals or emitting an alarm when a user is placed in the emergency state.

In a Multi RF Deck system, one of the multiple RF Decks executes the Emergency behavior in Emergency Mode, and the other RF Decks do not transmit and receive. The RF Decks enter Emergency Mode as a single system structured with Multi RF Deck/ Multi Control Head.

A Zone-channel on which the Emergency behavior is activated can be configured by using the configuration in **Emergency Channel Type** (Selected, Fixed).

● Selected

The transceiver resets the current channel moving status (such as Home Channel) and starts the Emergency behavior on the Zone-channel last selected by the Selected RF Deck.

● Fixed

If the transceiver enters Emergency Mode, the transceiver migrates to the Zone-channel of the RF Deck configured in Emergency Zone-Channel and starts the Emergency behavior.

The **Emergency** key can be configured for each Control Head. Also, Emergency in AUX Input can be configured only for one RF Deck or Control Head of all RF Decks and Control Heads.

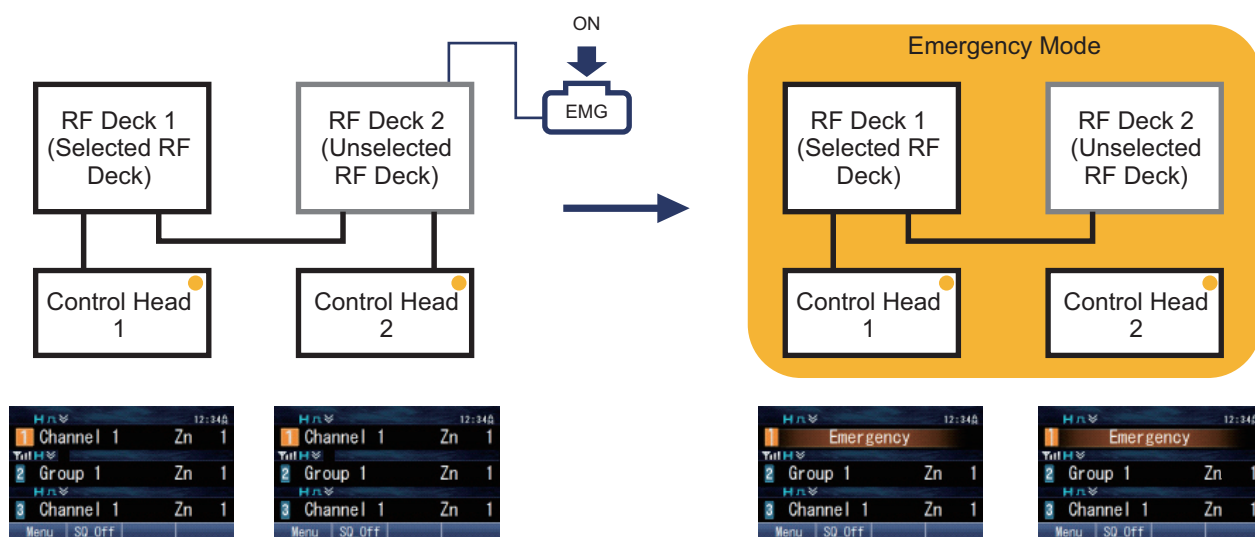


Figure 17-65 Emergency

For automatic transmission while the transceiver is in Emergency Mode, the Control Head that is enabled varies depending on the conditions for the transceiver to migrate to Emergency Mode.

● If the transceiver migrates to Emergency Mode by the Emergency key or the activation of an Emergency connected to AUX Input of the Control Head

Audio input can be made on the Mic Line of the Control Head with the Emergency key pressed, or with AUX Input activated.

On the Mic Line of the Control Head with the **Emergency** key not pressed, or with AUX Input not activated, audio input cannot be made.

● If the transceiver migrates to Emergency Mode under other conditions

Audio input can be made on the Mic Line of Control Head 1.

On the Mic Line of Control Head 2, audio input cannot be made.

17.16 Bluetooth Communication

This section describes the operation method for Bluetooth in a Multi RF Deck/ Multi Control Head structure.

A Bluetooth device is equipped in an RF Deck and a Control Panel (KCH-20R). If Multi RF Deck/ Multi Control Head is structured using KCH-20R, multiple available Bluetooth devices exist.

In **Bluetooth Interface Selection** of KPG-D1/ D1N, which Bluetooth device, the one equipped in an RF Deck or in a Control Head, to be used can be selected.

GPS/Bluetooth

☒ Built-in GPS Receiver/Bluetooth

GPS/Bluetooth Preset (Default)

☒ GPS

☐ Bluetooth (RF Deck/Control Head 1)

☐ Bluetooth (Control Head 2)

GPS

GPS Position Display

☒ Latitude and Longitude

Latitude and Longitude Format ddd mm.mmm

☐ Altitude

Altitude Unit Meter

Base Station Settings

☐ \$GPGGA (NMEA)

☐ \$GPGLL (NMEA)

☐ \$GPRMC (NMEA)

☐ \$PKLDS/\$PKNDS (KW)

☐ \$PKLID/\$PKNID (KW)

☐ \$PKLSH/\$PKNSH (KW)

Bluetooth

Bluetooth Interface Selection RF Deck

Figure 17-66 KPG-D1 > Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth

● If “RF Deck” is configured in Bluetooth Interface Selection

Out of Bluetooth-compatible devices equipped in each RF Deck, which device to be used can be configured. In a Triple RF Deck structure, devices equipped in all RF Decks can be used. Using only a device equipped in a single RF Deck is also possible. In this case, activating all devices is recommended because the connection to a Bluetooth-compatible device of each RF Deck becomes possible.

● If “Control Head” is configured in Bluetooth Interface Selection

A Bluetooth-compatible device equipped in KCH-20R can be used. In a Dual Control Head structure, Bluetooth-compatible devices of all Control Heads can be used. A Bluetooth-compatible device of each Control Head cannot be individually configured. Two Control Heads always become available at a time.

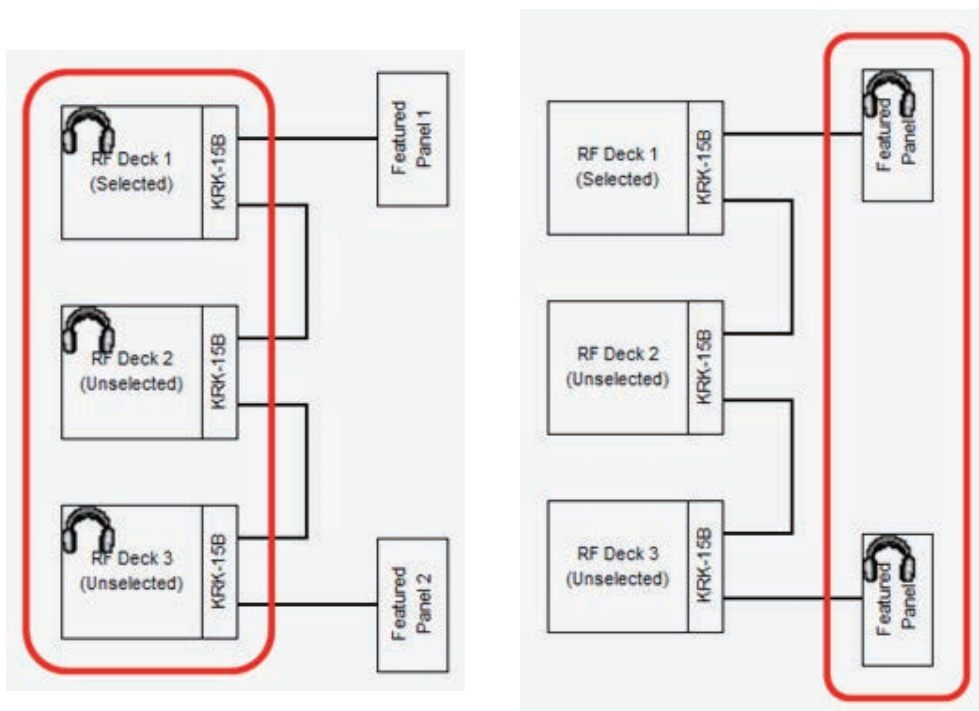


Figure 17-67 Bluetooth Interface Selection

The following Bluetooth basic functions work differently between when “RF Deck” is configured and when “Control Head” is configured in **Bluetooth Interface Selection**.

- Bluetooth On/Off
- Bluetooth Find Device
- Bluetooth Device Name
- Bluetooth Information
- Pairing
- Bluetooth My Devices
- VOX
- Bluetooth Speaker

The following describes how each function works.

Bluetooth On/Off

The Bluetooth function can be toggled between on and off. The toggling behavior varies according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

Bluetooth of the Selected RF Deck can be toggled between on and off by any of the following key operations:

1. Pressing the **Bluetooth** key toggles **Bluetooth** between on and off.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Bluetooth" can toggle **Bluetooth** between on and off.

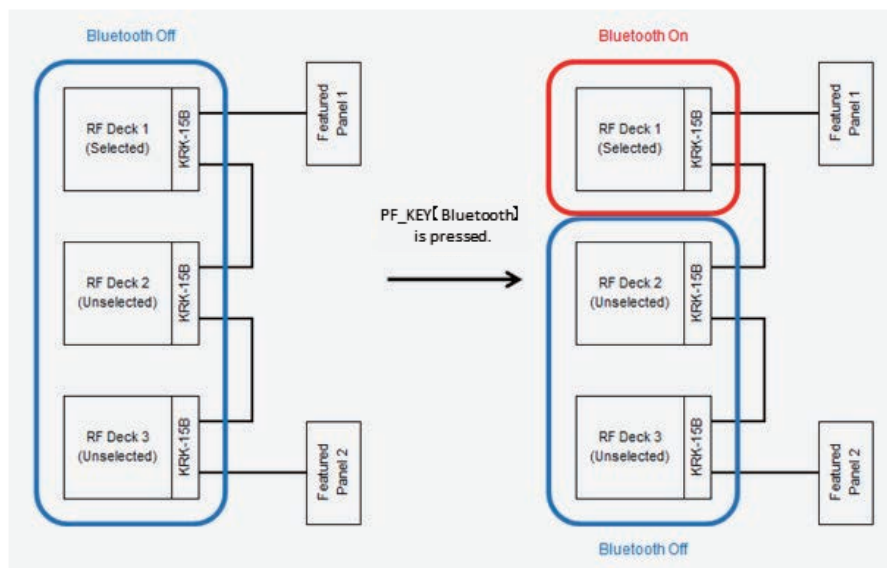


Figure 17-68 Bluetooth On/Off (RF Deck)

● Control Head

Bluetooth can be toggled between on and off by any of the following key operations:

1. Pressing the **Bluetooth** key toggles **Bluetooth** of the operated KCH-20R between on and off.
2. Entering Menu Mode by pressing the **Menu** key, and then executing "Bluetooth" can toggle **Bluetooth** of the operated Featured Panel between on and off.

If any of KCH-19, KCH-20R, and KCH-21R coexist, and if the operated Control Head is KCH-19, a Key-entry Error Tone sounds from the Control Head, and the Control Head does not respond.

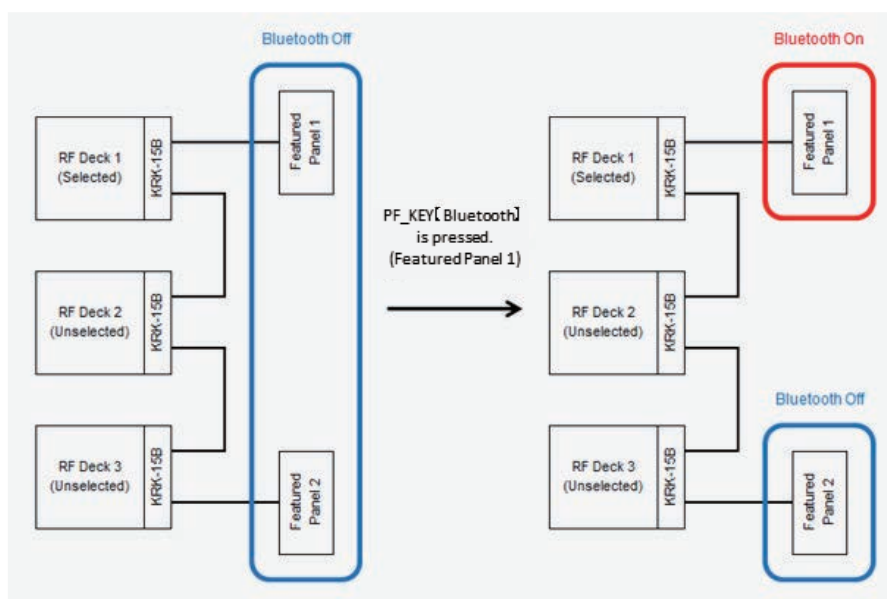


Figure 17-69 Bluetooth On/Off (Control Head)

Finding a Bluetooth-compatible Device (Bluetooth Find Device)

Bluetooth Find Device is the function to find a Bluetooth-compatible device for each RF Deck or Featured Panel. The finding behavior varies according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

By pressing the **Menu** key to enter Menu Mode, and then executing "Bluetooth Device", Bluetooth Device Mode is entered. After that, by executing Bluetooth Find Device, Bluetooth Find Device Mode is entered. After Bluetooth Find Device Mode is entered, the Selected RF Deck automatically starts searching for a Bluetooth-compatible device.

● Control Head

By pressing the **Menu** key to enter Menu Mode, and then executing "Bluetooth Device", Bluetooth Device Mode is entered. After that, by executing Bluetooth Find Device, Bluetooth Find Device Mode is entered. After Bluetooth Find Device Mode is entered, the operated KCH-20R automatically starts searching for a Bluetooth-compatible device.

If any of KCH-19, KCH-20R, and KCH-21R coexist, and if the operated Control Head is KCH-19, a Key-entry Error Tone sounds from the Control Head, and the Control Head does not respond.

Bluetooth Device Name

An own Bluetooth device name can be configured for each RF Deck or KCH-20R. The devices for which a Bluetooth device name can be configured vary according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

A Bluetooth device name can be configured for each RF Deck by using KPG-D1/ D1N.

If Model Name and Market Code of Kenwood ESN are used as a Bluetooth device name, each RF Deck uses own Kenwood ESN.

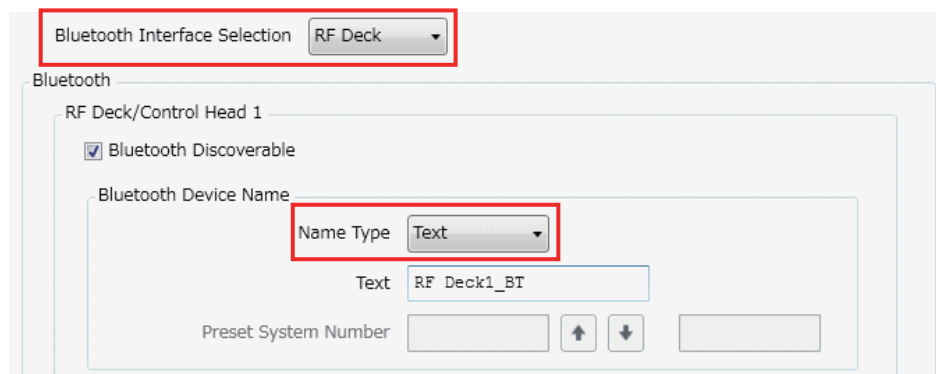


Figure 17-70 KPG-D1 > Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth

● Control Head

A Bluetooth device name can be configured for each KCH-20R by using KPG-D1/ D1N.

If "FleetSync ID", "Unit ID", "Unit ID Name" or "ESN" is configured in **Name Type**, or if Model Name and Market Code of Kenwood ESN are used as the Bluetooth device name (for example, if the configuration in Preset System Number is left blank), a Bluetooth device name needs to be configured according to the configuration for the Selected RF Deck.

The screenshot displays the Bluetooth configuration settings for two units: RF Deck/Control Head 1 and Control Head 2. At the top, a red box highlights the 'Bluetooth Interface Selection' dropdown menu, which is currently set to 'Control Head'. Below this, the settings for each unit are shown. For RF Deck/Control Head 1, the 'Bluetooth Discoverable' checkbox is checked. The 'Bluetooth Device Name' section has a red box around the 'Name Type' dropdown, which is set to 'Text'. The 'Text' field contains 'RF Deck1_BT'. Below this is the 'Preset System Number' field with up and down arrows. The 'Define Bluetooth Device' section shows an 'Address' field with six '00' segments and a 'Fixed PIN' field with '0000'. For Control Head 2, the 'Bluetooth Discoverable' checkbox is also checked. The 'Bluetooth Device Name' section has a red box around the 'Name Type' dropdown, which is set to 'Text'. The 'Text' field is empty. Below this is the 'Preset System Number' field with up and down arrows.

Figure 17-71 KPG-D1 > Transceiver Settings > Optional Features > Optional Features 2 > GPS/Bluetooth > Bluetooth

Checking the Bluetooth Device Name (Bluetooth Information)

In **Bluetooth Information**, the own Bluetooth device name configured for each RF Deck or KCH-20R can be confirmed on the display. The displayed Bluetooth device name varies according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

By pressing the **Menu** key to enter Menu Mode, and then executing "Bluetooth Information", Bluetooth Information Mode is entered. The Bluetooth device name configured for the Selected RF Deck can be confirmed.

● Control Head

By pressing the **Menu** key to enter Menu Mode, and then executing "Bluetooth Information", Bluetooth Information Mode is entered. The Bluetooth device name configured for the operated KCH-20R can be confirmed.

If any of KCH-19, KCH-20R, and KCH-21R coexist, and if the operated Control Head is KCH-19, a Key-entry Error Tone sounds from the Control Head, and the Control Head does not respond.

Registering a Bluetooth Connection Device (Pairing)

An Bluetooth connection device can be registered for each RF Deck or KCH-20R. The pairing behavior varies according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

Pairing can be executed by selecting a detected Bluetooth-compatible device after entering Bluetooth Find Device Mode or by pressing the **Bluetooth Connect/ Disconnect** key.

When the Selected RF Deck receives a pairing request from a Bluetooth-compatible device, the Bluetooth device name or Bluetooth device address of the Bluetooth-compatible device appears on the display, and whether to execute pairing can be selected.

Once pairing completes, the device configuration is registered in the Selected RF Deck.

If the Unselected RF Deck receives a pairing request, the request is automatically rejected.

● Control Head

Pairing can be executed by selecting a detected Bluetooth-compatible device after entering Bluetooth Find Device Mode or by pressing the **Bluetooth Connect/ Disconnect** key.

When KCH-20R receives a pairing request from a Bluetooth-compatible device, the Bluetooth device name or Bluetooth device address of the Bluetooth-compatible device appears on the display, and whether to execute pairing can be selected.

Once pairing completes, the device configuration is registered in the operated KCH-20R.

If the other KCH-20R receives a pairing request while KCH-20R of either Control Head 1 and Control Head 2 is executing pairing, the request is automatically rejected.

If any of KCH-19, KCH-20R, and KCH-21R coexist, and if the operated Control Head is KCH-19, a Key-entry Error Tone sounds from the Control Head, and the Control Head does not respond.

Displaying a Bluetooth-compatible Device (Bluetooth My Devices)

A Bluetooth-compatible device registered for each RF Deck or KCH-20R can be confirmed. The Bluetooth-compatible device which can be confirmed varies according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

By pressing the **Menu** key to enter Menu Mode, and then executing "Bluetooth Device", Bluetooth Device Mode is entered.

After that, by executing Bluetooth My Devices, Bluetooth My Devices Mode is entered. In Bluetooth My Devices Mode, the Bluetooth-compatible device registered in the Selected RF Deck can be confirmed.

● Control Head

By pressing the **Menu** key to enter Menu Mode, and then executing "Bluetooth Device", Bluetooth Device Mode is entered.

After that, by executing Bluetooth My Devices, Bluetooth My Devices Mode is entered. In Bluetooth My Devices Mode, the Bluetooth-compatible device registered in the operated KCH-20R can be confirmed.

If any of KCH-19, KCH-20R, and KCH-21R coexist, and if the operated Control Head is KCH-19, a Key-entry Error Tone sounds from the Control Head, and the Control Head does not respond.

VOX

VOX is the function to enable the transmission without pressing the **PTT** switch, just by inputting the audio to a microphone of the headset which supports Bluetooth.

In a Multi RF Deck/ Multi Control Head structure, the available operations increase compared with Single RF Deck/ Single Head Multi. The VOX behavior varies according to the configuration in **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

By pressing the **VOX** key, or by pressing the **Menu** key to enter Menu Mode and then executing "VOX", VOX for the Selected RF Deck can be toggled between on and off.

If VOX is enabled, and if the audio is inputted to a microphone of the headset, the RF Deck connected to the headset starts transmitting.

If **Cancel Operation** is enabled, VOX will be disabled when one of the following operations is executed by the Selected RF Deck or the Unselected RF Deck:

For the Selected RF Deck:

- Pressing the **PTT** switch of Control Head 1 or Control Head 2
- The External PTT (Voice) port (AUX Input) of the Selected RF Deck goes low level
- Pressing the **PTT** switch of the headset connected to the Selected RF Deck

For the Unselected RF Deck:

- The External PTT (Voice) port (AUX Input) of the Unselected RF Deck goes low level
- Pressing the **PTT** switch of the headset connected to the Unselected RF Deck

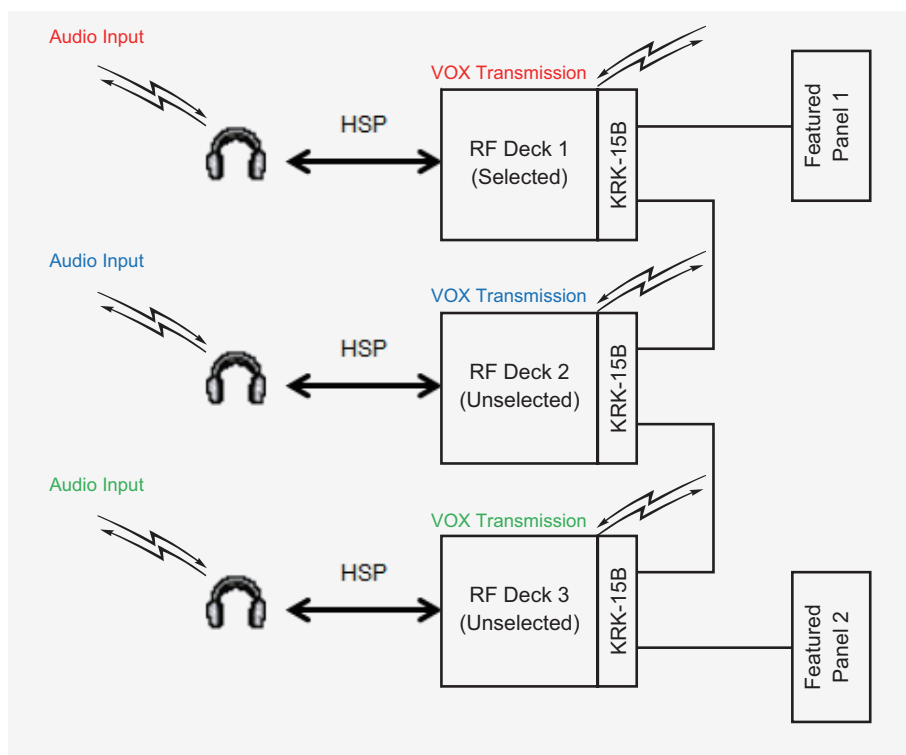


Figure 17-72 VOX Transmission (RF Deck)

● Control Head

By pressing the **VOX** key, or by pressing the **Menu** key to enter Menu Mode and then executing “VOX”, VOX for the Control Head can be toggled between on and off.

In a Multi RF Deck/ Multi Control Head structure, which headset is used to execute the VOX function, either the headset connected to Control Head 1 or the headset connected to Control Head 2, needs to be configured in **Control Head for VOX** of KPG-D1/ D1N.

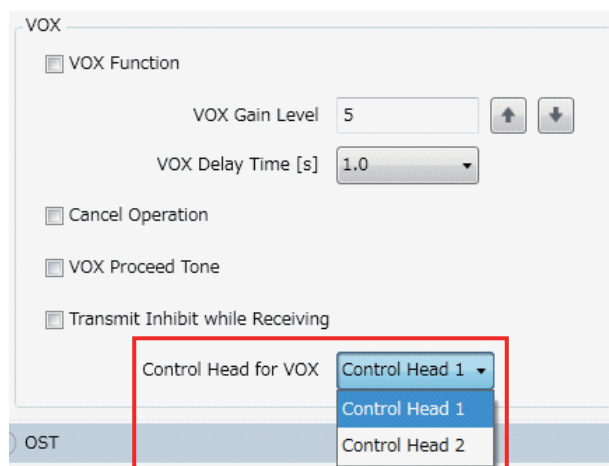


Figure 17-73 KPG-D1 > Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX

If “Control Head 1” is configured in Control Head for VOX:

The VOX function is executed using the headset connected to Control Head 1. If the headset is not connected to Control Head 1, VOX does not function.

Or, when **Cancel Operation** is enabled, executing any of the following operations disables VOX of whole Multi RF Deck/ Multi Control Head.

- Pressing the **PTT** switch of Control Head 1
- The External PTT (Voice) port (AUX Input) of the Selected RF Deck goes low level
- Pressing the **PTT** switch of the headset connected to Control Head 1

If “Control Head 2” is configured in Control Head for VOX:

The VOX function is executed using the headset connected to Control Head 2. If the headset is not connected to Control Head 2, VOX does not function.

Or, when **Cancel Operation** is enabled, executing any of the following operations disables VOX of whole Multi RF Deck/ Multi Control Head.

- Pressing the **PTT** switch of Control Head 2
- The External PTT (Voice) port (AUX Input) of the Selected RF Deck goes low level
- Pressing the **PTT** switch of the headset connected to Control Head 2

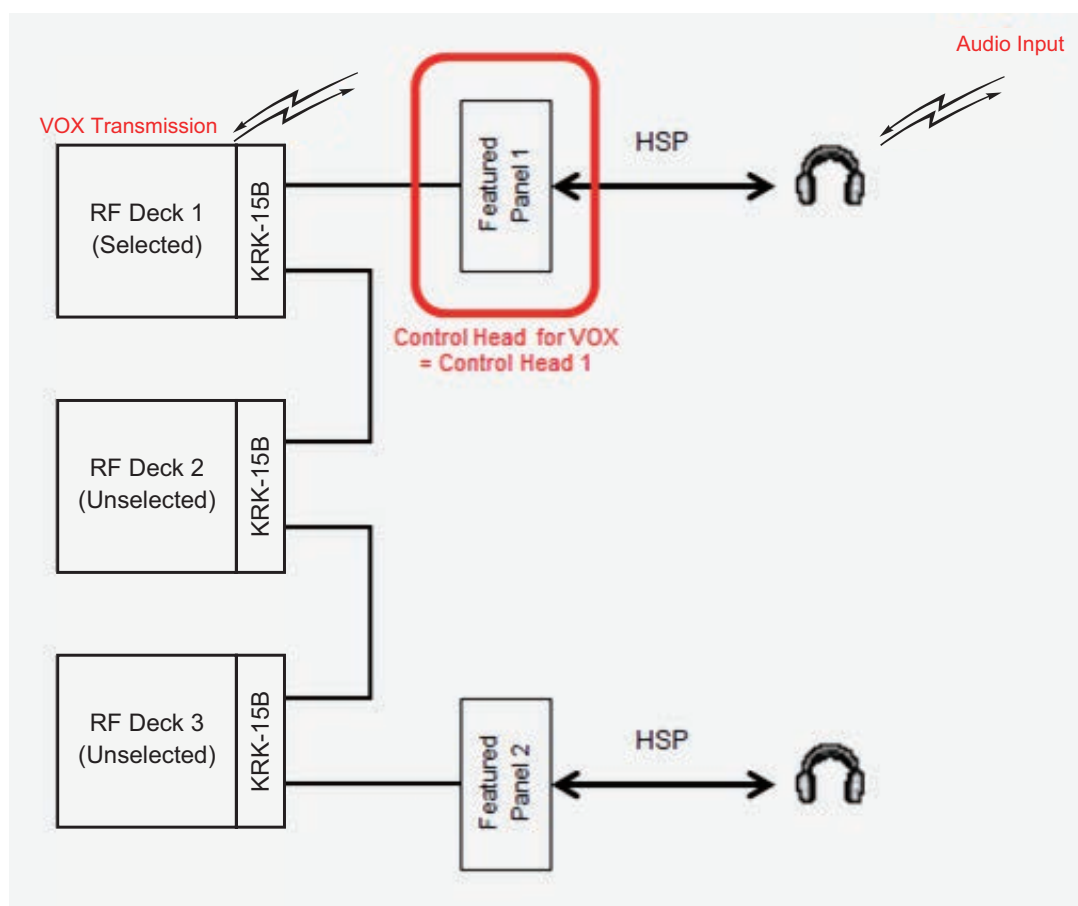


Figure 17-74 VOX Transmission (Control Head)

Switching the Speaker to Emit Audio (Bluetooth Speaker)

In a Multi RF Deck/ Multi Control Head structure, whether to emit audio from the speaker of the Bluetooth-compatible device connected by Headset Profile, or from the internal or the external speaker can be toggled by the configuration in **Bluetooth Speaker** (Off, Only, Both (Bluetooth+Radio)). The speaker to emit audio varies according to the configurations in **Bluetooth Speaker** and **Bluetooth Interface Selection** (RF Deck, Control Head).

● RF Deck

By pressing the **Bluetooth Speaker** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Bluetooth Speaker", the configuration in **Bluetooth Speaker** can be changed.

In the following diagram, a Bluetooth speaker is connected to all RF Decks. If "Both" is configured in **Bluetooth Speaker**, the pattern of emitting audio when the audio is simultaneously received is as follows:

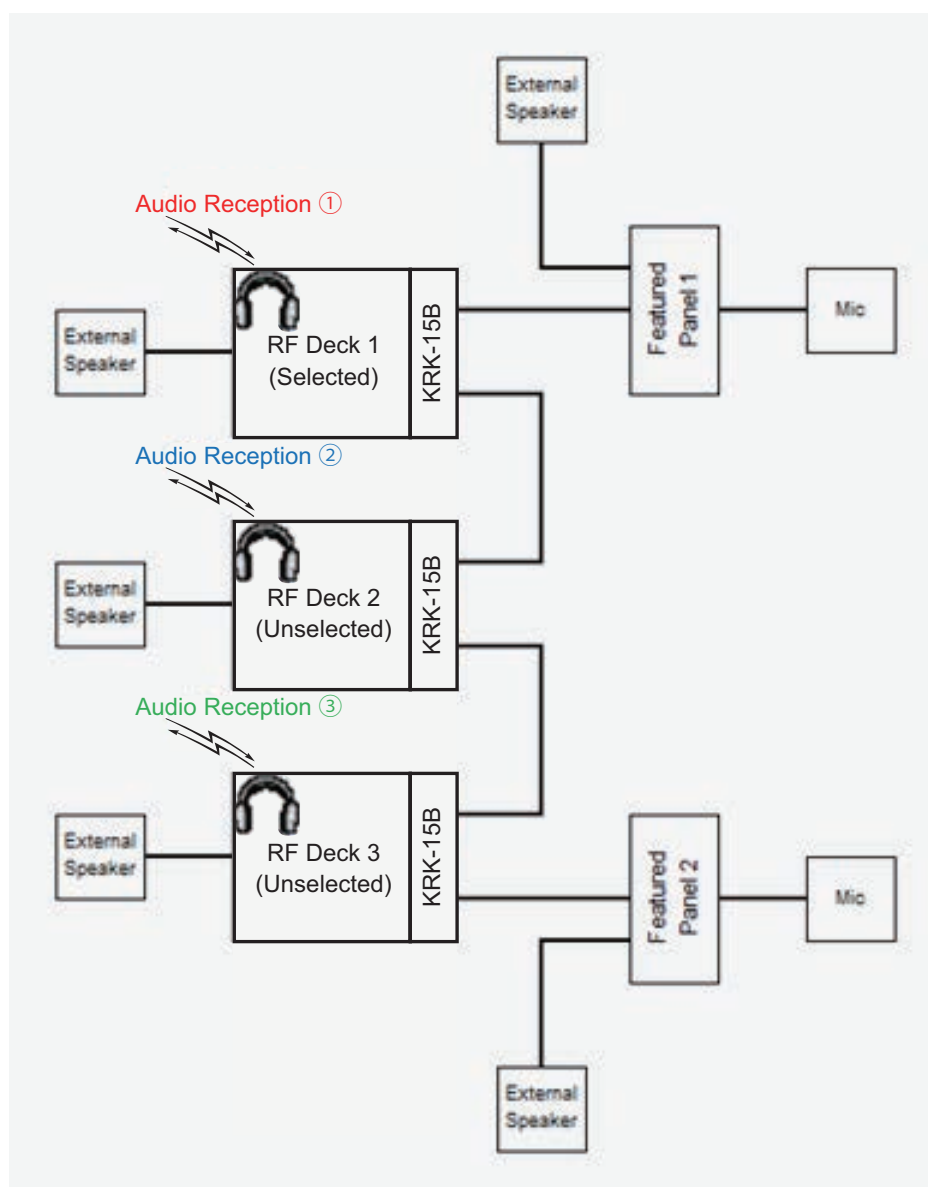


Figure 17-75 Pattern of Emitting Audio (RF Deck)

Table 17-11 Pattern of Emitting Audio (RF Deck)

Configuration Status		Audio Output Pattern							
Bluetooth Speaker	External Speaker	Control Head		RF Deck 1		RF Deck 2		RF Deck 3	
		External Speaker (Control Head 1) * 1	External Speaker (Control Head 2) * 1	Bluetooth-compatible Device	External Speaker	Bluetooth-compatible Device	External Speaker	Bluetooth-compatible Device	External Speaker
Off	Off	①	①	No	No	No	②	No	③
	On	No	No	No	①	No	②	No	③
	Internal + External	①	①	No	①	No	②	No	③
Only	Off	No	No	①	No	②	No	③	No
	On	No	No	①	No	②	No	③	No
	Internal + External	No	No	①	No	②	No	③	No
Both (Bluetooth + Radio)	Off	①	①	①	No	②	②	③	③
	On	No	No	①	①	②	②	③	③
	Internal + External	①	①	①	①	②	②	③	③

① : The audio reception ① of Figure 16-75 is emitted.

② : The audio reception ② of Figure 16-75 is emitted.

③ : The audio reception ③ of Figure 16-75 is emitted.

No: Audio is not emitted.

* 1: Treated as the internal speaker of each Control Head.

● Control Head

By pressing the **Bluetooth Speaker** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Bluetooth Speaker", the configuration in **Bluetooth Speaker** can be changed.

In the following diagram, a Bluetooth speaker is connected to all Control Heads. If "Both" is configured in **Bluetooth Speaker**, the pattern of emitting audio when the audio is simultaneously received is as follows:

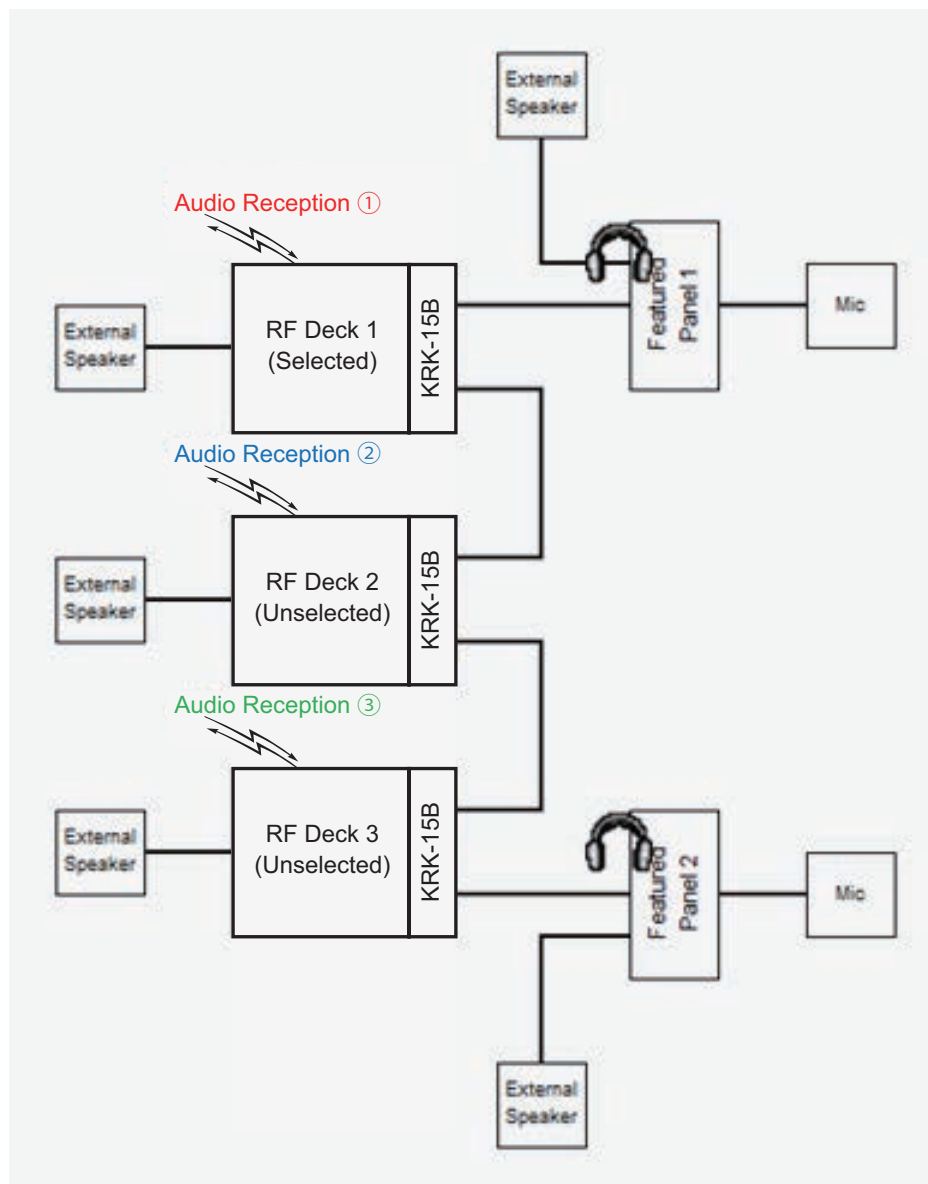


Figure 17-76 Pattern of Emitting Audio (Control Head)

Table 17-12 Pattern of Emitting Audio (Control Head)

Configuration Status		Audio Output Pattern						
Bluetooth Speaker	External Speaker	Control Head 1		Control Head 2		RF Deck 1	RF Deck 2	RF Deck 3
		External Speaker * 1	Bluetooth-compatible Device	External Speaker * 1	Bluetooth-compatible Device	External Speaker	External Speaker	External Speaker
Off	Off	①	No	①	No	No	②	③
	On	No	No	No	No	①	②	③
	Internal + External	①	No	①	No	①	②	③
Only	Off	No	①	No	①	No	②	③
	On	No	①	No	①	No	②	③
	Internal + External	No	①	No	①	No	②	③
Both (Bluetooth + Radio)	Off	①	①	No	①	No	②	③
	On	No	①	①	①	①	②	③
	Internal + External	①	①	①	①	①	②	③

① : The audio reception ① of Figure 16-76 is emitted.

② : The audio reception ② of Figure 16-76 is emitted.

③ : The audio reception ③ of Figure 16-76 is emitted.

No: Audio is not emitted.

* 1: Treated as the internal speaker of each Control Head.

17.17 microSD

This section describes the operation method for microSD/ Memory in a Multi RF Deck/ Multi Control Head structure.

The audio during transmission and reception, or the GPS location information can be stored in a microSD card. An SD card slot is equipped in the RF Deck and the Control Panel (KCH-20R). If Multi RF Deck/ Multi Control Head is structured using KCH-20R, multiple available microSD exist.

Which microSD card is used, either a microSD card inserted in the SD card slot of an RF Deck, or a microSD card inserted in the SD card slot of a Control Head, can be configured in **SD Card Selection** of KPG-D1/ D1N.

The screenshot shows the 'microSD/Memory' settings page. Key sections include:

- Auto Recording:** Includes a checkbox for 'Auto Recording', a 'Recording Type' dropdown set to 'Individual Call', and a 'Maximum Recording Length' section with 'Internal Memory [s]' and 'microSD Memory Card [s]' both set to 30.
- GPS Data Storage (Manual/Auto):** Includes a 'Record Format (Manual/Auto)' section with checkboxes for '\$GPGGA (NMEA)', '\$GPGLL (NMEA)', and '\$GPRMC (NMEA)', and an 'Auto' checkbox with an 'Interval [s]' set to 60.
- Playback End Tone:** A checked checkbox.
- First-in First-out Deletion:** An unchecked checkbox.
- Low Memory Warning:** A dropdown menu set to 'Off'.
- SD Card Selection:** A dropdown menu currently showing 'RF Deck'. A red box highlights the dropdown and its open list of options: 'RF Deck', 'RF Deck', 'Control Head 2', 'RF Deck Data A', 'RF Deck Data B', and 'RF Deck Data C'.
- GPS/Bluetooth:** A section with a 'Built-in GPS Receiver/Bluetooth' checkbox, a 'GPS/Bluetooth Preset (Default)' dropdown, and a checked 'GPS' checkbox.

Figure 17-77 KPG-D1 > Transceiver Settings > Optional Features > Optional Features 2 > microSD/Memory

● If “RF Deck” is configured in SD Card Selection

Audio and GPS data can be stored in the microSD card inserted in the SD card slot of each RF Deck. Audio data and GPS data are stored as follows depending on the availability of a microSD card:

Table 17-13 SD Card Selection (RF Deck)

Type	microSD Card Is in the RF Deck	No microSD Card Is in the RF Deck
Audio Data (Auto Recording)	Stored in the microSD card inserted in the RF Deck.	Stored in the internal memory.
Audio Data (Voice Memo)	Stored in the microSD card inserted in the RF Deck.	Not stored.
GPS Data (Automatic)	Stored in both the microSD card inserted in the RF Deck and the internal memory if the GPS data is automatically stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Stored in the internal memory.
GPS Data (Manual)	Stored only in the microSD card inserted in the RF Deck if the GPS data is manually stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Not stored.

● If “Control Head 1” is configured in SD Card Selection

Audio and GPS data can be stored in the microSD card inserted in the SD card slot of Control Head 1 (KCH-20R). Audio data and GPS data are stored as follows depending on the availability of a microSD card:

Table 17-14 SD Card Selection (Control Head 1)

Type	microSD Card Is in Control Head 1 (KCH-20R)	No microSD Card Is in Control Head 1 (KCH-20R)
Audio Data (Auto Recording)	Stored in the microSD card inserted in Control Head 1 (KCH-20R).	Stored in the internal memory.
Audio Data (Voice Memo)	Stored in the microSD card inserted in Control Head 1 (KCH-20R).	Not stored.
GPS Data (Automatic)	Stored in both the microSD card inserted in Control Head 1 (KCH-20R) and the internal memory if the GPS data is automatically stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Stored in the internal memory.
GPS Data (Manual)	Stored only in the microSD card inserted in Control Head 1 (KCH-20R) if the GPS data is manually stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Not stored.

● If “Control Head 2” is configured in SD Card Selection

Audio and GPS data can be stored in the microSD card inserted in the SD card slot of Control Head 2 (KCH-20R). Audio data and GPS data are stored as follows depending on the availability of a microSD card:

Table 17-15 SD Card Selection (Control Head 2)

Type	microSD Card Is in Control Head 2 (KCH-20R)	No microSD Card Is in Control Head 2 (KCH-20R)
Audio Data (Auto Recording)	Stored in the microSD card inserted in Control Head 2 (KCH-20R).	Stored in the internal memory.
Audio Data (Voice Memo)	Stored in the microSD card inserted in Control Head 2 (KCH-20R).	Not stored.
GPS Data (Automatic)	Stored in both the microSD card inserted in Control Head 2 (KCH-20R) and the internal memory if the GPS data is automatically stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Stored in the internal memory.
GPS Data (Manual)	Stored only in the microSD card inserted in Control Head 2 (KCH-20R) if the GPS data is manually stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Not stored.

● If “RF Deck Data A”, “RF Deck Data B” or “RF Deck Data C” is configured in SD Card Selection

The RF Deck (RF Deck 1, RF Deck 2 or RF Deck 3) corresponding to “RF Deck Data A”, “RF Deck Data B” or “RF Deck Data C” can be respectively associated when the FPU data is written to each RF Deck.

Audio and GPS data can be stored in the microSD card inserted in the SD card slot of RF Deck 1, RF Deck 2 or RF Deck 3.

Audio data and GPS data are stored as follows depending on the availability of a microSD card:

Table 17-16 SD Card Selection (RF Deck Data A/ RF Deck Data B/ RF Deck Data C)

Type	microSD Card Is in the RF Deck	No microSD Card Is in the RF Deck
Audio Data (Auto Recording)	Stored in the microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3.	Stored in the internal memory.
Audio Data (Voice Memo)	Stored in the microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3.	Not stored.
GPS Data (Automatic)	Stored in both the microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3 and the internal memories of all RF Decks if the GPS data is automatically stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Stored in the internal memory.
GPS Data (Manual)	Stored only in the microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3 if the GPS data is manually stored. (Refer to Storing the GPS Data (GPS Data Storage) .)	Not stored.

The following microSD basic functions work differently between when “RF Deck” is configured and when “Control Head 1” or “Control Head 2” is configured in **SD Card Selection**.

- Format SD Card
- Eject SD Card
- Auto Recording
- Playback
- GPS Data Storage

The following describes how each function works.

Formatting a microSD Card (Format SD Card)

For the first use of a microSD card inserted in the RF Deck or KCH-20R in a Multi RF Deck/ Multi Control Head structure, formatting of a microSD card is required.

A microSD card to be formatted varies according to the configuration in **SD Card Selection** (RF Deck, Control Head 1, Control Head 2, RF Deck Data A, RF Deck Data B, RF Deck Data C).

● RF Deck

By pressing the **Format SD Card** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Format SD Card Mode", a microSD card inserted in the Selected RF Deck can be formatted.

● Control Head 1/ Control Head 2

By pressing the **Format SD Card** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Format SD Card Mode", a microSD card inserted in Control Head 1/ Control Head 2 (KCH-20R) can be formatted.

● RF Deck Data A/ RF Deck Data B/ RF Deck Data C

By pressing the **Format SD Card** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Format SD Card Mode", a microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3 can be formatted.

Resetting the Recognition of microSD Card (Eject SD Card)

Eject SD Card Mode is used to reset the recognition of microSD card from an RF Deck and KCH-20R. A microSD card for which the recognition is reset varies according to the configuration in **SD Card Selection** (RF Deck, Control Head 1, Control Head 2, RF Deck Data A, RF Deck Data B, RF Deck Data C).

● RF Deck

By pressing the **Eject SD Card** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Eject SD Card Mode", the recognition of the microSD card inserted in the Selected RF Deck can be reset.

● Control Head 1/ Control Head 2

By pressing the **Eject SD Card** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Eject SD Card Mode", the recognition of the microSD card inserted in Control Head 1/ Control Head 2 (KCH-20R) can be reset.

● RF Deck Data A/ RF Deck Data B/ RF Deck Data C

By pressing the **Eject SD Card** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Eject SD Card Mode", the recognition of the microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3 can be reset.

Recording Received Audio Automatically (Auto Recording)

If each RF Deck transmits or receives, the audio is recorded to a microSD card or internal memory. The recording behavior varies according to the configuration in **SD Card Selection** (RF Deck, Control Head 1, Control Head 2, RF Deck Data A, RF Deck Data B, RF Deck Data C).

● RF Deck

The recording behavior is executed by each RF Deck. The method of starting recording can also be configured for each RF Deck.

If each RF Deck transmits or receives, the audio is recorded to a microSD card inserted in each RF Deck. If no microSD card is inserted, the audio is recorded to the internal memory of each RF Deck.

● Control Head 1/ Control Head 2

The recording behavior is executed by the Selected RF Deck. The method of starting recording is common to all RF Decks.

If a microSD card is inserted in Control Head 1/ Control Head 2 (KCH-20R), the audio is recorded to a microSD card when the Selected RF Deck transmits and receives. No recording is done by the Unselected RF Deck.

If no microSD card is inserted in Control Head 1/ Control Head 2 (KCH-20R), the audio is recorded to the internal memory of the Selected RF Deck when the Selected RF Deck transmits and receives. No recording is done by the Unselected RF Deck.

Recording ends if the Selected RF Deck is switched during recording. In this case, the Gap timer is not activated, and recording is not done during the silence time.

● RF Deck Data A/ RF Deck Data B/ RF Deck Data C

The recording behavior is executed by the Selected RF Deck. The method of starting recording is common to all RF Decks.

If a microSD card is inserted in RF Deck 1, RF Deck 2 or RF Deck 3, the audio is recorded to a microSD card when the Selected RF Deck transmits and receives. No recording is done by the Unselected RF Deck.

If no microSD card is inserted in RF Deck 1, RF Deck 2 and RF Deck 3, the audio is recorded to the internal memory of the Selected RF Deck when the Selected RF Deck transmits and receives. No recording is done by the Unselected RF Deck.

Recording ends if the Selected RF Deck is switched during recording. In this case, the Gap timer is not activated, and recording is not done during the silence time.

Note

- Recording is not done during formatting, deleting an audio file or recognizing a microSD card. Also, even after these statuses are reset, a communication that has already started is not recorded.
- After the configuration data is written, the configuration values in **Internal Memory** of **Maximum Recording Length** before and after writing are compared for each RF Deck. If the values differ, the audio data recorded in the internal memory of the RF Deck is deleted while "SELF TESTING" appears on the display.
- If the configuration data with **Audio/GPS Data Erase (Internal Memory)** enabled is written, the audio data recorded in the internal memory of all RF Decks is deleted while "SELF TESTING" appears on the display.
- If a microSD card is ejected during recording, the audio data file during recording may not be saved correctly.

Playing Back the Recorded Audio (Playback)

The audio data recorded in the microSD card or internal memory of each RF Deck can be played back. The audio data which can be played back in Playback Mode varies according to the configuration in **SD Card Selection** (RF Deck, Control Head 1, Control Head 2, RF Deck Data A, RF Deck Data B, RF Deck Data C).

● RF Deck

By pressing the **Playback** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Playback", Playback Mode is entered. If a microSD card is inserted in the Selected RF Deck, the audio data in the microSD card can be played back. If no microSD card is inserted in the Selected RF Deck, the audio data in the internal memory of the Selected RF Deck can be played back.

Playback Mode ends if a microSD card is ejected from the Selected RF Deck in Playback Mode.

● Control Head 1/ Control Head 2

By pressing the **Playback** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Playback", Playback Mode is entered. If a microSD card is inserted in Control Head 1/ Control Head 2 (KCH-20R), the audio data in the microSD card can be played back.

If no microSD card is inserted in Control Head 1/ Control Head 2 (KCH-20R), the audio data in the internal memory of the Selected RF Deck can be played back.

Playback Mode ends if a microSD card is ejected from Control Head 1/ Control Head 2 (KCH-20R) in Playback Mode.

● RF Deck Data A/ RF Deck Data B/ RF Deck Data C

By pressing the **Playback** key, or by pressing the **Menu** key to enter Menu Mode and then executing "Playback", Playback Mode is entered. If a microSD card is inserted in RF Deck 1, RF Deck 2 or RF Deck 3, the audio data in the microSD card can be played back.

If no microSD card is inserted in RF Deck 1, RF Deck 2 or RF Deck 3, the audio data in the internal memory of the Selected RF Deck can be played back.

Playback Mode ends if a microSD card is ejected from RF Deck 1, RF Deck 2 or RF Deck 3 in Playback Mode.

Note

- Playback Mode ends if the Selected RF Deck receives in Playback Mode. Even if the Unselected RF Deck receives, Playback Mode continues.
- If the Selected RF Deck is in the following conditions, even if the **Playback** key is pressed, a Key-entry Error Tone sounds, and Playback Mode is not entered:
 - While Speaker Unmute
 - While the Auto Recording behavior
 - While deleting audio data
 - While formatting a microSD card

Storing the GPS Data (GPS Data Storage)

GPS data can be automatically stored in both the internal memory and a microSD card. Also, GPS data can be manually stored in a microSD card.

In a Multi RF Deck/ Multi Control Head structure, the GPS data acquired by RF Deck 1 is transferred to RF Deck 2 and RF Deck 3. The transferred GPS data is automatically or manually stored in each RF Deck.

Automatically Storing the GPS Data

The storing behavior of GPS data varies according to the configuration in **SD Card Selection** (RF Deck, Control Head 1, Control Head 2, RF Deck Data A, RF Deck Data B, RF Deck Data C).

● RF Deck

The GPS data is temporarily stored in the RAM of each RF Deck at the time interval configured in **Interval**. If 3 pieces of GPS data are stored, these pieces of data are stored in both the internal memory of each RF Deck and a microSD card of each RF Deck. The GPS data (1 or 2 pieces) temporarily stored in the RAM of each RF Deck are deleted without being stored in the internal memory and microSD card when the RF Deck is turned OFF. Whether to store the GPS data can be configured for each microSD card inserted in each RF Deck.

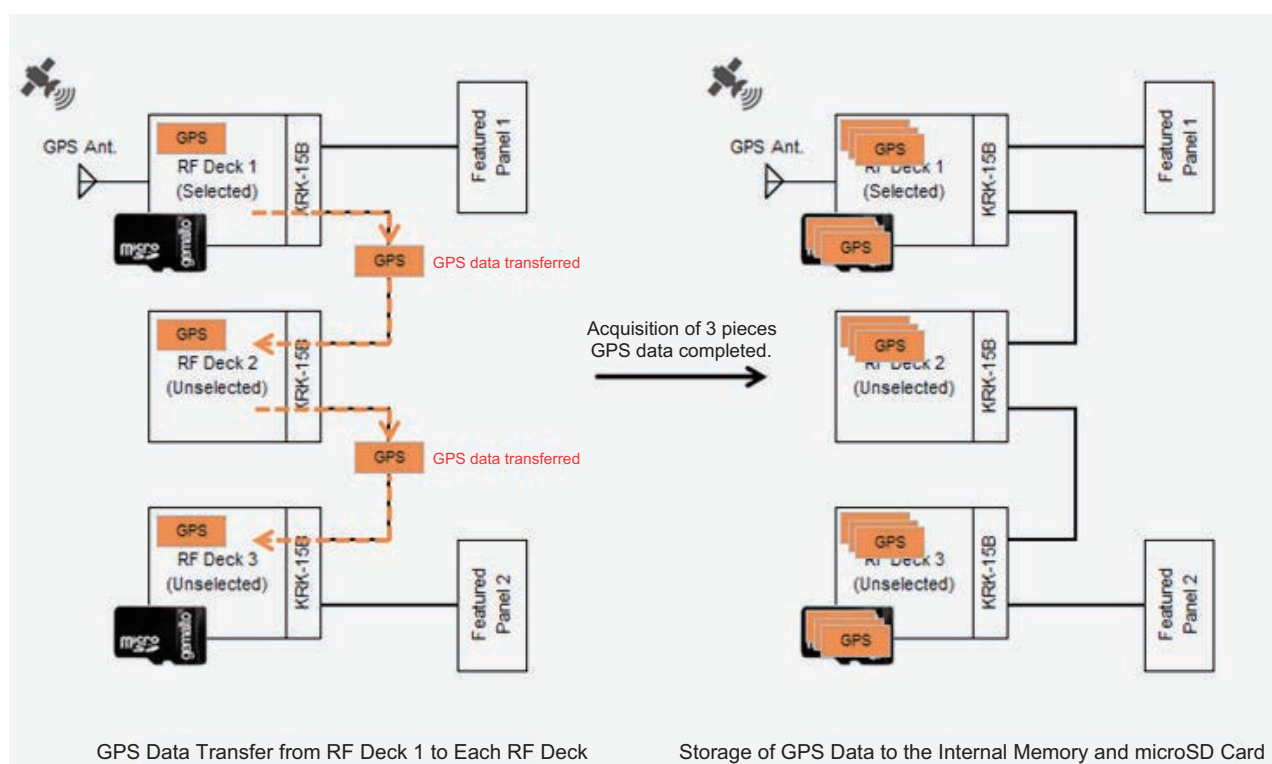


Figure 17-78 GPS Data Storage (Auto) (RF Deck)

● Control Head 1/ Control Head 2

The GPS data is temporarily stored in the RAM of each RF Deck at the time interval configured in **Interval**. If 3 pieces of GPS data are stored, these pieces of data are stored in both the internal memory of each RF Deck and a microSD card of Control Head 1/ Control Head 2 (KCH-20R). The GPS data (1 or 2 pieces) temporarily stored in the RAM of each RF Deck are deleted without being stored in the internal memory and microSD card when the RF Deck is turned OFF. Whether to store the GPS data in a microSD card inserted in Control Head 1/ Control Head 2 (KCH-20R) can be configured.

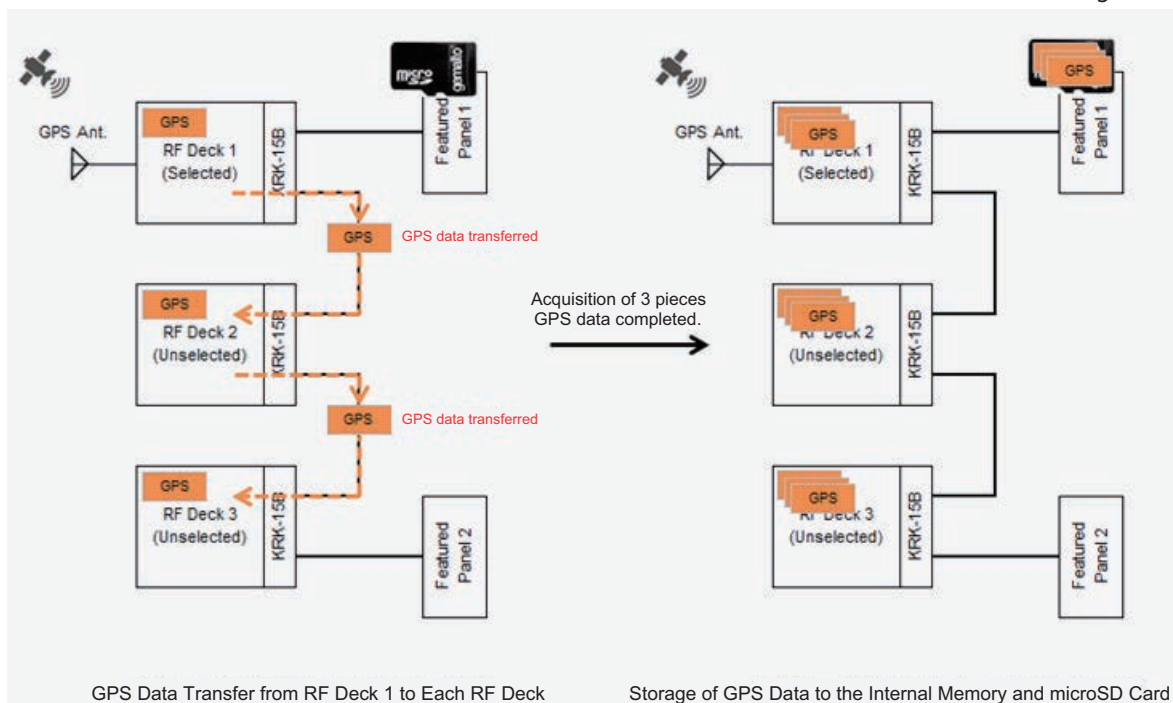


Figure 17-79 GPS Data Storage (Auto) (Control Head 1/ Control Head 2)

● RF Deck Data A/ RF Deck Data B/ RF Deck Data C

The GPS data is temporarily stored in the RAM of each RF Deck at the time interval configured in **Interval**. If 3 pieces of GPS data are stored, these pieces of data are stored in both the internal memory of each RF Deck and a microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3. The GPS data (1 or 2 pieces) temporarily stored in the RAM of each RF Deck are deleted without being stored in the internal memory and microSD card when the RF Deck is turned OFF. Whether to store the GPS data in a microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3 can be configured.

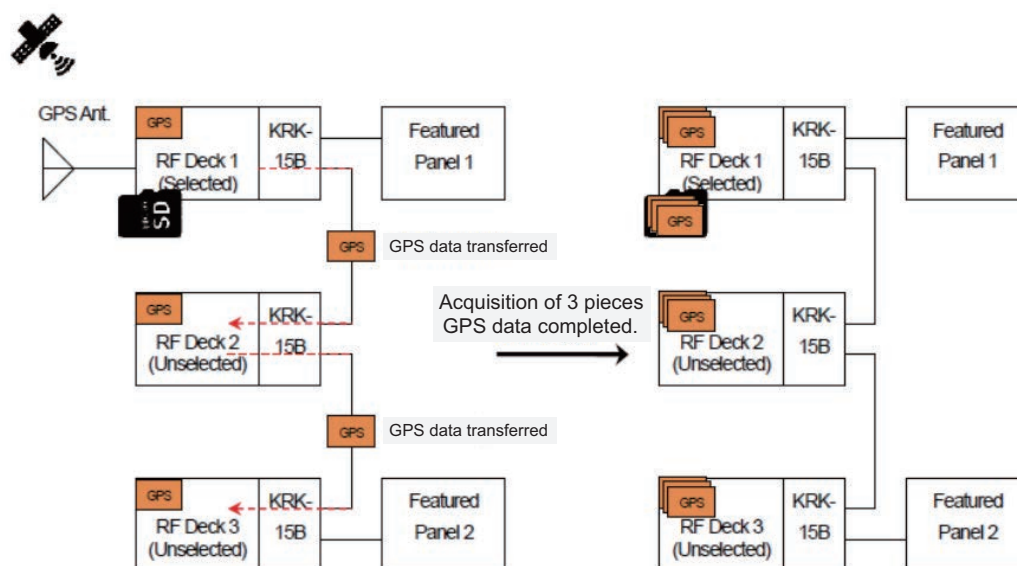


Figure 17-80 GPS Data Storage (Auto) (RF Deck Data A/ RF Deck Data B/ RF Deck Data C = RF Deck 1)

Manually Storing the GPS Data

The storing behavior of GPS data varies according to the configuration in **SD Card Selection** (RF Deck, Control Head 1, Control Head 2, RF Deck Data A, RF Deck Data B, RF Deck Data C).

● RF Deck

Whether the GPS data is stored is configured for each RF Deck.

By pressing the **Save GPS Data** key, or by pressing the **Menu** ([]) key or [*] key in GPS Position Display Mode, the GPS data is stored in the microSD card inserted in the Selected RF Deck. If no microSD card is inserted, a Key-entry Error Tone (1 beep) sounds from the transceiver and the GPS data is not stored.

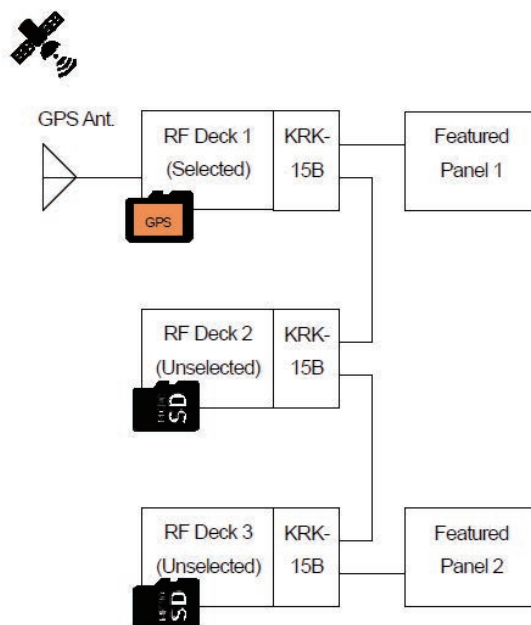


Figure 17-81 GPS Data Storage (Manual) (RF Deck)

● Control Head 1/ Control Head 2

Whether the GPS data is stored is commonly configured for all RF Decks.

By pressing the **Save GPS Data** key, or by pressing the **Menu** ([]) key or [*] key in GPS Position Display Mode, the GPS data is stored in the microSD card inserted in Control Head 1/ Control Head 2 (KCH-20R). If no microSD card is inserted, a Key-entry Error Tone (1 beep) sounds from the transceiver and the GPS data is not stored.

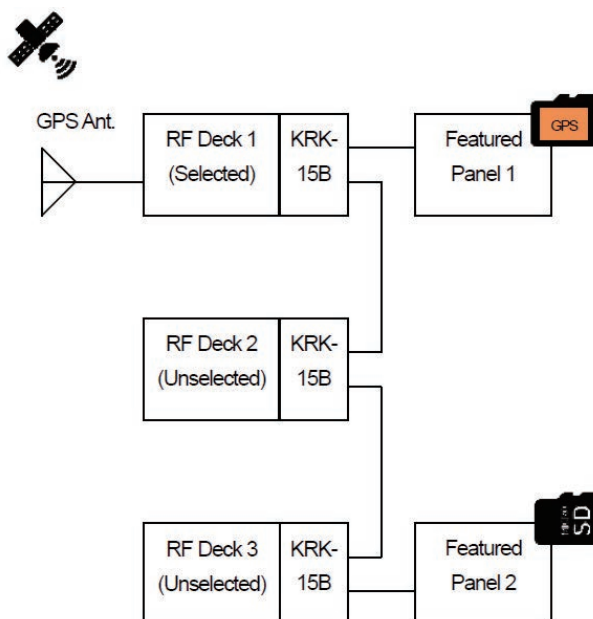


Figure 17-82 GPS Data Storage (Manual) (Control Head 1/ Control Head 2)

● RF Deck Data A/ RF Deck Data B/ RF Deck Data C

Whether the GPS data is stored is commonly configured for all RF Decks.

By pressing the **Save GPS Data** key, or by pressing the **Menu** ([]) key or [*] key in GPS Position Display Mode, the GPS data is stored in the microSD card inserted in RF Deck 1, RF Deck 2 or RF Deck 3. If no microSD card is inserted, a Key-entry Error Tone (1 beep) sounds from the transceiver and the GPS data is not stored.

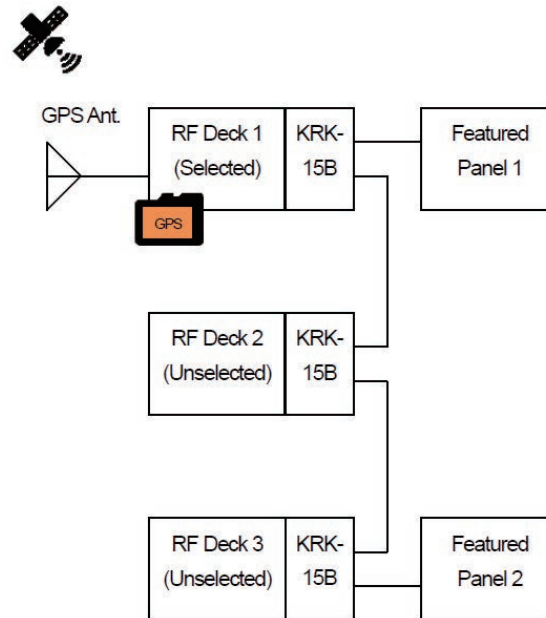


Figure 17-83 GPS Data Storage (Manual) (RF Deck Data A/ RF Deck Data B/ RF Deck Data C = RF Deck 1)

Note

- If the configuration data with Audio/GPS Data Erase (Internal Memory) enabled is written, the GPS data stored in the internal memory of all RF Decks is deleted while "SELF TESTING" appears on the display.
- If a microSD card is ejected while GPS data is being saved into the microSD card, the GPS data file which is being saved may not be saved correctly.

17.18 Relaying the Received Signal (Mobile Relay Station)

Mobile Relay Station is the function to relay the received signal by 2 RF Decks in a Multi RF Deck structure.

If this function is used, as shown in the diagram below, if RF Deck 1 transfers the signal received from Transceiver A to RF Deck 2, the signal can be transferred from RF Deck 2 to Transceiver B.

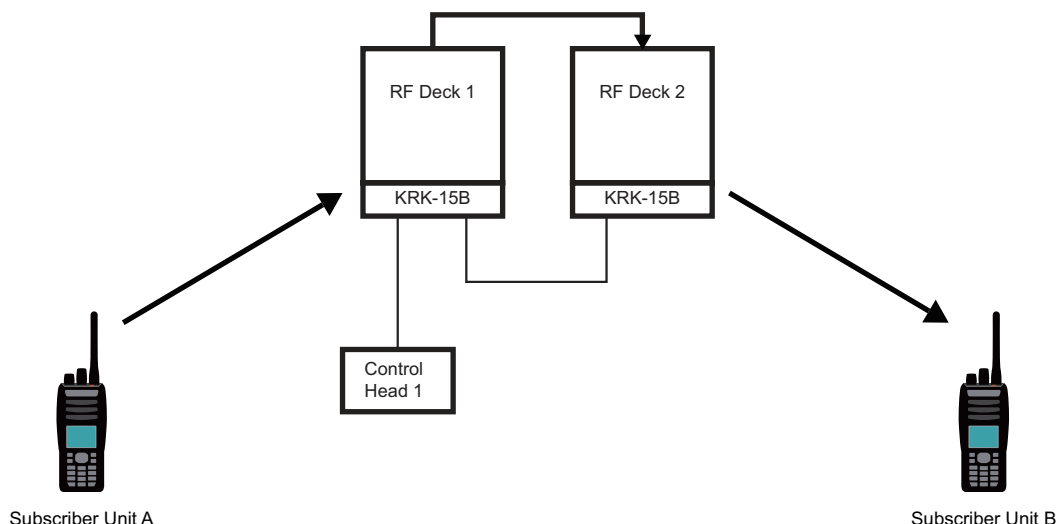


Figure 17-84 Outline of Mobile Relay Station

To use this function, the following configurations and RF Deck connections are required:

- By using KPG-D1/ D1N, configure the 2 RF Decks that activate **Mobile Relay Station**, and configure a **Mobile Relay Station** Zone-channel for each RF Deck. (Refer to [Configuring Mobile Relay Station](#).)
- By using KPG-D1/ D1N, assign the functions to enable **Mobile Relay Station** to the PF key and communication port. (Refer to [Configuring Mobile Relay Station](#).)
- Connect the 2 RF Decks that activate **Mobile Relay Station** by a D-sub 25-pin cable. (Refer to [Connecting the RF Deck by Using a D-sub 25-pin Cable](#).)

Hereinafter, the RF Decks configured with a **Mobile Relay Station** Zone-channel are referred to as "RF Deck 1" and "RF Deck 2".

Note

- Only a channel in an Analog Conventional system, NXDN Conventional system, or P25 Conventional system can be configured as a **Mobile Relay Station channel**. However, a channel with "Mixed" configured in **Channel Type** cannot be configured as a **Mobile Relay Station channel**.
- The configurations of the following need to be the same for each channel configured in the 2 RF Decks that activate **Mobile Relay Station**.
 - Channel Type
 - Channel Spacing (for a channel in an Analog Conventional system or NXDN Conventional system only)
 - P25 Modulation Type (for a channel in a P25 Conventional system only)
- If **Mobile Relay Station** is used, a delay of up to approximately 1 sec may occur in audio communications from the transceiver.

Configuration using KPG-D1/ D1N

- Configuring the RF Deck activating the **Mobile Relay Station** function (RF Deck Data) ([See](#) Transceiver Settings > Extended Function > Mobile > Mobile Relay Station > Mobile Relay Channel List)
- Configuring the **Mobile Relay Station** Zone-channel ([See](#) Transceiver Settings > Extended Function > Mobile > Mobile Relay Station > Mobile Relay Channel List)

Examples of Mobile Relay Station Operation

The following examples of the operation describes the behavior in a P25 Conventional system, but ID, frequency, and Signaling (QT/DQT, RAN) are transferred by the same the behavior in Analog Conventional and NXDN Conventional systems.

Also, all functions of each Conventional system, such as Optional Signaling (DTMF, 2-tone, MDC-1200, FleetSync, NXDN ID), Encryption, Emergency, and the functions of various calls, can be used.

Operation example 1

This is the example of the operation if **Mobile Relay Station** is used with the UHF transceiver as the transmitting unit and the VHF transceiver as the receiving unit in a P25 Conventional system.

The channel configurations of RF Deck 1 and RF Deck 2 are as follows:

Table 17-17 Mobile Relay Channel

RF Deck	Unit ID	Talkgroup ID	Receive Frequency	Transmit Frequency	NAC Decode	NAC Encode
RF Deck 1	1	1	460.5 MHz	465.5 MHz	293	29A
RF Deck 2	2	2	144.5 MHz	145.5 MHz	29B	29C

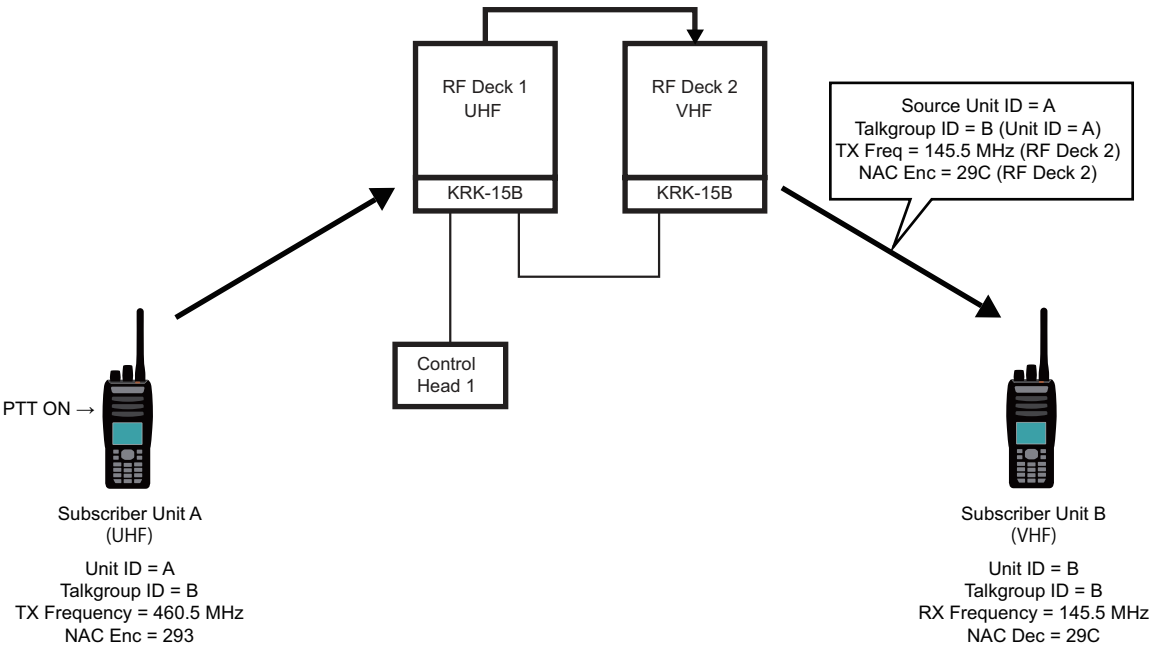


Figure 17-85 Mobile Relay Station (Operation Example 1)

In this case, RF Deck 1 behaves as the receiving repeater and RF Deck 2 behaves as the transmitting repeater. Contrary to the example shown above, RF Deck 2 can behave as the receiving repeater and RF Deck 1 can behave as the transmitting repeater.

Operation example 2

This is the example of the operation if **Mobile Relay Station** is used via a repeater with the UHF transceiver as the transmitting unit and the VHF transceiver as the receiving unit in a P25 Conventional system.

The channel configurations of RF Deck 1 and RF Deck 2 are as follows:

Table 17-18 Mobile Relay Channel

RF Deck	Unit ID	Talkgroup ID	Receive Frequency	Transmit Frequency	NAC Decode	NAC Encode
RF Deck 1	1	1	470.5 MHz	465.5 MHz	29E	29A
RF Deck 2	2	2	144.5 MHz	145.5 MHz	29B	29C

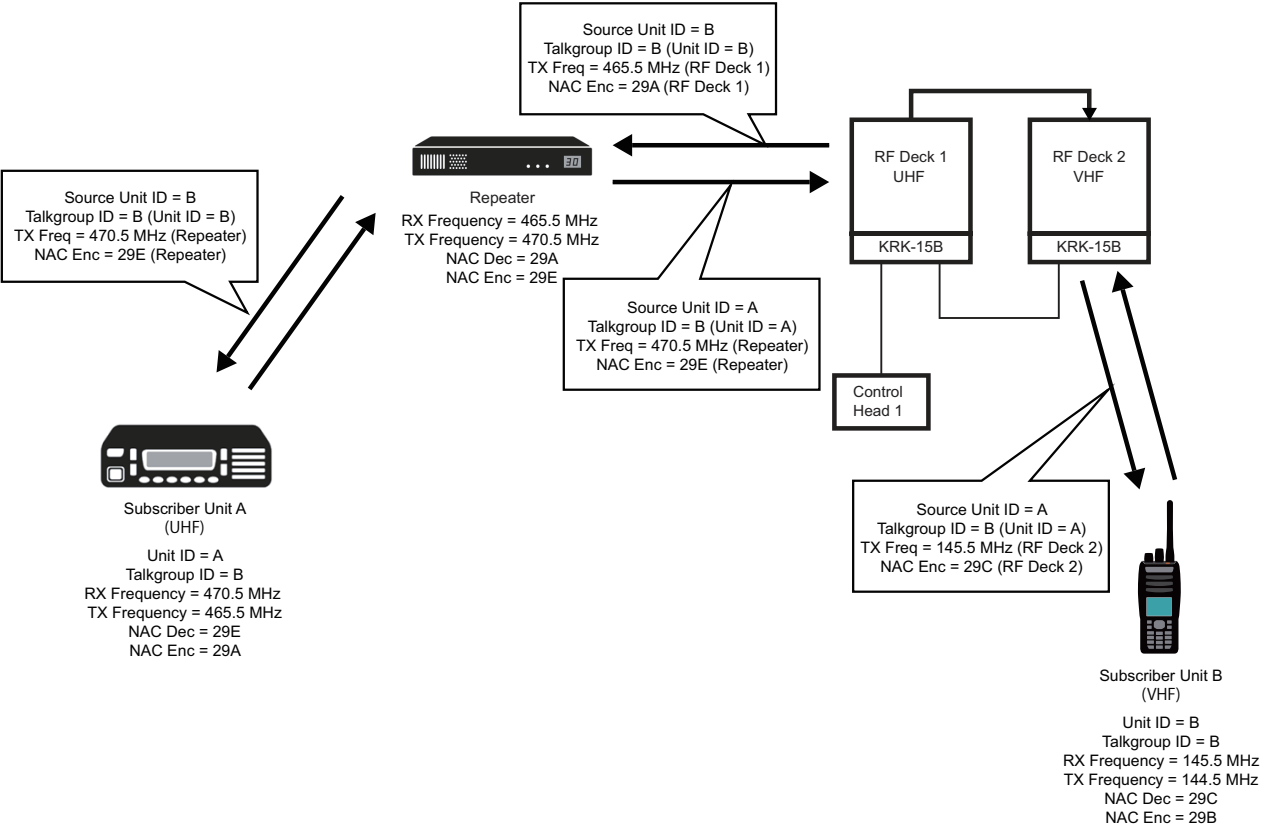


Figure 17-86 Mobile Relay Station (Operation Example 2)

Note

- **Mobile Relay Station** does not function if the received signaling does not match the signaling preconfigured for the receiving RF Deck.
- QT/DQT is decoded regardless of the status of **Off-hook Decode** and microphone hook.
- **Time-out Timer** executes according to the configuration.

Configuring Mobile Relay Station

Preparation in advance

The configuration conditions of the **Mobile Relay Station** function are as follows:

Firmware version of the transceiver:

Firmware version 2.00.00 or later

FPU:

KPG-D1/ D1N V 2.00 or later

Structure of transceivers:

Triple RF Deck or Dual RF Deck structure

Caution

Do not connect a D-sub 25-pin cable to the transceiver while the FPU data for Mobile Relay Station is not written in the transceiver. A D-sub 25-pin cable may malfunction if the D-sub 25-pin cable is connected to the transceiver in this state.

FPU configuration

Various functions of **Mobile Relay Station** are configured, and the configuration data is written to the transceiver by using KPG-D1/ D1N.

1 Configure “Mobile Relay Station” to a PF key or AUX Input port.

Note

- When “Mobile Relay Station” is configured for the AUX Input port, configure for only **RF Deck Data** of 1 unit. If “Mobile Relay Station” is configured for the AUX Input ports of **RF Deck Data** of 2 units, the behavior becomes incorrect.

2 Configure the channel that behaves as a Mobile Relay Channel in Mobile Relay Channel List.

The channel for which the values in System Type, Channel Type, and Channel Spacing are the same as the other channel needs to be configured as the Mobile Relay Channel. Also, configure both No.1 and No.2 RF Deck Data.

Mobile Relay Station

Mobile Relay Channel List

No.	RF Deck Data	Model Name	Frequency	Zone	Channel
1	None				
2	None				

Mobile Relay Station DB-25 Cable Custom Cable (Occupy COM port 2)

Figure 17-87 Mobile Relay Channel List

Note

- Mobile Relay Station DB-25 Cable** can be configured when No.1 and No.2 **RF Deck Data** are both configured.
- In a Triple RF Deck structure, **RF Deck Data** of 2 random units can be selected and configured as Mobile Relay Channels.
- If a Mobile Relay Channel is not configured, the transceiver cannot enter Mobile Relay Station Mode.

3 Configure the communication port to be used in Mobile Relay Station Mode in Mobile Relay Station DB-25 Cable.

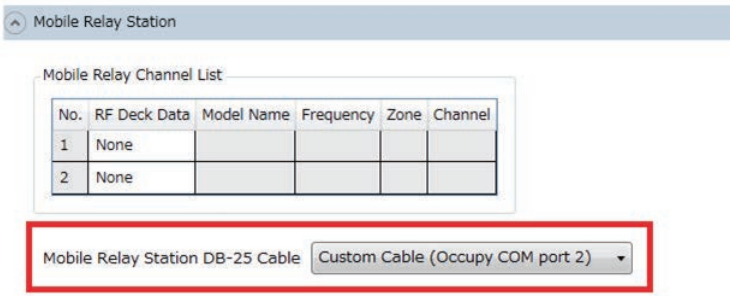


Figure 17-88 Mobile Relay Station DB-25 Cable

Table 17-19 Mobile Relay Station DB-25 Cable

Configuration	Description
Cross Cable (Occupy COM port 1)	This is the configuration for using a commercially available Null Modem cable. However, if a commercially available cable is used, an analog channel cannot be used as a Mobile Relay Channel. Also, the configuration cannot be used depending on the cable. Use a Null Modem cable of the same wiring as the wiring diagram in " ● COM port 1" of "Connecting the RF Deck by Using a D-sub 25-pin Cable" .
Custom Cable (Occupy COM port 2)	This is the configuration for using a self-made cable. Any of an analog channel, an NXDN channel, and a P25 channel can be used as a Mobile Relay Channel.

4 Write the FPU data.

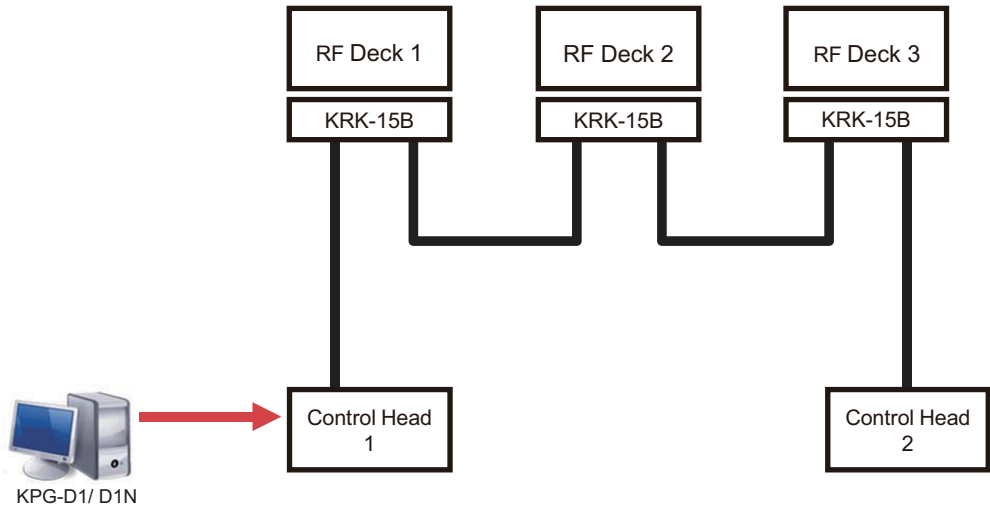


Figure 17-89 Triple RF Deck/ Dual Control Head (FPU Setting)

Connecting the RF Deck by Using a D-sub 25-pin Cable

Caution

Connect a D-sub 25-pin cable to the transceiver after confirming that the FPU data for Mobile Relay Station is written. A D-sub 25-pin cable may malfunction if the D-sub 25-pin cable is connected to the transceiver with the FPU data for Mobile Relay Station not written to the transceiver.

To use the **Mobile Relay Station** function, 2 RF Decks need to be connected by a D-sub 25-pin cable, and a Control Head needs to be connected to one of the RF Decks.

The following diagram is an example of RF Deck 1 and RF Deck 2 configured as Mobile Relay Channels in a Triple RF Deck structure:

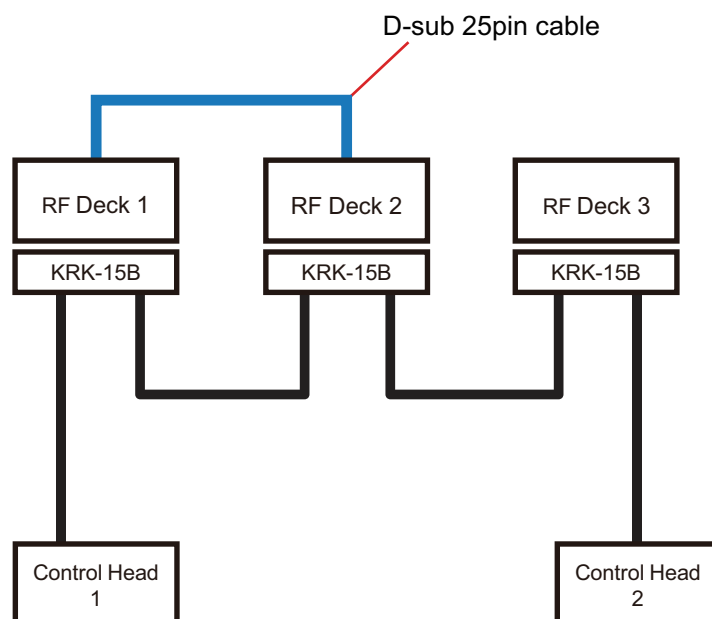


Figure 17-90 Connection Diagram

RF Deck 1 and RF Deck 2 can be connected by COM port 1 or COM port 2.

In analog communications, RF Decks are compatible with COM port 2. Also, in digital communications, RF Decks are compatible with COM port 1 and COM port 2.

● COM port 1

RF Deck 1 and RF Deck 2 can be connected by a commercially available Null Modem cable.

In this case, "Cross Cable (Occupy COM port 1)" needs to be configured in **Mobile Relay Station DB-25 Cable** by using KPG-D1/ D1N.

Refer to the diagram below to connect.

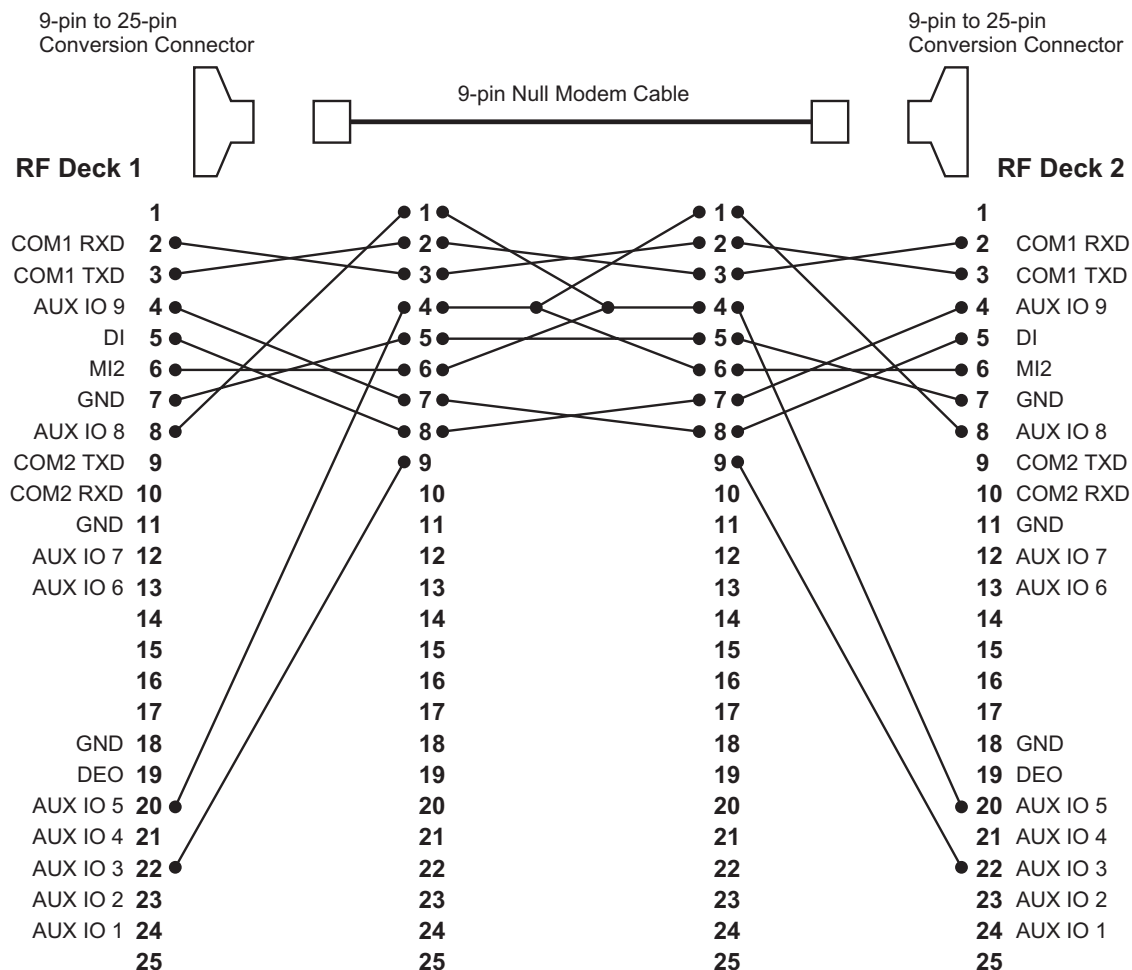


Figure 17-91 Wiring Diagram (COM port 1)

● COM port 2

To connect RF Deck 1 and RF Deck 2 by COM port 2 of a D-sub 25-pin connector, refer to the following wiring diagram and create a D-sub 25-pin cable. (Refer to [Creating a Dedicated Mobile Relay Station Cable](#).)

In this case, “Custom Cable (Occupy COM port 2)” needs to be configured in **Mobile Relay Station DB-25 Cable** by using KPG-D1/ D1N.

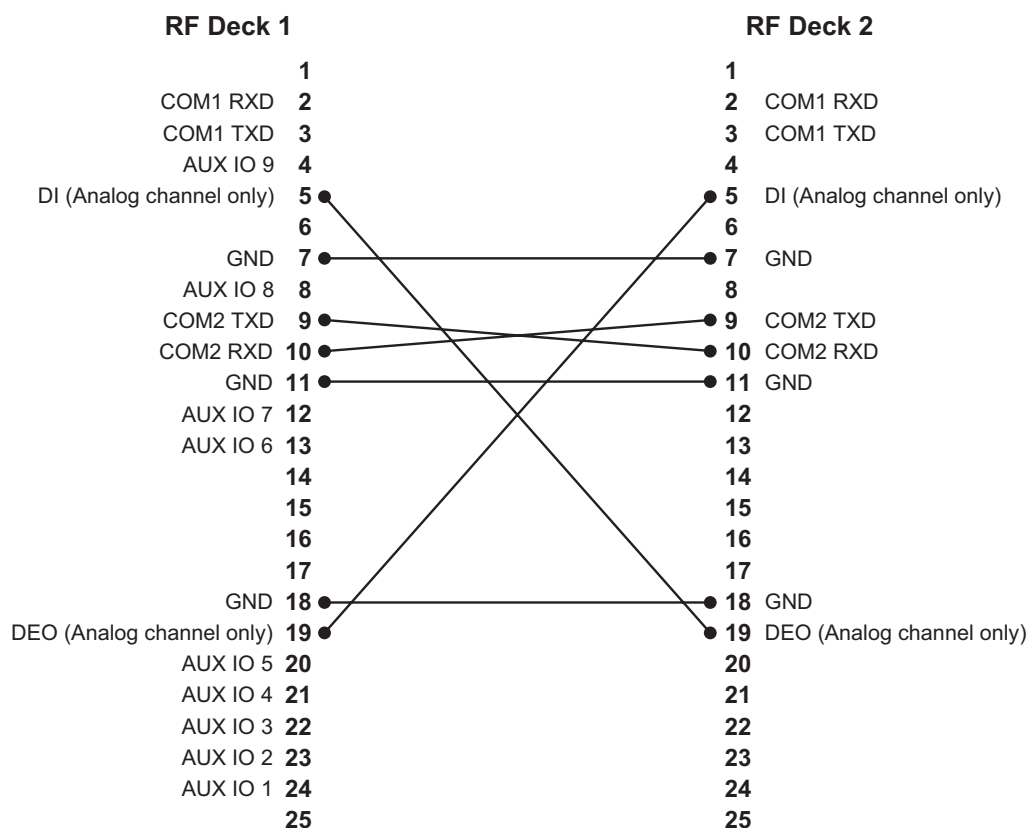


Figure 17-92 Wiring Diagram (COM port 2)

Note

- For only an analog channel, DI (Pin 5) and DEO (Pin 19) are interconnected. This connection is not required for a digital channel.
- If “Cross Cable (Occupy COM port 1)” is configured in **Mobile Relay Station DB-25 Cable**, the following AUX ports do not function:
 - DB-25 4pin
 - DB-25 8pin
 - DB-25 20pin
 - DB-25 24pin
- If “Custom Cable(Occupy COM Port 2)” is configured in **Mobile Relay Station DB-25 Cable**, Built-in GPS Receiver/ Bluetooth cannot be used.

Configuration using KPG-D1/ D1N

Configuring **Mobile Relay Station DB-25 Cable** (See Transceiver Settings > Extended Function > Mobile > Mobile Relay Station > Mobile Relay Channel List)

Creating a Dedicated Mobile Relay Station Cable

For connecting RF Deck 1 and RF Deck 2 by COM port 2, a D-sub 25-pin cable dedicated for Mobile Relay Station is created.

Required components

- D-sub 25-pin connector (male) (soldering type)
Comparable product to HDBB-25P(05) (Hirose)
A quantity of 2
- Flat cable
Comparable product to 28AWG
7 core wires
Approximate length of 40 cm
- Heat shrink tubing
SUMITUBE 1.5 φ
Appropriate quantity

Procedure to create a D-sub 25-pin cable

- 1** Cut the flat cable to the required length (approximately 40 cm), strip about 2 mm from the ends the cable, and prepare the ends with solder.

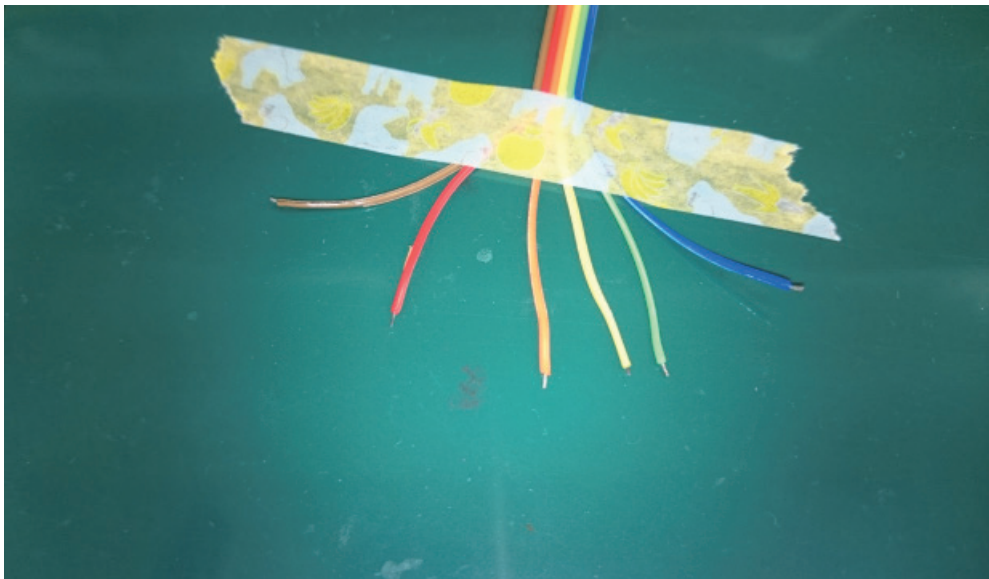


Figure 17-93 Processing of the Flat Cable

2 After slipping the heat shrink tubing on each cable, solder each cable to the D-sub 25-pin connector.

Solder according to the wiring diagram of "[Connecting the RF Deck by Using a D-sub 25-pin Cable](#)".

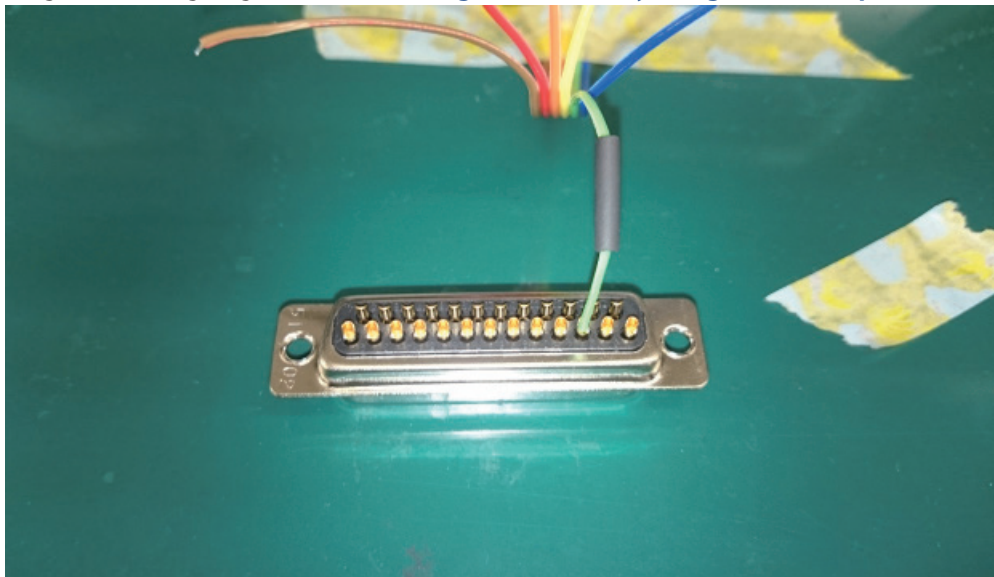


Figure 17-94 Cable Connection 1

3 Cover the soldered parts with the heat shrink tubing, and heat shrink with the hot air.

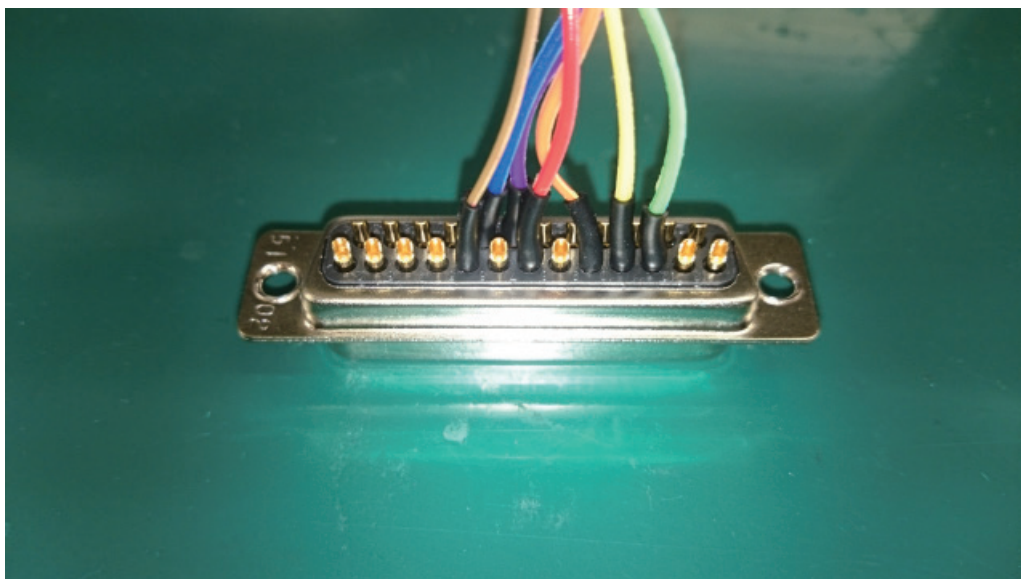


Figure 17-95 Cable Connection 2

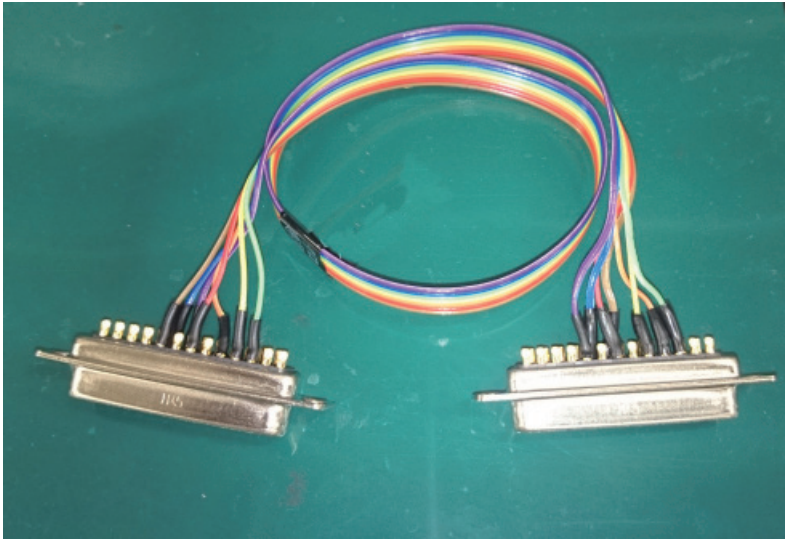


Figure 17-96 Completed Part

Connecting the External Speaker

Connect an external speaker to the RF Deck to monitor the received signal of a Mobile Relay Channel in Mobile Relay Station Mode. (Refer to [About the Pin Arrangement for KCT-72](#) and [the Connection of External Devices](#).)

If the received signal is encrypted, the received signal can be monitored when the SCM is connected to the transceiver. The following diagram is an example of an encrypted received signal being monitored while the SCM is connected to RF Deck 1:

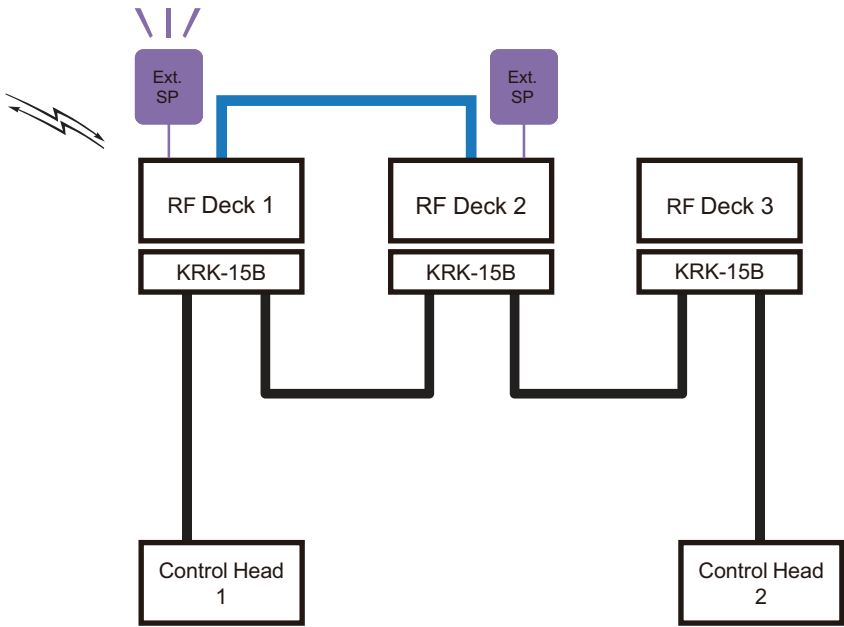


Figure 17-97 Monitor of Received Signal

Placing the Transceiver in Mobile Relay Station Mode

Mobile Relay Station functions if RF Deck 1 and RF Deck 2 are placed in Mobile Relay Station Mode.

Placing the RF Decks in Mobile Relay Station Mode

RF Deck 1 and RF Deck 2 can be placed in Mobile Relay Station Mode by one of the following methods:

- Pressing the **Mobile Relay Station** key
- Activating the Mobile Relay Station port
- Receiving a PC command from the communication port to enable Mobile Relay Station Mode

The Key Beep A (1 beep) sounds from the transceiver and "MOBILE RELAY" appears on the display when **Mobile Relay Station** is enabled.

Note

- If the SCM is connected to the transceiver, "Initializing" appears on the display while the SCM is being initialized when the transceiver enters Mobile Relay Station Mode.

About how to manage when a failure occurs

- If a Mobile Relay Channel is not configured in **Mobile Relay Channel List**, the transceiver cannot enter Mobile Relay Station Mode. In this case, configure a Mobile Relay Channel again. (Refer to [Configuring Mobile Relay Station](#).)
- If "Ch Mismatch" appears when the transceiver enters Mobile Relay Station Mode, a problem may exist in the configuration of a Mobile Relay Channel. In this case, check the configurations of **System Type**, **Channel Type** and **Channel Spacing** for the channel configured as a Mobile Relay Channel. (Refer to [Configuring Mobile Relay Station](#).)
- If "Cable Error" appears when the transceiver enters Mobile Relay Station Mode, a problem exists in the connection of the cable.
 - Check the connection of the cable. (Refer to [Connecting the RF Deck by Using a D-sub 25-pin Cable](#).)
 - Check the Mobile Relay Station DB-25 Cable configuration. (Refer to [Configuring Mobile Relay Station](#).)

Exiting Mobile Relay Station Mode

Mobile Relay Station Mode can be exited by one of the following methods:

- Pressing the **Menu** ([]) key
- Deactivating the Mobile Relay Station port
- Receiving a PC command from the communication port to disable Mobile Relay Station Mode

When **Mobile Relay Station** ends, the transceiver restarts in user mode. The Key Beep B (2 beeps) sounds from the transceiver when the **Menu** ([]) key is pressed.

Note

- When the **Mobile Relay Station** key is pressed, if the status of the Mobile Relay Station port is changed at the same time, the transceiver behaves according to the status of the Mobile Relay Station port.
- The status of Mobile Relay Station Mode is retained in the transceiver. Therefore, the transceiver starts in Mobile Relay Station Mode when the transceiver is turned OFF in Mobile Relay Station Mode and the transceiver is turned ON again.
- The receiving RF Deck can emit the received audio from the external speaker if the external speaker is connected to the RF Deck. The received audio cannot sound from the speaker of the Control Head.
- Encrypted audio can sound from the speaker. To do so, connect the SCM to RF Deck 1 and RF Deck 2.
- In Mobile Relay Station Mode, the following functions of AUX Input/Output can be activated:

AUX Input:

Mobile Relay Station, Light Sense, Zeroize

AUX Output:

COR, TOR, TXS, LOK, Encryption

- The following functions are unavailable in Mobile Relay Station Mode:
 - Built-in GPS Receiver/Bluetooth
 - Audio recording by the microSD function
 - OTAP
 - Bluetooth
 - Transmission and reception of a PC command by Bluetooth SPP
 - Reading and writing configuration data by using KPG-D1/ D1N
 - Emergency Mode
- In a Triple RF Deck structure, the RF Deck not configured as an RF Deck for Mobile Relay Station does not behave as the transceiver. However, the RF Deck can activate the AUX Input function only.

Configuration using KPG-D1/ D1N

- Assigning functions to the **PF** keys on the transceiver ( **See** Transceiver Settings > Key Assignment)
- Assigning functions to the AUX Input port ( **See** Transceiver Settings > Extended Function > AUX)

18 STRUCTURING A MULTI RF DECK/ MULTI CONTROL HEAD

Supported Models: Mobile (except NX-5700S/ NX-5800S)

This chapter describes the steps to structure a Multi RF Deck/ Multi Control Head system by connecting 1 or 2 Control Heads to multiple RF Decks.

Also refer to “**Configuring the Initial Configuration**” in “Multi RF Deck/ Multi Control Head” for the related configuration of when structuring a Multi RF Deck/ Multi Control Head system.

18.1 Initial Configuration for Multi RF Deck/ Multi Control Head

To activate Multi RF Deck/ Multi Control Head, the firmware needs to be updated to version 1.62.00 or later. To activate Multi RF Deck/ Multi Control Head properly, the RF Deck firmware and the Control Head firmware must be the same.

Because of the structure of the transceiver, the firmware of each RF Deck needs to be updated individually in a Single RF Deck / Single Control Head structure.

Assemble each of the following devices before updating the firmware:

- Attach KRK-15BM to the RF Deck.
- Attach KRK-14HM to KCH-19M.

Note

- If KCH-20RM is used, KRK-14HM does not need to be attached to KCH-20RM.

Attaching KRK-15BM to the RF Deck

If KCH-19M is attached to the RF Deck, KCH-19M needs to be removed from the RF Deck by referring to step 1 to step 3 below.

If no device is attached to the RF Deck, attach KRK-15BM to the RF Deck by referring to step 4 and later.

- 1 Lift up 2 tabs of KCH-19M on the bottom of the RF Deck by using a flathead screwdriver, and remove KCH-19M from the chassis.**

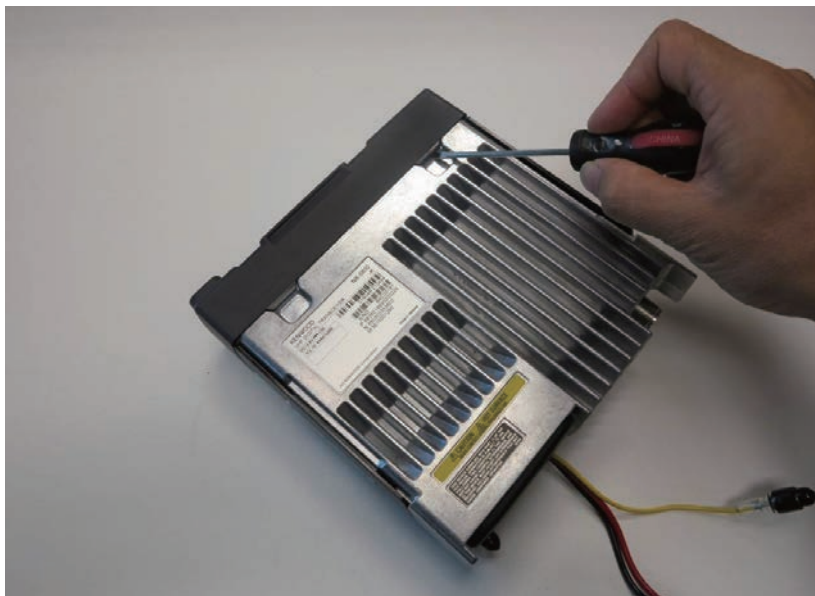


Figure 18-1 Removal of the Panel

2 Remove the flat cable from the display unit connector (CN6) of KCH-19M.

3 Remove the cable from the display unit connector (CN2) of KCH-19M.

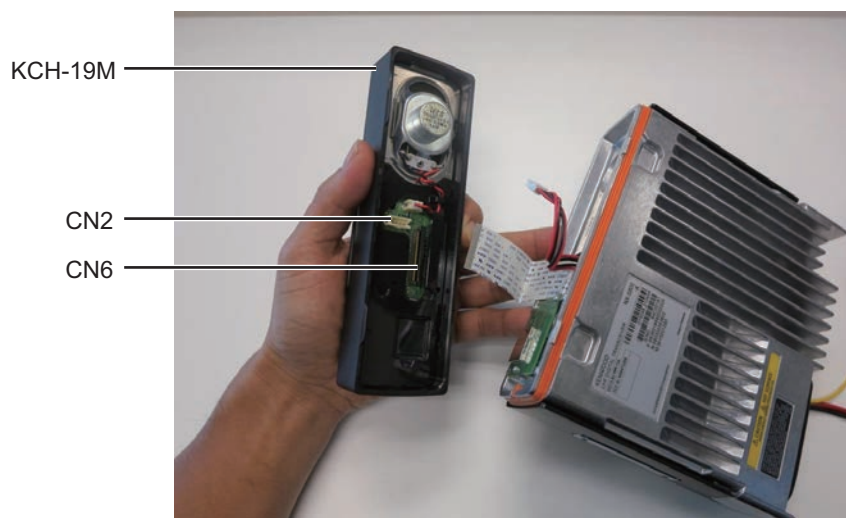


Figure 18-2 Removal of the Cables

4 Plug the cable into the connector (CN2) of KRK-15BM.

5 Plug the flat cable into the connector (CN1) of KRK-15BM.



Figure 18-3 Connection of the Cables

Note

- Be careful when plugging the flat cable into CN1.

6 Embed KRK-15BM on the front of the chassis by using 4 tabs.

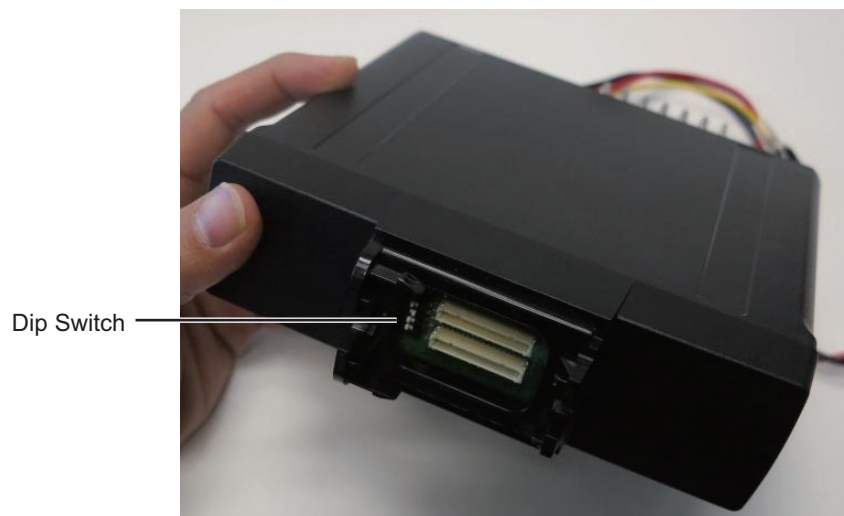


Figure 18-4 Attachment of KRK-15BM

Note

- As in image above, attach KRK-15BM so that the Dip switch is on the left side.

Attaching KRK-14HM to KCH-19M

To use KCH-19RM, KRK-14HM needs to be attached to KCH-19RM.

Note

- If KCH-20RM is used, KRK-14HM does not need to be attached to KCH-20RM.

1 Plug the cable into the connector (CN2) of KCH-19M.

2 Plug the flat cable into the connector (CN6) of KCH-19M.

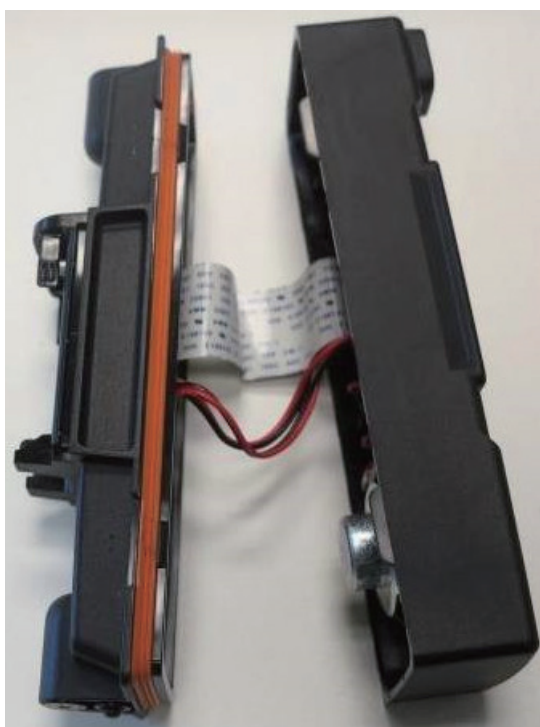


Figure 18-5 Connection of the Cables

Note

- Be careful when plugging the flat cable into CN6.
- So that the flat cable does not cross, insert the flat cable into CN6 straight.

3 Embed the 4 tabs of KRK-14HM in KCH-19M.



Figure 18-6 Attaching KRK-14HM

Note

- Lock KRK-14HM in place by applying appropriate pressure.

4 Confirm the DIP switch configuration.

When writing the firmware for the initial configuration, confirm that the Dip switch (1 to 4) equipped on each interface adapter (KRK-14H, KRK-15B, and KCH-20R) is in the ON position.



Updating the Firmware

Write the firmware version 1.62.00 or later into each of the following devices:

- NX-5000 RF Deck with KRK-15BM
- KCH-19M with KRK-14HM
- KCH-20RM



Figure 18-7 NX-5000 RF Deck with KRK-15BM/ KCH-19M with KRK-14HM/ KCH-20RM

Repeat the procedure below to write the firmware into each of the devices above.

1 Connect the RF Deck to the Control Head by using the KCT-71 cable, and turn the transceiver ON.



Figure 18-8 Connection of the KCT-71 Cables

Note

- Connect the KCT-71 cable to the upper connector of KRK-15BM.

2 Write the firmware.

The firmware is written after the programming cable is connected to Control Head 1.

1. Start up KFL to open the firmware (Ver.1.62.00 or later) of the NX-5000 series.
Configure COM Port, and configure "Auto" in Baud Rate.

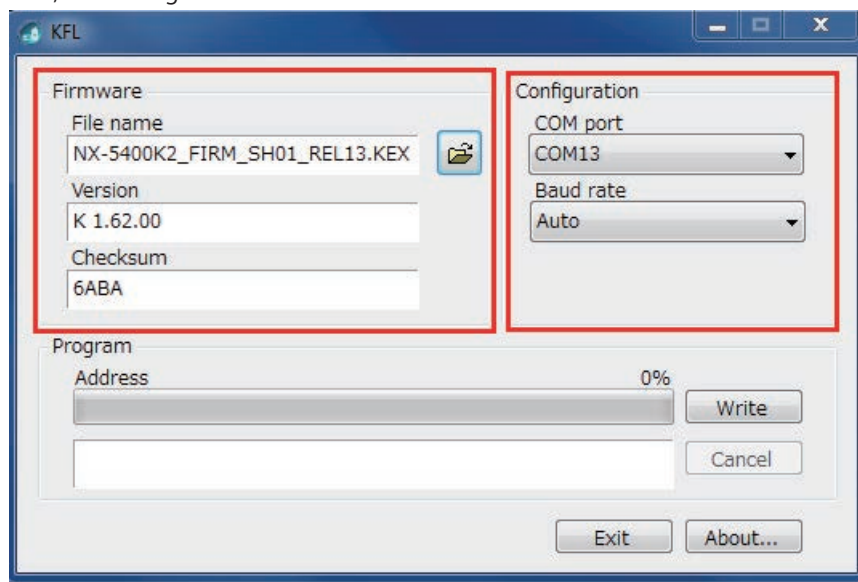


Figure 18-9 KFL

2. Connect the transceiver to the PC by using KPG-46UM or KPG-46XM.
3. Click the "Write" button of KFL.
If the writing is successful, a message box appears.
4. Click the "OK" button.

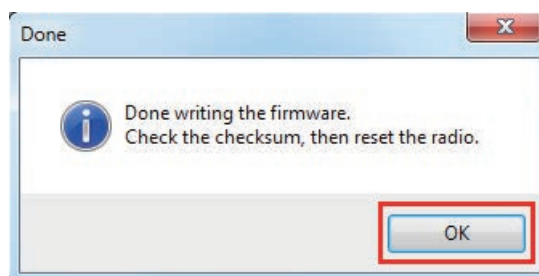


Figure 18-10 Message Box

5. Confirm the checksum of the firmware on the transceiver display.
Confirm that the appropriate firmware is written. If the checksum is incorrect, reexecute the operations from step 1 (Connect the RF Deck to the Control Head by using the KCT-71 cable, and turn the transceiver ON.).
6. Restart the transceiver.

About the Connection of the Control Head to the RF Deck

This section describes how to connect the Control Head and RF Deck.
The following explanations use images of the Dip switch. If the Control Head and RF Deck are in the factory default configurations, do not change the configuration of the Dip switch.

How to Assemble Remote Control Mount

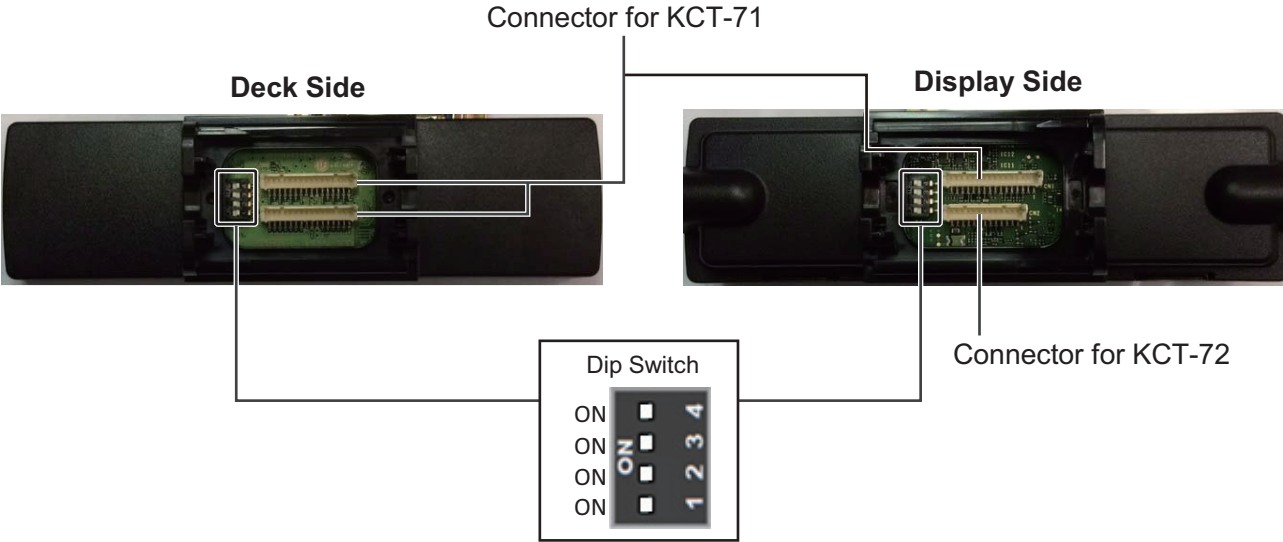


Figure 18-11 Connector Arrangement and Cable Connection

● 5BM/ 5FM

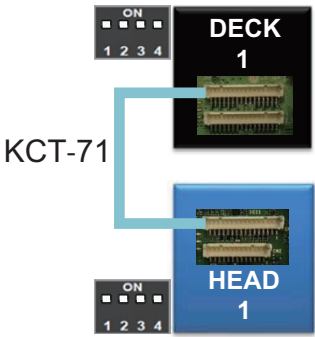


Figure 18-12 Single Deck Single Head Remote Mount

● 5BBM/ 5FFM

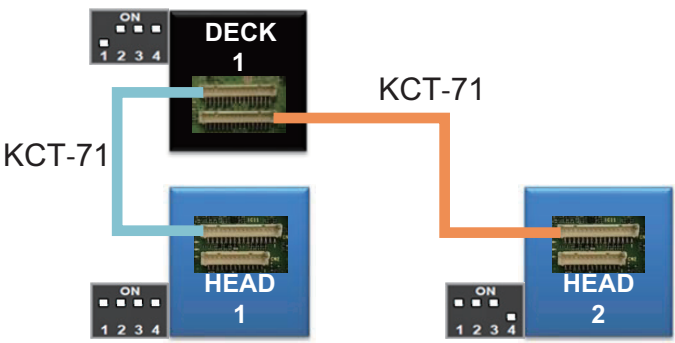


Figure 18-13 Single Deck Dual Head Remote Mount

● 5BMM/ 5FMM (-MR)

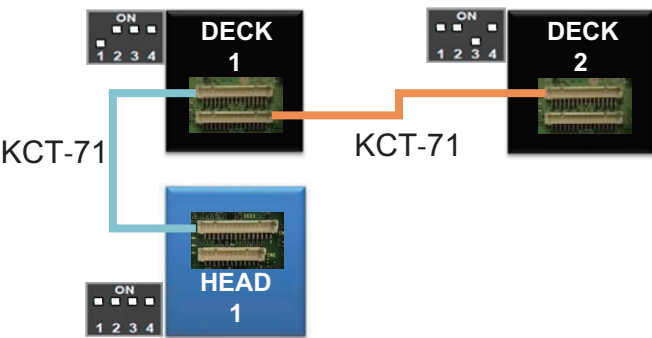


Figure 18-14 Dual Deck Single Head Remote Mount

● 5BBMM/ 5FFMM (-MR)

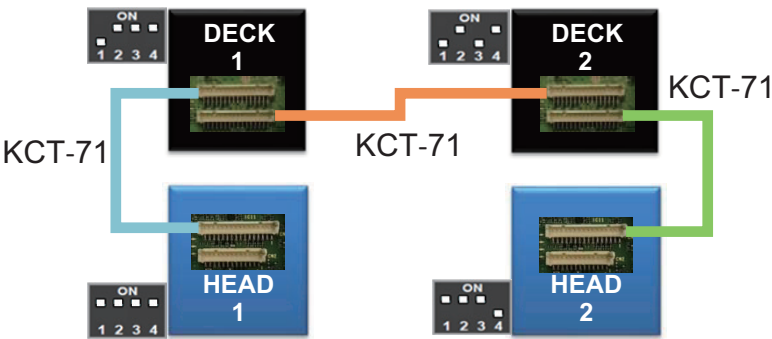


Figure 18-15 Dual Deck Dual Head Remote Mount

● 5BMMM /5BMMM (-MR)

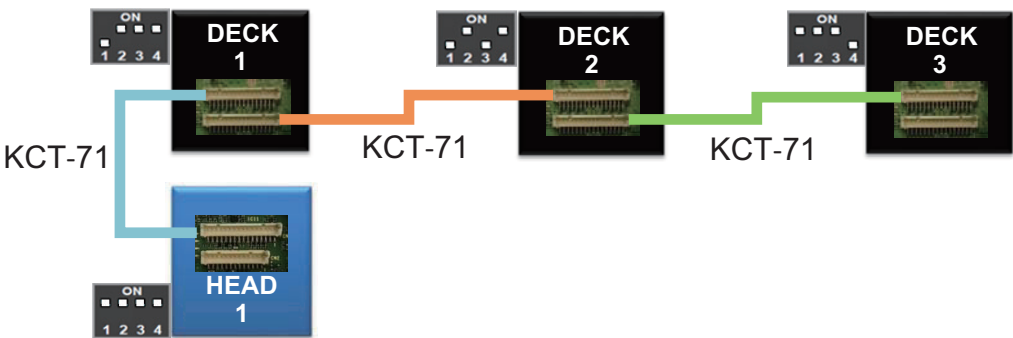


Figure 18-16 Triple Deck Single Head Remote Mount

● 5BBMMM/ 5FFMMM (-MR)

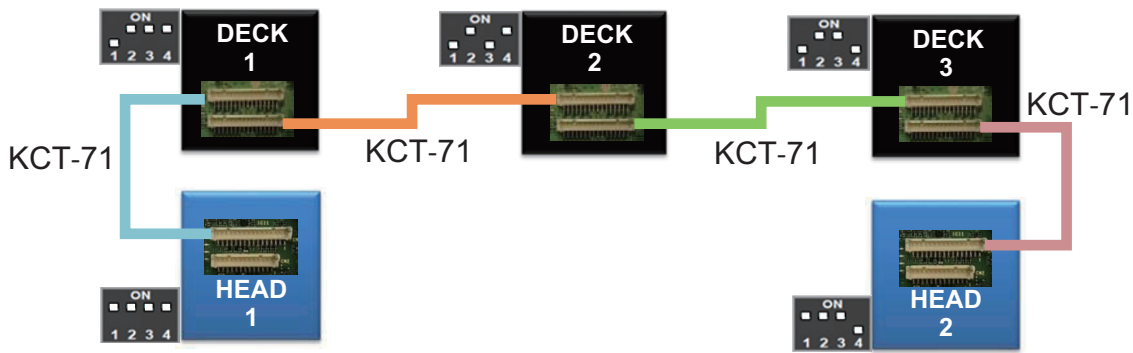


Figure 18-17 Triple Deck Dual Head Remote Mount

18.2 Adding an RF Deck/ Control Head

The system structure can be changed by adding Control Heads and RF Decks in a system that is operating.

Adding a Control Head

This section describes the procedure to add a Control Head to a system of a Triple RF Deck/ Single Control Head structure.

Note

- A Control Head can be added with the same procedure when adding the Control Head to a system of the following RF Deck/ Control Head structures:
 - Single RF Deck/ Single Control Head
 - Dual RF Deck/ Single Control Head

1 Turn OFF all RF Decks and Control Heads.

If a Control Head is turned OFF, all RF Decks are also turned OFF.

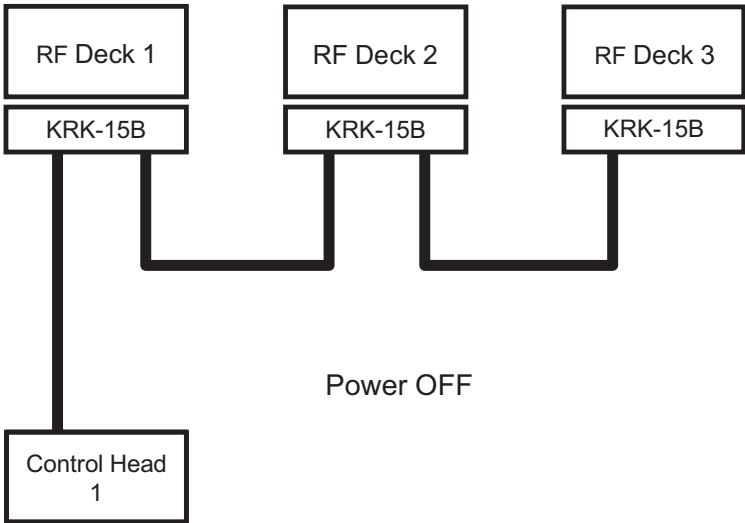


Figure 18-18 Triple RF Deck/ Single Control Head (Power OFF)

2 Add the Control Head.

Install the Control Head in a Multi RF Deck system.

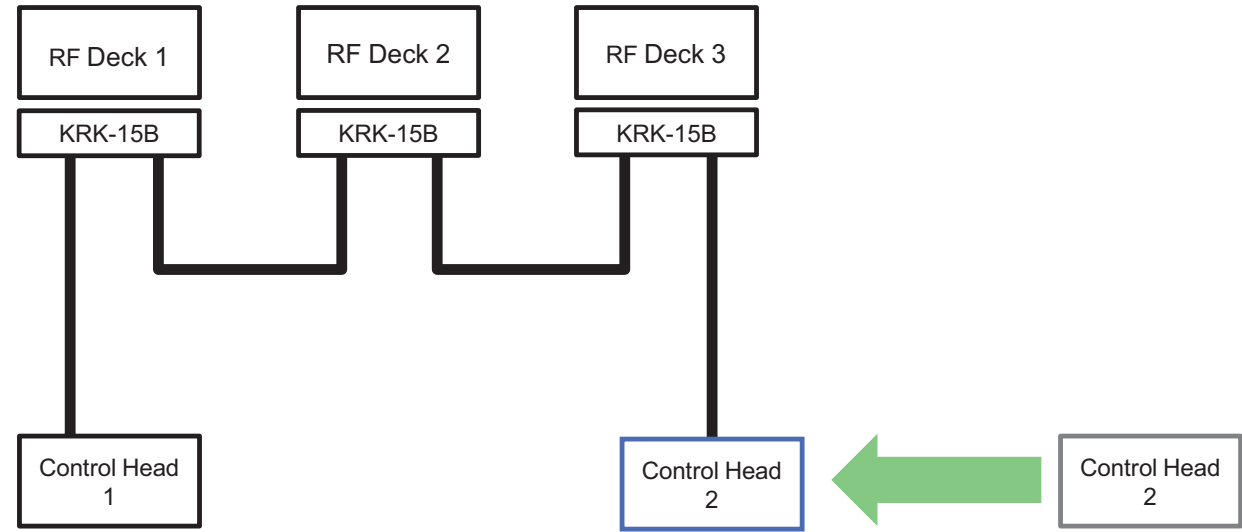


Figure 18-19 Installation of Control Head 2

3 Change the DIP switch.

Change the DIP switch to the Triple RF Deck/ Dual Control Head configuration.

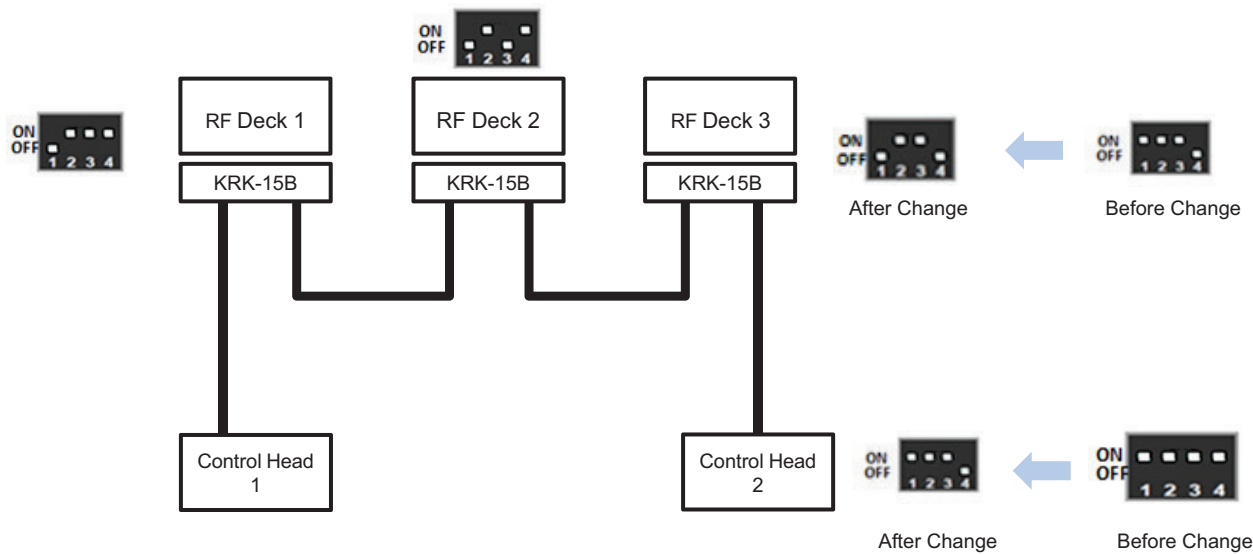


Figure 18-20 DIP Switch Configuration Triple RF Deck/ Dual Control Head

4 Turn ON all RF Decks and Control Heads.

If either Control Head is turned ON, all RF Decks and Control Heads are turned ON.

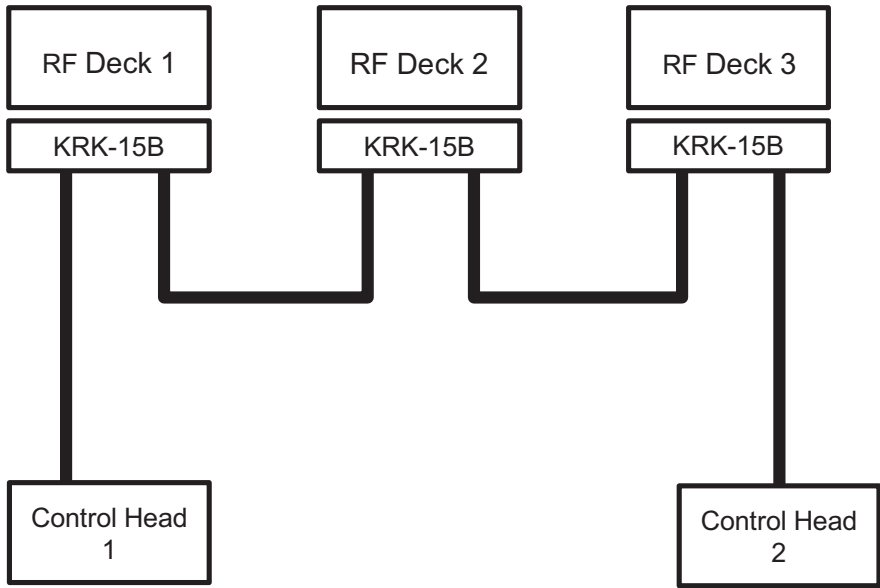


Figure 18-21 Triple RF Deck/ Dual Control Head (Power ON)

Note

- If "FIRM MISMATCH" is displayed on the screen of the Control Head, proceed to step 5.
- If "FPU MISMATCH" is displayed on the screen of the Control Head, proceed to step 6.

5 Write the firmware.

The firmware is written after the programming cable is connected to Control Head 1. To activate Multi RF Deck/ Multi Control Head, the firmware version 1.62.00 or later needs to be written. The firmware version of a Control Head can be confirmed in Radio Mode Selection.

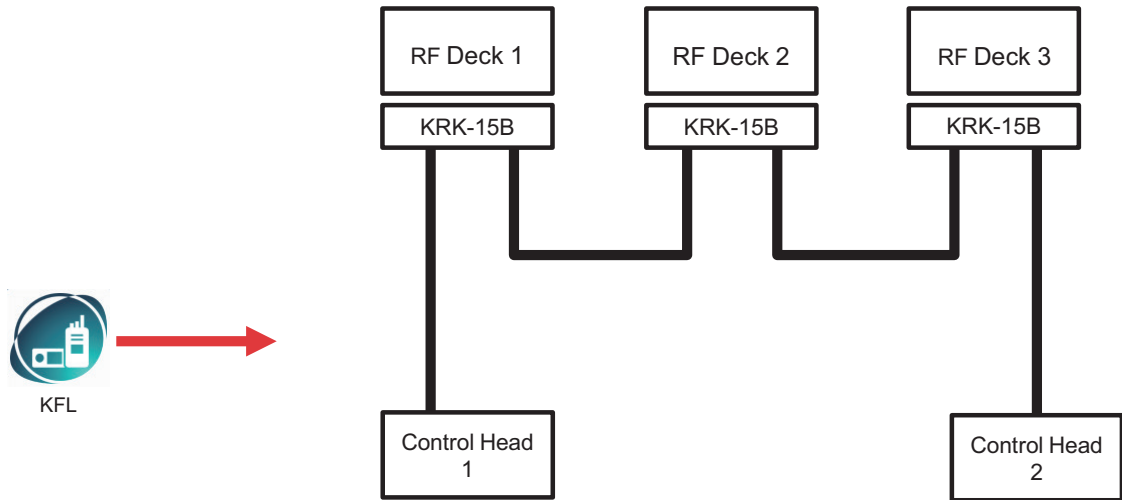


Figure 18-22 Triple RF Deck/ Dual Control Head (Firmware Setting)

Note

- If "FPU MISMATCH" is displayed on the screen of the Control Head, proceed to step 6.

6 Write the FPU data.

The FPU data for Triple RF Deck/ Dual Control Head is written to the Multi RF Deck system after the programming cable is connected to Control Head 1. Always write the FPU data in a Multi RF Deck system. Refer to **“Configuration in KPG-D1/ D1N If Control Heads Are Switched”** for writing configuration data.

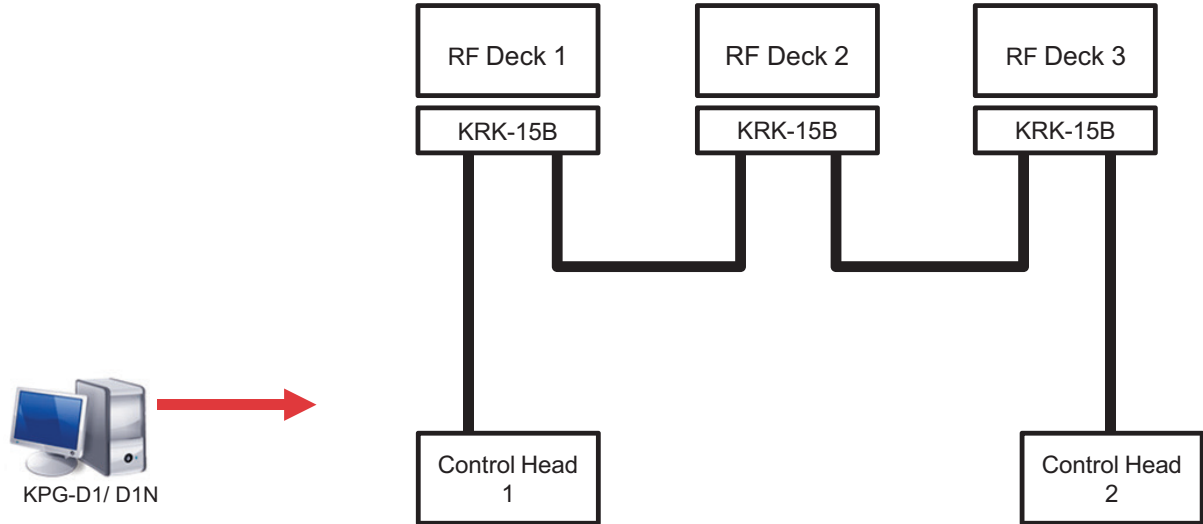


Figure 18-23 Triple RF Deck/ Dual Control Head (FPU Setting)

Note

- If “FIRM MISMATCH” is displayed on the screen of the Control Head, start again from step 5.

Adding an RF Deck

This section describes the steps to add an RF Deck to a system of a Dual RF Deck/ Dual Control Head structure.

Note

- An RF Deck can be added with the same procedure when adding the RF Deck to a system of the following RF Deck/ Control Head structures:
 - Single RF Deck/ Single Control Head
 - Single RF Deck/ Dual Control Head
 - Dual RF Deck/ Single Control Head

1 Turn OFF all RF Decks and Control Heads.

If either Control Head is turned OFF, all RF Decks and Control Heads are turned OFF.

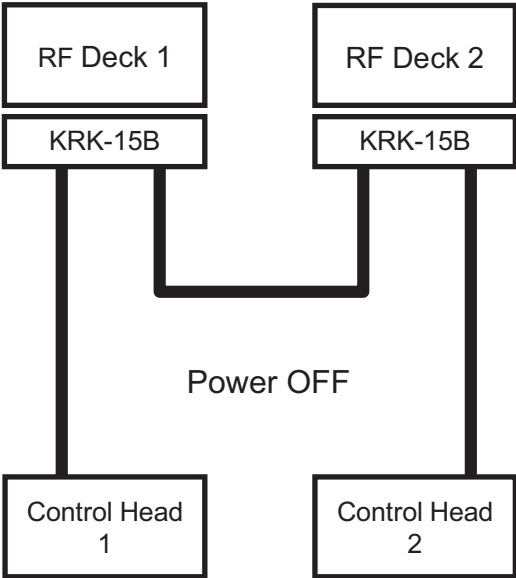


Figure 18-24 Dual RF Deck/ Dual Control Head (Power OFF)

2 Add the RF Deck.

Install RF Deck 3 and KCT-71 in a Multi RF Deck system.

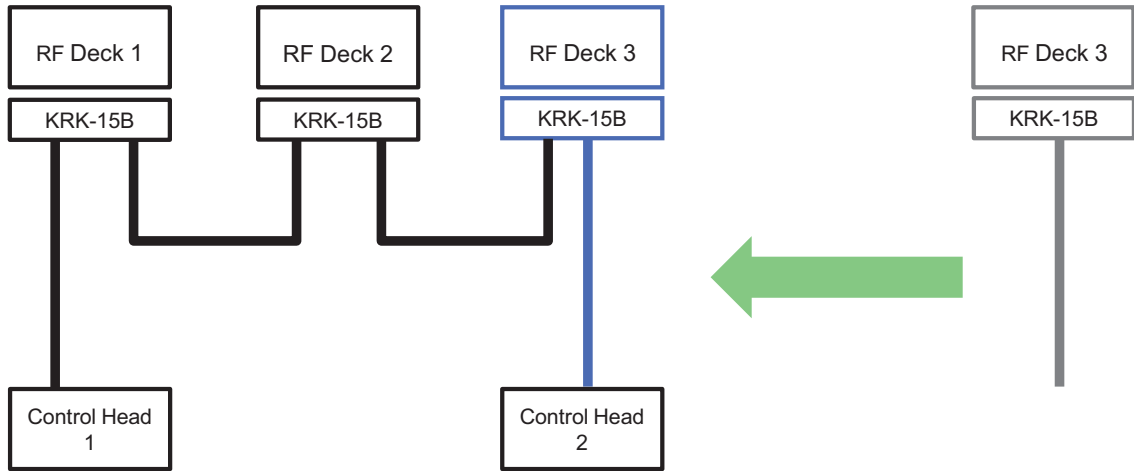


Figure 18-25 Installation of RF Deck 3/ KCT-71

Note

- The software option of the RF Deck to be added must be enabled. Refer to “[Activating a Radio Feature License \(KWD-5004MR\)](#)” of “Multi RF Deck/ Multi Control Head”.

3 Change the DIP switch.

Change the DIP switch to the Triple RF Deck/ Dual Control Head configuration.

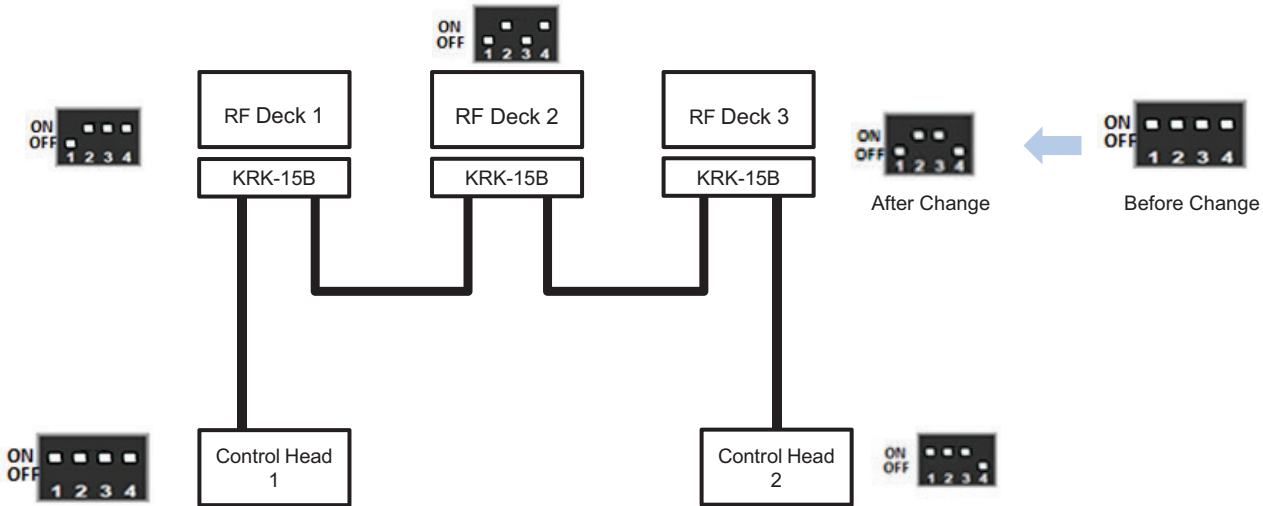


Figure 18-26 DIP Switch Configuration Triple RF Deck/ Dual Control Head

4 Turn ON all RF Decks and Control Heads.

If either Control Head is turned ON, all RF Decks and Control Heads are turned ON.

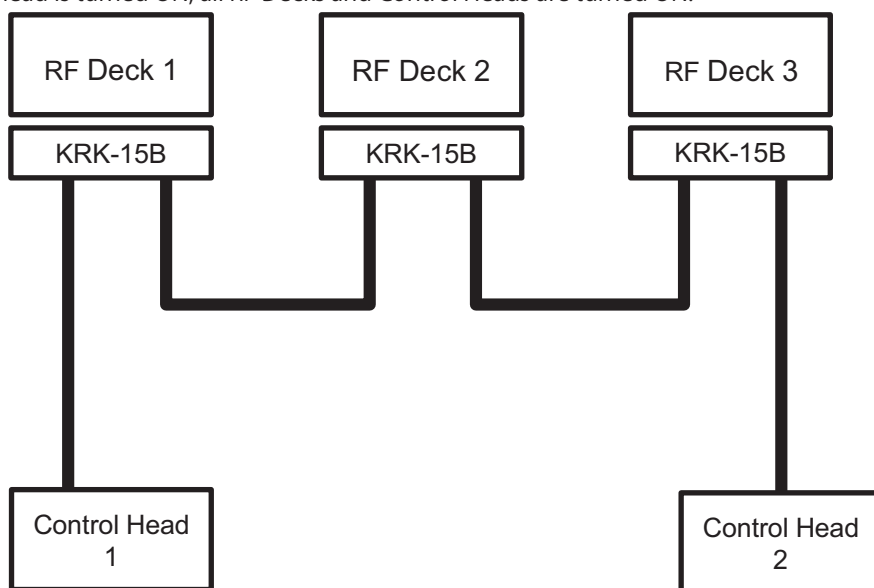


Figure 18-27 Triple RF Deck/ Dual Control Head (Power ON)

5 Write the FPU data and restart.

The FPU data for Triple RF Deck/ Dual Control Head is written to the Multi RF Deck system (RF Deck 1, RF Deck 2) after the programming cable is connected to Control Head 1.

Always write the FPU data in a Multi RF Deck system. Refer to “[Configuration in KPG-D1/ D1N if RF Decks Are Switched](#)” for writing configuration data.

After the FPU data is written, turn OFF all RF Decks and Control Heads, and be sure to restart the RF Decks and Control Heads.

- If “FIRM MISMATCH” is displayed on the screen of the Control Head, proceed to step 6.
- If “FPU MISMATCH” or “UNPROGRAM” is displayed on the screen of the Control Head, proceed to step 7.

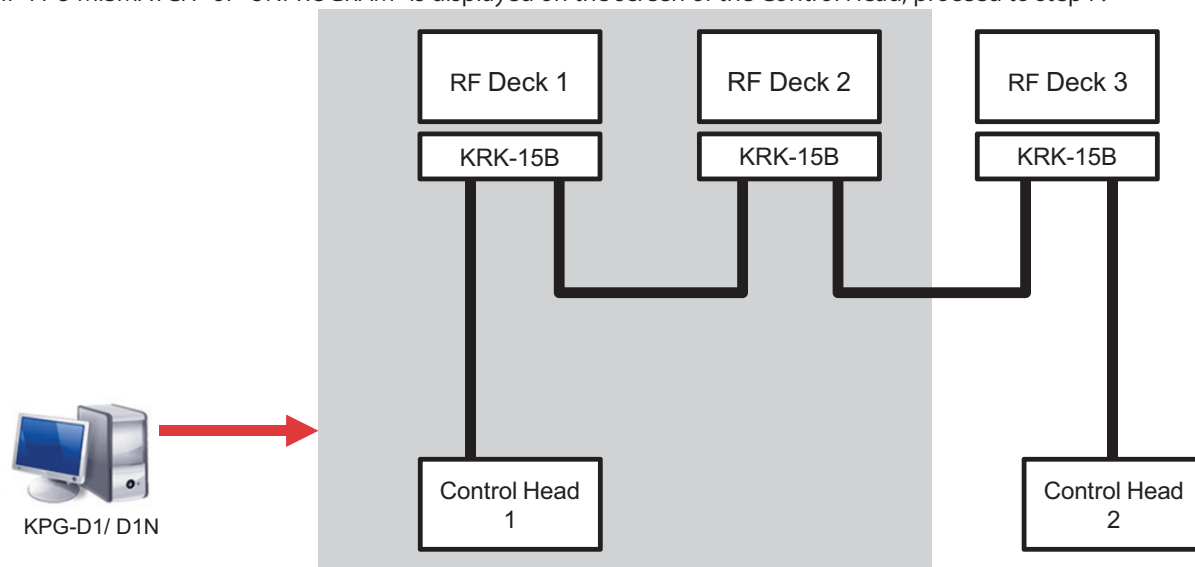


Figure 18-28 Triple RF Deck/ Dual Control Head (FPU Setting 1)

RF Deck Selection

FPU Configuration

	RF Deck Data A	RF Deck Data B	RF Deck Data C
Model Name	NX-5900 [Mobile]: K/F	NX-5900 [Mobile]: K/F	NX-5700H [Mobile]: F
Frequency [MHz]	700MHz/800MHz : 763-870 MHz	700MHz/800MHz : 763-870 MHz	VHF : 136-174 MHz

Radio Configuration

	RF Deck 1	RF Deck 2
Model Name	NX-5900 [Mobile]: K/F	NX-5900 [Mobile]: K/F
Frequency [MHz]	700MHz/800MHz : 763-870 MHz	700MHz/800MHz : 763-870 MHz
FPU Data Select	RF Deck Data A	RF Deck Data B

OK

Cancel

Help

Figure 18-29 RF Deck Selection

Note

- In this procedure, the FPU data is written to make the internal data of RF Deck 1 and RF Deck 2 for Triple RF Deck. Therefore, the FPU data is written to only RF Deck 1 and RF Deck 2, and the FPU data cannot be written to RF Deck 3. Therefore, only RF Deck 1 and RF Deck 2 are displayed and RF Deck 3 is not displayed for Radio Configuration on the **RF Deck Selection** screen.

6 Write the firmware.

To activate Multi RF Deck/ Multi Control Head, the firmware version 1.62.00 or later needs to be written. The firmware version of a Control Head can be confirmed in Radio Mode Selection.

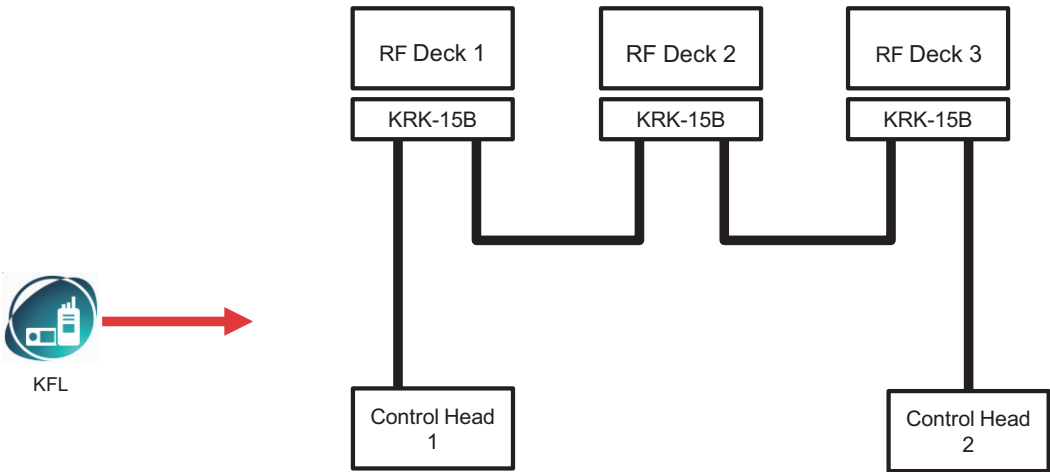


Figure 18-30 Triple RF Deck/ Dual Control Head (Firmware Setting)

Note

- If "FPU MISMATCH" or "UNPROGRAM" is displayed on the screen of the Control Head, proceed to step 7.
- If "FPU MISMATCH" and "UNPROGRAM" are not displayed on the screen of the Control Head, the procedure is completed with step 6.

7 Write the FPU data.

The FPU data for Triple RF Deck/ Dual Control Head is written in a Multi RF Deck system. Always write the FPU data in a Multi RF Deck system. Refer to "Configuration in KPG-D1/ D1N if RF Decks Are Switched" for writing configuration data.

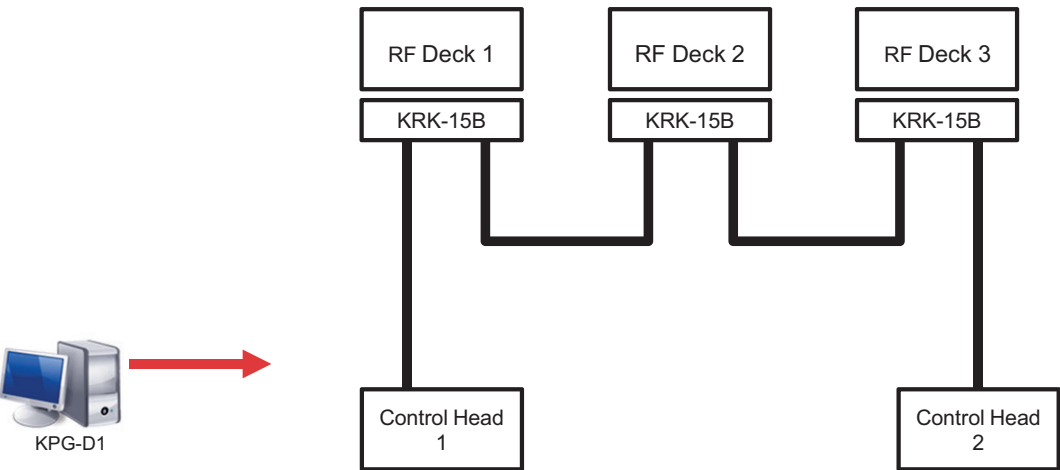


Figure 18-31 Triple RF Deck/ Dual Control Head (FPU Setting 2)

Note

- If "FIRM MISMATCH" is displayed on the screen of the Control Head, start again from step 6.
- If "FIRM MISMATCH" is not displayed on the screen of the Control Head, the procedure is completed with step 7.

18.3 Replacing an RF Deck/ Control Head

The Control Heads and RF Decks in a system that is operating can be replaced.

Replacing a Control Head

This section describes the procedure to replace a Control Head in a system of a Triple RF Deck/ Dual Control Head structure.

Note

- A Control Head can be replaced with the same procedure when replacing the Control Head in a system of the following RF Deck/ Control Head structures:
 - Dual RF Deck/ Single Control Head
 - Dual RF Deck/ Dual Control Head
 - Triple RF Deck/ Single Control Head

1 Turn OFF all RF Decks and Control Heads.

If either Control Head is turned OFF, all RF Decks and Control Heads are turned OFF.

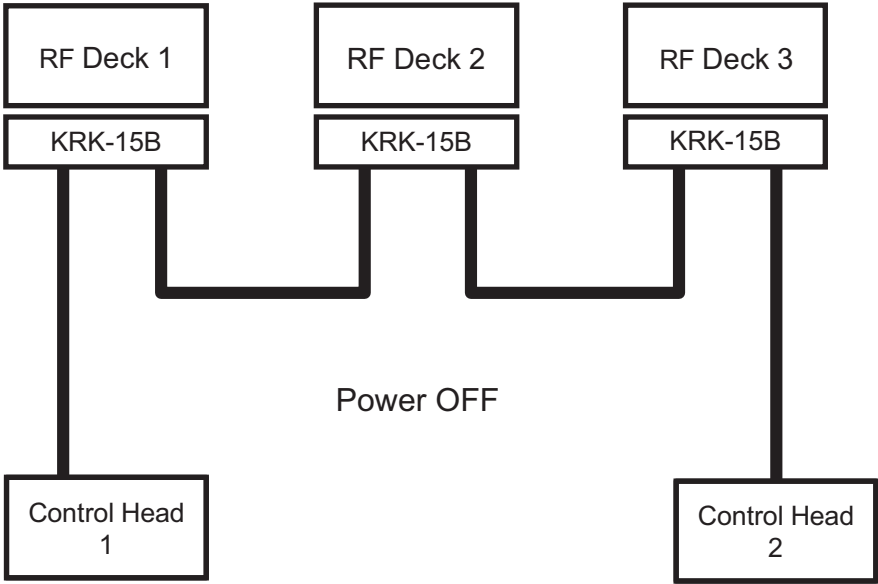


Figure 18-32 Triple RF Deck/ Dual Control Head (Power OFF)

2 Remove the Control Head.

Remove the Control Head from a Multi RF Deck system.

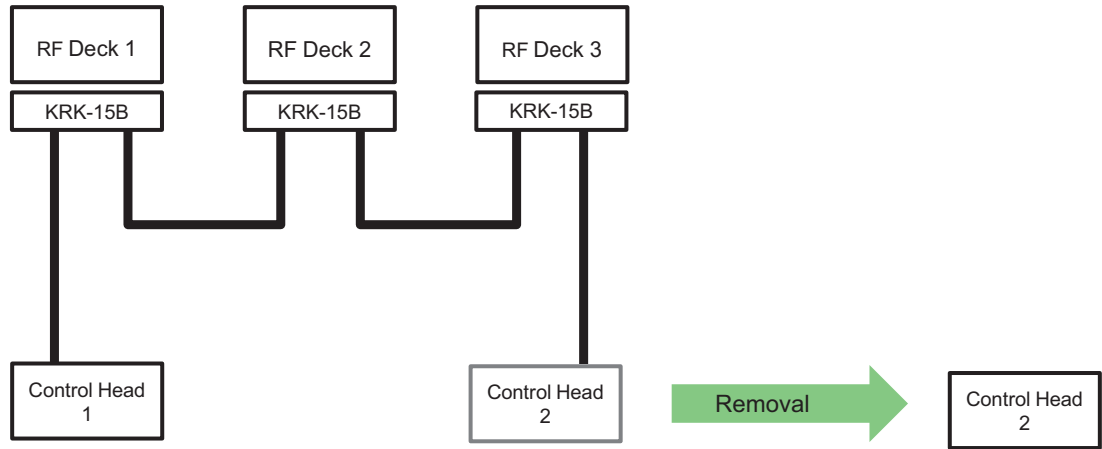


Figure 18-33 Removal of Control Head 2

3 Install the new Control Head.

Install the new Control Head in a Multi RF Deck system.

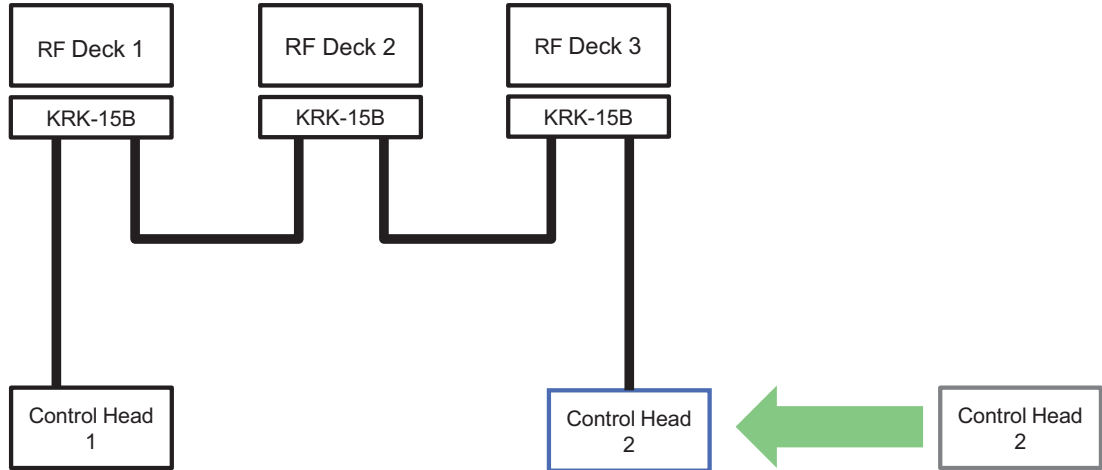


Figure 18-34 Installation of Control Head 2

4 Change the DIP switch.

Change the DIP switch to the Triple RF Deck/ Dual Control Head configuration.

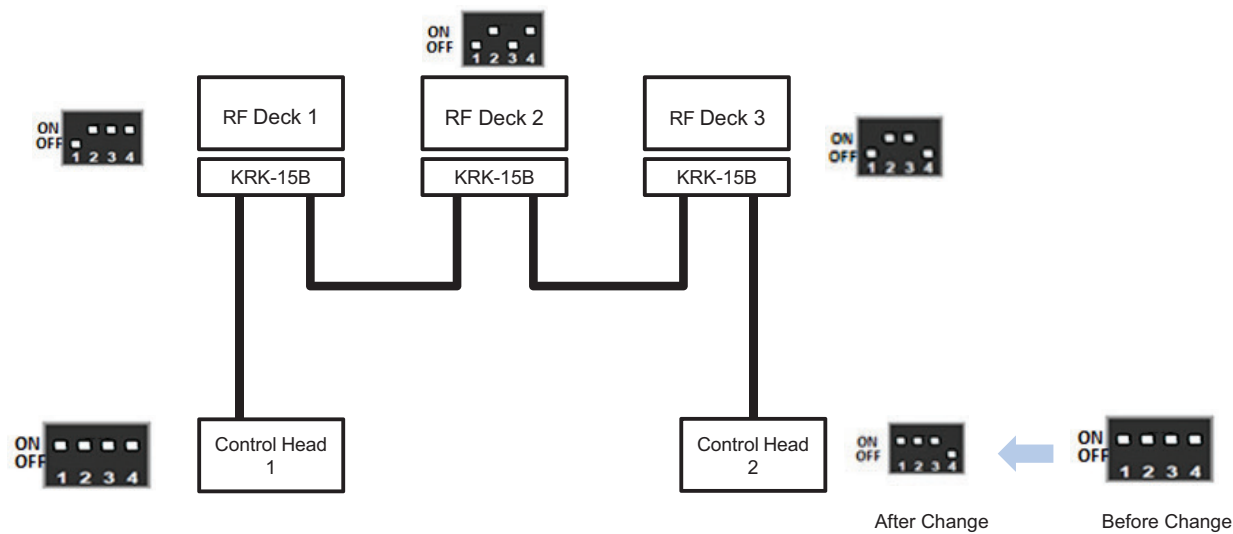


Figure 18-35 DIP Switch Configuration Triple RF Deck/ Dual Control Head

5 Turn ON all RF Decks and Control Heads.

If either Control Head is turned ON, all RF Decks and Control Heads are turned ON.

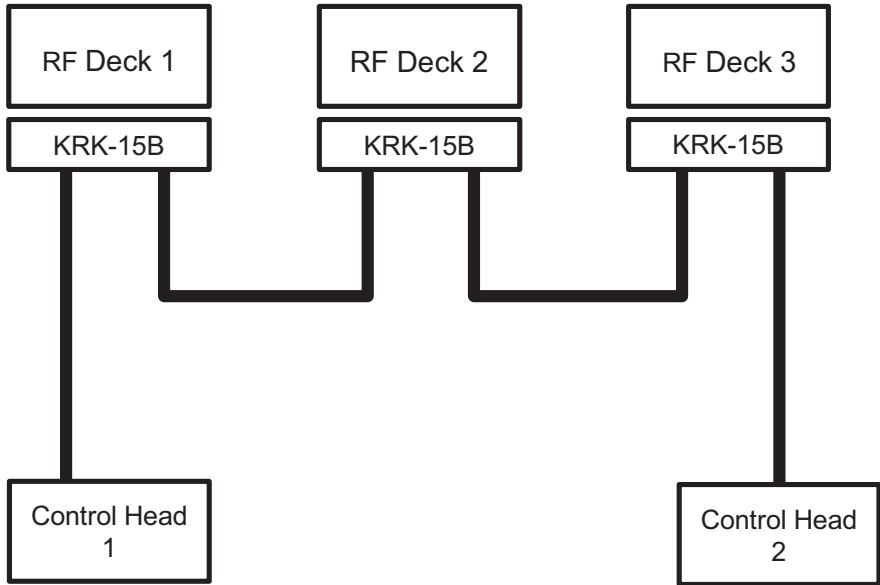


Figure 18-36 Triple RF Deck/ Dual Control Head (Power ON)

Note

- If "FIRM MISMATCH" is displayed on the screen of the Control Head, proceed to step 6.
- If "FPU MISMATCH" is displayed on the screen of the Control Head, proceed to step 7.

6 Write the firmware.

To activate Multi RF Deck/ Multi Control Head, the firmware version 1.62.00 or later needs to be written. The firmware version of a Control Head can be confirmed in Radio Mode Selection.

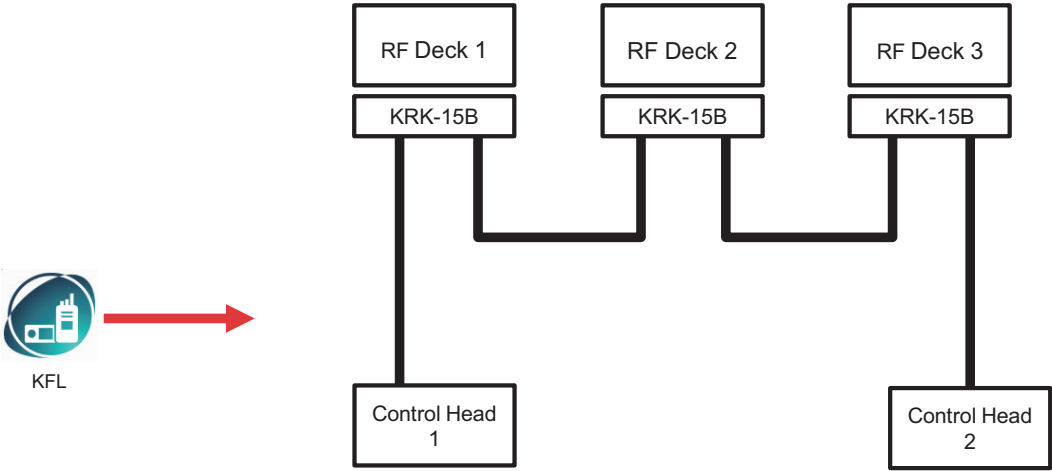


Figure 18-37 Triple RF Deck/ Dual Control Head (Firmware Setting)

Note

- If "FPU MISMATCH" is displayed on the screen of the Control Head, proceed to step 7.

7 Write the FPU data.

The FPU data for Triple RF Deck/ Dual Control Head is written in a Multi RF Deck system. Always write the FPU data in a Multi RF Deck system. Refer to "[Configuration in KPG-D1/ D1N If Control Heads Are Switched](#)" for writing configuration data.

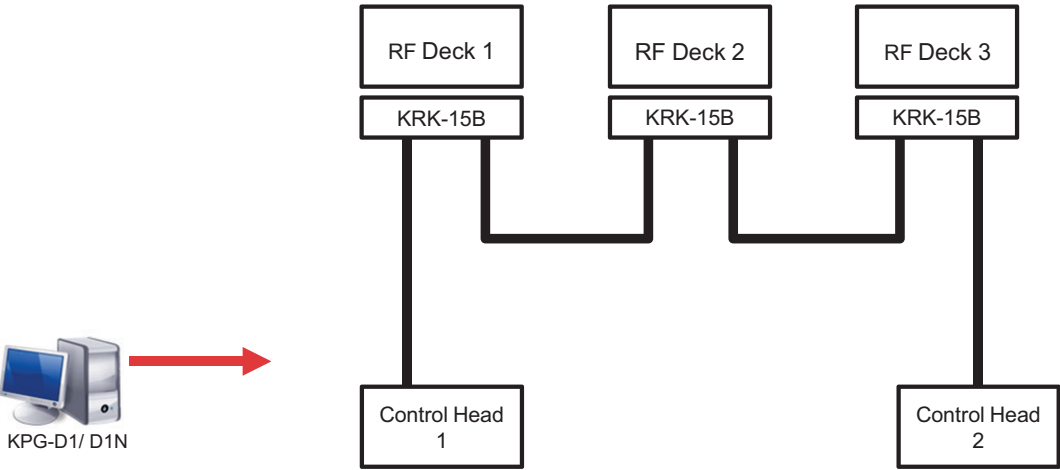


Figure 18-38 Triple RF Deck/ Dual Control Head (FPU Setting)

Note

- If "FIRM MISMATCH" is displayed on the screen of the Control Head, start again from step 6.

Replacing an RF Deck

This section describes the procedure to replace an RF Deck in a system of a Triple RF Deck/ Dual Control Head structure.

Note

- An RF Deck can be replaced with the same procedure when replacing the RF Deck in a system of the following RF Deck/ Control Head structures:
 - Dual RF Deck/ Single Control Head
 - Dual RF Deck/ Dual Control Head
 - Triple RF Deck/ Single Control Head

1 Turn OFF all RF Decks and Control Heads.

If either Control Head is turned OFF, all RF Decks and Control Heads are turned OFF.

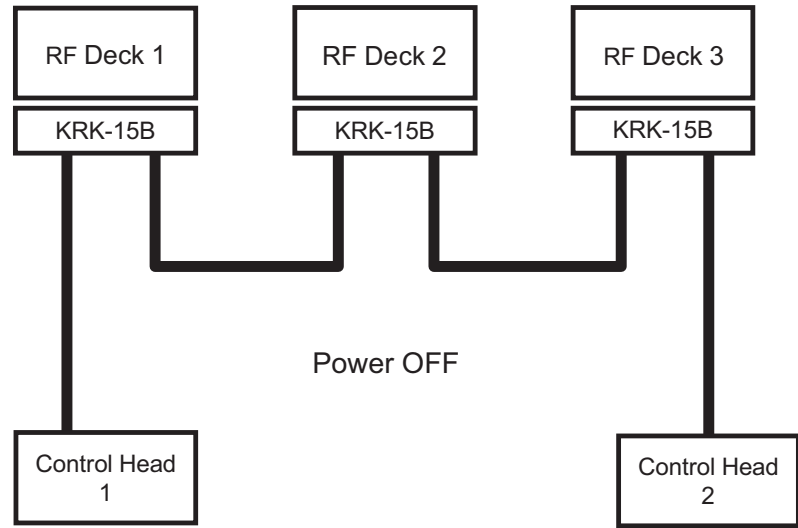


Figure 18-39 Triple RF Deck/ Dual Control Head (Power OFF)

2 Remove the RF Deck.

Remove the Control Head from a Multi RF Deck system.

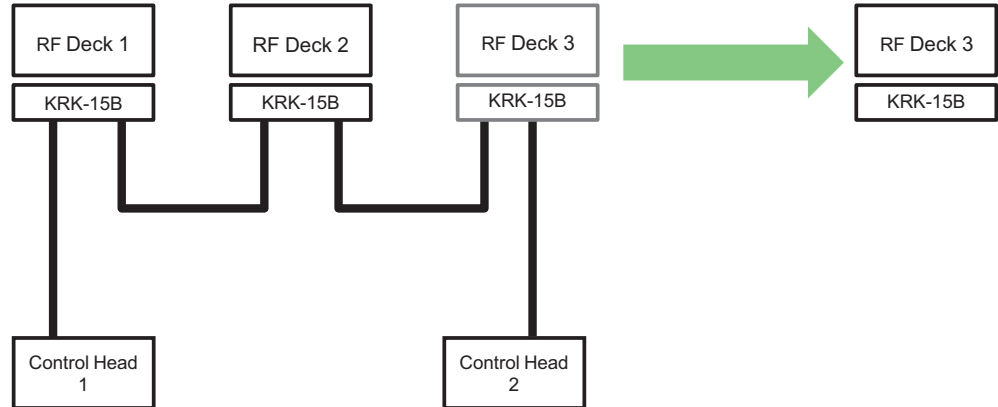


Figure 18-40 Removal of RF Deck 3

3 Install the new RF Deck.

Install the new RF Deck in a Multi RF Deck system.

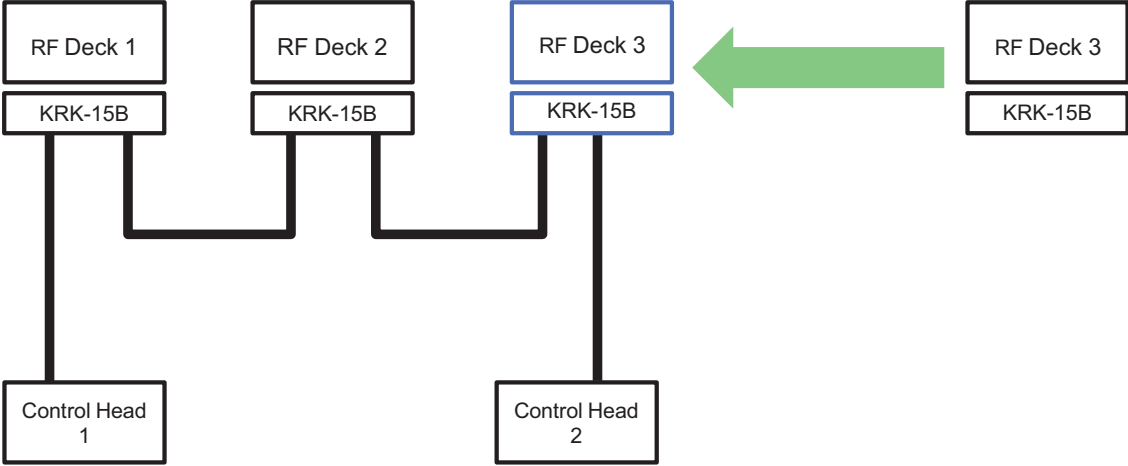


Figure 18-41 Installation of RF Deck 3

Note

- The software option of the new RF Deck must be enabled. Refer to “Configuring the Initial Configuration” of “Multi RF Deck/ Multi Control Head”.

4 Change the DIP switch.

Change the DIP switch to the Triple RF Deck/ Dual Control Head configuration.

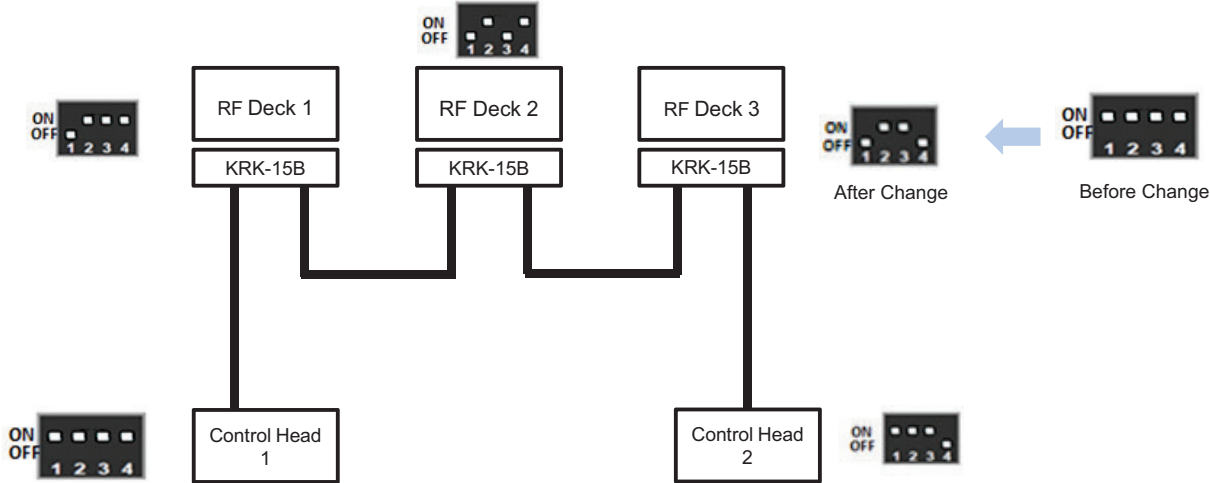


Figure 18-42 DIP Switch Configuration Triple RF Deck/ Dual Control Head

5 Turn ON all RF Decks and Control Heads.

If either Control Head is turned ON, all RF Decks and Control Heads are turned ON.

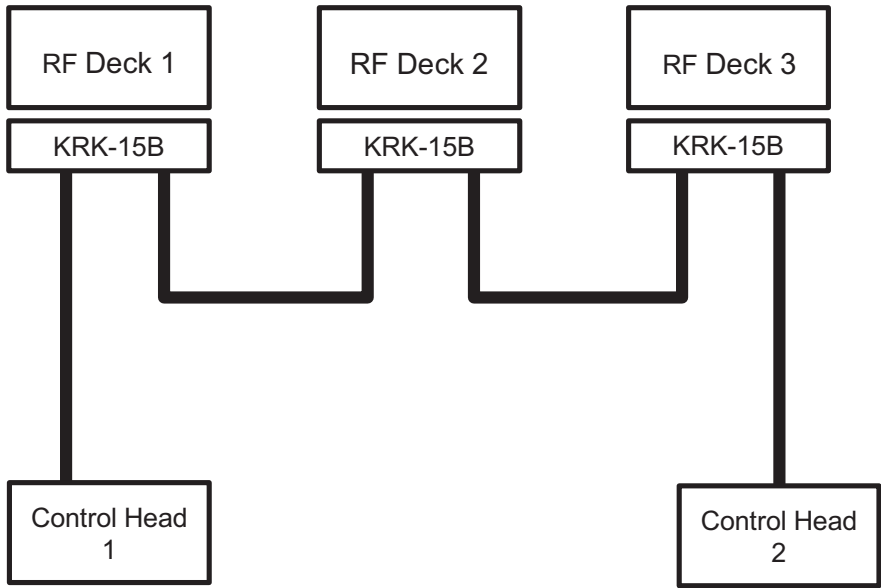


Figure 18-43 Triple RF Deck/ Dual Control Head (Power ON)

Note

- If "FIRM MISMATCH" is displayed on the screen of the Control Head, proceed to step 6.
- If "FPU MISMATCH" is displayed on the screen of the Control Head, proceed to step 7.

6 Write the firmware.

To activate Multi RF Deck/ Multi Control Head, the firmware version 1.62.00 or later needs to be written. The firmware version of a Control Head can be confirmed in Radio Mode Selection.

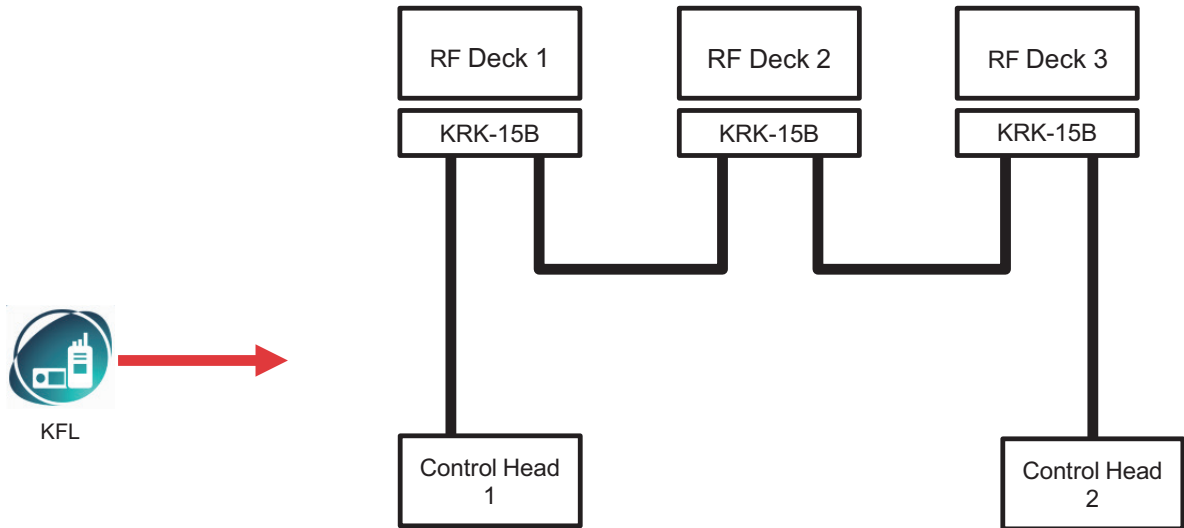


Figure 18-44 Triple RF Deck/ Dual Control Head (Firmware Setting)

Note

- If "FPU MISMATCH" is displayed on the screen of the Control Head, proceed to step 7.

7 Write the FPU data.

The FPU data for Triple RF Deck/ Dual Control Head is written in a Multi RF Deck system. Always write the FPU data in a Multi RF Deck system. Refer to **“Configuration in KPG-D1/ D1N if RF Decks Are Switched”** for writing configuration data.

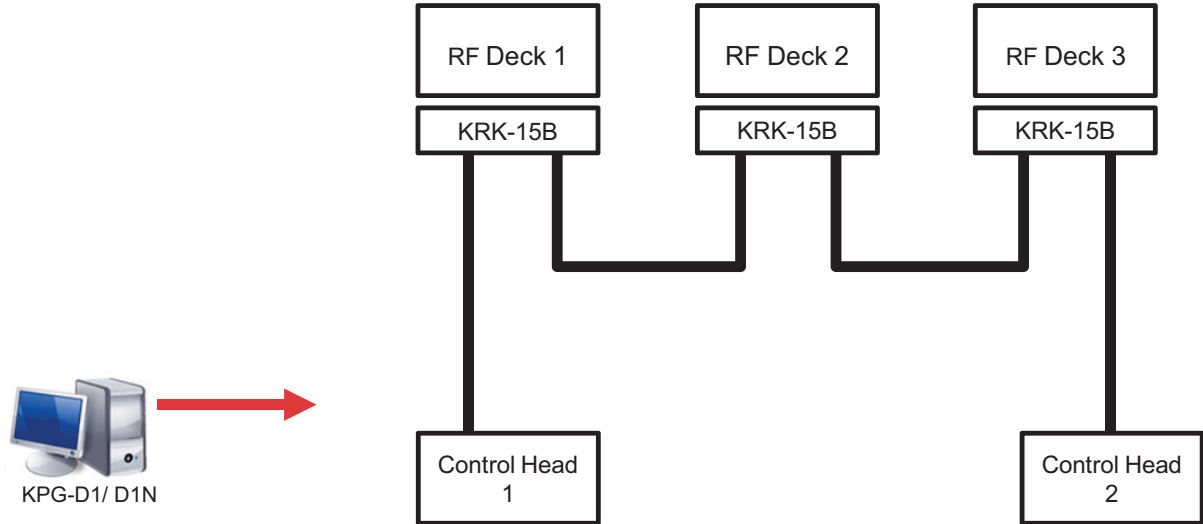


Figure 18-45 Triple RF Deck/ Dual Control Head (FPU Setting)

Note

- If “FIRM MISMATCH” is displayed on the screen of the Control Head, start again from step 6.

18.4 Removing an RF Deck/ Control Head

The system structure can be changed by removing the Control Heads and RF Decks in a system that is operating.

Removing a Control Head

This section describes the procedure to change a system to a Triple RF Deck/ Single Control Head structure by removing a Control Head from the system of a Triple RF Deck/ Dual Control Head structure.

Note

- A Control Head can be removed with the same procedure when removing the Control Head in a system of the following RF Deck/ Control Head structures:
 - Dual RF Deck/ Dual Control Head
 - Single RF Deck/ Dual Control Head

1 Turn OFF all RF Decks and Control Heads.

If either Control Head is turned OFF, all RF Decks and Control Heads are turned OFF.

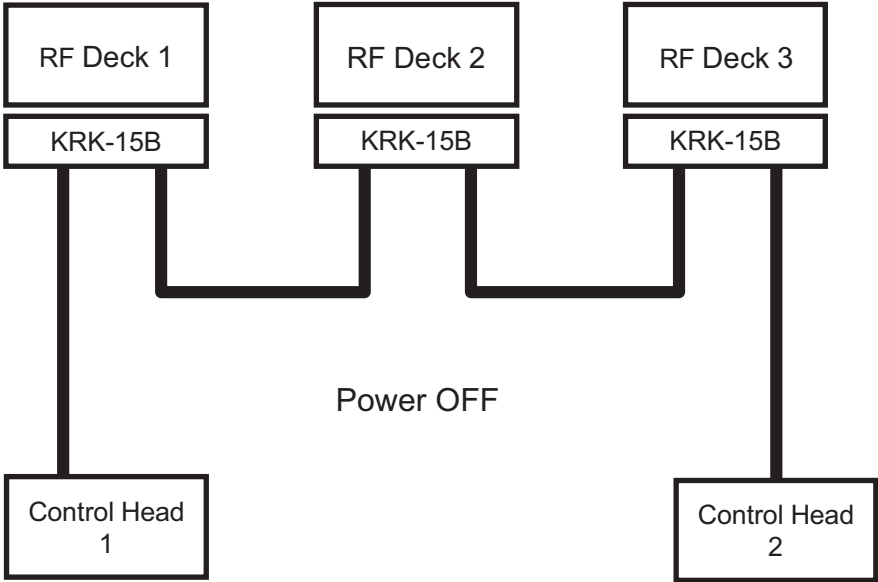


Figure 18-46 Triple RF Deck/ Dual Control Head (Power OFF)

2 Remove the Control Head.

Remove the Control Head and KCT-71 from a Multi RF Deck system.

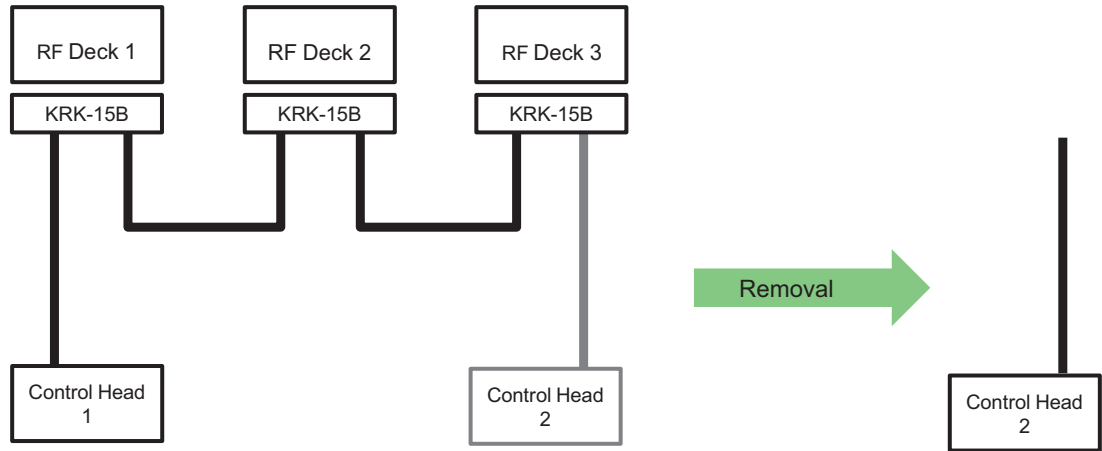


Figure 18-47 Removal of Control Head 2/ KCT-71

3 Change the DIP switch.

Change the DIP switch to the Triple RF Deck/ Single Control Head configuration.

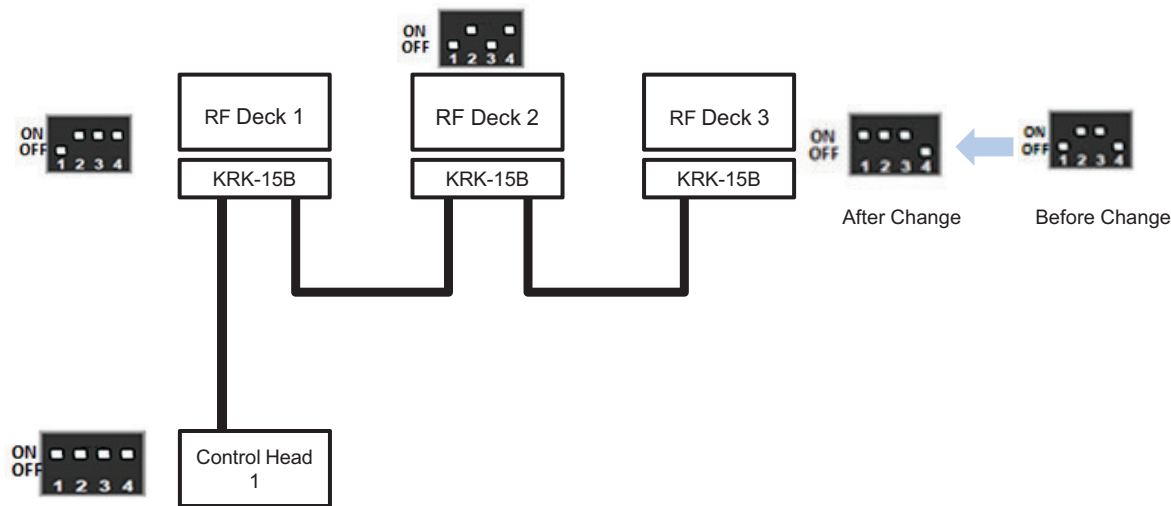


Figure 18-48 DIP Switch Configuration Triple RF Deck/ Single Control Head

4 Turn ON all RF Decks and Control Heads.

If a Control Head is turned ON, all RF Decks are also turned ON.

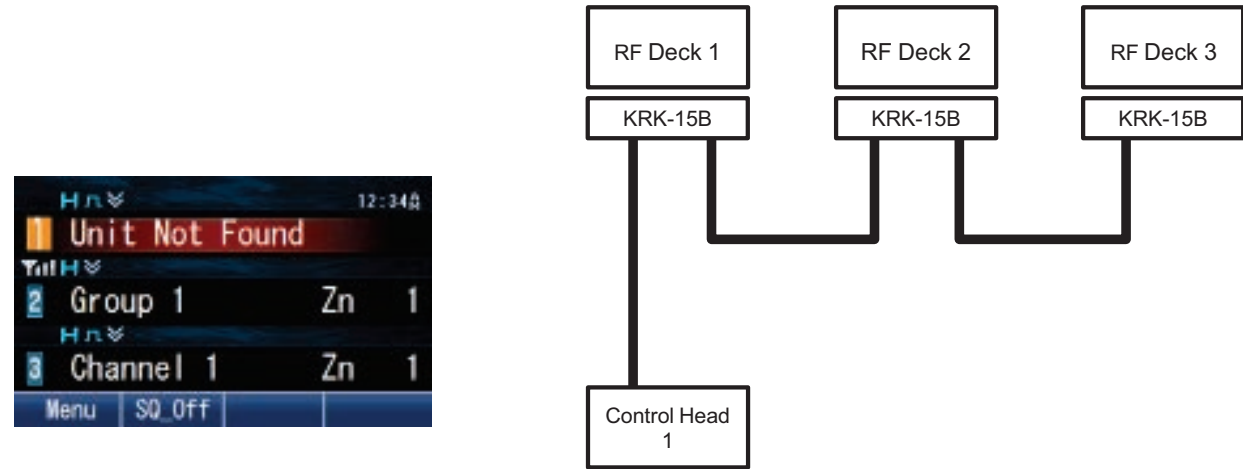


Figure 18-49 Triple RF Deck/ Single Control Head (Power ON)

Note

- "Unit Not Found" appears on the screen of Control Head 1 by the removal of Control Head 2.

5 Write the FPU data.

The FPU data for Triple RF Deck/ Single Control Head is written in a Multi RF Deck system. Always write the FPU data in a Multi RF Deck system. Refer to "[Configuration in KPG-D1/ D1N If Control Heads Are Switched](#)" for writing configuration data.

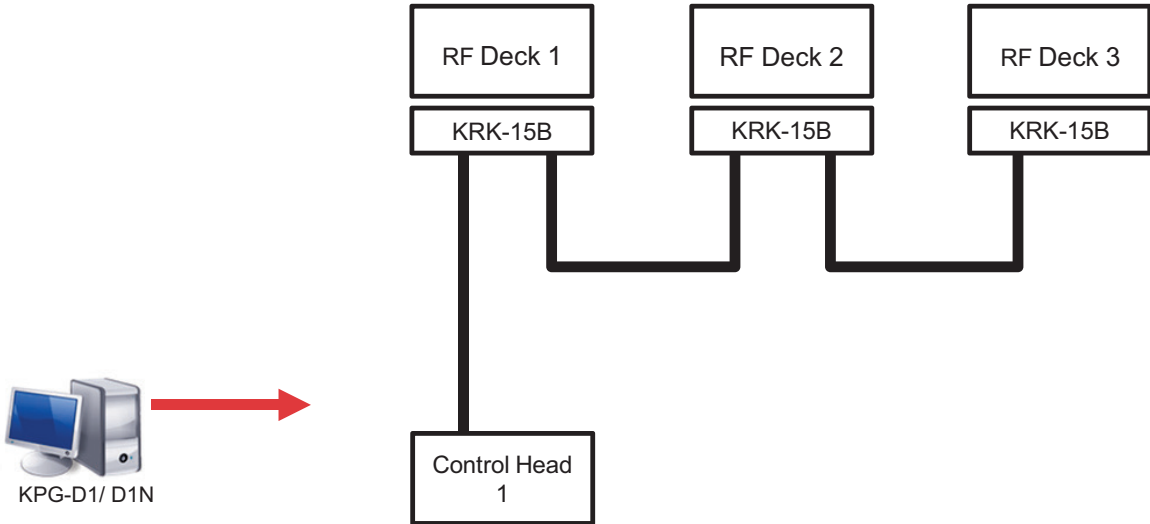


Figure 18-50 Triple RF Deck/ Single Control Head (FPU Setting)

Removing an RF Deck

This section describes the procedure to change a system to a Dual RF Deck/ Dual Control Head structure by removing an RF Deck from the system of a Triple RF Deck/ Dual Control Head structure.

Note

- This section describes the procedure to remove RF Deck 3 as an example, but the same procedure can be followed when removing RF Deck 1 or RF Deck 2.
- An RF Deck can be removed with the same procedure when removing the RF Deck in a system of the following RF Deck/ Control Head structures:
 - Triple RF Deck/ Single Control Head
 - Dual RF Deck/ Dual Control Head
 - Dual RF Deck/ Single Control Head

1 Turn OFF all RF Decks and Control Heads.

If either Control Head is turned OFF, all RF Decks and Control Heads are turned OFF.

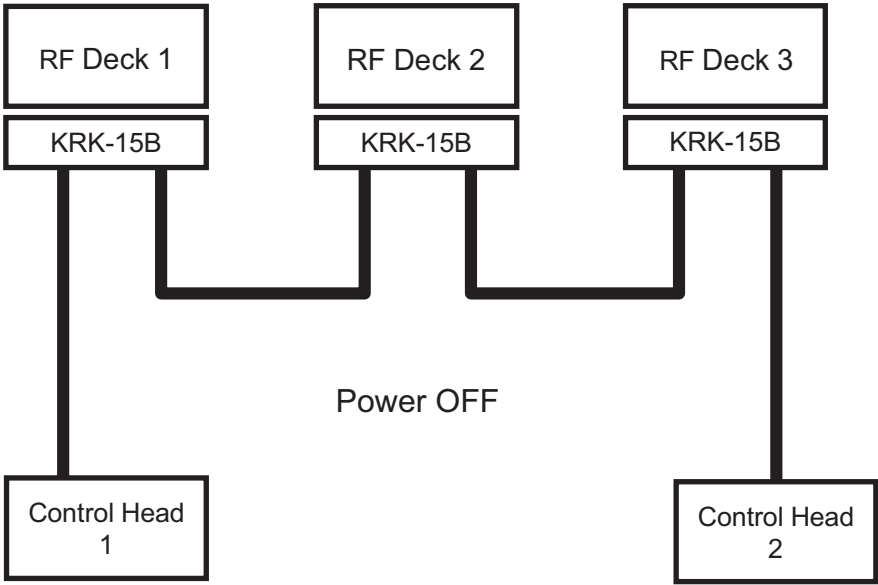


Figure 18-51 Triple RF Deck/ Dual Control Head (Power OFF)

2 Remove the RF Deck.

Remove RF Deck 3 and KCT-71 from a Multi RF Deck system.

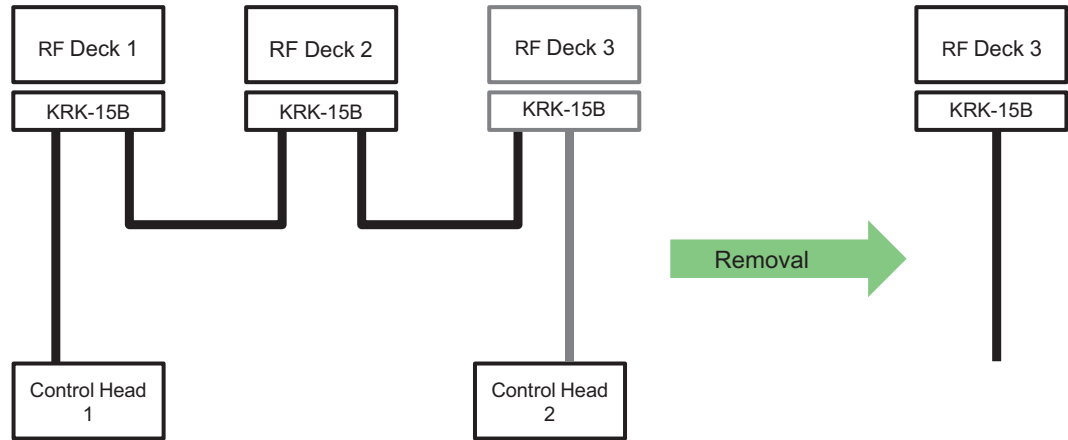


Figure 18-52 Removal of RF Deck 3/ KCT-71

3 Connect the Control Head.

Connect Control Head 2 to the KCT-71 connected to RF Deck 2.

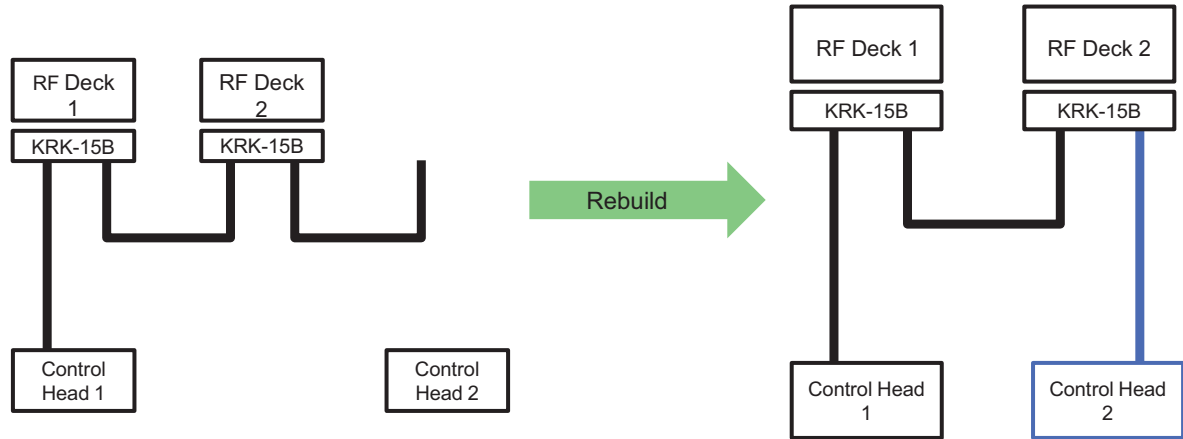


Figure 18-53 Dual RF Deck/ Dual Control Head

4 Change the DIP switch configuration.

Change the DIP switch to the Dual RF Deck/ Dual Control Head configuration.

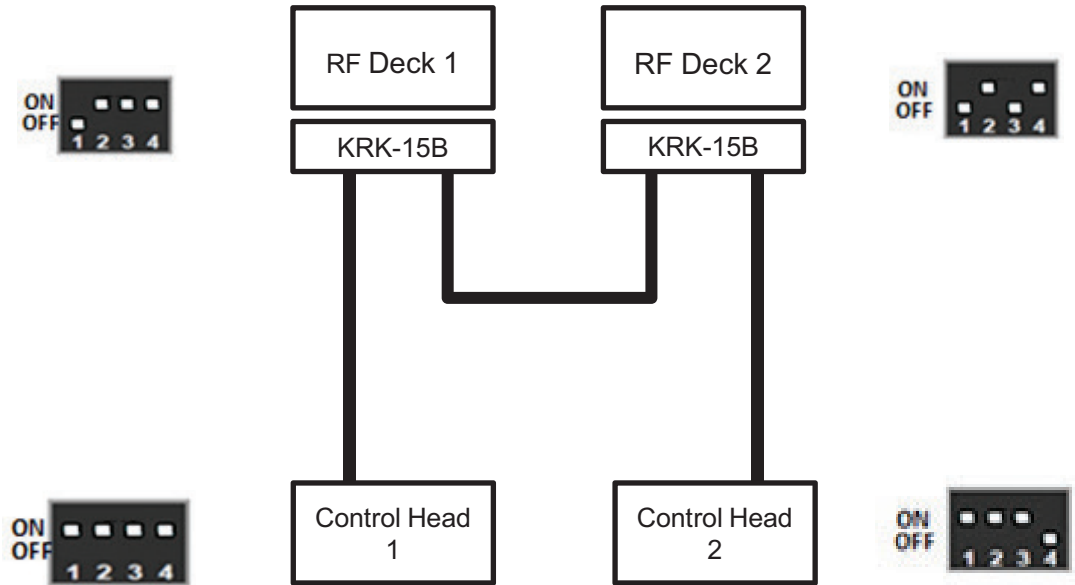


Figure 18-54 DIP Switch Configuration Dual RF Deck/ Dual Control Head

5 Turn ON all RF Decks and Control Heads.

If either Control Head is turned ON, all RF Decks and Control Heads are turned ON.

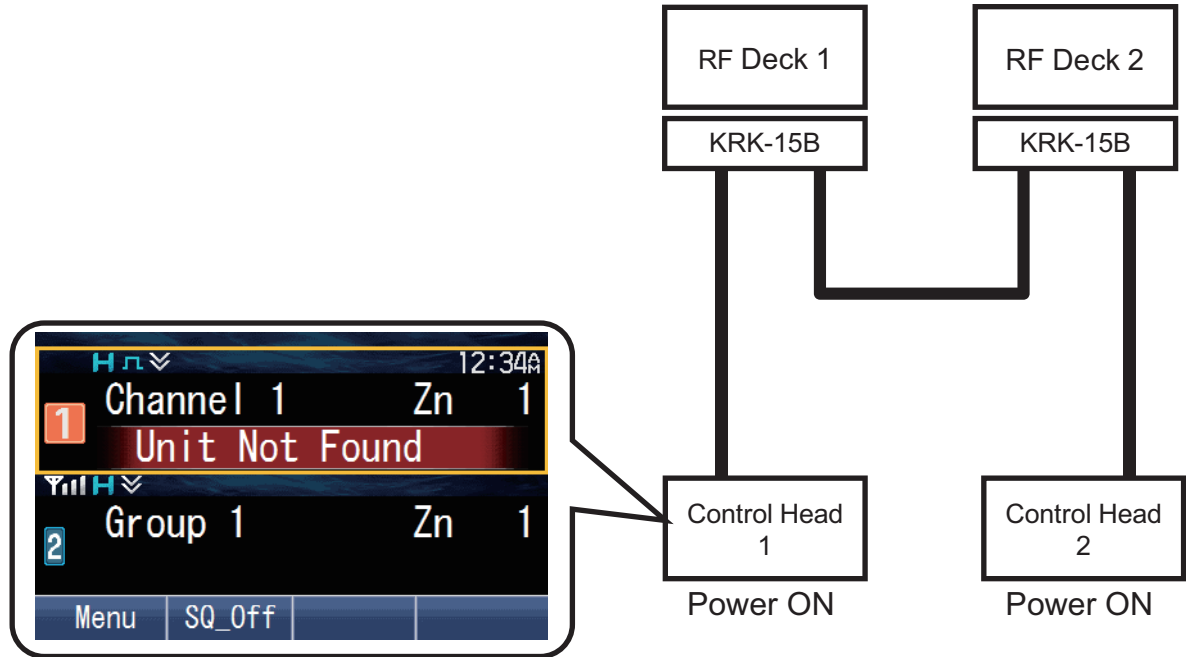


Figure 18-55 Dual RF Deck/ Dual Control Head (Power ON)

Note

- "Unit Not Found" appears on the screen of Control Head 1 by the removal of the RF Deck.

6 Write the FPU data.

The FPU data for Triple RF Deck/ Single Control Head is written in a Multi RF Deck system. Always write the FPU data in a Multi RF Deck system. Refer to **“Configuration in KPG-D1/ D1N if RF Decks Are Switched”** for writing configuration data.

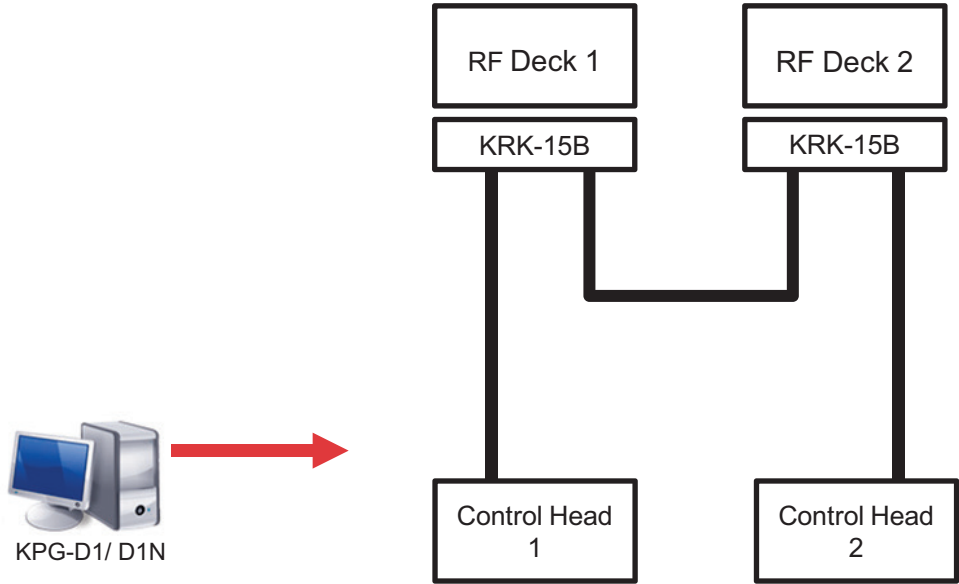


Figure 18-56 Dual RF Deck/ Dual Control Head (FPU Setting)

18.5 Changing Configuration Data While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating

While a system in a Multi RF Deck/ Multi Control Head structure is operating, the configuration data can be collectively written at the same time for the Multi RF Deck/ Multi Control Head system. Rebuilding a Multi RF Deck/ Multi Control Head structure as a Single RF Deck/ Single Control Head structure is not required. Refer to **“Configuration in KPG-D1/ D1N if RF Decks Are Switched”** for writing configuration data.

18.6 Updating Firmware While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating

While a system in a Multi RF Deck/ Multi Control Head structure is operating, the firmware can be collectively written at the same time to all RF Decks and Control Heads. Rebuilding a Multi RF Deck/ Multi Control Head structure as a Single RF Deck/ Single Control Head structure is not required.

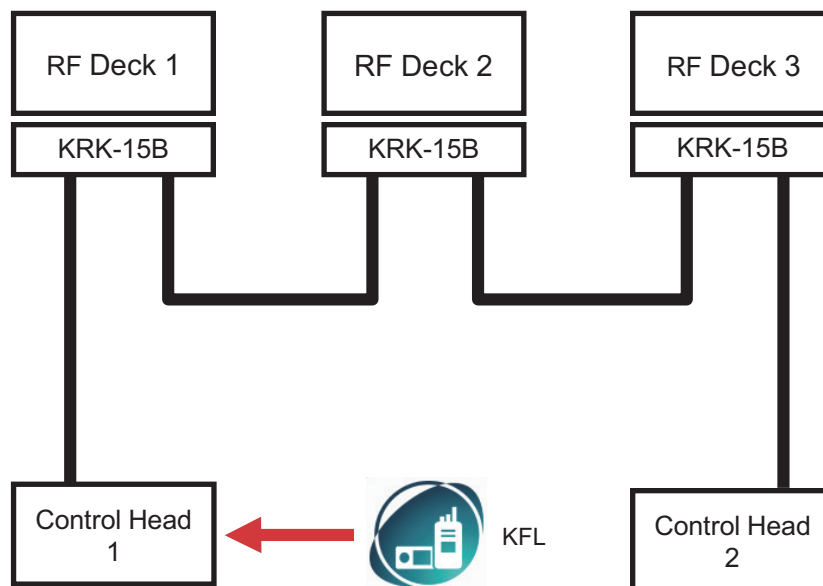


Figure 18-57 Multi RF Deck/ Multi Control Head (Firmware Update)

Note

- The firmware version written in the RF Deck can be viewed in Transceiver Information of KPG-D1/ D1N.
- To activate Multi RF Deck/ Multi Control Head, the firmware version 1.62.00 or later needs to be written.

18.7 Reconnecting a Removed RF Deck

This section describes the procedure for RF Deck removal when RF Deck 3 breaks and the procedure for installation after the repair of RF Deck 3 is completed while a system in a Triple RF Deck/ Dual Control Head structure is operating.

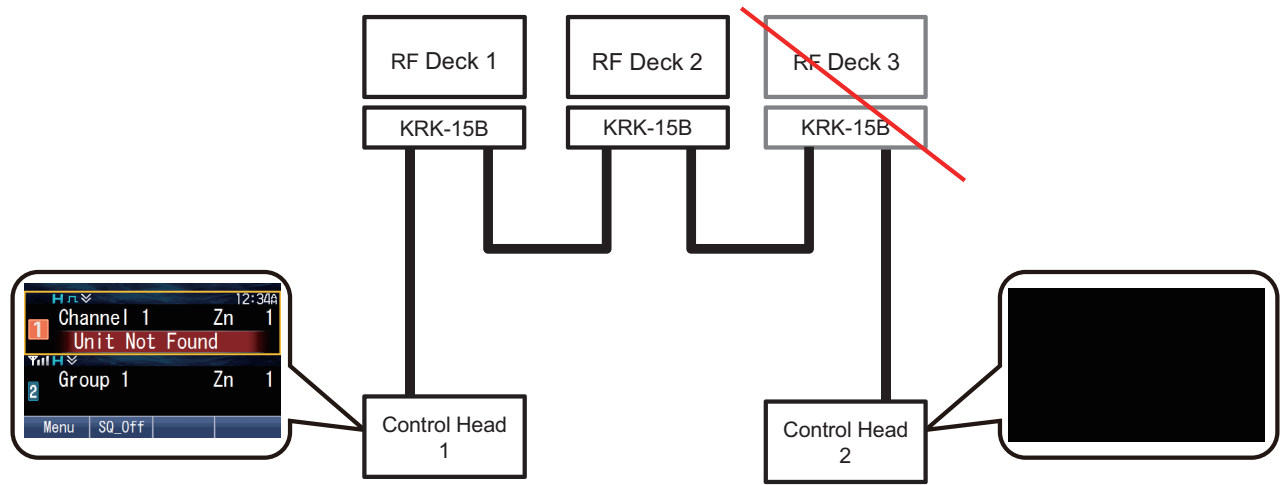


Figure 18-58 Breakdown of RF Deck 3

Note

- An RF Deck can be removed and installed with the same procedures even if in a system of the following RF Deck/ Control Head structures:
 - Triple RF Deck/ Single Control Head
 - Dual RF Deck/ Dual Control Head
 - Dual RF Deck/ Dual Control Head

1 Press the Power switch of a Control Head to turn OFF the power.

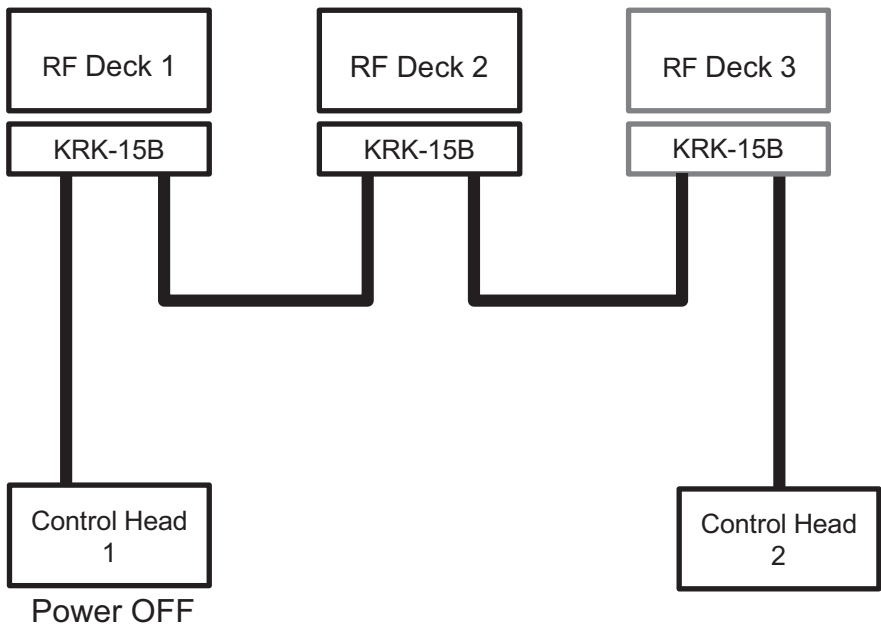


Figure 18-59 Triple RF Deck/ Dual Control Head (Power OFF)

2 Remove RF Deck 3 and KCT-71.

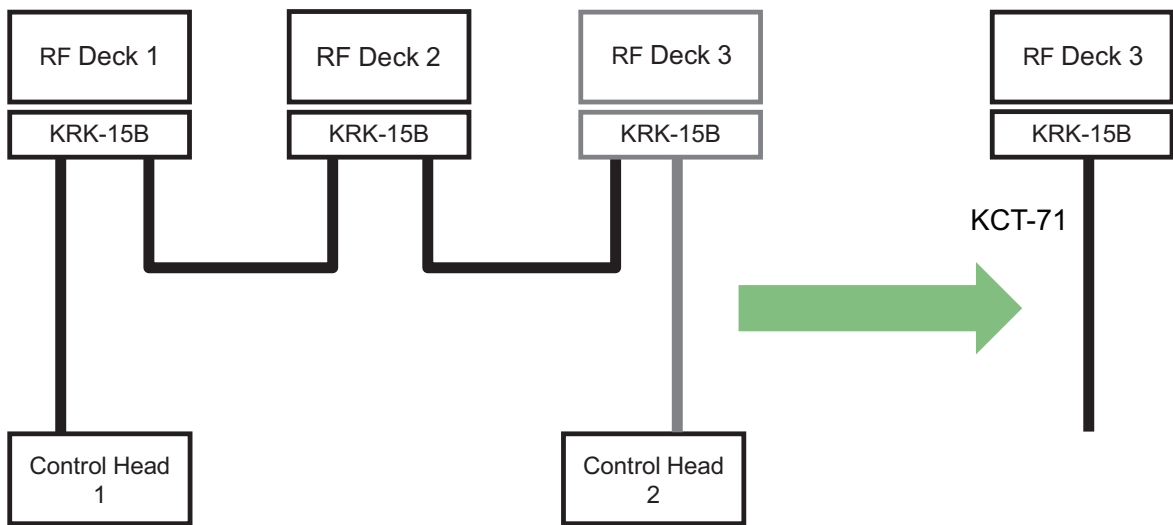


Figure 18-60 Removal of RF Deck 3/ KCT-71

Note

- If the removed RF Deck 3 is not broken, by changing the configuration of the DIP switch, the system can operate in a system of a Single RF Deck/ Single Control Head structure even without overwriting the configuration data. However, "Unit Not Found" appears on the display.

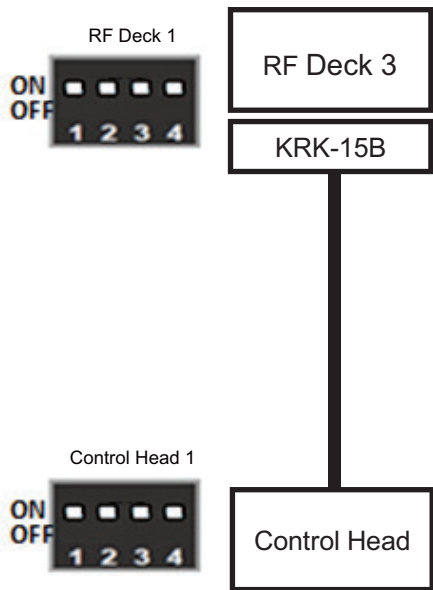


Figure 18-61 Single RF Deck/ Single Control Head

- Even if RF Deck 3 is removed, by connecting Control Head 2 to KCT-71 of RF Deck 2 and by changing the configuration of the DIP switch, the system can operate in a system of a Dual RF Deck/ Dual Control Head structure even without overwriting the configuration data. However, "Unit Not Found" appears on the display.

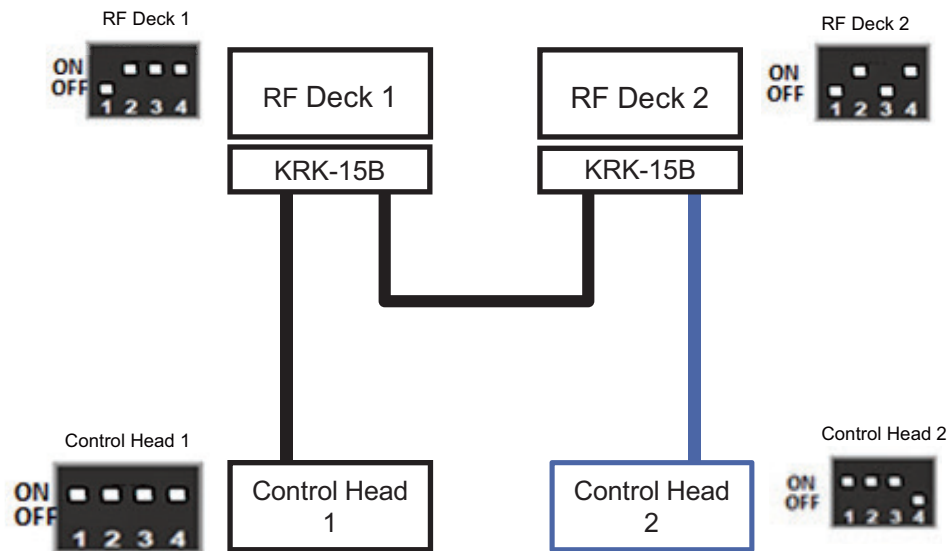


Figure 18-62 Dual RF Deck/ Dual Control Head

3 Restore RF Deck 3 to the previous state after the repair of RF Deck 3 completes.

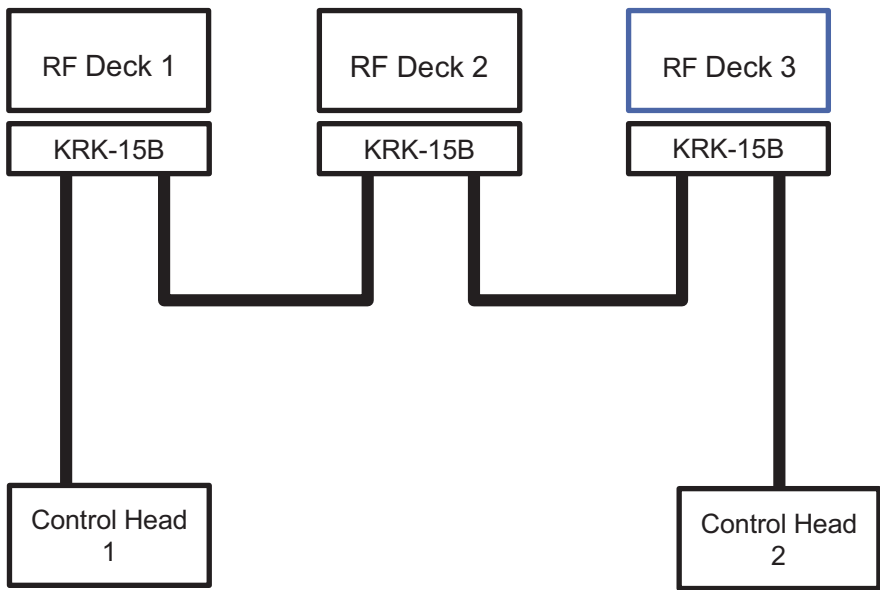


Figure 18-63 Triple RF Deck/ Dual Control Head

4 Configure the DIP switch.

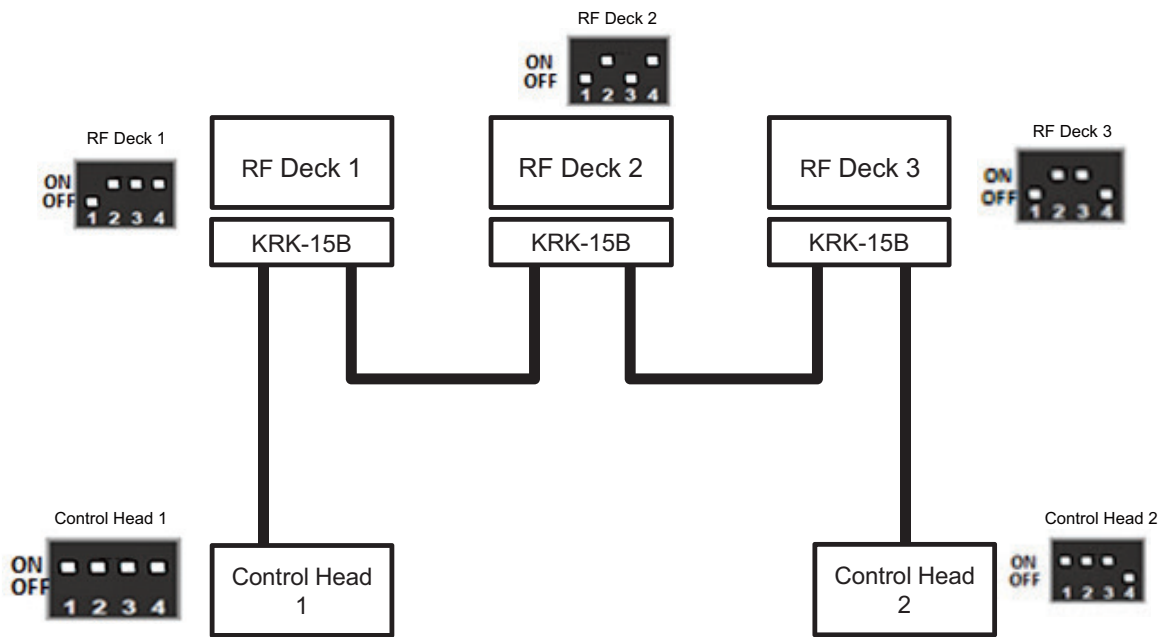


Figure 18-64 DIP Switch Configuration

18.8 Changing Configuration Data of 1 RF Deck While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating

The configuration data of an RF Deck can be changed while a system in a Multi RF Deck/ Multi Control Head structure is operating. This section describes the procedure for changing the configuration data of RF Deck 2.

Note

- The configuration data of RF Deck 1 and RF Deck 3 can be changed with the same procedure while a system in a Multi RF Deck/ Multi Control Head structure is operating.
- If even one piece of the configuration data is changed, the configuration data of all RF Decks and Control Heads needs to be overwritten.
- The configuration data of an RF Deck can be changed with the same procedure even if in a system of the following RF Deck/ Control Head structures:
 - Triple RF Deck/ Single Control Head
 - Dual RF Deck/ Dual Control Head
 - Dual RF Deck/ Single Control Head

1 Edit the configuration data of RF Deck 2 by using KPG-D1/ D1N.

To create new configuration data of RF Deck 2, confirm that the following are configured in **Product Information**:

- Multi RF Deck of **Feature Selection** is enabled.
- The configuration of **Control Head Configuration** matches the actual system structure.

2 Turn ON all RF Decks and Dual Control Heads in a Triple RF Deck/ Dual Control Head structure.

Configuration data can be written to all RF Decks and Control Heads.

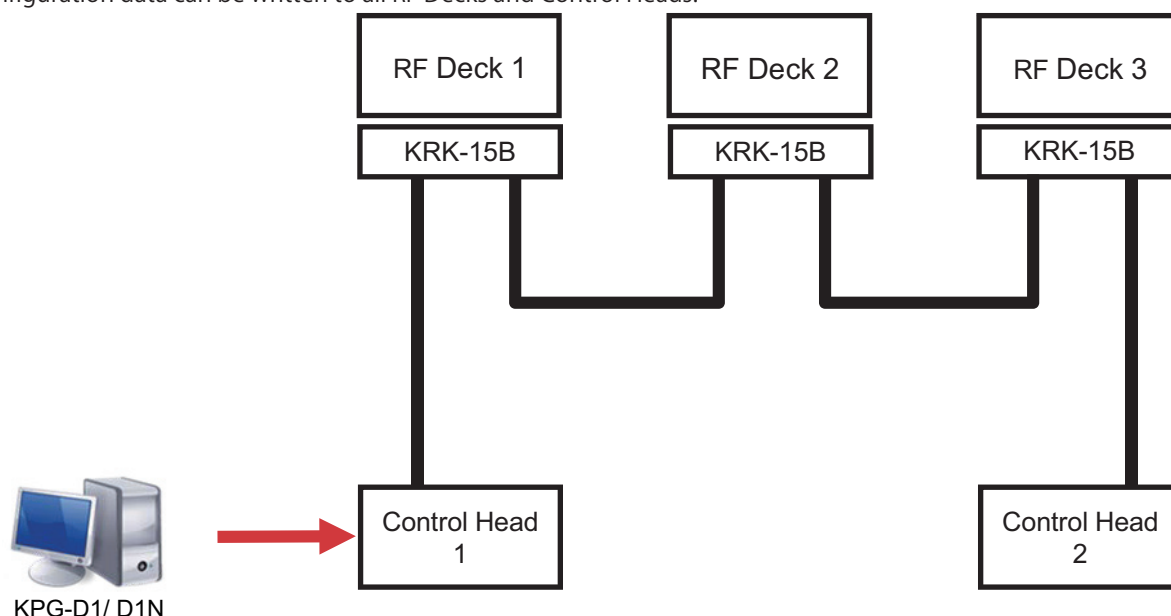


Figure 18-65 Triple RF Deck/ Dual Control Head (FPU Setting)

3 Select the configuration data of each RF Deck in **Program > Multi RF Deck Setup** of KPG-D1/ D1N.

Clicking the “Select File” button of **RF Deck Data A** to **RF Deck Data C** selects the configuration data file of each RF Deck. Also select the configuration data files of RF Decks of unchanged configurations.

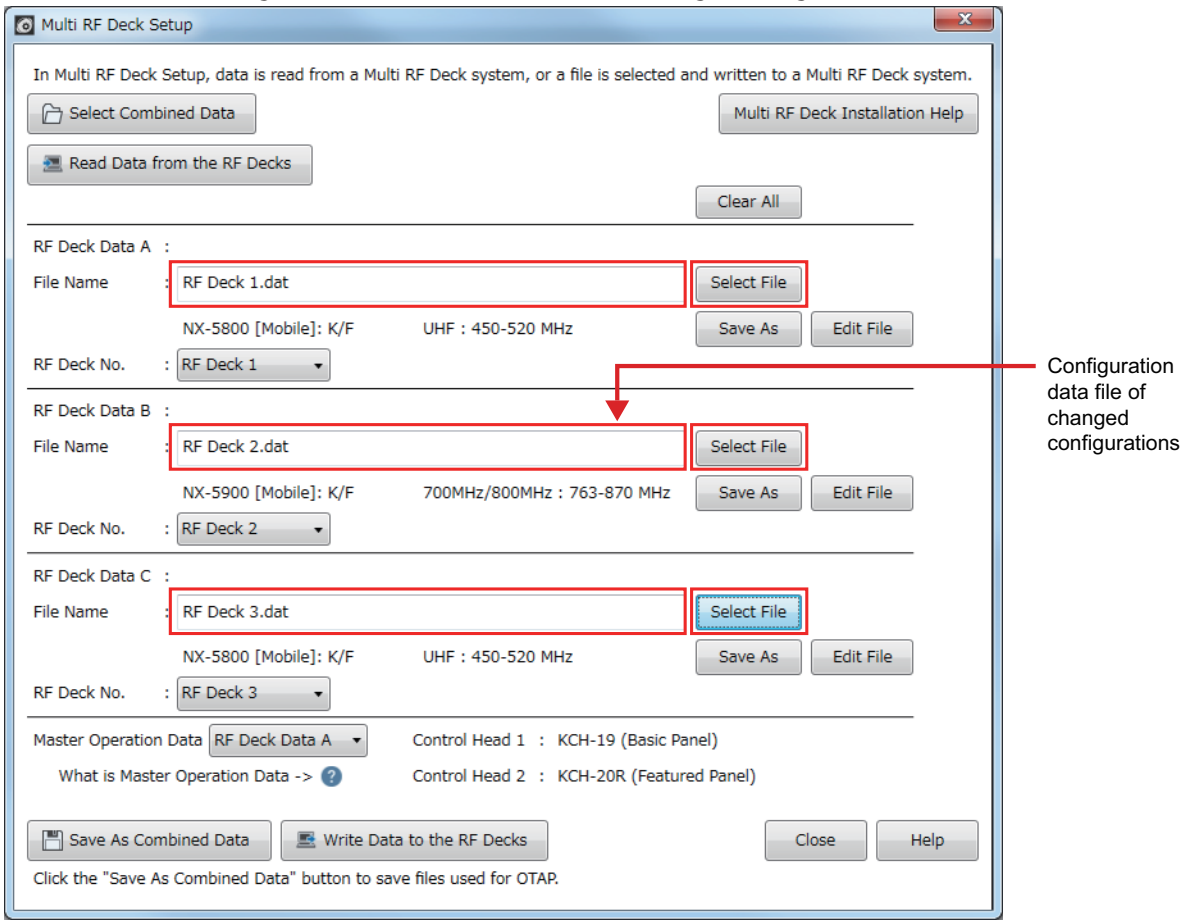


Figure 18-66 Multi RF Deck Setup (RF Deck Data)

4 Configure **Master Operation Data** and click the “Write” button.

From **RF Deck Data A** to **RF Deck Data C** configured in step 3, the configuration data of which RF Deck is to be the **Master Operation Data** is configured.

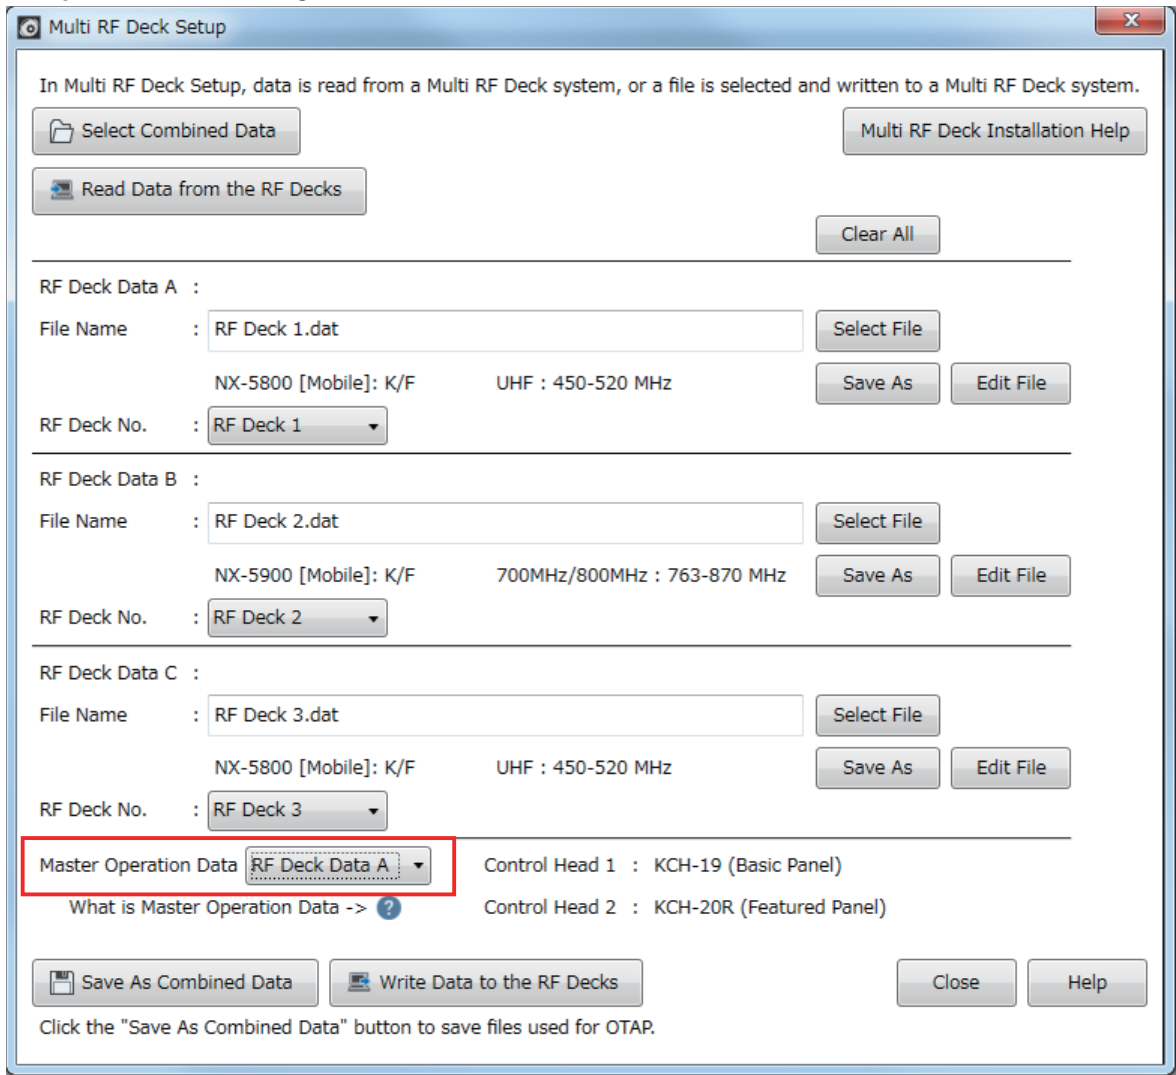


Figure 18-67 Multi RF Deck Setup (Master Operation Data)

Clicking the “Write” button displays **RF Deck Selection**.

5 Configure **FPU Data Select** and click the “OK” button.

From **RF Deck Data A** to **RF Deck Data C** configured in step 3, the configuration data of which RF Deck is to be written is configured for each RF Deck.

FPU Configuration			
	RF Deck Data A	RF Deck Data B	RF Deck Data C
Model Name	NX-5800 [Mobile]: K/F	NX-5800 [Mobile]: K/F	NX-5700 [Mobile]: K/F
Frequency [MHz]	UHF : 380-470 MHz	UHF : 450-520 MHz	VHF : 136-174 MHz

Radio Configuration			
	RF Deck 1	RF Deck 2	RF Deck 3
Model Name	NX-5800 [Mobile]: K/F	NX-5700 [Mobile]: K/F	NX-5800 [Mobile]: K/F
Frequency [MHz]	UHF : 450-520 MHz	VHF : 136-174 MHz	UHF : 380-470 MHz
FPU Data Select	RF Deck Data B	RF Deck Data C	RF Deck Data A

OK Cancel Help

Figure 18-68 RF Deck Selection

Clicking the “OK” button displays **Write Data to the Transceiver**.

6 Click the “Write” button.

☒ Zeroize
☐ Audio/GPS Data Erase (Internal Memory)
☐ DFA Data Erase
☒ Time Adjustment
☐ Consecutive Write
☒ ID (Own) Overwrite

Block 0/14922

Write Cancel Help

Figure 18-69 Write Data to the Transceiver

The writing of configuration data starts.
When the writing of configuration data completes, the transceiver starts up in user mode.

If continuously changing the configuration data of RF Deck 3

To continuously change the configuration data of RF Deck 3, click the “Close” button of Multi RF Deck Setup to close **Multi RF Deck Setup**.

Then, edit the configuration data of RF Deck 3, and write the configuration data by step 3 to step 6 above.

18.9 Changing the Display Positions of a Channel Name and an Icon When Multi RF Deck View Is On

If **Multi RF Deck View** is enabled when KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head) is used for a Control Head, the channel names of all RF Decks in the Multi RF Deck system can be displayed simultaneously on the display.

By changing the configuration of the DIP switch of an RF Deck, the display positions of a channel name and an icon in **Multi RF Deck View** can be changed.

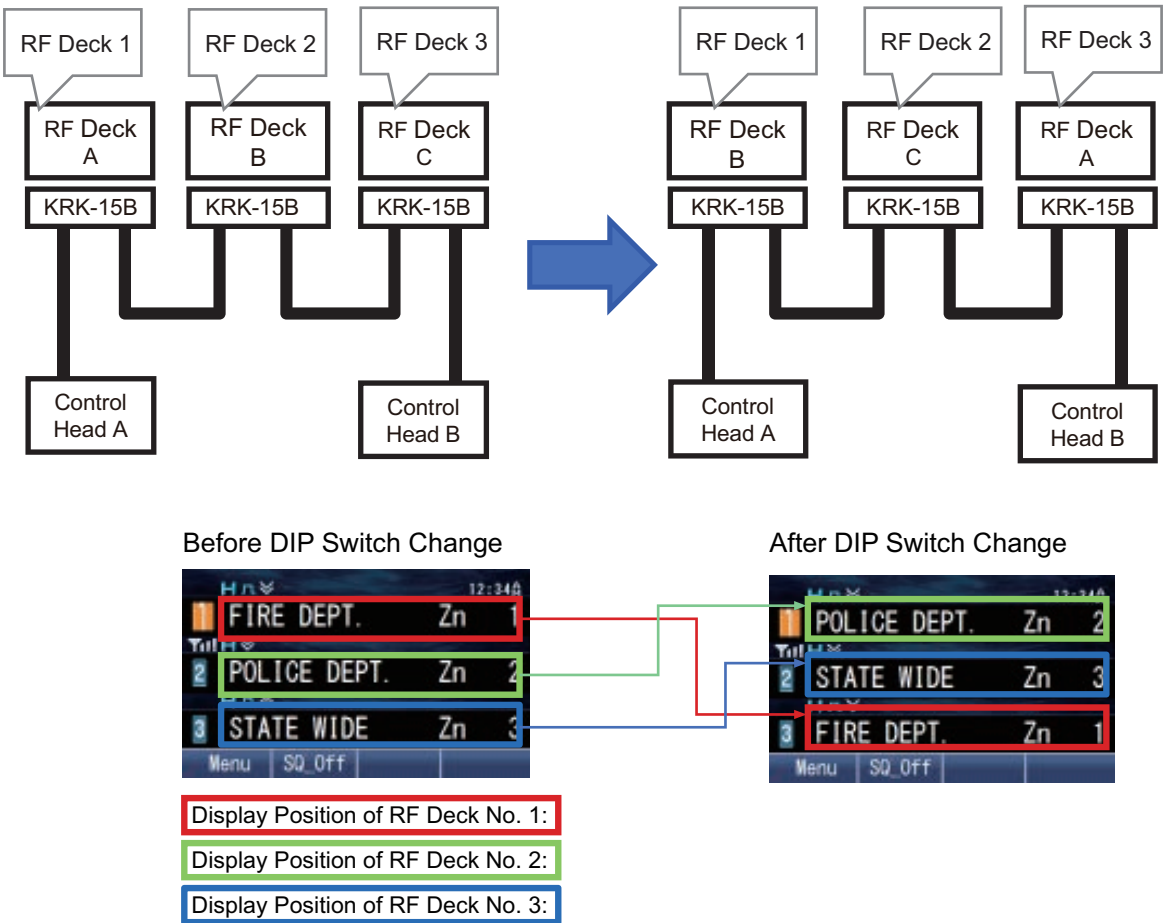


Figure 18-70 Changing the Display Position of a Channel Name in Multi RF Deck View

This section describes the procedure to switch an RF Deck number in a system of a Triple RF Deck/ Dual Control Head structure.

Note

- If switching an RF Deck number in a Multi RF Deck system, writing the configuration data is not required.

1 Press the **Power** switch of Control Head 1 or Control Head 2 to turn OFF the power.

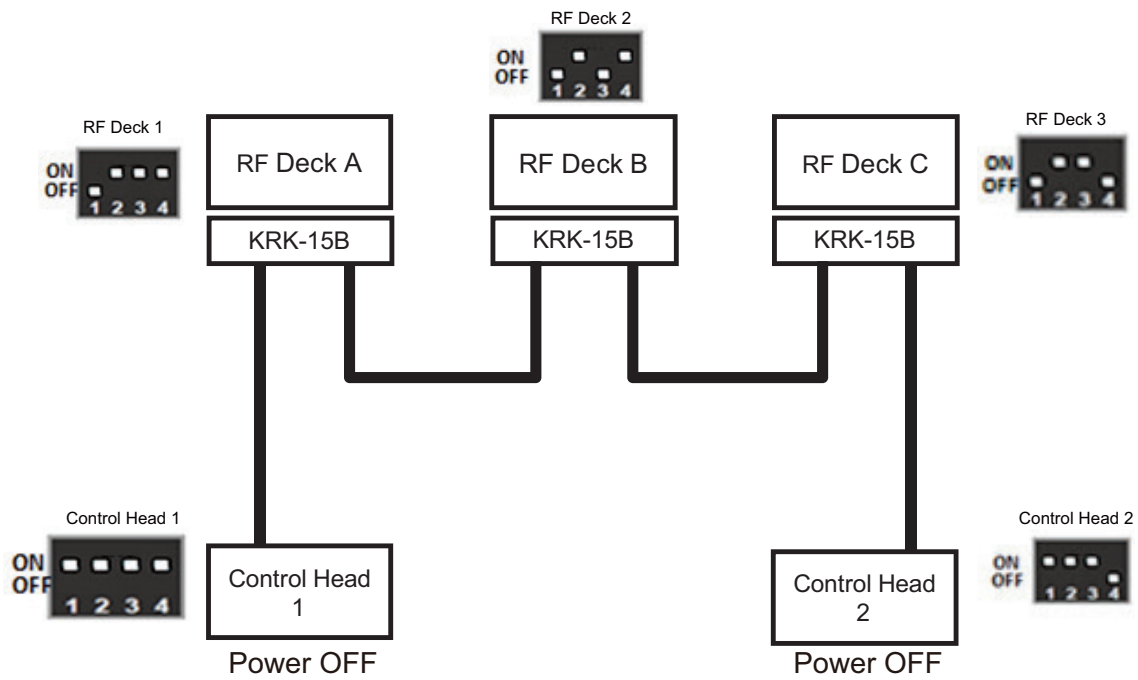


Figure 18-71 Triple RF Deck/ Dual Control Head (Power OFF)

2 Switch the RF Decks.

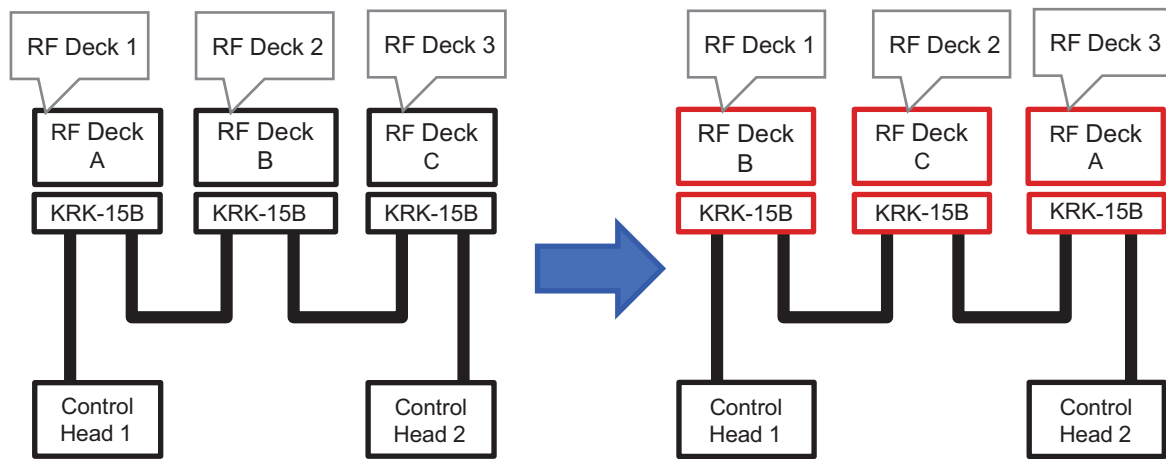


Figure 18-72 Switching of RF Decks

3 Change the DIP switch configuration.

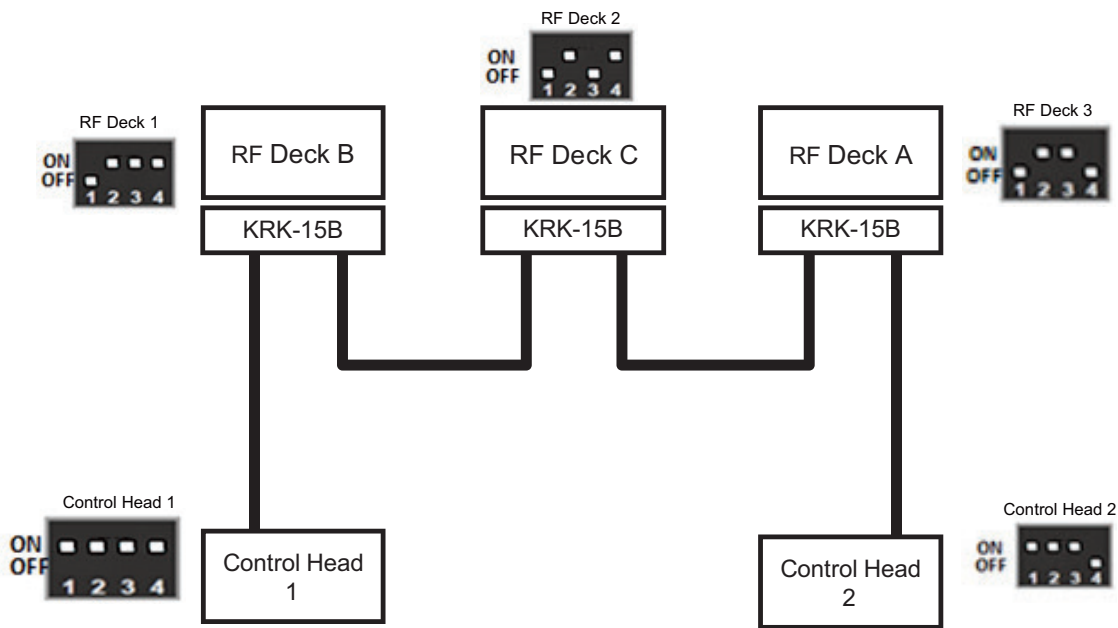


Figure 18-73 DIP Switch Configuration

4 Press the Power switch of Control Head 1 or Control Head 2 to turn ON the power.

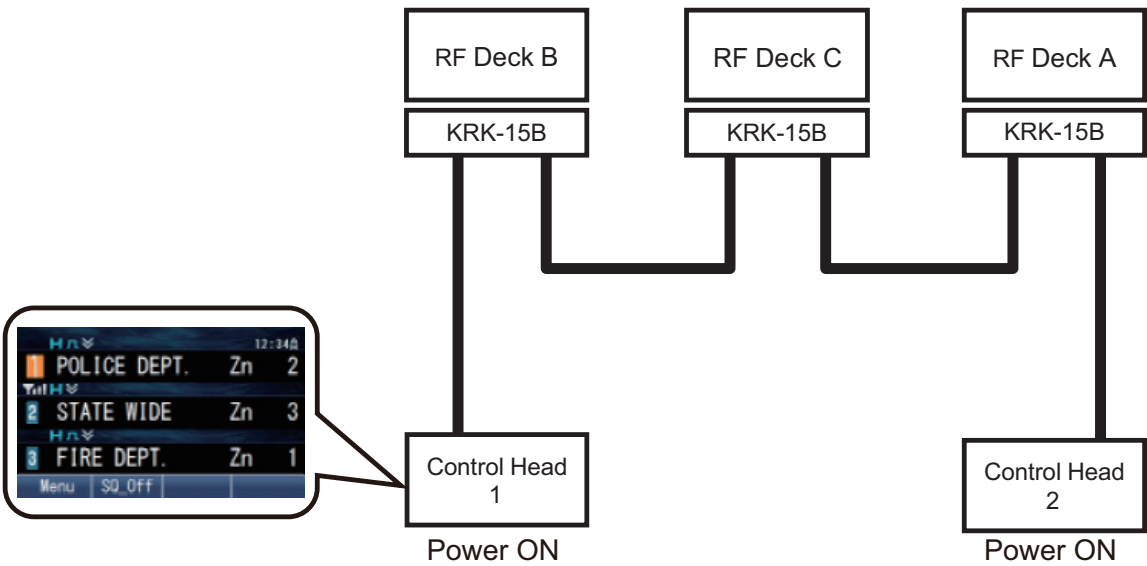


Figure 18-74 Triple RF Deck/ Dual Control Head (Power ON)

18.10 Troubleshooting in Single RF Deck/ Single Control Head

If “FIRMWARE PROG” or “FIRM MISMATCH” appears on the display in a system of a Single RF Deck/ Single Control Head structure, the firmware of the RF Deck and the firmware of the Control Head are different. In this case, write the firmware with the Control Head connected. If firmware is written from the Control Head with the Control Head connected, the same firmware is written to the RF Deck and the Control Head, and the transceiver behaves normally.

18.11 About Configuration Using KPG-D1/ D1N

This section describes the configurations in KPG-D1/ D1N for changing an RF Deck/ Control Head structure, and for switching an RF Deck and a Control Head.

Configuration in KPG-D1/ D1N If Changed from a Single RF Deck Structure to a Multi RF Deck System

1 Configure the configuration related to the RF Deck and Control Head to be switched in Product Information.

- Multi RF Deck is enabled in Feature Selection.
- Each Control Head to be used is configured in Control Head 1 and Control Head 2 of Control Head Configuration.

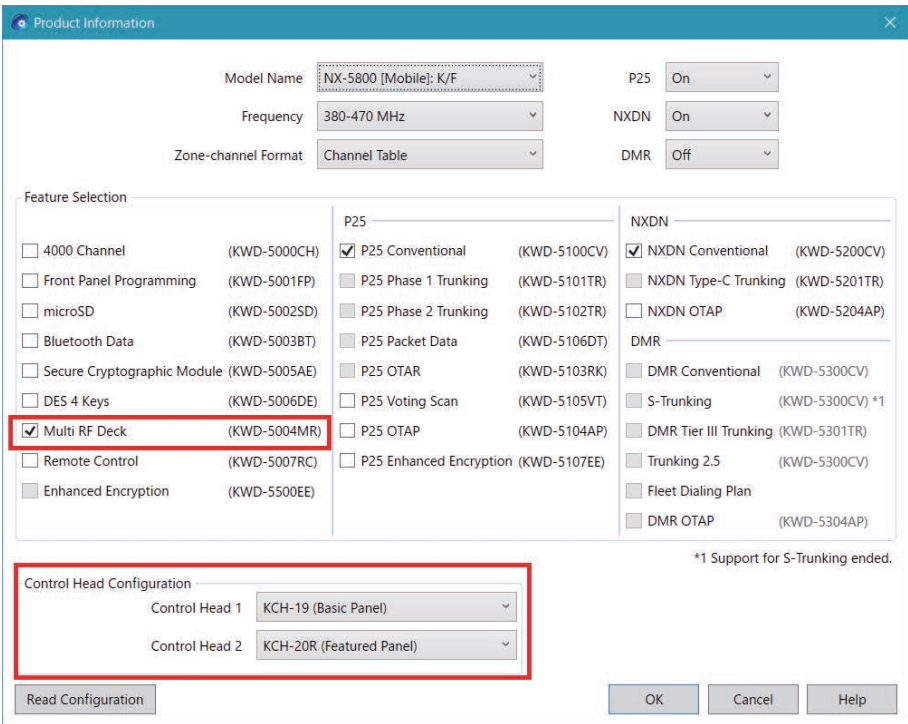


Figure 18-75 Product Information

2 Configure various functions of each RF Deck and Control Head in **Transceiver Settings**.

3 Select the configuration data of each RF Deck in **Program > Multi RF Deck Setup**.

Clicking the “Select File” button of **RF Deck Data A** to **RF Deck Data C** selects the configuration data file of each RF Deck.

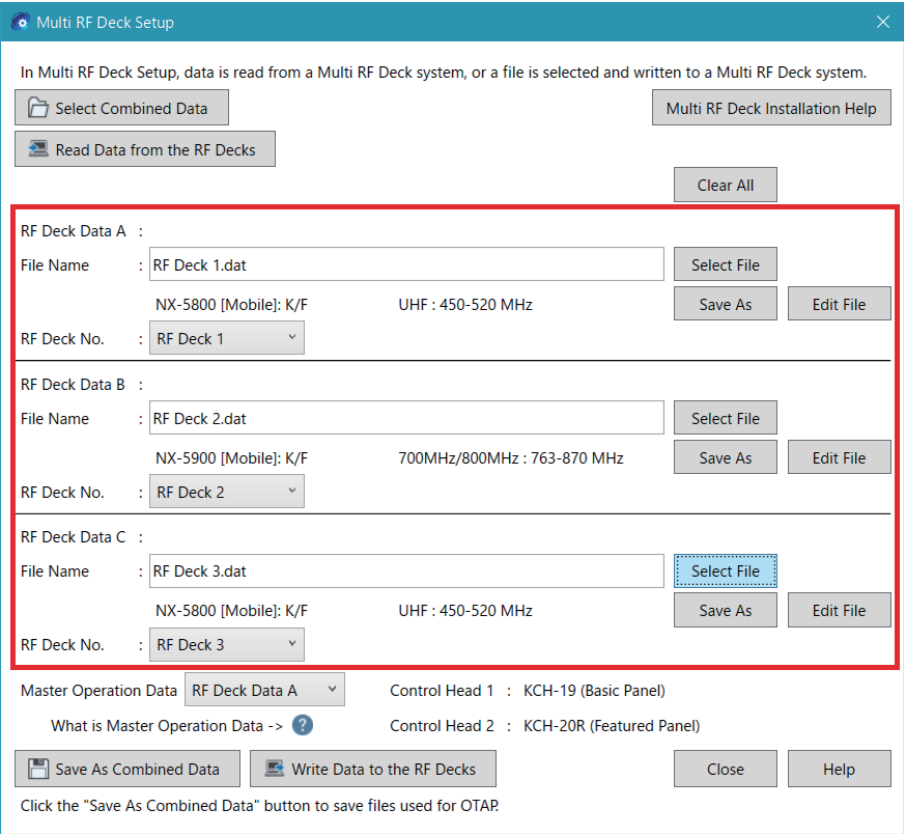


Figure 18-76 Multi RF Deck Setup (RF Deck Data)

4 Configure **Master Operation Data** and click the “Write Data to the RF Decks” button.

From **RF Deck Data A** to **RF Deck Data C** configured in step 3, the configuration data of which RF Deck is to be the **Master Operation Data** is configured.

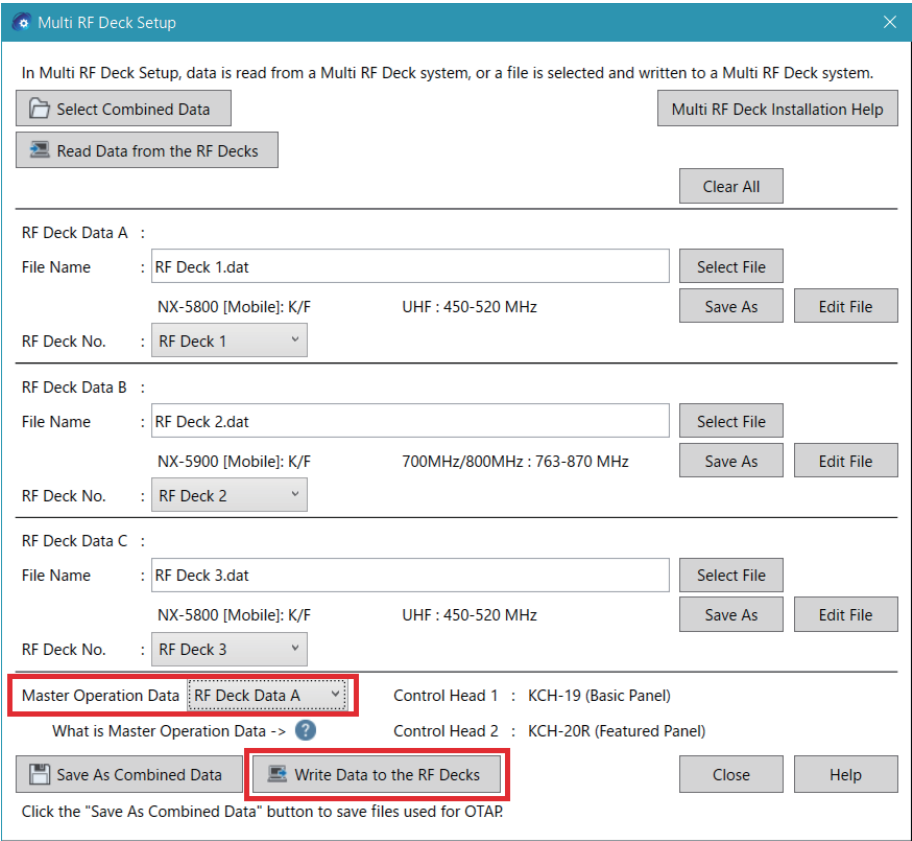


Figure 18-77 Multi RF Deck Setup (Master Operation Data)

Clicking the “Write Data to the RF Decks” button displays **RF Deck Selection**.

5 Configure **FPU Data Select** and click the “OK” button.

From **RF Deck Data A** to **RF Deck Data C** configured in step 3, the configuration data of which RF Deck is to be written is configured for each RF Deck.

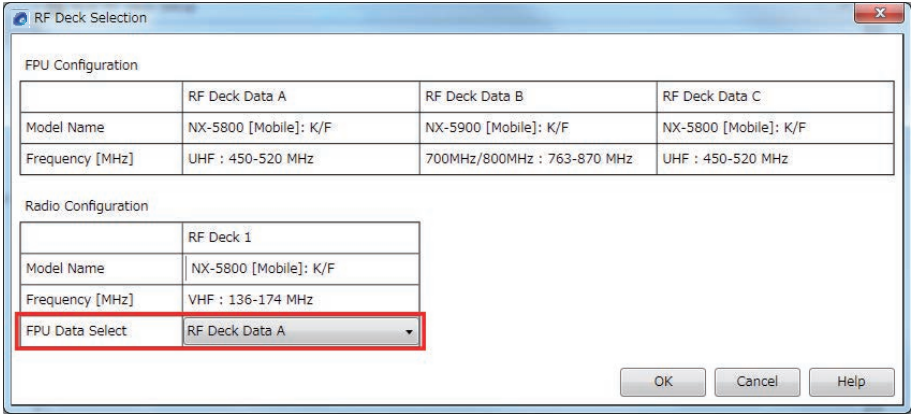


Figure 18-78 RF Deck Selection

Clicking the “OK” button displays **Write Data to the Transceiver**.

6

Click the “Write” button.

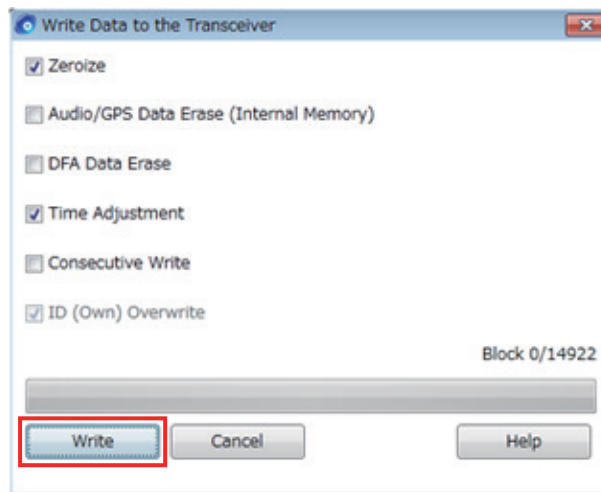


Figure 18-79 Write Data to the Transceiver

The writing of configuration data starts.

When the writing of configuration data completes, a writing complete message box appears. Click the “OK” button.

Configuration in KPG-D1/ D1N if RF Decks Are Switched

1 Select the configuration data of each RF Deck in Program > Multi RF Deck Setup.

Clicking the “Select File” button of **RF Deck Data A** to **RF Deck Data C** selects the configuration data file of each RF Deck.

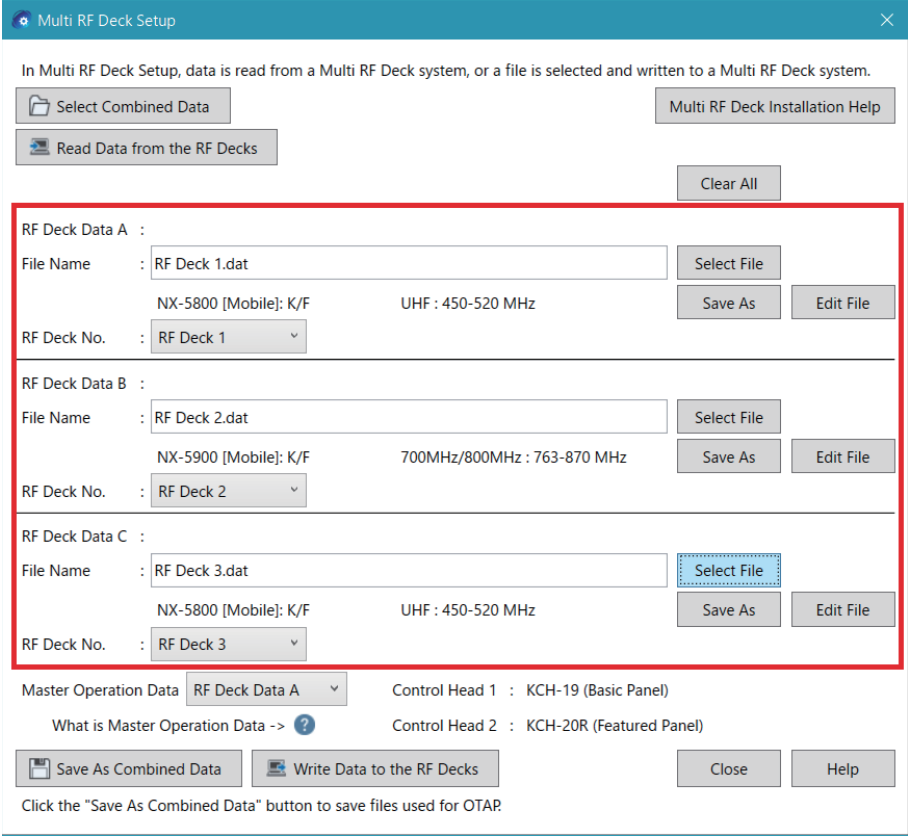


Figure 18-80 Multi RF Deck Setup (RF Deck Data)

2 Configure **Master Operation Data** and click the “Write Data to the RF Decks” button.

From **RF Deck Data A** to **RF Deck Data C** configured in step 1, the configuration data of which RF Deck is to be the **Master Operation Data** is configured.

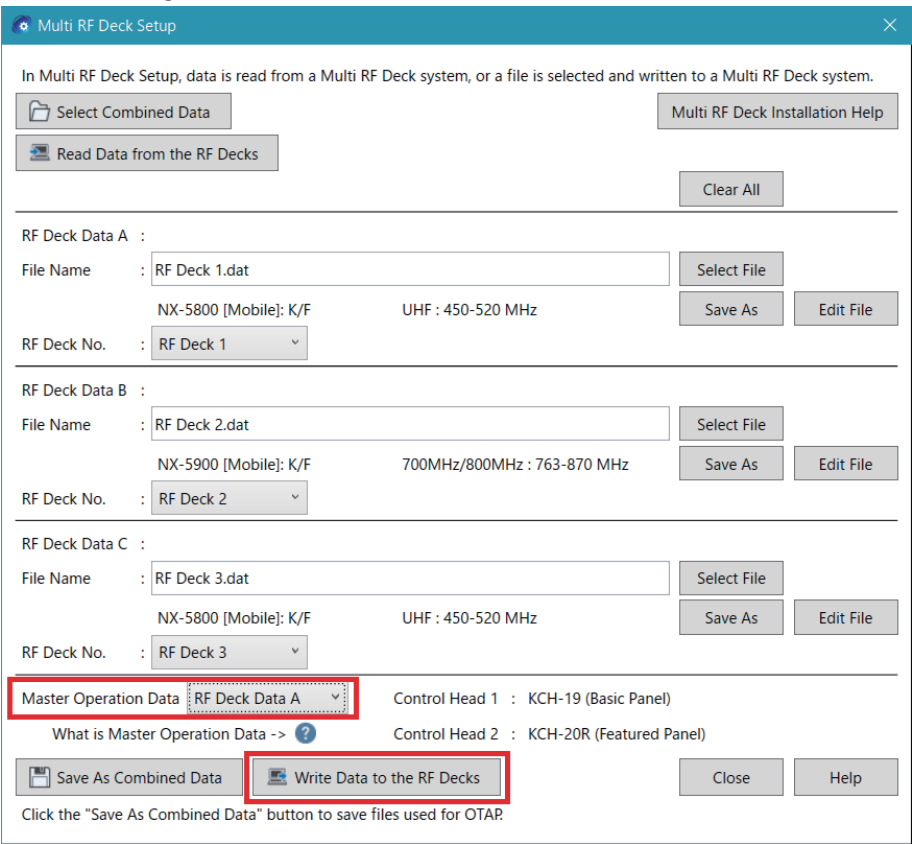


Figure 18-81 Multi RF Deck Setup (Master Operation Data)

Clicking the “Write Data to the RF Decks” button displays an information message box.

3 Click the “OK” button.

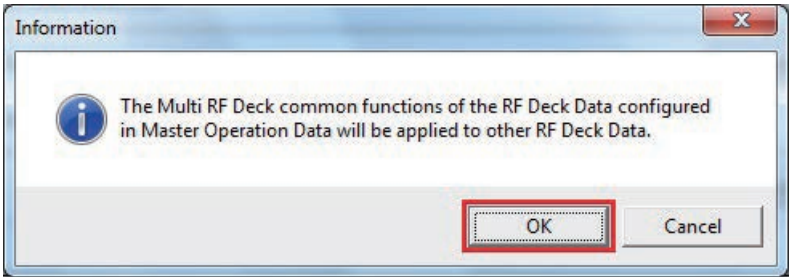


Figure 18-82 Information Message Box

RF Deck Selection appears.

4 Configure FPU Data Select and click the “OK” button.

From RF Deck Data A to RF Deck Data C configured in step 1, the configuration data of which RF Deck is to be written is configured for each RF Deck.

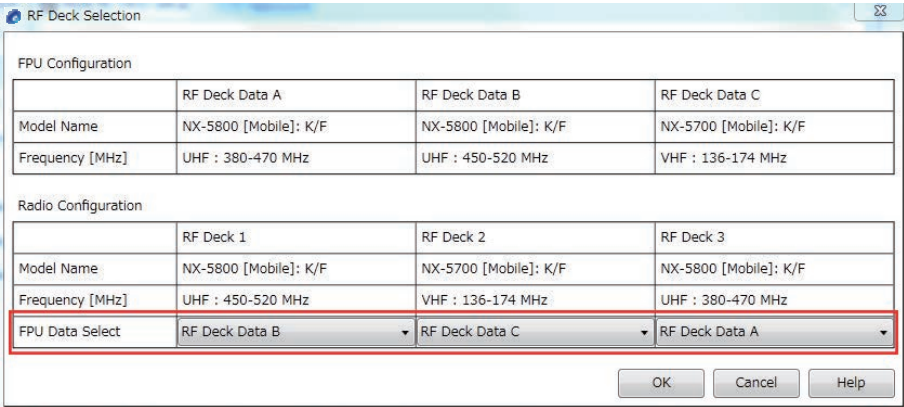


Figure 18-83 RF Deck Selection

Clicking the “OK” button displays Write Data to the Transceiver.

5 Click the “Write” button.

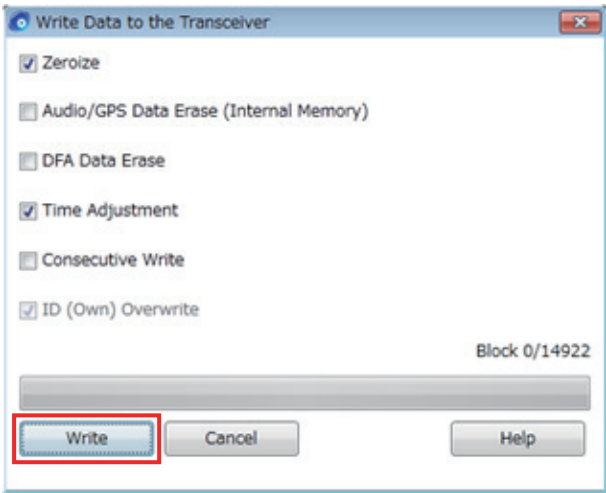


Figure 18-84 Write Data to the Transceiver

The writing of configuration data starts.
When the writing of configuration data completes, a writing complete message box appears.

6 Click the “OK” button.

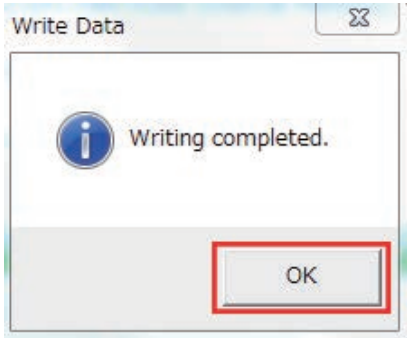


Figure 18-85 Write Data to the Transceiver

A warning message box appears.
This message appears because the common configuration in the configuration data configured in step 2 is expanded to the configuration data of each RF Deck, and the configuration contents of configuration data are changed for each RF Deck. Click the “Yes” button to store the configuration data.

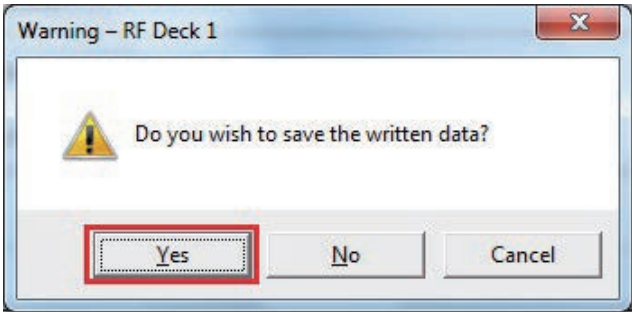


Figure 18-86 Warning Message Box

Configuration in KPG-D1/ D1N If Control Heads Are Switched

1 Change the configuration of the Control Head in Product Information.

Each Control Head to be used is configured in **Control Head 1** and **Control Head 2** of **Control Head Configuration**.

Product Information

Model NameNX-5800 [Mobile]: K/F

Frequency380-470 MHz

Zone-channel FormatChannel Table

P25On

NXDNOn

DMROff

Feature Selection

☐ 4000 Channel (KWD-5000CH)

☐ Front Panel Programming (KWD-5001FP)

☐ microSD (KWD-5002SD)

☐ Bluetooth Data (KWD-5003BT)

☐ Secure Cryptographic Module (KWD-5005AE)

☐ DES 4 Keys (KWD-5006DE)

☒ Multi RF Deck (KWD-5004MR)

☐ Remote Control (KWD-5007RC)

☐ Enhanced Encryption (KWD-5500EE)

☒ P25 Conventional (KWD-5100CV)

☐ P25 Phase 1 Trunking (KWD-5101TR)

☐ P25 Phase 2 Trunking (KWD-5102TR)

☐ P25 Packet Data (KWD-5106DT)

☐ P25 OTAR (KWD-5103RK)

☐ P25 Voting Scan (KWD-5105VT)

☐ P25 OTAP (KWD-5104AP)

☐ P25 Enhanced Encryption (KWD-5107EE)

☒ NXDN Conventional (KWD-5200CV)

☐ NXDN Type-C Trunking (KWD-5201TR)

☐ NXDN OTAP (KWD-5204AP)

☐ DMR Conventional (KWD-5300CV)

☐ S-Trunking (KWD-5300CV) *1

☐ DMR Tier III Trunking (KWD-5301TR)

☐ Trunking 2.5 (KWD-5300CV)

☐ Fleet Dialing Plan

☐ DMR OTAP (KWD-5304AP)

*1 Support for S-Trunking ended.

Control Head Configuration

Control Head 1KCH-19 (Basic Panel)

Control Head 2KCH-20R (Featured Panel)

Read Configuration

OK

Cancel

Help

Figure 18-87 Product Information

Refer to step 2 to step 6 of “**Configuration in KPG-D1/ D1N if RF Decks Are Switched**” for the configuration procedures from here.

Configuration in KPG-D1/ D1N If Changed from a Multi RF Deck System to a Single RF Deck Structure

1

Disable Multi RF Deck in Product Information.

- Multi RF Deck is disabled in Feature Selection.
- Configure "None" in **Control Head 2** if a Single Control Head structure is built.

The screenshot shows the 'Product Information' window with the following settings:

- Model Name:** NX-5800 [Mobile]: K/F
- Frequency:** 380-470 MHz
- Zone-channel Format:** Channel Table
- P25:** On
- NXDN:** On
- DMR:** Off
- Feature Selection:**
 - ☐ 4000 Channel (KWD-5000CH)
 - ☐ Front Panel Programming (KWD-5001FP)
 - ☐ microSD (KWD-5002SD)
 - ☒ Bluetooth Data (KWD-5003BT)
 - ☐ Secure Cryptographic Module (KWD-5005AE)
 - ☐ DES 4 Keys (KWD-5006DE)
 - ☒ Multi RF Deck (KWD-5004MR)
 - ☐ Remote Control (KWD-5007RC)
 - ☐ Enhanced Encryption (KWD-5500EE)
 - ☒ P25 Conventional (KWD-5100CV)
 - ☐ P25 Phase 1 Trunking (KWD-5101TR)
 - ☐ P25 Phase 2 Trunking (KWD-5102TR)
 - ☐ P25 Packet Data (KWD-5106DT)
 - ☐ P25 OTAR (KWD-5103RK)
 - ☐ P25 Voting Scan (KWD-5105VT)
 - ☐ P25 OTAP (KWD-5104AP)
 - ☐ P25 Enhanced Encryption (KWD-5107EE)
 - ☒ NXDN Conventional (KWD-5200CV)
 - ☐ NXDN Type-C Trunking (KWD-5201TR)
 - ☐ NXDN OTAP (KWD-5204AP)
 - ☐ DMR Conventional (KWD-5300CV)
 - ☐ S-Trunking (KWD-5300CV) *1
 - ☐ DMR Tier III Trunking (KWD-5301TR)
 - ☐ Trunking 2.5 (KWD-5300CV)
 - ☐ Fleet Dialing Plan
 - ☐ DMR OTAP (KWD-5304AP)
- Control Head Configuration:**
 - Control Head 1:** KCH-19 (Basic Panel)
 - Control Head 2:** None

Buttons at the bottom: Read Configuration, OK, Cancel, Help.

Figure 18-88 Product Information

2

Click the "Write" button in Program > Write.

The screenshot shows the 'Write Data to the Transceiver' window with the following options:

- ☒ Zeroize
- ☐ Audio/GPS Data Erase (Internal Memory)
- ☐ DFA Data Erase
- ☒ Time Adjustment
- ☐ Consecutive Write
- ☒ ID (Own) Overwrite

A progress bar shows 'Block 0/14922'.

Buttons at the bottom: Write, Cancel, Help.

Figure 18-89 Write Data to the Transceiver

The writing of configuration data starts.

When the writing of configuration data completes, a writing complete message box appears. Click the "OK" button.

18.12 About the Message Display

While building a Multi RF Deck/ Multi Control Head system, the messages that appear in the FPU are as follows:

Table 18-1 Message Display

Message	Description
"Do you wish to save the changed data?" (Yes/ No/ Cancel)	This message is displayed if Multi RF Deck Setup is opened while editing the configuration data of Multi RF Deck in a screen of KPG-D1/ D1N. Click the "Yes" button to store the configuration data. If the "No" button is clicked, the configuration data is not stored.
"The Multi RF Deck common functions of the RF Deck Data configured in Master Operation Data will be applied to other RF Deck Data." (OK/ Cancel)	Clicking the "Write" button in Multi RF Deck Setup displays this message. Clicking the "OK" button expands the common configuration in the configuration data configured in Master Operation Data to the data of other RF Decks. Because the configuration data cannot be written in Multi RF Deck unless the common configuration is expanded to all RF Decks, clicking the "OK" button is required.
"If you start "Write Data to the transceiver", P25 Encryption Key data will be cleared." (OK/ Cancel)	If Zeroize is enabled in Write Data to the Transceiver , clicking the "Write" button displays this message. Clicking the "OK" button starts the writing of the configuration data.
"The system structure of the data to be written differs from the system structure of the Multi RF Deck or Control Head. For this reason, some functions do not work. Do you wish to continue?" (OK/ Cancel)	When attempting to write configuration data to the transceiver not connected to Control Head 1, or when attempting to write the data configured in Control Head 2 (Product Information > Control Head Configuration) to the transceiver not connected to Control Head 2, this message appears.
"Do you wish to save the written data?" (Yes/ No/ Cancel)	After writing configuration data in an RF Deck, this message appears. The configuration contents of configuration data are automatically changed for each RF Deck by the common configuration in the configuration data configured in Master Operation Data being expanded to the configuration data of each RF Deck. Therefore, this message appears. Click the "Yes" button to store the configuration data. If the "No" button is clicked, the configuration data is not stored.

Note

- Refer to the service manual for the content of messages that appear on the transceiver display and how to manage when a message appears.

18.13 About the Pin Arrangement for KCT-72 and the Connection of External Devices

The following is the pin arrangement for KCT-72:

Table 18-2 Pin Arrangement for KCT-72

Pin No.	Color	Name
1	RED	IGN
2	Black	SB
3	LIGHT GREEN	GND
4	LIGHT BLUE	AUX_MIC
5	YELLOW	AUX_ME
6	GRAY	Ai1
7	WHITE	Ai2
8	PURPLE	Ao1
9	PINK	Ao2
10	ORANGE	SP-
11	BROWN	SP+
12	DARK GREEN	GND



Figure 18-90 KCH-20R with KCT-72

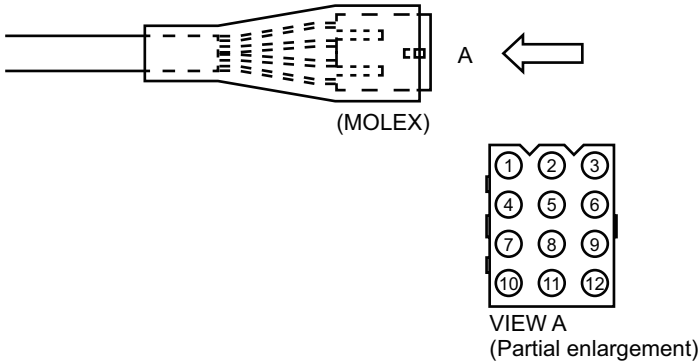


Figure 18-91 KCT-72 (Connection Cable)

Connecting the External Speaker

Connect the external speaker (KES-5/ KES-5A) to KCT-72 as follows:

- Connect the black cable of KES-5 or KES-5A to pin 10 of the KCT-72 connector.
- Connect the white cable of KES-5 or KES-5A to pin 11 of the KCT-72 connector.

Note

- The external speaker cannot be connected to KCH-19 because KCH-19 does not have a speaker output port.

Connecting the External Microphone

External microphone (KCT-73MIC)

Connect the external microphone (KCT-73MIC) to KCT-72 as follows:

- Connect the white cable of KCT-73MIC to pin 4 of the KCT-72 connector.
- Connect the black cable of KCT-73MIC to pin 5 of the KCT-72 connector.

External microphone (KCT-74PTT)

Connect the external microphone (KCT-74PTT) to KCT-72 as follows:

- Connect the red cable of KCT-74PTT to pin 6 or pin 7 of the KCT-72 connector.
- Connect the black cable of KCT-74PTT to pin 12 of the KCT-72 connector.

VOX is the function to transmit audio just by speaking into a microphone without pressing the **PTT** switch. This function can be used when a user cannot press the **PTT** switch, for instance, when a user is using both hands for other tasks. VOX is the function that can be used only when a user wears the headset and when the transceiver is operated in a Conventional system (Analog, NXDN, P25). To use VOX, a headset needs to be connected to the transceiver.

Portable:

For Portable, KHS-14, KHS-15 (Headset), or a headset which supports Bluetooth (Headset Profile) needs to be connected to the transceiver. The following are the behaviors of each device by the connection status.

Table 19-1 Headset Connection Status and Behavior

Connection Status		Operation
KHS-14/ KHS-15	Bluetooth-compatible Device	
Disconnected	Disconnected	Does not transmit by VOX.
Connected	Disconnected	Transmits by VOX with the audio inputted to KHS-14 or KHS-15.
Disconnected	Connected	Transmits by VOX with the audio inputted to a Bluetooth-compatible device.
Connected	Connected	Transmits by VOX with the audio inputted to a Bluetooth-compatible device.

Mobile:

For Mobile, a headset which supports Bluetooth (Headset Profile) needs to be connected to the transceiver. If **VOX Function** is enabled using KPG-D1/ D1N, VOX is activated when the transceiver is turned ON. Pressing and holding the **VOX** key toggles VOX between activated and deactivated. VOX can also be activated or deactivated by executing "VOX" after entering Menu Mode by pressing the **Menu** key.

Note


- Refer to "**BLUETOOTH COMMUNICATION**" on how to connect to a Bluetooth-compatible device.
- The VOX transmission is disabled when the transmission is prohibited, such as when the transceiver is in the Stun state.
- If the transmission ends because the Time-out Timer is activated during the continuous transmission by VOX, the transceiver cannot start the next transmission until both audio input and the **PTT** switch are disabled.
- VOX is not activated only with the transceiver itself. Although VOX is activated if the speaker microphone is connected to the transceiver, proper operation of the function cannot be guaranteed. Normally, VOX can be used by a user wearing a headset.

Operating the transceiver

● Enabling VOX

Press and hold the **VOX** key while VOX is disabled.


The "🎧" icon appears and then VOX is enabled.



● Disabling VOX

Press and hold the **VOX** key while VOX is enabled.

The "🎧" icon disappears and VOX is disabled.



Configuration using KPG-D1/ D1N

- Configuring **VOX Function** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)
- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

19.1 Configuring the Input Sensitivity of the Microphone (VOX Gain Level)

VOX Gain Level is the input sensitivity of the microphone for activating VOX. This function is used to adjust the VOX to work properly based on the user's voice tone or the surrounding noise when a user transmits by speaking into a microphone.

VOX Gain Level can be configured using KPG-D1/ D1N. **VOX Gain Level** can also be changed by operating the transceiver. Pressing the **VOX** key places the transceiver in VOX Gain Level Mode.

Or, pressing the **Menu** key to enter Menu Mode and then executing "VOX Gain Level" places the transceiver in VOX Gain Level Mode.

Operating the transceiver

1 Press the **VOX** key.

The transceiver enters VOX Gain Level Mode and the current VOX Gain Level appears. At the same time, VOX is enabled and the "🔊" icon appears. The following operations are the same even if the transceiver enters VOX Gain Level Mode by pressing the **Menu** key.



2 Adjust the VOX Gain Level by pressing the [▲]/[▼] key.

Adjustment can be done in the range between 1 and 10. Larger values result in higher sensitivity.



3 Speak into the microphone of the headset to check whether the sensitivity is configured properly.

The LED lights yellow when the audio input level reaches the reference value for transmission. In this case, the transceiver does not transmit.

4 Press the **Menu** ([□]) key.

VOX Gain Level is configured and the mode ends.

Note

- The higher sensitivity VOX Gain Level is, the smaller sound the transceiver reacts to, and the transceiver starts transmitting by VOX. Therefore, an appropriate **VOX Gain Level** needs to be configured according to the background noise in a usage environment.

Configuration using KPG-D1/ D1N

- Configuring **VOX Gain Level** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)
- Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

19.2 Retaining Transmitting State after VOX Transmission (VOX Delay Time)

VOX Delay Time is the duration for which the transceiver retains the transmission after VOX transmission. If the transceiver reverts to receive mode too quickly after a user pauses speaking, the last part of the speech may not be transmitted. To avoid this situation, VOX Delay Time needs to be configured so that the whole speech is transmitted and that the transmission retention time is not too long.

Upon the elapse of the time configured in **VOX Delay Time** after no audio is inputted to the microphone, the transceiver terminates VOX transmission.

If audio is inputted to the microphone while **VOX Delay Time** is counting down, **VOX Delay Time** is reset and the audio transmission continues.

Configuration using KPG-D1/ D1N

Configuring **VOX Delay Time** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)

19.3 Restricting the VOX Transmission while the Audio Sounds from the Transceiver (Transmit Inhibit while Receiving)

Transmit Inhibit while Receiving is the function to restrict the VOX transmission while the speaker of the transceiver is unmuted.

This function can be used to prevent VOX from being activated by audio emitted from the speaker.

If **Transmit Inhibit while Receiving** is enabled, the VOX transmission cannot be done while the speaker is unmuted.

If **Transmit Inhibit while Receiving** is disabled, the VOX transmission can be done even while the speaker is unmuted.

Configuration using KPG-D1/ D1N

Configuring **Transmit Inhibit while Receiving** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)

19.4 Disabling the VOX by Using the PTT Switch (Cancel Operation)

Cancel Operation is the function to disable VOX by pressing the **PTT** switch when VOX is enabled.

If **Cancel Operation** is enabled, VOX is disabled by operating the **PTT** switch, the External PTT (Voice) port, or the **PTT** switch of a Bluetooth-compatible device when VOX is enabled.

Even if VOX is disabled by **Cancel Operation**, VOX is enabled by pressing and holding the **VOX** key or by executing "VOX" after entering Menu Mode by pressing the **Menu** key.

If the **VOX** key is not configured and "VOX" is not configured in Menu Mode, VOX can be enabled by turning the transceiver OFF and ON again.

Configuration using KPG-D1/ D1N

Configuring **Cancel Operation** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)

19.5 Notifying a User of the Start of the VOX Transmission with a Tone (VOX Proceed Tone)

VOX Proceed Tone is the tone that sounds from the transceiver to notify that the audio transmission becomes available after the transmission is started by using VOX.

If **VOX Proceed Tone** is enabled, a VOX Proceed Tone that notifies that the audio transmission becomes available sounds from the transceiver after the transmission is started by using VOX.

-  **Note**
- A VOX Proceed Tone does not sound from the transceiver if other tones, such as a Sidetone or a PTT ID Sidetone, are configured to sound.

Configuration using KPG-D1/ D1N

Configuring **VOX Proceed Tone** to be enabled or disabled ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)

19.6 Selecting a Control Head for Using VOX (Control Head for VOX)

Supported Models: Mobile

Control Head for VOX is the function to select either Control Head 1 or Control Head 2 for enabling VOX in a Dual Control Head structure.

KCH-20R (Featured Panel) needs to be connected to a Control Head for using VOX.

Table 19-2 Control Head for VOX

Configuration	Description
Control Head 1	The VOX function behaves in Control Head 1 with KCH-20R (Featured Panel) connected.
Control Head 2	The VOX function behaves in Control Head 2 with KCH-20R (Featured Panel) connected.

Configuration using KPG-D1/ D1N

Configuring **Control Head for VOX** ( [See](#) Transceiver Settings > Optional Features > Optional Features 2 > Conventional > VOX)

The transceiver always records the hardware failure information and the software status. The Field Support function can read the log information in the transceiver to a PC by using KPG-D1/ D1N.

JVCKENWOOD Corporation uses the information recorded by the Field Support function in order to verify the cause of the transceiver failure.

The log information is retained in the non-volatile memory of the transceiver by one of the following operations or the resetting behavior:

- Turning the transceiver OFF
- Pressing the **Save Log Data** key, or executing "Save Log Data" after entering Menu Mode by pressing the **Menu** key
- Restart of the transceiver by the software reset

The following is the procedure to read the log information:

1 Select "Read Log Data" from the **Program** menu.

The communication port needs to be configured in **Setup > COM port** after connecting the transceiver to a PC. After the configuration, select "Read Log Data". (Refer to [Connecting the Transceiver to a PC.](#))

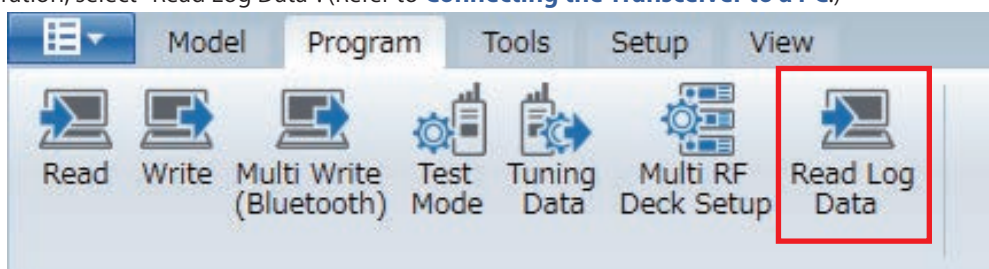


Figure 20-1 KPG-D1/ D1N Main Window

2 Click the "Read" button.

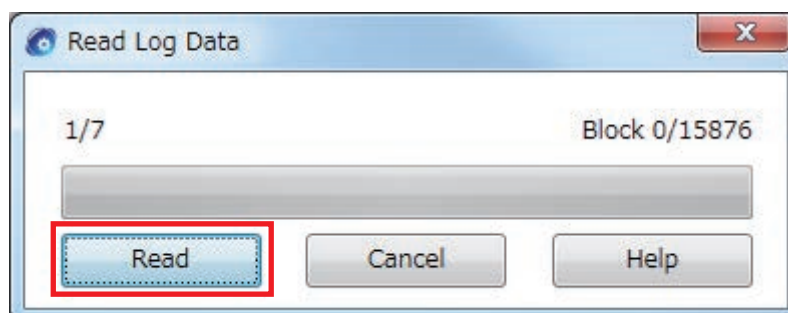


Figure 20-2 Read Log Data

The message "Reading completed." appears after reading ends.

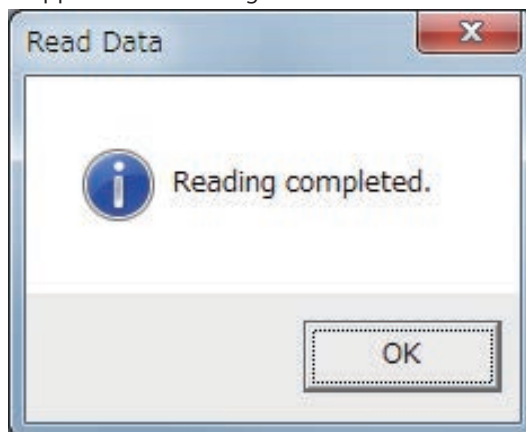


Figure 20-3 Read Data

3 Click the "OK" button.

The location to save the Log file which contains each history information is displayed, and the file needs to be saved in a PC.

The type of file to be saved: Log Files (*.log)

Send the saved Log file by e-mail, etc. to the technical staff of the JVCKENWOOD sales company.

Note

- Minimize the number of times that the transceiver is turned ON/OFF and that "Save Log Data" is operated in order to save the most recent log file.

21.1 Available Functions for the PF Keys

The following are the functions that can be assigned to the **PF** keys:

Table 21-1 Available Functions for the PF Keys

Function Name	Description	Available Communication Systems ^{*1}
None	No function is activated.	-
2-tone	The transceiver enters 2-tone Mode. In 2-tone Mode, the transceiver can send a 2-tone code by selecting a 2-tone code configured in Encode List of 2-tone.	Analog Conventional P25 Conventional NXDN Conventional
Activity Detection (Portable only)	Toggles Activity Detection between enabled and disabled. See • P25 FUNC Placing the Transceiver in Emergency Mode Using the Activity Detection Function (Portable Only) • NXDN FUNC Using the Activity Detection Function to Place the Transceiver in Emergency Mode • DMR FUNC Placing the Transceiver in Emergency Mode by Using the Activity Detection Function	ALL
Activity Reset (Portable only)	The Man-down Delay Time , Stationary Delay Time , or Motion Delay Time timer is reset and then restarts counting down from the beginning. See • P25 FUNC Placing the Transceiver in Emergency Mode Using the Activity Detection Function (Portable Only) • NXDN FUNC Using the Activity Detection Function to Place the Transceiver in Emergency Mode • DMR FUNC Placing the Transceiver in Emergency Mode by Using the Activity Detection Function	ALL
Auto Telephone	The transceiver searches an LTR Trunking system that can connect to a telephone line and connects.	LTR Trunking
Autodial	The transceiver enters Autodial Mode. In Autodial Mode, the transceiver can transmit by selecting a DTMF Code from the Autodial List or by entering a DTMF Code.  Note • For P25 Trunking, NXDN Trunking, and DMR-based Trunking, Autodial Mode is used at the start of a Telephone Call. See • P25 FUNC Communicating with a Telephone (Telephone Call) • NXDN FUNC Communicating with a Telephone (Telephone Call) • DMR FUNC Communicating with a Telephone (Telephone Call)	P25 Trunking NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking Analog Conventional LTR Trunking
Autodial Programming	The transceiver enters Autodial Programming Mode. In Autodial Programming Mode, the data configured in Autodial List can be added, changed, and deleted.	ALL
AUX (Portable only)	Alternates the status of the AUX Output port. The AUX Output port status is changed to inactive if the status is active; or, the AUX Output port status is changed to active if the status is inactive. Status of the AUX port can be changed by pressing the AUX key, hence an external device connected to the AUX port can be controlled.	ALL
AUX A (Mobile only)	Alternates the status of the AUX A Output port. The AUX A Output port status is changed to inactive if the status is active; or, the AUX A Output port status is changed to active if the status is inactive. Status of the AUX A port can be changed by pressing the AUX A key, hence an external device connected to the AUX A port can be controlled.	ALL
AUX B (Mobile only)	Alternates the status of the AUX B Output port. The AUX B Output port status is changed to inactive if the status is active; or, the AUX B Output port status is changed to active if the status is inactive. Status of the AUX B port can be changed by pressing the AUX B key, hence an external device connected to the AUX B port can be controlled.	ALL

Function Name	Description	Available Communication Systems ^{*1}
AUX C (Mobile only)	Alternates the status of the AUX C Output port. The AUX C Output port status is changed to inactive if the status is active; or, the AUX C Output port status is changed to active if the status is inactive. Status of the AUX C port can be changed by pressing the AUX C key, hence an external device connected to the AUX C port can be controlled.	ALL
AUX Output ID 1 (Mobile only)	If "Off" is configured in State Hold Timer (Active Low): Each time the AUX Output ID 1 key is pressed, the AUX Output ID 1 port is toggled from high level to low level or from low level to high level. If anything other than "Off" is configured in State Hold Timer (Active Low): Pressing the AUX Output ID 1 key switches the AUX Output ID 1 port to low level.	ALL
AUX Output ID 2 (Mobile only)	If "Off" is configured in State Hold Timer (Active Low): Each time the AUX Output ID 2 key is pressed, the AUX Output ID 2 port is toggled from high level to low level or from low level to high level. If anything other than "Off" is configured in State Hold Timer (Active Low): Pressing the AUX Output ID 2 key switches the AUX Output ID 2 port to low level.	ALL
AUX Output ID 3 (Mobile only)	If "Off" is configured in State Hold Timer (Active Low): Each time the AUX Output ID 3 key is pressed, the AUX Output ID 3 port is toggled from high level to low level or from low level to high level. If anything other than "Off" is configured in State Hold Timer (Active Low): Pressing the AUX Output ID 3 key switches the AUX Output ID 3 port to low level.	ALL
Backlight (Portable only)	The backlight of the transceiver lights. See Lighting the Backlight (Backlight)	ALL
Battery Status (Portable only)	The transceiver notifies by blinking the LED or emitting a Beep that the remaining battery power is low. See Displaying the Remaining Battery Power by Operating the Transceiver (Battery Status)	ALL
BLE Beacon Display (Portable only)	The transceiver enters BLE Beacon Display Mode. BLE Beacon Display is the function to display on the LCD of the transceiver the beacon information received while the Indoor Location function functions. See BLE Beacon Display	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
BLE Scan (Portable only)	Toggles BLE Scan between On and Off. See BLE Scan	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Bluetooth	Toggles Bluetooth between On and Off. See Toggling Bluetooth On/ Off	ALL
Bluetooth Speaker	Switches the speaker to emit audio between the built-in speaker of the transceiver and the speaker of the Bluetooth-compatible device connected to the transceiver by Headset Profile. See Switching the Speaker to Emit Audio (Bluetooth Speaker)	ALL
Bluetooth Connect/ Disconnect	Pairing is started for a Bluetooth-compatible device having an address configured in Define Bluetooth Device . The connection to the connected Bluetooth-compatible device is reset. See Registering and Connecting a Bluetooth-compatible Device to the Transceiver (Pairing/ HSP Connection)	ALL

Function Name	Description	Available Communication Systems *1
Broadcast	Alternates between Broadcast Call and Conference Call. This function can be used only for initiating a Group Call. See • NXDN FUNC Making an Informative Group Call (Broadcast Group Call) • DMR FUNC Making an Informative Group Call (Broadcast Group Call)	NXDN Trunking DMR Conventional DMR-based Trunking
Call 1 to Call 6	Sends the signaling (Status List (NXDN), Individual ID List (NXDN)) configured for the transceiver.	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking Analog Conventional
Call Interruption *3	A Call Interruption request message is sent. See DMR FUNC Terminating Voice Communications by a Transceiver Other Than the Transmitting Transceiver (Call Interruption)	DMR Conventional DMR-based Trunking
Call Response	Pressing the Call Response key when receiving an Individual Call causes the transceiver to respond. See • P25 FUNC Making an Individual Call • NXDN FUNC Initiating an Individual Call After Ensuring That the Target Party Is Available for Communications (Individual Call Acknowledge Request) • NXDN FUNC Initiating an Individual Call After Ensuring That the Target Party Is Available for Communications (Message Trunked (Enhanced))	P25 Trunking NXDN Conventional NXDN Trunking
Channel Down	Decreases the channel number in steps of 1.	ALL
Channel Down (Continuous)	Pressing and holding the Channel Down key causes the channel number to be decreased in steps of 1 every 200 ms.  Note • Channel Down (Continuous) can be configured only in Hold for the Channel Down key, and the configuration cannot be changed.	ALL
Channel Entry	Directly specify the channel number by pressing a key(s) on the keypad. See Changing the Channel by Specifying the Number (Channel Entry)	ALL
Channel Information	Changes the display of the transceiver in order of the channel name, Zone-channel number, frequency, QT/ DQT, and RAN code.	ALL
Channel Recall	Pressing the Channel Recall key while scanning causes Channel Recall to be toggled between enabled and disabled. If Channel Recall is enabled, the transceiver migrates to the channel on which a signal was last received. See • NXDN FUNC SCAN • P25 FUNC SCAN • DMR FUNC SCAN	ALL
Channel Up	Increases the channel number in steps of 1.	ALL
Channel Up (Continuous)	Pressing and holding the Channel Up key causes the channel number to be increased in steps of 1 every 200 ms.  Note • Channel Down (Continuous) can be configured only in Hold for the Channel Up key, and the configuration cannot be changed.	ALL
Clear	Aborts the current mode, disconnects communication, or cancels data transmission.	P25 Trunking NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking

Function Name	Description	Available Communication Systems ^{*1}
Clock	The current time appears. See Displaying the Current Time	ALL
Clock Adjustment	The current time can be adjusted. See Adjusting the Time	ALL
CW Message	Sends the CW Message configured for the transceiver. See NXDN FUNC Communicating using a CW Message	NXDN Conventional
Dialing	Enters Dialing Mode. The various communications can be executed by entering a dialing code in Dialing Mode. See DMR FUNC Executing Various Communications by Using the Dialing Function	DMR Tier III Trunking S-Trunking
Digit 10x Down ^{*2 *3}	The code in the 2nd digit from the last digit of the Selcall code of 5-tone decreases by one. See 5-tone FUNC Changing the Selcall Code with the Digit Specified	Analog Conventional
Digit 10x Up ^{*2 *3}	The code in the 2nd digit from the last digit of the Selcall code of 5-tone increases by one. See 5-tone FUNC Changing the Selcall Code with the Digit Specified	Analog Conventional
Digit 1x Down ^{*2 *3}	The code in the 1st digit from the last digit of the Selcall code of 5-tone decreases by one. See 5-tone FUNC Changing the Selcall Code with the Digit Specified	Analog Conventional
Digit 1x Up ^{*2 *3}	The code in the 1st digit from the last digit of the Selcall code of 5-tone increases by one. See 5-tone FUNC Changing the Selcall Code with the Digit Specified	Analog Conventional
Direct Channel 1 to Direct Channel 5	Migrates to a channel configured as a Direct Channel. See Changing the Channel with a Single Touch	ALL
Direct Channel 1 Select to Direct Channel 5 Select	Determines the displayed channel as a Direct Channel. See Changing the Channel with a Single Touch  Note Direct Channel 1 Select to Direct Channel 5 Select can be configured only in Hold for the Direct Channel 1 to Direct Channel 5 keys, and the configuration cannot be changed.	ALL
Display Format	Toggles between the Channel Name display and the Zone-channel display.	ALL
Eject SD Card ^{*3}	Enters Eject SD Card Mode, and the clearing of microSD card recognition is enabled. See Removing the microSD Card	ALL
Emergency	Enters Emergency Mode. See - NXDN FUNC COMMUNICATIONS IN AN EMERGENCY - P25 FUNC COMMUNICATIONS IN AN EMERGENCY - DMR FUNC COMMUNICATIONS IN AN EMERGENCY  Note - For Portable, "Emergency" can be assigned to the AUX key or the PF 1 key of the speaker microphone only as the function when the key is held. - For Mobile, "Emergency" can be assigned to the AUX key only as the function when the key is held.	ALL

Function Name	Description	Available Communication Systems ^{*1}
Emergency Cancel ^{*2}	Sends the Emergency Mode exit request message (CAN_SRV_REQ) to a system. See P25 FUNC Placing the Transceiver in Emergency Mode	P25 Trunking
External Speaker	Toggles between the external speaker connected to the transceiver and the internal speaker of the transceiver.	ALL
Fixed Volume	Changes the tone level in the following order: Low → High → Off. See SOUND	ALL
Front Panel Programming	Enters Front Panel Programming Mode. In Front Panel Programming mode, data such as the frequency of a Conventional Channel can be changed, or a Conventional Channel can be added. See Changing the Configuration of the Transceiver (Front Panel Programming Mode)	Analog Conventional P25 Conventional NXDN Conventional DMR Conventional
Format SD Card ^{*3}	Enters Format SD Card Mode, and the formatting of a microSD card is enabled. See Formatting a microSD Card	ALL
Function	Waits for the activation of the Key Function assigned to the 2nd Function and starts counting down the Mode Reset Timer . The Function status will be reset if no key is pressed before the amount of time configured in Mode Reset Timer elapses.	ALL
GPS	Toggles the built-in GPS receiver between On and Off.	ALL
GPS Position Display	Enters GPS Position Display Mode. See GPS POSITION DISPLAY	ALL
Group ID/Channel Entry	If an NXDN Trunking system is selected, the Group ID in the NXDN Trunking system can be specified directly by using the keypad. See Changing the Group ID by Specifying the ID (Group ID Entry) (NXDN Trunking System Only) If a system other than an NXDN Trunking system is selected, the channel number can be specified directly by using the keypad. See Changing the Channel by Specifying the Number (Channel Entry)	ALL
Group	Analog Conventional: The transceiver enters Selcall Mode of FleetSync or of MDC-1200. In Selcall Mode, a call can be initiated by selecting an ID configured in the ID List of FleetSync or of MDC-1200, or by directly entering an ID. P25 Conventional: Enters Talkgroup ID Select Mode. In Talkgroup ID Select Mode, the Talkgroup ID configured for a channel can be changed. See P25 FUNC Making a Group Call NXDN Conventional/ DMR Conventional: Enters Group Call Mode. In Group Call Mode, a Group Call can be initiated by selecting a Group ID registered in the Group ID List. See • NXDN FUNC Making a Group Call • DMR FUNC Making a Group Call	Analog Conventional P25 Conventional NXDN Conventional DMR Conventional

Function Name	Description	Available Communication Systems ^{*1}
Group + Short Message	Analog Conventional: The transceiver enters Selcall Mode of FleetSync or of MDC-1200. Pressing the [▶] key while the transceiver is in Selcall Mode of FleetSync places the transceiver in Short Message Mode. Even if the [▶] key is pressed while the transceiver is in Selcall Mode of MDC-1200, the transceiver does not respond at all. P25 Conventional: Enters Talkgroup ID Select Mode. In Talkgroup ID Select Mode, the Talkgroup ID configured for a channel can be changed. NXDN Conventional/ DMR Conventional: Enters Group Call Mode. In Group Call Mode, a call can be initiated by selecting a Group ID registered in the Group ID List. Then, pressing the [▶] key while the transceiver is in Group Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. NXDN Trunking/ DMR-based Trunking: The transceiver enters Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. See • NXDN FUNC Sending and Receiving a Short Message (Short Data Call) • DMR FUNC Sending and Receiving a Short Message (Short Data Call)	Analog Conventional P25 Conventional NXDN Conventional DMR Conventional NXDN Trunking DMR-based Trunking
Group + Status	Analog Conventional: The transceiver enters Selcall Mode of FleetSync or of MDC-1200. Pressing the [▶] key while the transceiver is in Selcall Mode of FleetSync places the transceiver in Status Mode. Even if the [▶] key is pressed while the transceiver is in Selcall Mode of MDC-1200, the transceiver does not respond at all. P25 Conventional: Enters Talkgroup ID Select Mode. In Talkgroup ID Select Mode, the Talkgroup ID configured for a channel can be changed. NXDN Conventional/ DMR Conventional: Enters Group Call Mode. In Group Call Mode, a call can be initiated by selecting a Group ID registered in the Group ID List. Then, pressing the [▶] key while the transceiver is in Group Call Mode allows the transceiver to enter Status Mode. In Status Mode, a Status Message can be sent by selecting a status configured in NXDN Status List or by directly entering a status number. NXDN Trunking/ DMR-based Trunking: The transceiver enters Status Mode. In Status Mode, a Status Message can be sent by selecting a status configured in NXDN Status List or by directly entering a status number. See • NXDN FUNC Sending and Receiving a Status Message (Status Call) • DMR FUNC Sending and Receiving a Status Message (Status Call)	Analog Conventional P25 Conventional NXDN Conventional DMR Conventional NXDN Trunking DMR-based Trunking

Function Name	Description	Available Communication Systems ^{*1}
High Transmit Power	Analog Conventional/ P25 Conventional/ NXDN Conventional/ DMR Conventional: Selecting a channel configured "Medium" or "Low" for the transmission power and then pressing the High Transmit Power key switches the transmission power to "High". P25 Trunking/ NXDN Trunking/ DMR-based Trunking: Selecting a channel in a system configured "Medium" or "Low" for the transmission power and then pressing the High Transmit Power key switches the transmission power to "High". See Transmit Power	ALL
Home Channel	Migrates to a channel configured as the Home Channel. See Changing the Channel with a Single Touch	ALL
Home Channel Select	Determines the displayed channel as the Home Channel. See Changing the Channel with a Single Touch  Note • Home Channel Select can be configured only in Hold for the Home Channel key, and the configuration cannot be changed.	ALL
Horn Alert (Mobile only)	Toggles Horn Alert between enabled and disabled. See Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert)	ALL
Individual	Analog Conventional: The transceiver enters Selcall Mode of FleetSync or of MDC-1200. In Selcall Mode, a call can be initiated by selecting an ID configured in the ID List of FleetSync or of MDC-1200, or by directly entering an ID. NXDN system/ P25 system/ DMR system: Enters Individual Call Mode in an NXDN system, P25 system, or DMR system. In Individual Call Mode, a call can be initiated by selecting a Unit ID registered in the Individual ID List or by directly entering a Unit ID. See • P25 FUNC (Conventional) Making an Individual Call • P25 FUNC (Trunking) Making an Individual Call • NXDN FUNC (Conventional) Making an Individual Call • NXDN FUNC (Conventional) Initiating an Individual Call After Ensuring That the Target Party Is Available for Communications (Individual Call Acknowledge Request) • NXDN FUNC (Trunking) Making an Individual Call (Transmission Trunked) • NXDN FUNC (Trunking) Initiating an Individual Call After Ensuring That the Target Party Is Available for Communications (Message Trunked (Enhanced)) • DMR FUNC (Conventional) Making an Individual Call • DMR FUNC (Conventional) Initiating an Individual Call After Ensuring That the Target Party Is Available for Communications (Individual Call Acknowledge Request) • DMR FUNC (Trunking) Making an Individual Call	Analog Conventional P25 Conventional P25 Trunking NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking

Function Name	Description	Available Communication Systems *1
Individual + Short Message	Analog Conventional: The transceiver enters Selcall Mode of FleetSync or of MDC-1200. Pressing the [▶] key while the transceiver is in Selcall Mode of FleetSync places the transceiver in Short Message Mode. Even if the [▶] key is pressed while the transceiver is in Selcall Mode of MDC-1200, the transceiver does not respond at all. P25 Conventional: Enters Individual Call Mode in a P25 system. In Individual Call Mode, a call can be initiated by selecting a Unit ID registered in the Individual ID List or by directly entering a Unit ID. NXDN system/ DMR system: Enters Individual Call Mode in an NXDN system or DMR system. In Individual Call Mode, a call can be initiated by selecting a Unit ID registered in the Individual ID List or by directly entering a Unit ID. Then, pressing the [▶] key while the transceiver is in Individual Call Mode allows the transceiver to enter Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. See • P25 FUNC Making an Individual Call • NXDN FUNC Sending and Receiving a Short Message (Short Data Call) • DMR FUNC Sending and Receiving a Short Message (Short Data Call)	Analog Conventional P25 Conventional NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Individual + Status	Analog Conventional: The transceiver enters Selcall Mode of FleetSync or of MDC-1200. Pressing the [▶] key while the transceiver is in Selcall Mode of FleetSync places the transceiver in Status Mode. Even if the [▶] key is pressed while the transceiver is in Selcall Mode of MDC-1200, the transceiver does not respond at all. P25 Conventional: Enters Individual Call Mode in a P25 system. In Individual Call Mode, a call can be initiated by selecting a Unit ID registered in the Individual ID List or by directly entering a Unit ID. NXDN system/ DMR system: Enters Individual Call Mode in an NXDN system or DMR system. In Individual Call Mode, a call can be initiated by selecting a Unit ID registered in the Individual ID List or by directly entering a Unit ID. Then, pressing the [▶] key while the transceiver is in Individual Call Mode allows the transceiver to enter Status Mode. In Status Mode, a Status Message can be sent by selecting a status configured in NXDN Status List or by directly entering a status number. See • P25 FUNC Making an Individual Call • NXDN FUNC Sending and Receiving a Status Message (Status Call) • DMR FUNC Sending and Receiving a Status Message (Status Call)	Analog Conventional P25 Conventional NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Intercom (Mobile only)	The communication between Control Head 1 and Control Head 2 can be toggled between enabled and disabled.  Note • This function can be used only in a Dual Control Head structure of Mobile.	ALL
Key Delete	Enters Key Delete Mode. In Key Delete Mode, an Encryption Key can be selected and then deleted. See • P25 FUNC Deleting the Encryption Key (Key Delete) • NXDN FUNC Deleting the Encryption Key (Key Delete) • DMR FUNC Deleting the Encryption Key (Key Delete)	ALL

Function Name	Description	Available Communication Systems ^{*1}
Key Lock	Toggles the Key Lock between enabled and disabled. See Locking the Transceiver Keys (Key Lock)  Note For Mobile, this function cannot be used in a Multi RF Deck/ Dual Control Head structure.	ALL
Keyset ^{*2}	Enters Keyset Select Mode and then the Active Keyset can be changed. See P25 FUNC About the Encryption Key	P25 Conventional P25 Trunking
LCD Brightness	Gradates the brightness of the backlight. See Changing the Brightness of the Backlight (LCD Brightness)	ALL
Lone Worker	Toggles the Lone Worker between enabled and disabled. See - P25 FUNC Placing the Transceiver in Emergency Mode Using the Lone Worker Function - NXDN FUNC Placing the Transceiver in Emergency Mode Using the Lone Worker Function - DMR FUNC Placing the Transceiver in Emergency Mode Using the Lone Worker Function  Note - For Mobile, this function cannot be used in a Multi RF Deck/ Dual Control Head structure.	ALL
Low Transmit Power	Analog Conventional/ P25 Conventional/ NXDN Conventional/ DMR Conventional: Selecting a channel configured "High" or "Medium" for the transmission power and then pressing the Low Transmit Power key switches the transmission power to "Low". P25 Trunking/ NXDN Trunking/ DMR-based Trunking: Selecting a channel in a system configured "High", "Medium" or "Auto" for the transmission power and then pressing the Low Transmit Power key switches the transmission power to "Low". See Transmit Power	ALL
Maintenance	Enters Maintenance Display Mode. See Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)  Note For Mobile, this function cannot be used in a Multi RF Deck/ Dual Control Head structure.	ALL
Manual Site Hunt ^{*3}	Starts searching for a repeater which can be synchronized by using the Site Roaming function in a DMR Conventional system. See DMR FUNC Migrating Automatically to the Site Providing Better Radio Environment (Site Roaming)	DMR Conventional
Master Volume Control (Mobile only)	Switches the Control Head for controlling the volume of an external speaker between Control Head 1 and Control Head 2.  Note This function can be used only in a Multi RF Deck system of Mobile.	ALL
Menu	Enters Menu Mode. In Menu Mode, various functions can be configured or activated. See Using Menu Mode	ALL

Function Name	Description	Available Communication Systems *1
Mobile Relay Station (Mobile only)	Places the transceiver in Mobile Relay Station Mode. See Relaying the Received Signal (Mobile Relay Station)	Analog Conventional P25 Conventional NXDN Conventional
Monitor	Analog Conventional: The transceiver disables the QT tone or DQT code and the Optional Signaling and unmutes the speaker upon detection of a carrier. P25 Conventional: The transceiver disables the NAC and unmutes the speaker upon detection of a frame. NXDN Conventional: The transceiver resets the matching state of RAN code and Optional Signaling and unmutes the speaker upon detection of an NXDN frame. See • P25 FUNC Temporarily Disabling the Signaling (Monitor) • NXDN FUNC Temporarily Disabling the Signaling (Monitor)	Analog Conventional P25 Conventional NXDN Conventional
Monitor Momentary	Analog Conventional: The transceiver disables the QT tone or DQT code and the Optional Signaling and unmutes the speaker upon detection of a carrier while the Monitor Momentary key is pressed and held. P25 Conventional: The transceiver disables NAC and unmutes the speaker upon detection of a frame while the Monitor Momentary key is pressed and held. NXDN Conventional: The transceiver resets the matching state of RAN code and Optional Signaling and unmutes the speaker upon detection of an NXDN frame while the Monitor Momentary key is pressed and held. See • P25 FUNC Temporarily Disabling the Signaling (Monitor) • NXDN FUNC Temporarily Disabling the Signaling (Monitor)	Analog Conventional P25 Conventional NXDN Conventional
Multi RF Deck View (Mobile only)	Multi RF Deck View is toggled between On and Off. Note • This function can be used only when KCH-20R (Featured Panel) or KCH-21R (Handheld Control Head) is connected to either Control Head 1 or Control Head 2.	ALL
Operator Selectable Tone	Toggles the OST between enabled and disabled.	Analog Conventional
OST List	Enters OST List Mode. In OST List Mode, an OST List can be selected. Note • OST List can be configured only in Hold for the Operator Selectable Tone key, and the configuration cannot be changed.	Analog Conventional
OST Down	Decreases the OST list number in steps of 1.	Analog Conventional
OST Down (Continuous)	Pressing and holding the OST Down key decreases the OST list number in steps of 1 every 100 ms.	Analog Conventional
OST Up	Increases the OST list number in steps of 1.	Analog Conventional
OST Up (Continuous)	Pressing and holding the OST Up key increases the OST list number in steps of 1 every 100 ms.	Analog Conventional

Function Name	Description	Available Communication Systems ^{*1}
OVCN ^{*3}	Toggles the OVCN between enabled and disabled. See DMR FUNC Causing Transceivers Other than the Transceiver of the Specified ID to Participate in a Conversation (Open Voice Channel Mode)	DMR Conventional
Playback	Enters Playback Mode. In Playback Mode, the transceiver can play back audio recorded using Auto Recording. See Playing Back the Recorded Audio (Playback)	ALL
Playback (Last Recording)	Enters Playback Mode. In Playback Mode, the transceiver can play back the latest audio recorded using Auto Recording. See Playing Back the Recorded Audio (Playback)	ALL
Priority-channel Select	Enters Priority-channel Select Mode. In Priority-channel Select Mode, the channel selected on the transceiver can be changed as a Priority-channel. See • P25 FUNC Scanning the Specific Channel Preferentially (Priority Scan) • NXDN FUNC Scanning the Specific Channel Preferentially (Priority Scan) • DMR FUNC Scanning the Specific Channel Preferentially (Priority Scan)	Analog Conventional P25 Conventional NXDN Conventional DMR Conventional
Public Address (Mobile only)	Toggles the Public Address between enabled and disabled. See Using the Transceiver as a Megaphone (Public Address)	ALL
Receive Entry ^{*2 *3}	Places the transceiver in Receive Entry Mode. In Receive Entry Mode, the Receive code can be changed by directly entering a Receive code. See 5-tone FUNC Changing the Receive Code	Analog Conventional
Redial	Enters Redial Mode. In Redial Mode, a list can be resent by selecting the list from the past dialing history. See DMR FUNC Initiating a Communication in Redial Mode	DMR-based Trunking
Regroup Request ^{*2}	Sends a Dynamic Regrouping command to the system. See P25 FUNC Functions of Dynamic Regrouping	P25 Trunking
Rekey Request ^{*2}	Sends a Hello Command (Rekey Request) to the system. See P25 FUNC Requesting the Update of an Encryption Key (Rekey Request)	P25 Conventional P25 Trunking
Remote Control	Places the transceiver in Remote Control Mode. See • NXDN FUNC Remote Operation by Radio Communication (Remote Control) • DMR FUNC Remote Operation by Radio Communication (Remote Control)	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
RF Deck 1 (Mobile only)	Switches the RF Deck (mobile transceiver) to be operated to RF Deck 1.  Note • This function can be used only in a Multi RF Deck system of Mobile.	ALL
RF Deck 2 (Mobile only)	Switches the RF Deck (mobile transceiver) to be operated to RF Deck 2.  Note • This function can be used only in a Multi RF Deck system of Mobile.	ALL
RF Deck 3 (Mobile only)	Switches the RF Deck (mobile transceiver) to be operated to RF Deck 3.  Note • This function can be used only in a Multi RF Deck system of Mobile.	ALL

Function Name	Description	Available Communication Systems *1
RF Deck Down (Mobile only)	The selected RF Deck switches in the order of Deck 1 → Deck 2 → Deck 3.	ALL
RF Deck Select (Mobile only)	Switches the RF Deck (mobile transceiver) to be operated.  Note • This function can be used only in a Multi RF Deck system of Mobile.	ALL
RF Deck Up (Mobile only)	The selected RF Deck switches in the order of Deck 3 → Deck 2 → Deck 1.	ALL
Save GPS Data	The GPS data acquired from the GPS receiver unit is stored in a microSD card. See Storing the GPS Data (GPS Data Storage)	ALL
Save Log Data	The operation history and communication history of the transceiver are saved in the Flash ROM. See READING THE LOG INFORMATION OF THE TRANSCEIVER (FIELD SUPPORT)	ALL
Scan	Starts or stops scanning. See • NXDN FUNC SCAN • P25 FUNC SCAN • DMR FUNC SCAN	ALL
Scan Delete/Add	The selected channel is added to or excluded from the target channels for scan. See • P25 FUNC Adding or Deleting a Channel to/from the Target Channels for Scan (Scan Delete/Add) • NXDN FUNC Adding or Deleting a Channel to/from the Target Channels for Scan (Scan Delete/Add) • DMR FUNC Adding or Deleting a Channel to/from the Target Channels for Scan (Scan Delete/Add)	ALL
Scan Normal	Starts a Non-Priority Scan. See • NXDN FUNC SCAN • P25 FUNC SCAN • DMR FUNC SCAN	ALL
Scan Program	Enters Scan Program Mode. The Scan List can be edited in Scan Program Mode. See • P25 FUNC Changing the Scan List (Scan Program) • NXDN FUNC Changing the Scan List (Scan Program) • DMR FUNC Changing the Scan List (Scan Program)	ALL
Scrambler/ Encryption	Toggles the Voice Scrambler/ Encryption between enabled and disabled. See • P25 FUNC COMMUNICATION SECURITY • NXDN FUNC COMMUNICATION SECURITY • DMR FUNC COMMUNICATION SECURITY	Voice Scrambler: Analog Conventional Encryption: P25 Conventional P25 Trunking NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking

Function Name	Description	Available Communication Systems ^{*1}
Scrambler/ Encryption Code	Pressing and holding the Scrambler/Encryption key causes the transceiver to enter Scrambler/Encryption Code Mode. In Scrambler/Encryption Code Mode, the Scrambler Code or Encryption Key data can be changed. See • P25 FUNC COMMUNICATION SECURITY • NXDN FUNC COMMUNICATION SECURITY  Note • Scrambler/Encryption Code can be configured only in Hold for the Scrambler/Encryption key, and the configuration cannot be changed.	Voice Scrambler: Analog Conventional Encryption: P25 Conventional NXDN Conventional NXDN Trunking
Send the GPS Data	Sends the location information of the nearest beacon or the location information of the own station received from the GPS Unit. See • NXDN FUNC Send the Location Data (Indoor Location) • DMR FUNC Send the Location Data (Indoor Location)	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Send the Location Data (Portable only)	Sends the location information of the nearest beacon or the location information of the own station received from the GPS Unit. See • NXDN FUNC Send the Location Data (Indoor Location) • DMR FUNC Send the Location Data (Indoor Location)	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Short Message	The transceiver enters Short Message Mode. In Short Message Mode, a Short Message can be sent by directly entering a Short Message. See • NXDN FUNC Sending and Receiving a Short Message (Short Data Call) • DMR FUNC Sending and Receiving a Short Message (Short Data Call)	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking Analog Conventional
Site Down	Decreases the site number in steps of 1. See NXDN FUNC Locking the Site to Be Used (Site Lock/ Site Select)	NXDN Trunking
Site Down (Continuous)	Pressing and holding the Site Down key causes the site number to be decreased in steps of 1 every 100 ms.  Note • Site Down (Continuous) can be configured only in Hold for the Site Down key, and the configuration cannot be changed.	NXDN Trunking
Site Lock	Toggles the Site Lock between enabled and disabled. See • NXDN FUNC Locking the Site to Be Used (Site Lock/ Site Select) • DMR FUNC Locking the Site to Be Used (Site Lock)	NXDN Trunking DMR-based Trunking
Site Select	Pressing and holding the Site Lock key causes the transceiver to enter Site Select Mode, and then the site to be stored can be selected. See NXDN FUNC Locking the Site to Be Used (Site Lock/ Site Select)  Note • Site Select can be configured only in Hold for the Site Lock key, and the configuration cannot be changed.	NXDN Trunking
Site Up	Increases the site number in steps of 1. See NXDN FUNC Locking the Site to Be Used (Site Lock/ Site Select)	NXDN Trunking

Function Name	Description	Available Communication Systems ^{*1}
Site Up (Continuous)	Pressing and holding the Site Up key causes the site number to be increased in steps of 1 every 100 ms.  Note Site Up (Continuous) can be configured only in Hold for the Site Up key, and the configuration cannot be changed.	NXDN Trunking
Speaker Attenuation	Temporarily attenuates the volume level of the speaker. See Temporarily Reducing the Volume Level of the Speaker (Speaker Attenuation)	ALL
Speaker 1-2 Mute (Mobile only)	Pressing the Speaker 1-2 Mute key of Control Head 1 mutes the speaker of Control Head 2. Pressing the Speaker 1-2 Mute key of Control Head 2 mutes the speaker of Control Head 1.  Note This function can be used only in a Dual Control Head structure of Mobile.	ALL
Squelch Level	Enters Squelch Level Mode. In Squelch Level Mode, the Squelch level can be changed.	Analog Conventional
Squelch Off	Analog Conventional: The transceiver opens squelch and unmutes the speaker. P25 Conventional: The transceiver disables the NAC and unmutes the speaker upon detection of a frame. NXDN Conventional: The transceiver resets the matching state of RAN code and Optional Signaling and unmutes the speaker upon detection of an NXDN frame. See - P25 FUNC Temporarily Disabling the Squelch (Squelch Off) - NXDN FUNC Temporarily Disabling the Squelch (Squelch Off)	Analog Conventional P25 Conventional NXDN Conventional
Squelch Off Momentary	Analog Conventional: The transceiver opens squelch and unmutes while the Squelch Off Momentary key is pressed and held. P25 Conventional: The transceiver disables NAC and unmutes the speaker upon detection of a carrier while the Squelch Off Momentary key is pressed and held. NXDN Conventional: The transceiver disables the RAN code and Optional Signaling and unmutes the speaker upon detection of a carrier while the Squelch Off Momentary key is pressed and held. See - P25 FUNC Temporarily Disabling the Squelch (Squelch Off) - NXDN FUNC Temporarily Disabling the Squelch (Squelch Off)	Analog Conventional P25 Conventional NXDN Conventional
Stack	Enters Stack Mode. In Stack Mode, the data stored in the stack memory of the transceiver, such as call records, Status Messages and Short Messages, can be referred or cleared. See Viewing the Receive History (Stack)	ALL

Function Name	Description	Available Communication Systems ^{*1}
Status	The transceiver enters Status Mode. In Status Mode, a status configured in the Status List of FleetSync, P25 Trunking, NXDN, or DMR can be selected. Also, in a FleetSync or NXDN system, a Status Message can be sent by directly entering a status number. See • P25 FUNC Notifying the System of the Transceiver Status (Status) • NXDN FUNC Sending and Receiving a Status Message (Status Call) • DMR FUNC Sending and Receiving a Status Message (Status Call)	Analog Conventional P25 Trunking NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Surveillance	Toggles the Surveillance between enabled and disabled. While the Surveillance function is enabled, the transceiver does not emit a tone or light the backlight even when the transceiver functions.  Note • For Mobile, this function cannot be used in a Multi RF Deck/ Dual Control Head structure.	ALL
System Down	Decreases the system name in steps of 1. System Lock is enabled in the selected system.	NXDN Trunking
System Down (Continuous)	Pressing and holding the System Down key causes the system name to be decreased in steps of 1 every 100 ms. System Lock is enabled in the selected system.	NXDN Trunking
System Lock	Toggles the System Lock between enabled and disabled.	NXDN Trunking
System Search	P25 Trunking: The RFSS ID and Site ID of the site currently being used appears for 2 sec. NXDN Trunking: The Site No. appears. See • P25 FUNC Manually Searching for a New Site (System Search) • NXDN FUNC Starting the Control Channel Hunt Manually (Forced Search)	P25 Trunking NXDN Trunking
System Search Function	P25 Trunking: Pressing and holding the System Search key starts a system search. NXDN Trunking: Pressing and holding the System Search key starts a control channel hunt. See • P25 FUNC Manually Searching for a New Site (System Search) • NXDN FUNC Starting the Control Channel Hunt Manually (Forced Search)  Note • System Search Function can be configured only in Hold for the System Search key, and the configuration cannot be changed.	P25 Trunking NXDN Trunking
System Select	Enters System Select Mode.	NXDN Trunking
System Up	Increases the system name in steps of 1. System Lock is enabled in the selected system.	NXDN Trunking
System Up (Continuous)	Pressing and holding the System Up key causes the system name to be increased in steps of 1 every 100 ms. System Lock is enabled in the selected system.	NXDN Trunking
Tactical Zone	When the transceiver is not in Tactical Zone Mode, pressing the Tactical Zone key registers the selected channel in Tactical Zone.	Analog Conventional P25 Conventional
Tactical Zone (All Channels)	When the transceiver is not in Tactical Zone Mode, pressing the Tactical Zone (All Channels) key registers all at once all the corresponding channels of the selected zone in Tactical Zone.	Analog Conventional P25 Conventional

Function Name	Description	Available Communication Systems ^{*1}
Talk Around	Toggles the Talk Around between enabled and disabled. See • P25 FUNC Communicating Without Using a Repeater (Talk Around) • NXDN FUNC Communicating Without Using a Repeater (Talk Around) • DMR FUNC Communicating Without Using a Repeater (Talk Around/ DMR Direct Mode)	Analog Conventional P25 Conventional NXDN Conventional LTR Trunking DMR Conventional
Talkgroup Reset ^{*2}	The Talkgroup ID changed in Talkgroup ID Select Mode is restored to the value configured using KPG-D1/ D1N. See P25 FUNC Making a Group Call	P25 Conventional
Task Request Confirmation	The transceiver enters Task Request Confirmation Mode and the contents of the received Task Request are checked. See • NXDN FUNC TASK REQUEST • DMR FUNC TASK REQUEST	NXDN Conventional NXDN Trunking DMR Conventional DMR Tier III Trunking S-Trunking
Telephone Disconnect	The transceiver sends a disconnect signal (# of DTMF Code) when the transceiver is connecting to a telephone line of an LTR Trunking system.	LTR Trunking
Transceiver Password	Enters Transceiver Password Mode. In Transceiver Password Mode, the transceiver cannot be used until the correct password is entered. See Password for Transceiver Operation (Transceiver Password)	ALL
Transfer (Mobile only)	Toggles the Transfer between enabled and disabled. See 5-tone FUNC Transferring the Received 5-tone Code (Transfer)	Analog Conventional
Unselected RF Deck Speaker (Mobile only)	The configuration of Unselected RF Deck Speaker switches to "Unmute" or "Mute". See Switching the Output Status of the External Speaker (Unselected RF Deck Speaker)  Note • This function can be used only in a Multi RF Deck system of Mobile.	ALL
Vibrator (Portable only)	Toggles the Vibrator between enabled and disabled. See Using the Vibrator	ALL
Voice Memo ^{*3}	The transceiver enters Voice Memo Mode and starts recording to a microSD card. See Recording Audio to a microSD Card (Voice Memo)	ALL
Volume Down (Mobile only)	Decreases the volume level in steps of 1.	ALL
Volume Down (Continuous) (Mobile only)	Pressing and holding the Volume Down (Continuous) key will decrease the volume level in steps of 1 every 100 ms.  Note • Volume Down (Continuous) can be configured only in Hold for the Volume Down key, and the configuration cannot be changed.	ALL
Volume Up (Mobile only)	Increases the volume level in steps of 1.	ALL
Volume Up (Continuous) (Mobile only)	Pressing and holding the Volume Up (Continuous) key will increase the volume level in steps of 1 every 100 ms.  Note • Volume Up (Continuous) can be configured only in Hold for the Volume Up key, and the configuration cannot be changed.	ALL

Function Name	Description	Available Communication Systems ^{*1}
VOX	Enters VOX Gain Level Mode. In VOX Gain Level Mode, the microphone sensitivity of VOX can be adjusted. See VOX	Analog Conventional NXDN Conventional P25 Conventional DMR Conventional
VOX Function	Pressing and holding the VOX key toggles VOX between enabled and disabled. See VOX  Note VOX Function can be configured only in Hold for the VOX key, and the configuration cannot be changed.	Analog Conventional NXDN Conventional P25 Conventional DMR Conventional
Zeroize	Deletes the following types of Encryption Keys: - Encryption Key configured for the Secure Cryptographic Module (SCM) - Built-in DES - Enhanced Encryption (DMR) - P25 Enhanced Encryption See - P25 FUNC Deleting all Encryption Keys (Zeroize) - NXDN FUNC Deleting All Encryption Keys (Zeroize) - DMR FUNC Deleting All Encryption Keys (Zeroize)	P25 Conventional P25 Trunking NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Zone Delete/Add	The selected zone is added to or excluded from the target for scan.	ALL
Zone Down	Decreases the zone number in steps of 1.	ALL
Zone Down (Continuous)	Pressing and holding the Zone Down key will decrease the zone number in steps of 1 every 200 ms.  Note Zone Down (Continuous) can be configured only in Hold for the Zone Down key, and the configuration cannot be changed.	ALL
Zone Up	Increases the zone number in steps of 1.	ALL
Zone Up (Continuous)	Pressing and holding the Zone Up key will increase the zone number in steps of 1 every 200 ms.  Note Zone Up (Continuous) can be configured only in Hold for the Zone Up key, and the configuration cannot be changed.	ALL

^{*1} ALL indicates that a function can be used in all the following communication systems:

- Analog Conventional
- P25 Conventional
- P25 Trunking
- NXDN Conventional
- NXDN Trunking
- DMR Conventional
- DMR-based Trunking
- LTR Trunking

^{*2} Not supported for NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S.

^{*3} Not supported for NX-5200LG/ NX-5300LG.

Note

- The transceiver migrates to the function's own mode by pressing a key to which the following functions are assigned. This mode is referred to as "Function Mode".

Table 21-2 Function Mode

Key Function	Function Mode
2-tone	2-tone Mode
Autodial	Autodial Mode
Autodial Programming	Autodial Programming Mode
BLE Beacon Display	BLE Beacon Display Mode
Channel Entry	Channel Entry Mode
Clock Adjustment	Clock Adjustment Mode
Dialing	Dialing Mode
Eject SD Card	Eject SD Card Mode
Format SD Card	Format SD Card Mode
GPS Position Display	GPS Position Display Mode
Group Group + Short Message Group + Status	Group Call Mode Selcall Mode (FleetSync or MDC-1200)
Group ID/Channel Entry	Group ID Entry Mode
Individual Individual + Short Message Individual + Status	Individual Call Mode Selcall Mode (FleetSync or MDC-1200)
Key Delete	Key Delete Mode
Keyset	Keyset Select Mode
Maintenance	Maintenance Display Mode
Menu	Menu Mode
Mobile Relay Station ^{*1}	Mobile Relay Station Mode
OST List	OST List Mode
Playback Playback (Last Recording)	Playback Mode
Priority-channel Select	Priority-channel Select Mode
Receive Entry	Receive Entry Mode
Redial	Redial Mode
Remote Control	Remote Control Mode
Scan Program	Scan Program Mode
Scrambler/Encryption Code	Scrambler/Encryption Code Mode
Short Message Group + Short Message Individual + Short Message	Short Message Mode
Site Select	Site Select Mode
Squelch Level	Squelch Level Mode
Stack	Stack Mode
Status Group + Status Individual + Status	Status Mode
System Select	System Select Mode
Talkgroup Reset	Talkgroup ID Select Mode
Task Request Confirmation	Task Request Confirmation Mode
Transceiver Password	Transceiver Password Mode
Voice Memo	Voice Memo Mode
VOX	VOX Gain Level Mode

^{*1} Not supported for NX-5700S/ NX-5800S.

- If the transceiver migrates to each Function Mode, the assigned functions will not be activated by pressing the following keys, but the mode's own behavior will be executed.

Portable:

- [▲]/[▼] key
- [◀]/[▶] key
- **Menu** ([□]) key
- **Back** ([↩]) key
- **Function** ([○]) key
- **Home** ([🏠]) key
- Keypad
- **PTT** switch

Mobile:

- [▲]/[▼] key
- [◀]/[▶] key
- **Menu** ([□]) key
- **Back** ([↩]) key
- **Function** ([○]) key
- **Home** ([🏠]) key
- Microphone Keypad
- **PTT** switch

- To directly enter a Unit ID or status in FleetSync, MDC-1200, an NXDN system, a P25 system, or a DMR system, Manual Dialing needs to be enabled using KPG-D1/ D1N. (Refer to [Manual Dialing](#).)
- The following functions are the common keys between **Primary** and **Secondary**. If one of the following functions is configured in **Primary**, the same function is automatically configured in **Secondary**.

Channel Down
Channel Down (Continuous)
Channel Up
Channel Up (Continuous)
Direct Channel 1 to Direct Channel 5
Direct Channel 1 Select to Direct Channel 5 Select
Emergency
Function
Home Channel
Home Channel Select
Key Lock
Scan
Scan Normal
Zone Down
Zone Down (Continuous)
Zone Up
Zone Up (Continuous)

Configuration using KPG-D1/ D1N

Assigning functions to the **PF** keys on the transceiver ( [See](#) Transceiver Settings > Key Assignment)

21.2 Available Functions for Menu Mode

Following are the functions that can be configured for Menu Mode. Each function is identical to the corresponding PF key.

Refer to “[Available Functions for the PF Keys](#)” for details of each function.

Table 21-3 Available Functions for Menu Mode

Function Name	Display	Corresponding PF Keys
2-tone	2-tone	2-tone
Activity Detection (Portable only)	Activity Det	Activity Detection
ANR Preset	ANR Preset	-
Audio Profile	Audio Profile	-
Auto Dimmer (Mobile only)	Auto Dimmer	-
Auto Telephone	Auto Telephone	Auto Telephone
Autodial	Auto Dial	Autodial
Autodial Programming	Auto Dial Prog	Autodial Programming
AUX (Portable only)	AUX	AUX
AUX A (Mobile only)	AUX A	AUX A
AUX B (Mobile only)	AUX B	AUX B
AUX C (Mobile only)	AUX C	AUX C
Battery Information (Portable only)	Battery Info	-
Battery Status (Portable only)	Battery Status	Battery Status
BLE Beacon Display (Portable only)	BLE BCN Disp	BLE Beacon Display
BLE Scan (Portable only)	BLE Scan	BLE Scan
Bluetooth	Bluetooth	Bluetooth
Bluetooth Device	BT Device	-
Bluetooth Discoverable	Discoverable	-
Bluetooth Headset Connection Type	BT Headset Typ	-
Bluetooth Information	Bluetooth Info	-
Bluetooth Speaker	BT Speaker	Bluetooth Speaker
Broadcast	Broadcast	Broadcast
Clock	Clock	Clock
Clock Adjustment	Clock Adjust	Clock Adjustment
Color Scheme ^{*2 *3}	Color Scheme	-
Dialing	Dialing	Dialing
Direct Channel 1 Select to Direct Channel 5 Select	Direct Ch1 Sel	Direct Channel 1 Select to Direct Channel 5 Select
Display Format	Display Format	Display Format
Eject SD Card ^{*3}	Eject Card	Eject SD Card
External Speaker	External SP	External Speaker
External Microphone Sense	Ext Mic Sense	-
Fixed Volume	Fixed Volume	Fixed Volume
Format SD Card ^{*3}	Format Card	Format SD Card
Front Panel Programming	Panel Program	Front Panel Programming

Function Name	Display	Corresponding PF Keys
GPS	GPS	GPS
GPS/Bluetooth Reset	GPS/BT Reset	-
GPS Position Display	GPS Pos Disp	GPS Position Display
Group	Group	Group
Group + Short Message	Group+SDM	Group + Short Message
Group + Status	Group+Status	Group + Status
High Transmit Power	High TX Power	High Transmit Power
Home Channel Select	Home Ch Sel	Home Channel Select
Horn Alert (Mobile only)	Horn Alert	Horn Alert
Individual	Individual	Individual
Individual + Short Message	Indiv+SDM	Individual + Short Message
Individual + Status	Indiv+Status	Individual + Status
Intercom (Mobile only)	Intercom	Intercom
IP Address ^{*2}	IP Address	-
Key Delete	Key Delete	Key Delete
Keyset ^{*2}	Keyset	Keyset
Language	Language	-
LCD Brightness	LCD Brightness	LCD Brightness
Lone Worker ^{*1}	Lone Worker	Lone Worker
Low Transmit Power	Low TX Power	Low Transmit Power
Maintenance	Maintenance	Maintenance
Manual Site Hunt ^{*3}	Manual Hunt	-
Master Volume Control (Mobile only)	Master Volume	Master Volume Control
Medium Transmit Power	Med TX Power	-
Microphone Sense	Mic Sense	-
Microphone Type	Mic Type	-
Monitor	Monitor	Monitor
Multi RF Deck View (Mobile only)	Multi View	Multi RF Deck View
Operator Selectable Tone	OST	Operator Selectable Tone
OST List	OST List	OST List
OVCM ^{*3}	OVCM	OVCM
Playback	Playback	Playback
Priority-channel Select	Pri Ch Select	Priority-channel Select
Public Address	Public Address	Public Address
Radio Check	Radio Check	-
Radio Inhibit	Inhibit	-
Radio Uninhibit	Uninhibit	-
Receive Entry ^{*2 *3}	Receive Entry	Receive Entry
Redial	Redial	Redial
Rekey Request ^{*2}	Rekey Request	Rekey Request

Function Name	Display	Corresponding PF Keys
Regroup Request * ²	Regroup Req	Regroup Request
Remote Control	Remote Control	Remote Control
RF Deck Select	RF Deck Select	RF Deck Select
RX Audio Equalizer (High)	RX EQ High	-
RX Audio Equalizer (High Midrange)	RX EQ High Mid	-
RX Audio Equalizer (Midrange)	RX EQ Midrange	-
RX Audio Equalizer (Low Midrange)	RX EQ Low Mid	-
RX Audio Equalizer (Low)	RX EQ Low	-
RX Auto Gain Control	RX AGC	-
Save GPS Data	Save GPS Data	Save GPS Data
Save Log Data	Save Log Data	Save Log Data
Scan	Scan	Scan
Scan Delete/Add	Scan Del/Add	Scan Delete/Add
Scan Normal	Scan Normal	Scan Normal
Scan Program	Scan Program	Scan Program
Scrambler/Encryption	Scram/Encryp	Scrambler/Encryption
Scrambler/Encryption Code	Scram Code	Scrambler/Encryption Code
Send the GPS Data	Send GPS Data	Send the GPS Data
Send the Location Data (Portable only)	Send LOC Data	Send the Location Data
Short Message	Short Message	Short Message
Site Lock	Site Lock	Site Lock
Site Number	Site No.	System Search
Site Select	Site	Site Select
Speaker Type	Speaker Type	-
Speaker 1-2 Mute (Mobile only)	Speaker 1-2 Mute	Speaker 1-2 Mute
Squelch Level	Squelch Level	Squelch Level
Squelch Off	Squelch Off	Squelch Off
Stack	Stack	Stack
Status	Status	Status
System Search	System Search	System Search
Surveillance	Surveillance	Surveillance
System Lock	System Lock	System Lock
System Select	System	System Select
Talk Around	Talk Around	Talk Around
Talkgroup Reset * ²	Talkgroup Rst	Talkgroup Reset
Task Request Confirmation	Task	Task Request Confirmation
Transceiver Password	Password	Transceiver Password
Transfer (Mobile only)	Transfer	Transfer
TX Audio Equalizer (High)	TX EQ High	-
TX Audio Equalizer (High Midrange)	TX EQ High Mid	-
TX Audio Equalizer (Midrange)	TX EQ Midrange	-

Function Name	Display	Corresponding PF Keys
TX Audio Equalizer (Low Midrange)	TX EQ Low Mid	-
TX Audio Equalizer (Low)	TX EQ Low	-
TX Auto Gain Control	TX AGC	-
Unselected RF Deck Speaker (Mobile only)	Unsel Deck SP	Unselected RF Deck Speaker
Unselected Speaker Offset (Mobile only)	Unsel Deck Vol	-
Vibrator (Portable only)	Vibrator	Vibrator
Voice Memo ^{*3}	Voice Memo	Voice Memo
VOX (Portable only)	VOX Level	VOX
VOX Function (Portable only)	VOX	VOX Function
Zeroize	Zeroize	Zeroize

^{*1} If "Transmit/Receive Inhibit" is configured in **Lone Worker Type**, Lone Worker cannot be turned ON or OFF in Menu Mode.

^{*2} Not supported for NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S.

^{*3} Not supported for NX-5200LG/ NX-5300LG.

21.3 Available Functions for the Selector

Supported Models: Portable

By using KPG-D1/ D1N, the following functions can be assigned to the **Selector**. What function can be selected varies depending on the configuration in **16 Zone/Channel Selector**.

● If 16 Zone/Channel Selector is enabled

Table 21-4 Available Functions for the Selector

Function Name	Description	Available Communication Systems ^{*1}
None	No function is activated. Rotating the Selector causes the Key-entry Error Tone (1 beep) to sound.	ALL
Channel Select	Rotating the Selector causes the transceiver to migrate to the channel having the same number specified by the pointer of Selector .	ALL
Zone Select	Rotating the Selector causes the transceiver to migrate to the zone indicated by the pointer of the Selector .	ALL
Site Select	Turning the Selector causes the transceiver to migrate to the site specified by the Selector . (Refer to NXDN FUNC Locking the Site to Be Used (Site Lock/ Site Select).)	NXDN Trunking

^{*1} ALL indicates a function that can be used in all systems.

● If 16 Zone/Channel Selector is disabled

Table 21-5 Available Functions for the Selector

Function Name	Description	Available Communication Systems ^{*1}
None	No function is activated. Rotating the Selector causes the Key-entry Error Tone (1 beep) to sound.	ALL
Channel Up/Down	Rotating the Selector causes the channel number to be increased or decreased in steps of 1.	ALL
Zone Up/Down	Rotating the Selector causes the zone number to be increased or decreased in steps of 1.	ALL
Site Up/Down	Turning the Selector increases or decreases the site number in steps of 1. (Refer to NXDN FUNC Locking the Site to Be Used (Site Lock/ Site Select).)	NXDN Trunking

^{*1} ALL indicates that a function can be used in all the following communication systems:

- Analog Conventional
- P25 Conventional
- P25 Trunking
- NXDN Conventional
- NXDN Trunking
- DMR Conventional
- DMR-based Trunking
- LTR Trunking

Configuration using KPG-D1/ D1N

- Assigning functions to the **Selector** of the transceiver ( **See** Transceiver Settings > Key Assignment > Top/Side)
- Configuring **16 Zone/Channel Selector** to be enabled or disabled ( **See** Transceiver Settings > Key Assignment > Top/Side)

Available Functions for the Lever Switch

Supported Models: Portable

The following are the functions that can be assigned to the **Lever** switch.

Positioning the **Lever** switch to the **[A]** or **[B]** position activates the assigned function.

Table 21-6 Available Functions for the Lever Switch

Function Name	Description	Available Communication Systems ^{*1}
None	No function is activated.	-
AUX	Alternates the status of the AUX Output port. The AUX Output port status is changed to inactive if the status is active; or, the AUX Output port status is changed to active if the status is inactive. The status of the AUX port is changed by operating the Lever switch, and an external device connected to the AUX port can be controlled.	ALL
BLE Beacon Display	Enters BLE Beacon Display Mode. See BLE Beacon Display	NXDN Conventional NXDN Trunking DMR Conventional DMR-based Trunking
Display Format	Toggles between the Channel Name display and the Zone-channel display.	ALL
Function	Waits for the activation of the Key Function assigned to the 2nd Function and starts counting down the Mode Reset Timer . The Function status will be reset if no key is pressed before the amount of time configured in Mode Reset Timer elapses.	ALL
GPS Position Display	Enters GPS Position Display Mode. See GPS POSITION DISPLAY	ALL
High Transmit Power	Analog Conventional/ P25 Conventional/ NXDN Conventional: Selecting a channel where "Medium" or "Low" is configured for the transmission power, and then positioning the Lever switch to the position assigned "High Transmit Power" switches the transmission power to "High". P25 Trunking/ NXDN Trunking/ DMR-based Trunking: Selecting a channel in a system where "Medium", "Low" or "Auto" is configured for the transmission power and then positioning the Lever switch to the position assigned "High Transmit Power" switches the transmission power to "High". See Transmit Power	ALL
Key Lock	Toggles the Key Lock between enabled and disabled. See Locking the Transceiver Keys (Key Lock)	ALL
Lone Worker	Toggles the Lone Worker between enabled and disabled. See • P25 FUNC Placing the Transceiver in Emergency Mode Using the Lone Worker Function • NXDN FUNC Placing the Transceiver in Emergency Mode Using the Lone Worker Function	ALL

Function Name	Description	Available Communication Systems ^{*1}
Low Transmit Power	Analog Conventional/ P25 Conventional/ NXDN Conventional: Selecting a channel where "High" or "Medium" is configured for the transmission power, and then positioning the Lever switch to the position assigned "Low Transmit Power" switches the transmission power to "Low". P25 Trunking/ NXDN Trunking/ DMR-based Trunking: Selecting a channel in a system where "High", "Medium" or "Auto" is configured for the transmission power and then positioning the Lever switch to the position assigned "Low Transmit Power" switches the transmission power to "Low". See Transmit Power	ALL
Monitor	Analog Conventional: The transceiver disables the QT tone or DQT code and the Optional Signaling and unmutes the speaker upon detection of a carrier. P25 Conventional: The transceiver disables the NAC and unmutes the speaker upon detection of a frame. NXDN Conventional: The transceiver resets the matching state of RAN code and Optional Signaling and unmutes the speaker upon detection of an NXDN frame. See • P25 FUNC Temporarily Disabling the Signaling (Monitor) • NXDN FUNC Temporarily Disabling the Signaling (Monitor)	Analog Conventional P25 Conventional NXDN Conventional
Scan	Starts or stops scanning. See • NXDN FUNC SCAN • P25 FUNC SCAN	ALL
Scan Normal	Starts a Non-Priority Scan. See • NXDN FUNC SCAN • P25 FUNC SCAN	ALL
Scan Program	Enters Scan Program Mode. The Scan List can be edited in Scan Program Mode. See • P25 FUNC Changing the Scan List (Scan Program) • NXDN FUNC Changing the Scan List (Scan Program)	ALL
Scrambler/ Encryption	Toggles the Voice Scrambler/ Encryption between enabled and disabled. See • P25 FUNC COMMUNICATION SECURITY • NXDN FUNC COMMUNICATION SECURITY	Voice Scrambler: Analog Conventional Encryption: P25 Conventional P25 Trunking NXDN Conventional NXDN Trunking

Function Name	Description	Available Communication Systems ^{*1}
Squelch Off	Analog Conventional: The transceiver opens squelch and unmutes the speaker. P25 Conventional: The transceiver disables the NAC and unmutes the speaker upon detection of a frame. NXDN Conventional: The transceiver resets the matching state of RAN code and Optional Signaling and unmutes the speaker upon detection of an NXDN frame. See • P25 FUNC Temporarily Disabling the Squelch (Squelch Off) • NXDN FUNC Temporarily Disabling the Squelch (Squelch Off)	Analog Conventional P25 Conventional NXDN Conventional
Surveillance	Toggles the Surveillance between enabled and disabled. While the Surveillance function is enabled, the transceiver does not emit a tone or light the backlight even when the transceiver functions.	ALL
Talk Around	Toggles the Talk Around between enabled and disabled. See • P25 FUNC Communicating Without Using a Repeater (Talk Around) • NXDN FUNC Communicating Without Using a Repeater (Talk Around) • DMR FUNC Communicating Without Using a Repeater (Talk Around/ DMR Direct Mode)	Analog Conventional P25 Conventional NXDN Conventional DMR Conventional
Vibrator	Toggles the Vibrator between enabled and disabled. See Using the Vibrator	ALL
Zone Select	Positioning the Lever switch to the [A] position migrates the transceiver to the zone configured in Zone A (Lever A Position). Positioning the Lever switch to the [B] position migrates the transceiver to the zone configured in Zone B (Lever B Position). See Changing the Zone	ALL

^{*1} ALL indicates that a function can be used in all the following communication systems:

- Analog Conventional
- P25 Conventional
- P25 Trunking
- NXDN Conventional
- NXDN Trunking
- DMR Conventional
- DMR-based Trunking

21.4 Available Functions for COM Port

Portable

For Portable, the COM port 0 is assigned to the 14-pin universal connector (TXD: Pin No.12/ RXD: Pin No.13).

Table 21-7 Available Functions for COM Ports

Range	Communication Ports
	COM port 0
None	The transceiver can communicate with KPG-D1/ D1N.
Data	The transceiver can remotely be controlled using PC commands. The transceiver can communicate with KPG-D1/ D1N.
GPS	Position data can be acquired from the GPS receiver unit. Also, the transceiver can send the received GPS data when the transceiver receives the GPS data from another transceiver. The transceiver can communicate with KPG-D1/ D1N.
Data + GPS Data Output	The transceiver can remotely be controlled using PC commands. The transceiver will send GPS data by adding STX and ETX when the transceiver receives GPS data from another transceiver. The transceiver can communicate with KPG-D1/ D1N. "Data + GPS Data Output" can be configured for the transceiver having firmware version earlier than 5.30.00.
Data + Location Data Output	The transceiver can remotely be controlled using PC commands. The transceiver will send GPS data by adding STX and ETX when the transceiver receives GPS data from another transceiver. The transceiver will send BLE data by adding STX and ETX when the transceiver receives BLE data from another transceiver. The transceiver can communicate with KPG-D1/ D1N. "Data + Location Data Output" can be configured for the transceiver having firmware version 5.30.00 or later.
Transparent	The port functions as the data communication port for the Transparent data communication. The transceiver can communicate with KPG-D1/ D1N. However, the transceiver can communicate only for 10 sec on the COM port 0 after the transceiver is turned ON.
Transparent (Digital)	The port functions as the data communication port for the Transparent data communication using the NXDN/ DMR protocol for which the communication method is optimized. By using Transparent (Digital), data can be sent more efficiently than by using Transparent. The transceiver can communicate with KPG-D1/ D1N. However, the transceiver can communicate only for 10 sec on the COM port 0 after the transceiver is turned ON.

Mobile

Mobile has the following 3 communication ports:

- **COM port 0**

The COM port 0 is assigned to the microphone jack on the front panel. (TXD: Pin No.4/ RXD: Pin No.7)

- **COM port 1**

The COM port 1 is assigned to the 25-pin connector on the rear panel. (TXD: Pin No.3/ RXD: Pin No.2)

- **COM port 2**

The COM port 2 is assigned to the 25-pin connector on the rear panel. (TXD: Pin No.9/ RXD: Pin No.10)

The following functions can be assigned to communication ports by using KPG-D1/ D1N:

Table 21-8 Available Functions for COM Ports

Range	Communication Ports		
	COM port 0	COM port 1	COM port 2
None	The transceiver can communicate with KPG-D1/ D1N.		
Data	The transceiver can remotely be controlled using PC commands. The transceiver can communicate with KPG-D1/ D1N.		
GPS	-	Position data can be acquired from the GPS receiver unit. Also, the transceiver can send the received GPS data when the transceiver receives the GPS data from another transceiver. The transceiver can communicate with KPG-D1/ D1N.	
Data + GPS Data Output	The transceiver can remotely be controlled using PC commands. The transceiver will send GPS data by adding STX and ETX when the transceiver receives GPS data from another transceiver. The transceiver can communicate with KPG-D1/ D1N. "Data + GPS Data Output" can be configured for the transceiver having firmware version earlier than 5.30.00.		
Data + Location Data Output	The transceiver can remotely be controlled using PC commands. The transceiver will send GPS data by adding STX and ETX when the transceiver receives GPS data from another transceiver. The transceiver will send BLE data by adding STX and ETX when the transceiver receives BLE data from another transceiver. The transceiver can communicate with KPG-D1/ D1N. "Data + Location Data Output" can be configured for the transceiver having firmware version 5.30.00 or later.		
Transparent	-	The port functions as the data communication port for the Transparent data communication.	
Transparent (Digital)	-	The port functions as the data communication port for the Transparent data communication using the NXDN/ DMR protocol for which the communication method is optimized. By using Transparent (Digital), data can be sent more efficiently than by using Transparent.	

COM port Bluetooth

Various functions can be assigned to Bluetooth communication ports.

Table 21-9 Available Functions for Bluetooth Communication Ports

Range	Bluetooth Communication Port
None	The transceiver can communicate with KPG-D1/ D1N.
Data	The transceiver can remotely be controlled using PC commands. The transceiver can communicate with KPG-D1/ D1N.
Data + GPS Data Output	The transceiver can remotely be controlled using PC commands. The transceiver will send GPS data by adding STX and ETX when the transceiver receives GPS data from another transceiver. The transceiver can communicate with KPG-D1/ D1N. "Data + GPS Data Output" can be configured for the transceiver having firmware version earlier than 5.30.00.
Data + Location Data Output	The transceiver can remotely be controlled using PC commands. The transceiver will send GPS data by adding STX and ETX when the transceiver receives GPS data from another transceiver. The transceiver will send BLE data by adding STX and ETX when the transceiver receives BLE data from another transceiver. The transceiver can communicate with KPG-D1/ D1N. "Data + Location Data Output" can be configured for the transceiver having firmware version 5.30.00 or later.
Transparent	The port functions as the data communication port for the Transparent data communication.
Transparent (Digital)	The port functions as the data communication port for the Transparent data communication using the NXDN/ DMR protocol for which the communication method is optimized. By using Transparent (Digital), data can be sent more efficiently than by using Transparent.

Note

- For Mobile, the PC command such as J Command which notifies a user that the transceiver status has been changed cannot be sent from the COM port 0.
- If "Display Unit" is configured in **Bluetooth Interface Selection**, "Transparent" and "Transparent (Digital)" cannot be configured in **COM port Bluetooth**.
- For Mobile, if "Transparent" or "Transparent (Digital)" is configured for the configuration of COM port, some of the transmission functions by the PC command become unavailable in an NXDN system, DMR system, P25 system, and FleetSync system.
- Refer to "**Communication Ports**" in "Multi RF Deck/ Multi Control Head" for the configuration of COM port in a Multi RF Deck/ Multi Control Head structure for Mobile.
- To use **COM port Bluetooth**, a connection by Serial Port Profile of Bluetooth is required. Refer to "**About Serial Port Profile (SPP Connection/ SPP Disconnection)**" for the connection by Serial Port Profile.
- The transceiver is equipped with a communication port on the connection of the internal PC board in the transceiver. Refer to the service manual for details.

Configuration using KPG-D1/ D1N

Assigning functions to the **COM port** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface > COM Port)

Flow Control of the Communication Port (Flow Control)

Flow Control is the function that operates a port as the flow control port when the transceiver sends data communications using Transparent. (Refer to NXDN FUNC Transparent, DMR FUNC Transparent.)

Caution

For Portable, if "RTS/CTS" is configured in Flow Control, both the external microphone and the external PTT do not function.

Note

- For **COM port Bluetooth**, the flow control does not function regardless of the configuration in **Flow Control**.

Configuration using KPG-D1/ D1N

Configuring **Flow Control** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface > COM Port)

COM Port Functions

The following functions of each communication port can be configured using KPG-D1/ D1N.

Table 21-10 COM Port Functions

Function	Description
Polarity	Polarity is the logic of data lines for sending data using a communication port where "GPS" is assigned. However, Polarity of COM port 0, COM port 1 and COM port 2 are fixed at Normal in order to communicate with KPG-D1/ D1N and the configurations cannot be changed.
Stop Bit	Stop Bit is the bit information for sending data using a communication port where "Data", "GPS", "Data + GPS Data Output", "Data + Location Data Output", "Transparent", or "Transparent (Digital)" is assigned. "1" or "2" can be configured for Stop Bit. However, for Mobile, Stop Bit of COM port 0 is fixed at "2" in order to communicate with KPG-D1/ D1N and the configuration cannot be changed.
Baud Rate	Baud Rate is the communication rate for sending data using a communication port where "Data", "GPS", "Data + GPS Data Output", "Data + Location Data Output", "Transparent", or "Transparent (Digital)" is assigned. Baud Rate can be configured by selecting from 1200 bps, 2400 bps, 4800 bps, 9600 bps or 19200 bps.

Note

- "Data + GPS Data Output" can be configured for the transceiver having firmware version earlier than 5.30.00. "Data + Location Data Output" can be configured for the transceiver having firmware version 5.30.00 or later.

Configuration using KPG-D1/ D1N

- Configuring **Polarity** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface > COM Port)
- Configuring **Stop Bit** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface > COM Port)
- Configuring **Baud Rate** ( **See** Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface > COM Port)

Serial Protocol Types

There are 2 types of serial protocols to be used for controlling a transceiver by using PC commands: Version 1 and Version 2. The serial protocol type (PC Interface Protocol) can be configured using KPG-D1/ D1N.

Table 21-11 Serial Protocol Types

Configuration	Description
Version 1	The command sequence of this version starts with STX (Start of Text) and ends with ETX (End of Text). This version is compatible with transceivers that support the KENWOOD PC Interface Protocol.
Version 2	This version is almost the same as the Version 1 data format, but it has the command sequence of Version 1 and a sequence number (SEQ).

Configuration using KPG-D1/ D1N

Configuring **PC Interface Protocol** ( See Transceiver Settings > Optional Features > Optional Features 1 > Serial Interface)

22 KEY OPERATIONS FOR EACH MODE

Key operations for selecting a list or entering characters are described for each mode in this section. Refer to “Operating the Transceiver in Each Mode (Common Operation)” for operation methods.

Key		Transceiver Password Mode	Menu Mode
Menu ([])	Press	Confirms the code (while the code blinks). Checks the code (after the code is confirmed).	Migrates to the Function List.
Back ([])	Press	Deletes a code.	-
	Hold Down	Deletes all codes.	-
Function ([])	Press	-	-
Home ([])	Press	Restores the “Input Password” display.	Aborts the current mode.
Side 1 ^{*1} or [+] ^{*2}	Press	-	The configured function functions.
Side 2 ^{*1} or [-] ^{*2}	Press	-	The configured function functions.
Side 3 ^{*1}	Press	-	The configured function functions.
[]/[]	Press	Selects a code one at a time.	Moves the cursor up or down.
	Hold Down	Selects codes continuously.	Moves the cursor up or down continuously.
[]/[] or []/[] ^{*2}	Press	-	Moves the cursor to the left or right.
	Hold Down	-	Moves the cursor to the left or right continuously.
Selector ^{*3}	-	-	The configured function functions after aborting the current mode.
Lever Switch ^{*4}	-	-	The configured function functions after aborting the current mode.
[0] to [9] ^{*5}	Press	Enters a code.	Directly selects an option registered in the list.
[*] ^{*5}	Press	Confirms the code (while the code blinks). Checks the code (after the code is confirmed).	Migrates to the Function List.
[#] ^{*5}	Press	Deletes a code.	-
	Hold Down	Deletes all codes.	-
PTT Switch	Press	-	Transmits after aborting the current mode.



^{*1} Portable/ KCH-21R (Handheld Control Head) only

^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		Menu Mode	Channel Entry Mode
		Menu Icon Size: Small 	
Menu ([])	Press	Migrates to the Function List.	Confirms the channel number and then aborts the current mode.
Back ([])	Press	-	Deletes a channel number.
	Hold Down	-	Deletes all channel numbers.
Function ([])	Press	-	-
Home ([])	Press	Aborts the current mode.	Aborts the current mode.
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
Side 3 ^{*1}	Press	The configured function functions.	
[]/[]	Press	Moves the cursor up or down.	Changes the channel number.
	Hold Down	Moves the cursor up or down continuously.	Changes the channel number continuously.
[]/[] or []/[] ^{*2}	Press	-	-
	Hold Down	-	-
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	Directly selects an option registered in the list.	Enter the channel number.
[*] ^{*5}	Press	Migrates to the Function List.	Confirms the channel number and then aborts the current mode.
[#] ^{*5}	Press	-	Deletes a channel number.
	Hold Down	-	Deletes all channel numbers.
PTT Switch	Press	Transmits after aborting the current mode.	

^{*1} Portable/ KCH-21R (Handheld Control Head) only

^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		Stack Mode	
		Selecting a list (Category)	Selecting a list (Caller ID)
			
Menu ([])	Press	Migrates to the list selection for Caller ID, Status Message or Short Message.	Initiates a Paging Call or Individual Call after aborting the current mode.
	Hold Down	-	-
Back ([])	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	Deletes one stack data of Caller ID.
	Hold Down	-	Deletes all stack data of Caller ID.
Function ([])	Press	-	-
	Hold Down	-	-
Home ([])	Press	Aborts the current mode.	
	Hold Down	-	-
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
	Hold Down	-	-
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
	Hold Down	-	-
Side 3 ^{*1}	Press	The configured function functions.	
	Hold Down	-	-
[]/[]	Press	Selects a category one at a time.	Selects stack data one at a time.
	Hold Down	Selects a category continuously.	Selects stack data continuously.
[]/or [] ^{*2}	Press	-	Switches the display. Caller ID → Receive Channel → Receive Date and Time → Caller ID → ...
		-	-
[] or [] ^{*2}	Press	-	Switches the display. Caller ID → Receive Date and Time → Receive Channel → Caller ID → ...
		-	-
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	Selects a category.	Selects stack data.
[*] ^{*5}	Press	Migrates to the list selection for Caller ID, Status Message or Short Message.	Initiates a Paging Call or Individual Call after aborting the current mode.
	Hold Down	-	-
[#] ^{*5}	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	Deletes one stack data of Caller ID.
	Hold Down	-	Deletes all stack data of Caller ID.
PTT Switch	Press	Transmits after aborting the current mode.	

*1 Portable/ KCH-21R (Handheld Control Head) only

*2 KCH-20R (Featured Panel) only

*3 Portable/ KCH-20R (Featured Panel) only

*4 Portable only

*5 Portable (Full Key Model) only

Key		Stack Mode	
		Selecting a list (Status Message)	Selecting a list (Short Message)
Menu ([])	Press	-	Migrates to the Message View display.
	Hold Down	-	-
Back ([])	Press	Deletes one stack data of Status Message.	Deletes one stack data of Short Message.
	Hold Down	Deletes all stack data of Status Message.	Deletes all stack data of Short Message.
Function ([])	Press	-	-
	Hold Down	-	-
Home ([])	Press	Aborts the current mode.	
	Hold Down	-	-
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
	Hold Down	-	-
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
	Hold Down	-	-
Side 3 ^{*1}	Press	The configured function functions.	
	Hold Down	-	-
[]/[]	Press	Selects stack data one at a time.	Selects stack data one at a time.
	Hold Down	Selects stack data continuously.	Selects stack data continuously.
[]/ or [] ^{*2}	Press	Switches the display. Message → Caller ID → Receive Channel → Receive Date and Time → Message → ...	
		-	
[] or [] ^{*2}	Press	Switches the display. Message → Receive Date and Time → Receive Channel → Caller ID → Message → ...	
		-	
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	Selects stack data.	
[*] ^{*5}	Press	Initiates a Paging Call or Individual Call after aborting the current mode.	Migrates to the Message View display.
	Hold Down	-	-
[#] ^{*5}	Press	Deletes one stack data of Status Message.	Deletes one stack data of Short Message.
	Hold Down	Deletes all stack data of Status Message.	Deletes all stack data of Short Message.
PTT Switch	Press	Transmits after aborting the current mode.	


^{*1} Portable/ KCH-21R (Handheld Control Head) only

^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		Maintenance Display Mode	
		Conventional	P25 Trunking
			
Menu ([])	Press	-	Confirms the channel.
Back ([])	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	
Function ([])	Press	-	
Home ([])	Press	Aborts the current mode.	
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
Side 3 ^{*1}	Press	The configured function functions.	
[]/[]	Press	-	Changes the channel number.
	Hold Down	-	Changes the channel number continuously.
[] or [] ^{*2}	Press	-	Switches the display. RSSI/ Site Display → ID/ CH No. Display → Frequency Display → RSSI/ Site Display → ...
[] or [] ^{*2}	Press	-	Switches the display. RSSI/ Site Display → Frequency Display → ID/ CH No. Display → RSSI/ Site Display → ...
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	-	
[*] ^{*5}	Press	-	Confirms the channel.
[#] ^{*5}	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	
PTT Switch	Press	Transmits.	


^{*1} Portable/ KCH-21R (Handheld Control Head) only


^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		Maintenance Display Mode	GPS Position Display Mode
		NXDN Trunking 	
Menu ([])	Press	-	Stores the location information in a microSD card (if the microSD card is inserted in the transceiver and if Record Format (Manual/ Auto) is configured). Aborts the current mode (if anything other than the above).
	Hold Down	-	Pauses or resumes the automatic switching of the display (Mobile only).
Back ([])	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	
Function ([])	Press	-	Pauses or resumes the automatic switching of the display (Mobile only).
Home ([])	Press	Aborts the current mode.	
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
Side 3 ^{*1}	Press	The configured function functions.	
[]/[]	Press	Changes the channel number.	Switches a display one at a time (Mobile only). Latitude/ Longitude → Altitude → Latitude/ Longitude → ...
	Hold Down	Changes the channel number continuously.	Switches a display continuously (Mobile only). Latitude/ Longitude → Altitude → Latitude/ Longitude → ...
[] or [] ^{*2}	Press	RSSI/ Site Number Display → RSSI/ BER Display → Frequency Display → RSSI/ Site Number Display → ... When Multi-System Hunt is configured: RSSI/ Site Number Display → RSSI/ BER Display → System Name/ Site Number Display → Frequency Display → RSSI/ Site Number Display → ...	-
	Hold Down	-	
[] or [] ^{*2}	Press	RSSI/ Site Number Display → Frequency Display → RSSI/ BER Display → RSSI/ Site Number Display → ... When Multi-System Hunt is configured: RSSI/ Site Number Display → Frequency Display → System Name/ Site Number Display → RSSI/ BER Display → RSSI/ Site Number Display → ...	Migrates to the GPS data file list display (if Product Information > microSD is enabled).
	Hold Down	-	

Key		Maintenance Display Mode	GPS Position Display Mode
		NXDN Trunking 	
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	-	
[*] ^{*5}	Press	-	Stores the location information in a microSD card (if the microSD card is inserted in the transceiver and if Record Format (Manual/Auto) is configured). Aborts the current mode (if anything other than the above).
	Hold Down	-	Pauses or resumes the automatic switching of the display (Mobile only).
[#] ^{*5}	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	
PTT Switch	Press	Transmits.	


^{*1} Portable/ KCH-21R (Handheld Control Head) only

^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		Playback Mode	Clock Adjustment Mode
			
Menu ([])	Press	Starts the playback of audio data.	Confirms the configuration and then aborts the current mode.
Back ([])	Press	With a microSD card: Returns to the folder list display of each function. Without a microSD card: Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).
	Hold Down	-	-
Function ([])	Hold Down	Switches the key operation mode.	-
Home ([])	Press	Aborts the current mode.	
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
Side 3 ^{*1}	Press	The configured function functions.	
[]/[]	Press	Selects audio data one at a time.	Changes the year/ month/ date/ hour/ minute one at a time.
	Hold Down	Selects audio data continuously.	Changes the year/ month/ date/ hour/ minute continuously.
[] or [] ^{*2}	Press	Switches the display. Recording Start Date and Time Display → ID Display → Recording Start Date and Time Display → ...	Moves to the previous configuration item.
[] or [] ^{*2}	Hold Down	-	Selects the previous configuration item continuously.
[] or [] ^{*2}	Press	Switches the display. Recording Start Date and Time Display → ID Display → Recording Start Date and Time Display → ...	Moves to the next configuration item.
[] or [] ^{*2}	Hold Down	-	Selects the next configuration item continuously.
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	-	
[*] ^{*5}	Press	Starts the playback of audio data.	Confirms the configuration and then aborts the current mode.
[#] ^{*5}	Press	With a microSD card: Returns to the folder list display of each function. Without a microSD card: Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).
	Hold Down	-	
PTT Switch	Press	Transmits after aborting the current mode.	



^{*1} Portable/ KCH-21R (Handheld Control Head) only



^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		Task Request Confirmation Mode	
		Selecting a Category (New) 	Selecting a Response 
Menu ([])	Press	Migrates to the Task Request View display.	Sends a Response after aborting the current mode.
	Hold Down	-	-
Back ([])	Press	Returns to the Category list display (if Message Deletable is disabled). Deletes the selected item.	Returns to the Task Request View display.
	Hold Down	Deletes all Category messages (if Message Deletable is enabled).	-
Function ([])	Press	-	-
	Hold Down	-	-
Home ([])	Press	Aborts the current mode.	
	Hold Down	-	-
Side 1 ^{*1} or [+] ^{*2}	Press	The configured function functions.	
	Hold Down	-	-
Side 2 ^{*1} or [-] ^{*2}	Press	The configured function functions.	
	Hold Down	-	-
Side 3 ^{*1}	Press	The configured function functions.	
	Hold Down	-	-
[]/[]	Press	Selects a list display one at a time.	Selects a display line one at a time.
	Hold Down	Selects list displays continuously.	Selects display lines continuously.
[]/ or [] ^{*2}	Press	Switches the display. Message Display → Receive Date and Time → Message Display → ...	-
	Hold Down	-	-
[] or [] ^{*2}	Press	Switches the display. Message Display → Receive Date and Time → Message Display → ...	-
	Hold Down	-	-

Key		Task Request Confirmation Mode	
		Selecting a Category (New)	Selecting a Response
			
Selector ^{*3}	-	The configured function functions after aborting the current mode.	
Lever Switch ^{*4}	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	Enters by a shortcut.	
[*] ^{*5}	Press	Migrates to the Task Request View display.	Sends a Response after aborting the current mode.
	Hold Down	-	
[#] ^{*5}	Press	Returns to the Category list display (if Message Deletable is disabled). Deletes the selected item.	Returns to the Task Request View display.
	Hold Down	Deletes all Category messages (if Message Deletable is enabled).	-
PTT Switch	Press	Transmits after aborting the current mode.	Sends a Response after aborting the current mode.


^{*1} Portable/ KCH-21R (Handheld Control Head) only

^{*2} KCH-20R (Featured Panel) only

^{*3} Portable/ KCH-20R (Featured Panel) only

^{*4} Portable only

^{*5} Portable (Full Key Model) only

Key		BLE Beacon Display Mode ^{*4}	
		 	← Alternate display every 5 sec →
Menu ([F])	Press	Pauses or resumes the automatic switching of the display.	
Back ([←])	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	
Function ([O])	Press	-	
Home ([H])	Press	Aborts the current mode.	
Side 1	Press	The configured function functions.	
Side 2	Press	The configured function functions.	
Side 3	Press	The configured function functions.	
[▲]/[▼]	Press	Switches a display one at a time. UUID List No./ RSSI/ Measured Power → Major/ Minor → UUID List No./ RSSI/ Measured Power → ...	
	Hold Down	Switches a display continuously. UUID List No./ RSSI/ Measured Power → Major/ Minor → UUID List No./ RSSI/ Measured Power → ...	
[◀]/[▶]	Press	-	
	Hold Down	-	
Selector	-	The configured function functions after aborting the current mode.	
Lever Switch	-	The configured function functions after aborting the current mode.	
[0] to [9] ^{*5}	Press	-	
[*] ^{*5}	Press	Pauses or resumes the automatic switching of the display.	
[#] ^{*5}	Press	Returns to the menu (if the transceiver enters this mode by pressing the Menu key).	
PTT Switch	Press	Transmits.	

^{*4} Portable only^{*5} Portable (Full Key Model) only


● Power-on Tone

Tone Name	Pattern	Reference
Power-on Tone A	1 beep  1480 Hz (500 ms)	Turning the Transceiver ON Power-on Tone Testing the Transmit and Receive Capabilities of the Transceiver (Panel Test Mode) Adjusting the Transmit and Receive Capabilities of the Transceiver (Panel Tuning Mode)
Power-on Tone B	2 beeps  1630 Hz (50 ms)	Power-on Tone

● Control Tone


Tone Name	Pattern	Reference
Key Beep A	1 beep  1630 Hz (50 ms)	Home Channel Direct Channel Control Tone Formatting a microSD Card Removing the microSD Card Playing Back the Recorded Audio (Playback) Toggling Bluetooth On/ Off Finding a Bluetooth-compatible Device (Bluetooth Find Device) Finding, Registering and Connecting a Bluetooth-compatible Device (Bluetooth Find Device) Registering and Connecting Using PF Keys (Define Bluetooth Device) Receive a pairing request from a Bluetooth-compatible device Displaying a Bluetooth-compatible Device (Bluetooth My Devices) Resetting the GPS/Bluetooth Device (GPS/Bluetooth Reset) Adjusting the Time BLE Scan
Key Beep B	2 beeps  1630 Hz (50 ms)	Home Channel Direct Channel Control Tone Toggling Bluetooth On/ Off Displaying a Bluetooth-compatible Device (Bluetooth My Devices) BLE Scan
Key Beep C	3 beeps  1630 Hz (50 ms)	Home Channel Direct Channel Control Tone Adjusting the Time

Tone Name	Pattern	Reference
Key-entry Error Tone	1 beep  700 Hz (50 ms)	Keypad Operation Changing the Channel by Specifying the Number (Channel Entry) Changing the Group ID by Specifying the ID (Group ID Entry) (NXDN Trunking System Only) Viewing the Receive History (Stack) Locking the Transceiver Keys (Key Lock) Operations in a Single RF Deck/ Dual Control Head Structure Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display) Control Tone Deleting the GPS Data File Formatting a microSD Card Recording Audio to a microSD Card (Voice Memo) Playing Back the Recorded Audio (Playback) Registering and Connecting Using PF Keys (Define Bluetooth Device) Displaying a Bluetooth-compatible Device (Bluetooth My Devices) Switching the Speaker to Emit Audio (Bluetooth Speaker) Determining the Speaker to Emit by Linking with the Microphone Hook (Off-hook Speaker Revert) Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver (Heart Rate Service) Available Functions for AUX Input Ports Available Functions for the Selector BLE Scan
Rollover Tone	1 beep  1630 Hz (200 ms)	Using Menu Mode Rollover/End Stop Control Tone Displaying a Bluetooth-compatible Device (Bluetooth My Devices)
Stop Tone	1 beep  700 Hz (50 ms)	Rollover/End Stop Control Tone
Password Authorization Tone	2 beeps  1630 Hz (50 ms)	Turning the Transceiver ON/ OFF Control Tone Password for Transceiver Operation (Transceiver Password)
Priority-channel Tone	1 beep  2000 Hz (50 ms)	Control Tone


Tone Name	Pattern	Reference
Scan Stop Tone	2 beeps  700 Hz (50 ms)	Home Channel Direct Channel Control Tone
Search Mode Tone	1 beep  770 Hz (400 ms)	Control Tone
Out of Range Tone	1 beep  770 Hz (400 ms)	Control Tone
In-service Tone	3 beeps  770 Hz (50 ms)	Control Tone
Call Request Tone	1 beep  1630 Hz (50 ms)	Control Tone
Call In Progress Tone	2 beeps  980 Hz (100 ms)	Control Tone
Disconnect Indication Tone	2 beeps  980 Hz (300 ms) 490 Hz (300 ms)	Control Tone
Key Load Alert Tone	1 beep  1633 Hz (1 sec)	Control Tone
Bluetooth Find Device Mode Tone	2 beeps  940 Hz (50 ms)	Control Tone Finding a Bluetooth-compatible Device (Bluetooth Find Device)
Bluetooth Connect Tone	2 beeps  980 Hz 1920 Hz (100 ms) (100 ms)	Control Tone Finding a Bluetooth-compatible Device (Bluetooth Find Device) Registering and Connecting Using PF Keys (Define Bluetooth Device) Receive a pairing request from a Bluetooth-compatible device
Bluetooth Disconnect Tone	2 beeps  980 Hz 490 Hz (300 ms) (100 ms)	Control Tone Displaying a Bluetooth-compatible Device (Bluetooth My Devices) Resetting the Connection by Headset Profile
Complete Tone	5 beeps  980 Hz (20 ms)	Control Tone

Tone Name	Pattern	Reference
Playback End Tone	3 beeps  2100 Hz (400 ms)	Playing Back the Recorded Audio (Playback)
Record Stopped Tone	4 beeps  940 Hz 700 Hz (300 ms) (100 ms)  940 Hz 700 Hz (300 ms) (100 ms)	Recording Audio to a microSD Card (Voice Memo)

● Warning Tone

Tone Name	Pattern	Reference
Warning Tone A	continuous beep  700 Hz (until the PTT switch is released)	Viewing the Receive History (Stack) Warning Tone
Warning Tone B	1 beep  700 Hz (1 sec)	Warning Tone
Warning Tone C	1 beep  700 Hz (50 ms)	Warning Tone
TOT Pre-alert Tone	3 beeps  1630 Hz (50 ms)	Warning Tone
Battery Warning Tone	3 beeps  700 Hz (50 ms)	Warning Tone Warning that the Battery Voltage Is Low (Battery Warning)
PLL Unlock Tone	1 beep  1400 Hz (50 ms)	Warning Tone
Busy Tone	continuous beep  940 Hz (150 ms)	Warning Tone
Busy Tone 2	3 beeps  940 Hz (150 ms)	Warning Tone

Tone Name	Pattern	Reference
Timed Power-off Pre-alert Tone A	2 beeps  1480 Hz (50 ms)	Warning Tone The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)
Timed Power-off Pre-alert Tone B	4 beeps  1480 Hz (50 ms)	Warning Tone The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)
Timed Power-off Pre-alert Tone C	1 beep  1480 Hz (2 sec)	Warning Tone The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)
Call Queue Tone	2 beeps  940 Hz (50 ms)	Warning Tone
System Busy Tone	3 beeps  440 Hz (200 ms)	Warning Tone
System Search Tone	1 beep  1630 Hz (50 ms)	Warning Tone
System Search End Tone	3 beeps  940 Hz (150 ms) 770 Hz (150 ms) 940 Hz (150 ms)	Warning Tone
System Select Tone	4 beeps  980 Hz (50 ms) 1220 Hz (50 ms) 980 Hz (50 ms) 1220 Hz (50 ms)	Warning Tone
Call Invalid Tone	4 beeps  440 Hz (1 sec) 440 Hz (50 ms)	Warning Tone
Invalid Dial Tone	5 beeps  440 Hz (50 ms) 440 Hz (700 ms) 440 Hz (50 ms)	Warning Tone

Tone Name	Pattern	Reference
Not Authorized Tone	4 beeps  440 Hz (300 ms) 440 Hz (50 ms) 440 Hz (800 ms)	Warning Tone
No Reply Tone	4 beeps  440 Hz (50 ms) 440 Hz (1 sec)	Warning Tone
Call Fail Tone	2 beeps  440 Hz (50 ms) 440 Hz (1 sec)	Warning Tone
Call Deny Tone	3 beeps  440 Hz (200 ms) 440 Hz (80 ms) 440 Hz (900 ms)	Warning Tone
Lone Worker Tone	2 beeps  1630 Hz (150 ms) 940 Hz (150 ms)	Warning Tone
Group-registration Invalid Tone	2 beeps  440 Hz (50 ms)	Warning Tone
Group Subscription Invalid Indicator Tone	2 beeps  440 Hz (50 ms)	Warning Tone
Call Processing Tone	2 beeps  940 Hz (50 ms)	Warning Tone
Network Failure Tone A	2 beeps  620 Hz (100 ms) 930 Hz (100 ms)	Warning Tone
Network Failure Tone B	1 beep  1630 Hz (1 sec)	Warning Tone
Man-down Pre-alert Tone	1 beep  1630 Hz (50 ms)	Warning Tone

Tone Name	Pattern	Reference
Stationary Pre-alert Tone	1 beep  770 Hz (50 ms)	Warning Tone
Motion Pre-alert Tone	1 beep  1210 Hz (50 ms)	Warning Tone
Key Fail Alert Tone	6 beeps  940 Hz (100 ms)	Warning Tone
Trunking Tone	2 beeps  1180 Hz 1480 Hz (50 ms) (50 ms)	Warning Tone
Invalid Dialing Entry Tone	1 beep  490 Hz (2 sec)	Warning Tone
Ignore Encryption Switch Alert Tone	continuous beep  697 Hz (until the PTT switch is released)	Warning Tone
Site Trunking Tone	2 beeps  620 Hz 930 Hz (100 ms)(100 ms)	Warning Tone
Bluetooth No Response Tone	1 beep  440 Hz (1 sec)	Warning Tone Behavior of the Transceiver When Pairing Cannot Occur Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Headset Profile)
Bluetooth Connect Denied Tone	2 beeps  440 Hz (1 sec) 440 Hz (100 ms)	Warning Tone Behavior of the Transceiver When Pairing Cannot Occur Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Headset Profile)
Bluetooth Connect Invalid Tone	3 beeps  440 Hz (1 sec) 440 Hz (50 ms)	Warning Tone Behavior of the Transceiver When Pairing Cannot Occur
Bluetooth No Service Tone	3 beeps  440 Hz (50 ms)	Warning Tone Behavior of the Transceiver When Pairing Cannot Occur Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Headset Profile)

Tone Name	Pattern	Reference
Battery Level Tone	1 beep  700 Hz (500 ms)	Warning Tone Displaying the Remaining Battery Power by Operating the Transceiver (Battery Status)
Delay Tone	1 beep  940 Hz (150 ms)	Warning Tone
Intercept Tone	2 beeps  940 Hz (200 ms) 770 Hz (200 ms)	Warning Tone
Intercept Tone 2	6 beeps  940 Hz (200 ms) 770 Hz (200 ms) 940 Hz (200 ms) 770 Hz (200 ms) 940 Hz (200 ms) 770 Hz (200 ms)	Warning Tone
Deny Tone	3 beeps  940 Hz (150 ms) 770 Hz (150 ms) 940 Hz (150 ms)	Warning Tone
Low SD Memory Tone	4 beeps  940 Hz (50 ms)	Configuring the Warning Behavior for the Remaining Memory Capacity (Low Memory Warning)
Anomaly Detection Tone	3 beeps  550 Hz (100 ms)	Warning Tone
Anomaly Detection Release Tone	4 beeps  550 Hz (100 ms) 940 Hz (100 ms)	Warning Tone

● Locator Tone

Tone Name	Pattern	Reference
Emergency Locator Tone	2 beeps  1630 Hz (90 ms) 940 Hz (90 ms)	Locator Tone

● Sidetone

Tone Name	Pattern	Reference
Proceed Tone	3 beeps  1000 Hz (20 ms)	Sidetone Using Sound to Notify the Timing to Start Communications (PTT Proceed Tone)
VOX Proceed Tone	1 beep  1550 Hz (30 ms)	Sidetone
PTT ID Sidetone	4 beeps  1210 Hz (30 ms) 1630 Hz (30 ms) 1210 Hz (30 ms) 1630 Hz (30 ms)	Sidetone

● Alert Tone

Tone Name	Pattern	Reference
Transmit Clear Alert Tone	1 beep  1477 Hz (50 ms)	Alert Tone
Site Trunking Alert	2 beeps  622 Hz (100 ms) 932 Hz (100 ms)	Alert Tone
Ack Wait Enter Tone	7 beeps  770 Hz (30 ms)	Alert Tone
Emergency Indicator Alert Tone	1 beep  880 Hz (150 ms)	Alert Tone

● Volume Level Tone

Tone Name	Pattern	Reference
Volume Key Tone	1 beep  1630 Hz (50 ms)	Volume Level Tone
Fixed Volume Key Tone	1 beep  1630 Hz (50 ms)	Volume Level Tone

● Transmit Tone

Tone Name	Pattern	Reference
Transpond Tone	1 beep  2100 Hz (1 sec)	Transmit Tone
Stun-on Tone	1 beep  1477 Hz (2 sec)	Transmit Tone
Stun-off Tone	2 beeps  1477 Hz (2 sec) 1477 Hz (2 sec)	Transmit Tone
PTT Release Tone	1 beep  1397 Hz (100 ms)	Transmit Tone
Background Tone	1 beep  1630 Hz (50 ms)	Transmit Tone

Numerics

5-tone Function Reference (5-tone FUNC)	x

A

Abbreviations Used in This Document	xii
About Authentication	218
About Bluetooth Low Energy (Heart Rate Service/ Automatic Injury Detection Service/ Battery Service/ Device Information Service)	242
About Configuration Using KPG-D1/ D1N	445
About Copyright	xiii
About Examples of the Transceiver Display	xi
About Featured Panel Operations	78
About file name	171
About Headset Profile (HSP Connection/ HSP Disconnection)	234
About KPG-D1N	xiv
About LCD	9
About microSD Card	167
About Multi RF Deck/ Multi Control Head	xv
About Notations	x
About NX-5200LG/ NX-5300LG	xvi
About NX-5200S/ NX-5300S/ NX-5700S/ NX-5800S	xvii
About Options to Use the Functions Described in This Document	xviii
About Serial Port Profile (SPP Connection/ SPP Disconnection)	238
About System Type	xv
About the Audio to Be Recorded	180
About the Behavior in Function Mode While in a Dual Control Head Structure	77
About the Built-in GPS Receiver Unit	xx
About the Connection of the Control Head to the RF Deck	407
About the Displayed Contents of a Bluetooth-compatible Device	214
About the Message Display	455
About the Notation of "Configuration Using KPG-D1/ D1N"	xiv
About the Notation of the Supported Models	xi

About the Pin Arrangement for KCT-72 and the Connection of External Devices	456
About the Programming Software	xiv
About the Reception Display of a Short Message When in a Dual Control Head Structure	78
About the Speaker to Emit Audio	132
About the writing of configuration data in a Multi RF Deck/ Multi Control Head structure	23
About the Zone-channel Format	xiv
About This Manual	viii
About Trademarks and Patent Rights	xiii
Activating a Radio Feature License (KWD-5004MR)	312
Activating Horn Alert According to the Microphone Hook (Off-hook Horn Alert)	293
Activation of Emergency	252
Active Noise Reduction	144
Adding a Control Head	409
Adding an RF Deck	413
Adding an RF Deck/ Control Head	409
Adjusting the Output Level of the External Speaker (Unselected Speaker Offset)	342
Adjusting the Time	299
ADJUSTING THE TIME ON THE TRANSCEIVER	298
Adjusting the Transmit and Receive Capabilities of the Transceiver (Panel Tuning Mode)	302
Adjusting the Volume Level	32
AFO Level	285
Alert Tone	118
Analog Conventional/ P25 Conventional/ NXDN Conventional/ DMR Conventional	157
ANALOG MODES	xxv
Assigning Functions to the Universal Connector	263
Attaching KRK-14HM to KCH-19M	403
Attaching KRK-15BM to the RF Deck	400
Audio Equalizer (RX Audio Response)	140
Audio Equalizer (TX Audio Response)	142
Audio Function	340
Auto Gain Control (RX Audio Response)	140
Auto Gain Control (TX Audio Response)	142
Auto Key Lock Timer	75

Automatically Adjusting the Brightness Level of the LCD (Auto Dimmer)	99
Automatically Storing the GPS Data	188, 383
Automatic Status Transmission	249
AUX Input Status Message 1 to AUX Input Status Message 3	274
Available Functions for AUX Input Ports	266
Available Functions for AUX Output Ports	276
Available Functions for COM Port	491
Available Functions for Menu Mode	483
Available Functions for the Lever Switch	488
Available Functions for the PF Keys	464
Available Functions for the Selector	487
Avoiding Noise and Chattering on the AUX Input Port (Debounce Time)	280

B

Basic Operations	325
BASIC OPERATIONS	29
BATTERY	154
Beacon List	200
Beat Shift	86
BEEP LIST	507
Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Bluetooth Low Energy)	247
Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Headset Profile)	237
Behavior of the Transceiver When Connecting to a Bluetooth-compatible Device Fails (Serial Port Profile)	239
Behavior of the Transceiver When Pairing Cannot Occur	228
Behaviors of Each Ignition Terminal	360
BLE Beacon Display	207
BLE Scan	202
BLE Scan Time	204
Bluetooth Communication	364
BLUETOOTH COMMUNICATION	210
Bluetooth Device Name	367
Bluetooth On/Off	366

Building a Multi RF Deck System	310
Busy LED	93

C

Call 1 to Call 6	275
Caller ID Stack	59
Changing Configuration Data of 1 RF Deck While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating	438
Changing Configuration Data While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating	432
Changing the Brightness of the Backlight (LCD Brightness)	98
Changing the Channel	44
Changing the Channel by Specifying the Number (Channel Entry)	45
Changing the Channel with a Single Touch	48
Changing the Color Scheme of the Transceiver Display (Color Scheme)	99
Changing the Configuration of the Transceiver (Front Panel Programming Mode)	304
Changing the Display Positions of a Channel Name and an Icon When Multi RF Deck View Is On	442
Changing the Group ID by Specifying the ID (Group ID Entry) (NXDN Trunking System Only)	47
Changing the Tone Volume Level with a Single Touch (Selectable Tone Level)	128
Changing the Zone	43
Changing the Zone-channel	43
Channel Select A to Channel Select D	271
Channel Spacing	84
Character Entry	72
Checking the Bluetooth Device Name (Bluetooth Information)	216, 369
Checking the Detailed Information of a Battery (Battery Information Display)	160
Checking the Firmware Version (Transceiver Information Mode)	306
Clear Caller ID Stack on Reply	60
Clock Display	109
Common Function Reference (Common FUNC)	x
Communicating Directly Between Control Heads (Intercom)	343

Communication Ports	357	Configuring the Storage Method of an Audio Data File (First-in First-out Deletion)	174
Communications in an Emergency (Emergency)	363	Configuring the Volume Level of Various Tones (Tone Volume)	127
COM Port Functions	494	Configuring the Warning Behavior for the Remaining Memory Capacity (Low Memory Warning)	173
Conditions to Activate the Horn Alert	290	Configuring Voice Guidance Method (Voice Announcement Type)	148
CONFIGURATION FOR EACH FUNCTION	464	Configuring Whether or Not to Reduce the Noise (Noise Blanker (Analog))	129
Configuration in KPG-D1/ D1N If Changed from a Multi RF Deck System to a Single RF Deck Structure	454	Confirming Damage to a Bluetooth-compatible Device by Using the Transceiver (Bluetooth My Devices Mode)	258
Configuration in KPG-D1/ D1N If Changed from a Single RF Deck Structure to a Multi RF Deck System	445	Confirming microSD Card Contents via a PC (SD Card Direct Access)	190
Configuration in KPG-D1/ D1N If Control Heads Are Switched	453	Confirming the Heart Rate by Using the Transceiver (Bluetooth My Devices Mode)	256
Configuration in KPG-D1/ D1N if RF Decks Are Switched	449	Confirming the Location Information Stored in the microSD Card	164
Configuring Audio Profile (Audio Profile)	135	Confirming the Manufacturer Name, Model Number, Etc. of a Bluetooth-compatible Device (Device Information Service)	260
Configuring Mobile Relay Station	390	Confirming the Remaining Battery Power of a Bluetooth-compatible Device (Battery Service)	259
Configuring Recording Time (Maximum Recording Length)	178	Connecting by Bluetooth Low Energy	246
Configuring the Alert Tone (Special Alert Tone)	123	Connecting by Headset Profile	234
Configuring the Bluetooth Device Name of the Transceiver (Bluetooth Device Name)	215	Connecting by Serial Port Profile	238
Configuring the Connection Destination of a Bluetooth-compatible Device (Bluetooth Interface Selection)	262	Connecting the External Microphone	457
Configuring the DIP Switch	319	Connecting the External Speaker	397, 457
Configuring the Display Order of Data in Stack Mode (Stack Order)	57	Connecting the RF Deck by Using a D-sub 25-pin Cable	392
Configuring the FPU	212, 243	Connecting the Transceiver to a PC	21
Configuring the FPU Data and Writing the FPU Data to Each RF Deck	313	Connecting the Transceiver to a PC by Bluetooth	22
Configuring the GPS Position Display	161	CONTENTS	i
Configuring the Initial Configuration	310	CONTENTS BY PURPOSE	xxxvii
Configuring the Input Sensitivity of the Microphone (VOX Gain Level)	459	Controlling Vehicle Operation According to the State of the Horn Alert Port (Horn Alert)	288
Configuring the Maximum Volume Level (Maximum Volume)	126	Control Tone	112
Configuring the Minimum Volume Level (Minimum Volume)	126	Copying the Configuration Data to Another Transceiver (Clone Mode)	303
Configuring the Offset Value for Volume Level (Tone Volume Offset)	127	Creating a Dedicated Mobile Relay Station Cable	395
Configuring the Output Method of the Received Audio and Beep (Multi RF Deck Audio Output Type)	349	Customizing a Displayed Text String (Display Customization)	109

D

Data PTT	268
DEO Level	285
Description	308
Determining the Speaker to Emit by Linking with the Microphone Hook (Off-hook Speaker Revert)	241
Digital Audio Offset	139
DI Level	285
Direct Channel	49
Disabling the VOX by Using the PTT Switch (Cancel Operation)	461
Display Format	105
Display Functions of the Display	105
Displaying a Bitmap Image When the Transceiver is Turned ON (Custom Start-up Screen)	109
Displaying a Bluetooth-compatible Device (Bluetooth My Devices)	229, 370
Displaying the Caller ID when Displaying a Message (Caller ID for Message)	57
Displaying the Current Time	298
Displaying the GPS Data File	164
Displaying the Location Information	162
Displaying the Receive Channel (Channel Name (Message Display))	58
Displaying the Remaining Battery Power by Operating the Transceiver (Battery Status)	156
Displaying the Remaining Battery Power Level (Battery Indicator)	154
Displaying the Remaining Battery Power When the Transceiver Is Turned ON (Power-on Battery Information)	159
Displaying the Signal Strength Level (RSSI Level, BER) (Maintenance Display)	87
Displaying the Signal Strength (Signal Strength Indicator)	104
DMR DIGITAL MODES	xxiv
DMR Function Reference (DMR FUNC)	x
DMR Tier III Trunking (Power Save)	158
D-sub 25-pin Connector	266
DTC	272
Dwell Time	280

E

Embedded Message	24
Embedded Message with Password	24
Embedding a Message in the Transceiver (Embedded Message)	24
Emergency	273
Enabling the Storage of Redundant Data (Repeated Calls Stack)	57
Entering or Deleting a Code	64
Entering or Deleting Characters	66
Examples of Mobile Relay Station Operation	388
External Hook	273
External Monitor	273
EXTERNAL PORTS	263
External Ports (AUX Input/ Output)	358
External PTT (Data)	267
External PTT (PA)	268
External PTT (Voice)	267
External Speaker	273

F

Finding a Bluetooth-compatible Device (Bluetooth Find Device)	212, 367
Finding, Registering and Connecting a Bluetooth-compatible Device (Bluetooth Find Device)	218
Firmware Copyrights	xiii
Flow Control of the Communication Port (Flow Control)	494
Folder Structure of a microSD Card	170
Formatting a microSD Card	168
Formatting a microSD Card (Format SD Card)	380
Function Guide	150
FUNCTIONS AND PANEL LAYOUT	1
FUNCTIONS LINKED TO A VEHICLE	287
Functions Related to the Volume Configuration	126
Functions When Sending by Using the External PTT and Data PTT	282

G

General	136
GENERAL FEATURES	xxii
GETTING STARTED	20
GPS	361
GPS Data Transmission	255
GPS Delay Time	206
GPS POSITION DISPLAY	161

H

Home Channel	48
Horn Alert Logic Signal	292
Horn Alert Status When the Transceiver Is Turned ON (Horn Alert Mode)	293
How to Read the In-depth Manual	x
How to Search for Information	xx

I

Icons	16
Ignition Sense	360
INDEX	517
INDICATION AND DISPLAY	93
INDOOR LOCATION	193
Inhibiting Transceiver Behaviors by Remote Control (Inhibit/ Stun)	356
Initial Configuration for Multi RF Deck/ Multi Control Head	400
IP Based Packet Data Format	27

K

Key Guide	17
KEY OPERATIONS FOR EACH MODE	496
Keypad Operation	36

L

LCD	9
Lighting the Backlight (Backlight)	96
Light Sense	275
Locator Tone	117

Locking the Transceiver Keys (Key Lock)	73

M

Manual Dialing	39
Manually Storing the GPS Data	189, 385
Message Memory	60
Mic Mute	273
Microphone-hook	361
Microphone Sense/ External Microphone Sense	139
Microphone Type (digital channels only)	138
microSD	377
Migrating to a Zone-channel by Using a Connected External Device (Remote Zone-Channel)	284
Minimum Valid Beacon Signal	201
MODE	301
Mode Reset Timer	33
Modulation Line	331
Monitoring the Communications of Control Heads (Transmit Audio Monitor)	345
MULTI RF DECK/ MULTI CONTROL HEAD	308
Muting the Speaker of a Control Head (Speaker 1-2 Mute)	347

N

Notifying a User of the Start of the VOX Transmission with a Tone (VOX Proceed Tone)	461
Notifying of Damage on a Bluetooth-compatible Device to the Transceiver (Automatic Injury Detection Service)	257
Notifying of the Transmit Error by the Display and a Tone	130
Notifying the Heart Rate from a Bluetooth-compatible Device to the Transceiver (Heart Rate Service)	248
NX-5600H/ NX-5700/ NX-5700H/ NX-5700S/ NX-5800/ NX-5800H/ NX-5800S/ NX-5900	4
NXDN DIGITAL MODES	xxiii
NXDN Function Reference (NXDN FUNC)	x

O

Operating a Control Head	325

Operating the Transceiver in Each Mode (Common Operation)	61
Operations in a Single RF Deck/ Dual Control Head Structure	76
Optimizing Various Signal Levels	285
Optional Signaling LED	95
Outline of This Transceiver	xxii
Overwriting the Firmware (Firmware Programming Mode)	305

P

P25 DIGITAL MODES	xxiii
P25 Function Reference (P25 FUNC)	x
P25 Trunking OTAP	28
Password for Transceiver Operation (Transceiver Password)	294
Password for Writing Configuration Data (Overwrite Password)	296
Password When Reading Configuration Data in a PC (Read Authorization Password)	295
PC Interface Protocol	358
Placing the Transceiver in Mobile Relay Station Mode	398
Playing Back the Recorded Audio (Playback)	181, 382
Power-on Text	106
Power-on Tone	112
Power Switch Status Memory	31

R

Reading the Configuration Data from the Transceiver	23
READING THE LOG INFORMATION OF THE TRANSCIVER (FIELD SUPPORT)	462
Receive a pairing request from a Bluetooth-compatible device	225
Receiving	328
Reconnecting a Removed RF Deck	434
Reconnecting by Bluetooth Low Energy	246
Recording Audio to a microSD Card (Voice Memo)	179
Recording Received Audio Automatically (Auto Recording)	381

Recording Time of a microSD Card	174
Recording Transmitted and Received Audio Automatically (Auto Recording)	175
Reducing Battery Consumption (Battery Saver)	157
Reducing the Audio Output to the External Speaker (External Speaker 4W)	129
Registering a Bluetooth Connection Device (Pairing)	369
Registering and Connecting a Bluetooth-compatible Device to the Transceiver (Pairing/ HSP Connection)	217
Registering and Connecting Using PF Keys (Define Bluetooth Device)	222
Relaying the Received Signal (Mobile Relay Station)	387
Removing a Control Head	426
Removing an RF Deck	429
Removing an RF Deck/ Control Head	426
Removing the microSD Card	169
Replacing a Control Head	418
Replacing an RF Deck	422
Replacing an RF Deck/ Control Head	418
Resetting the Connection by Bluetooth Low Energy	247
Resetting the Connection by Headset Profile	237
Resetting the Connection by Serial Port Profile	239
Resetting the GPS/ Bluetooth Device (GPS/Bluetooth Reset)	261
Resetting the Recognition of microSD Card (Eject SD Card)	380
Responding to the Search of a Bluetooth-compatible Device (Bluetooth Discoverable)	216
Restricting Alert Tone When Consecutively Receiving a Call (Alert Tone Restriction from 2nd Call)	133
Restricting the Functions of KPG-D1/ D1N (Read FPU Data Inhibition)	297
Restricting the VOX Transmission while the Audio Sounds from the Transceiver (Transmit Inhibit while Receiving)	460
Restrictions When Configuring AUX Input/ Output	359
Retaining Transmitting State after VOX Transmission (VOX Delay Time)	460
Revision History	xxvi

Rollover/End Stop	45
RX Audio Response	140

S

Scan	274, 362
Scrambler/Encryption	275
Scroll Display	71
Selecting a Control Head for Using VOX (Control Head for VOX)	461
Selecting or Clearing Data from a List	61
Selecting the Audio Input Line If Detaching and Using Control Head (Control Head Mic Input)	286
Selective Call Alert LED	94
Sending and transferring the GPS data	188
Serial Protocol Types	495
Sidetone	117
Software Copyrights	xiii
SOUND	110
Speaker Mute	272
Speaker Type (digital channels only)	136
Specifying a Control Head for Controlling the Volume (Master Volume Control)	340
Stack Procedure of the Receive History (Old Message Overwrite)	58
State Hold Timer (Active Low)	281
Status Guide	152
Status Memory (AUX Output Status Message)	281
Status Request Message Response	253
Storing Audio Data in the Saved Folder	187
STORING RECORDED AUDIO/ GPS DATA	167
Storing the GPS Data (GPS Data Storage)	188, 383
Structures of Multi RF Deck/ Multi Control Head	309
STRUCTURING A MULTI RF DECK/ MULTI CONTROL HEAD	400
Sub-LCD Display	108
Sub-LCD Display Priority	108
Switching the Display Language	79
Switching the Output Status of the External Speaker (Unselected RF Deck Speaker)	341
Switching the Speaker to Emit Audio (Bluetooth Speaker)	240, 373

T

Temporarily Reducing the Volume Level of the Speaker (Speaker Attenuation)	128
Testing or Adjusting the Transmit and Receive Capabilities of the Transceiver (PC Test Mode/ PC Tuning Mode)	307
Testing the Transmit and Receive Capabilities of the Transceiver (Panel Test Mode)	301
The Amount of Time Until the Transceiver Is Turned OFF (Timed Power-off)	288
The Icons on the LCD	101
Time Stamp	60
Toggling Bluetooth On/ Off	210
Tones that Sound When a User Operates the Transceiver or When the Transceiver Status Is Changed	110
Tones that Sound When the Communication Starts/ Ends	124
Tones that Sound When the Transceiver Receives a Call	119
TRANSCIVER DATA PROTECTION WITH PASSWORD	294
TRANSMISSION/ RECEPTION	80
Transmit LED	93
Transmit Power	81
Transmit/ Receive Frequencies	80
Transmitting	329
Transmitting/ Receiving	51
Transmit Tone	118
Troubleshooting in Single RF Deck/ Single Control Head	445
Turning the Transceiver OFF	31
Turning the Transceiver ON	29
Turning the Transceiver ON/ OFF	29
Turning the Transceiver ON or OFF According to the State of the Ignition Sense Port (Ignition Sense)	287
TX Digital Audio Response	142
TX Interval	205
TX Power	206

U

Universal Connector	263

Updating Firmware While a System in a Multi RF Deck/ Multi Control Head Structure Is Operating	433
Updating the Firmware	310, 405
Usage of the Ignition Sense Port	287
Using Function Keys	32
Using Menu Mode	40
Using Sound to Notify the Other Party that the Communication Ends (PTT Release Tone)	125
Using Sound to Notify the Timing to Start Communications (PTT Proceed Tone)	124
Using the Transceiver as a Megaphone (Public Address)	131, 348
Using the Vibrator	264
Using Voice Guidance (Voice Announcement)	148

V

Viewing the Receive History (Stack)	52
Volume Level Tone	118
VOX	370, 458

W

Warning that the Battery Voltage Is Low (Battery Warning)	155
Warning the Battery Power of the Vehicle Battery Is Low (Battery Warning)	156
Warning Tone	114
When a Pairing Cannot Occur with the Bluetooth-compatible Device or the Bluetooth-compatible Device Does Not Behave (Bluetooth Headset Connection Type)	236
without Alert Tone	265
Writing configuration data to multiple transceivers using Bluetooth communication	23
Writing Configuration Data Using Wireless Communication (OTAP)	25
Writing the Configuration Data to the Transceiver	22

Z

Zeroize	274
Zone-Channel Guide	149
Zone Name Display	105